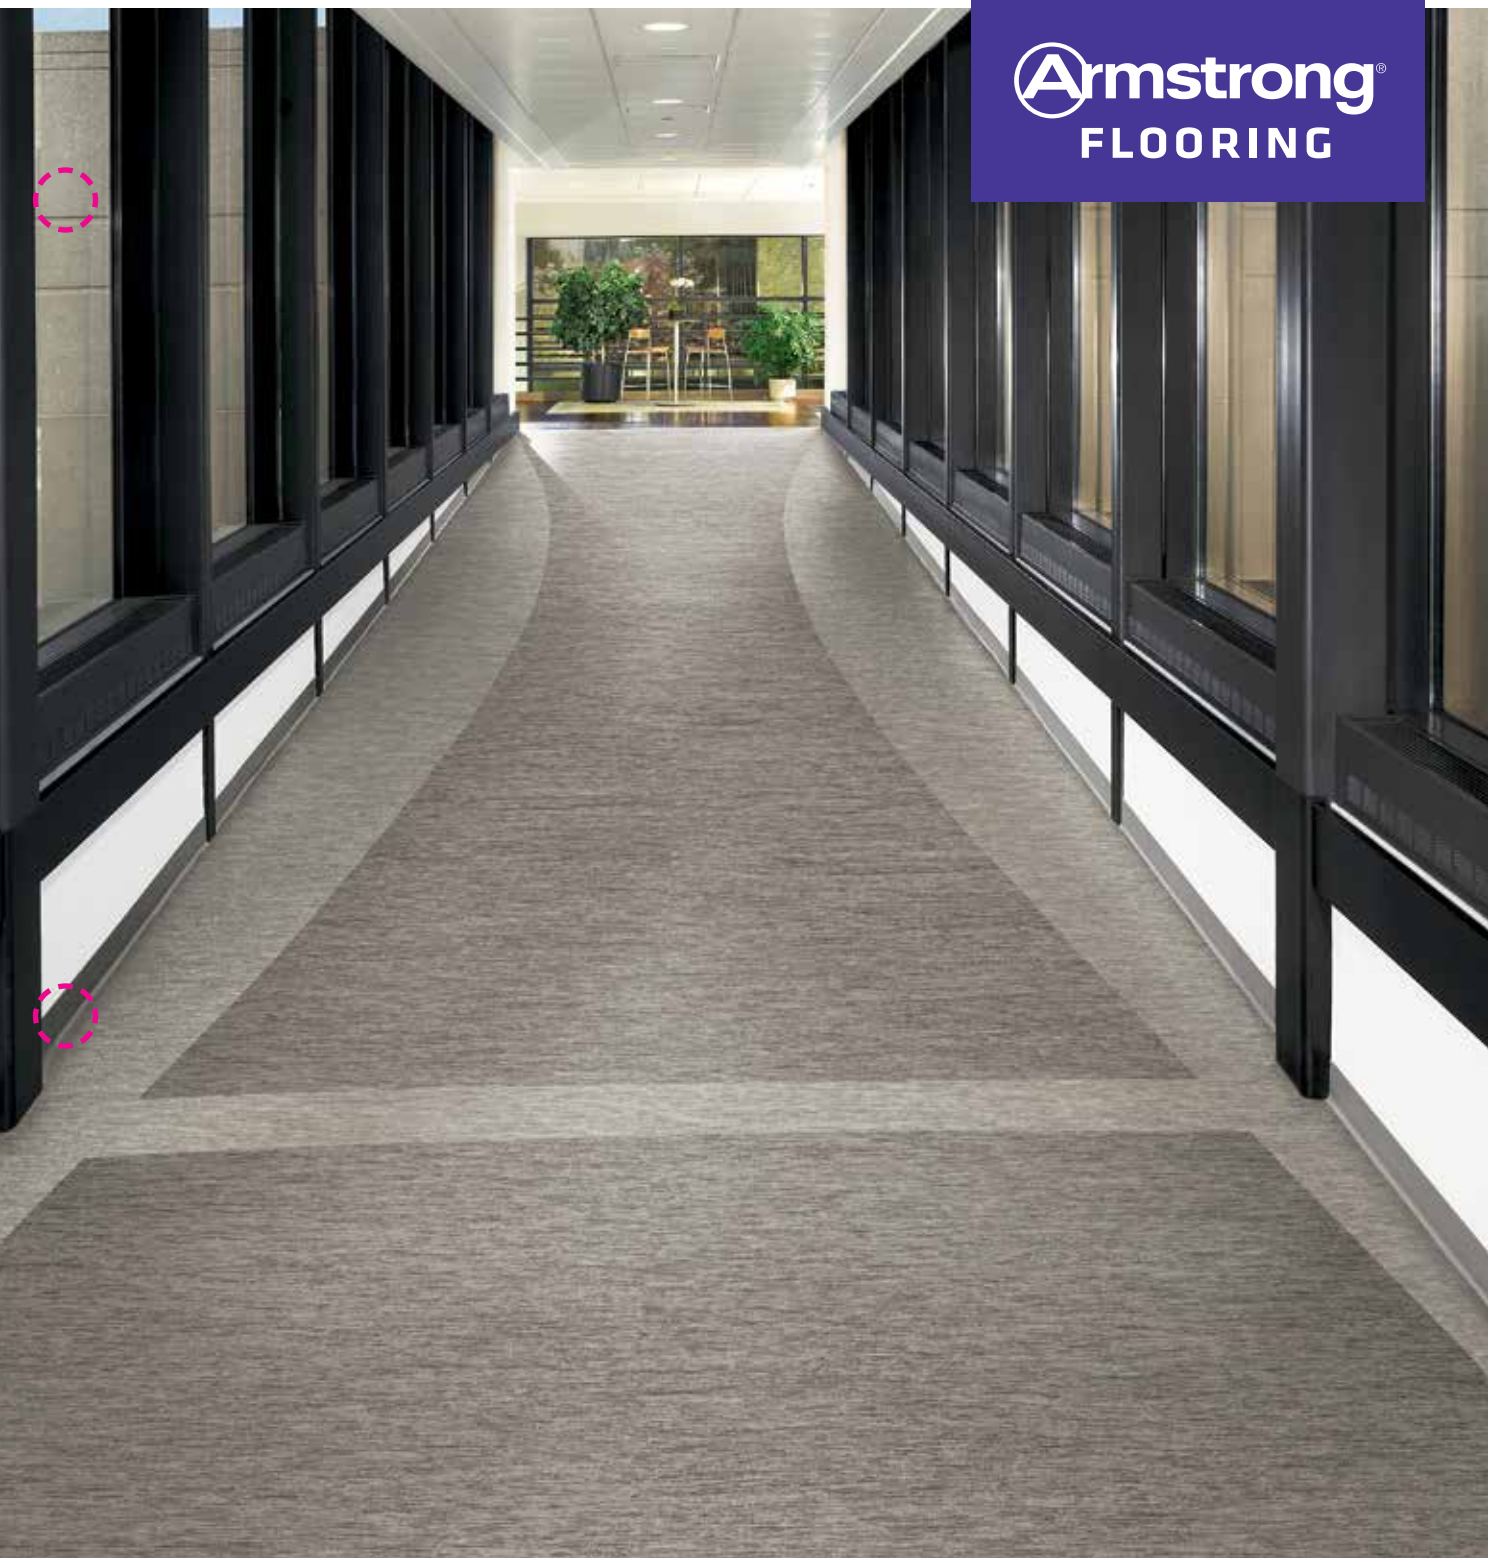

Armstrong® FLOORING

HETEROGENEOUS DESIGNER SERIES

DECORART® Rejuvenations™

TimberLine® | StoneRun™ | Ambigu™

DIAMOND 10 TECHNOLOGY

DecorArt® Rejuvenations™ – A Winning Combination of Beauty and Strength

Consisting of three unique collections, TimberLine®, StoneRun™ and Ambigu™, Rejuvenations™ with Diamond 10® Technology coating features realistic, nature-inspired visuals and timeless textures.

TimberLine features woods with rustic charm, dimensional edge detail for realistic bevels and on-trend naturals, grays and browns in modern, popular species.

StoneRun showcases on-trend stone and concrete visuals in modern contemporary tones of gray, mimicking polished concrete installations.

Ambigu combines textures and patterns to create a rich textile look. Coordinated visuals complement each other and create continuity from space to space in neutral beiges and gray tones.

As part of Continuum™ Solutions, all three collections work seamlessly with other Armstrong Commercial Flooring products to create beautiful, coordinated spaces, allowing you to choose the right flooring structure for the space you are designing without compromising your vision.

DecorArt® Rejuvenations™ TimberLine®
37504 **Rustic Beech** tan

DIAMOND 10® TECHNOLOGY

Stunning Design. Proven Durability.

Whether you are looking for a dramatic statement for a space, or a beautiful, timeless anchor for your interior design, DecorArt® Rejuvenations™ with Diamond 10® Technology coating is a low-maintenance sheet floor that delivers enhanced scratch, stain and scuff resistance. Coordinating across the Armstrong Flooring commercial portfolio, Rejuvenations provides an extensive offering of visuals and colors for your installation.

Perfect for healthcare applications looking for soothing, biophilic designs, education spaces commanding beautiful visuals that also stand up to the day-to-day demands of this environment, or corporate spaces seeking textile visuals with resilient benefits, Rejuvenations with Diamond 10 Technology coating meets your needs.

DecorArt® Rejuvenations™ StoneRun™
34506 **Sidecar** roadmap; 34507 **Sidecar** destination

Trusted Performance

With this beautiful collection, keeping your newly installed Rejuvenations™ with Diamond 10® Technology coating looking beautiful for years to come is of utmost importance. The inclusion of our patent-pending Diamond 10® Technology coating provides an enhanced level of performance, standing up to commercial demands such as heavy traffic and staining to keep your floors looking newer longer. For added ease of maintenance, Rejuvenations offers a no-polish option for a true low-maintenance floor.

DecorArt® Rejuvenations flooring is backed by a 10-year limited commercial warranty.

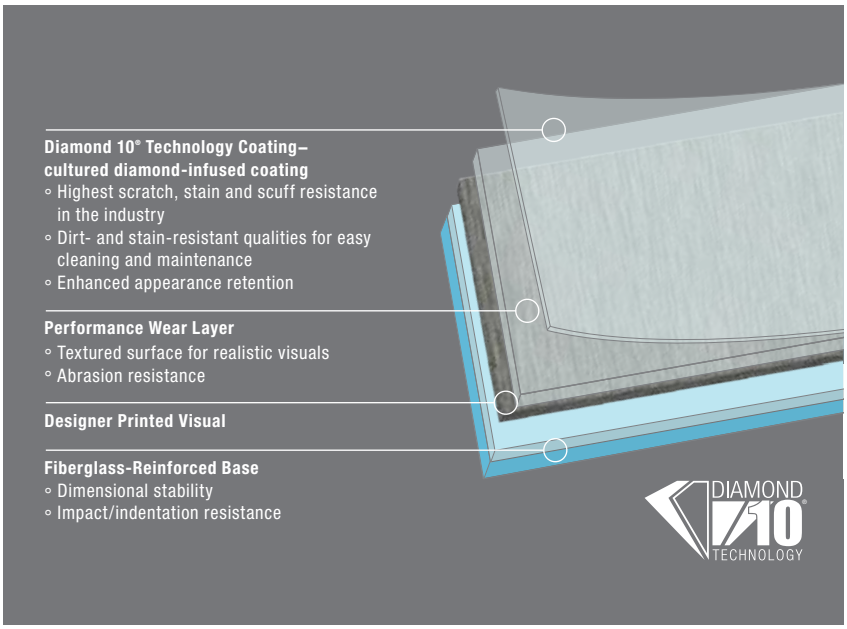

DecorArt® Rejuvenations™ TimberLine®
37516 **Oak Landing** peanut

SCRATCH RESISTANCE

Each product was scratched using an abrasive pad under a 12.5 lb. load for 20 passes.

Diamond 10® Technology Coating | Aluminum Oxide | Quartz Enhanced Urethane | Urethane | Urethane

HOSPITAL STAIN RESISTANCE

Staining reagents were applied to material using an eye dropper and allowed to reside on the samples for 24 hours. Material was cleaned using a common disinfectant cleaner and clean cotton cloth.

Diamond 10® Technology Coating

Aluminum Oxide

Quartz Enhanced Urethane

Urethane

Urethane



Easy Maintenance

Maintaining the appearance of your floor for years to come will be simple with Rejuvenations™ with Diamond 10® Technology coating. With dirt, scratch and stain resistant qualities, Rejuvenations is a low-maintenance product with a no-polish option, minimizing costly disruptions for maintenance procedures.

- No Polish/No Buff
- No Polish/Spray Buff

With Diamond 10 Technology coating, DecorArt® Rejuvenations is a true no-polish option.

POLISH

Before first application of polish, scrub the floor with a neutral cleaner such as Armstrong® S-485 Commercial Floor Cleaner at six ounces per gallon using a rotary machine equipped with a 3M™ Blue Cleaner Pad to ensure polish wet out and adhesion.

DISINFECTANT/WET OUT

Before first application of a disinfectant cleaner, scrub floor with Armstrong® S-485 Commercial Floor Cleaner at six ounces/gallon using a rotary machine equipped with a 3M™ Blue Cleaner Pad to promote disinfectant wet out. If disinfectant does not wet out to your maintenance standards, strip once with a stripper containing sodium hydroxide (NaOH) at a concentration of 1% or greater, such as Spartan® Square One®, and a dilution of no more than 1:4.

Visit ArmstrongFlooring.com/commercial for detailed maintenance instructions.

Peace of Mind

- Ortho-Phthalates Free and heavy-metal free
- Low VOC Emissions and FloorScore® certified
- Meets WELL Building Standards requirements for: Cleanable Environments, VOC Reduction, Toxic Material Reduction, Biophilia I Qualitative and Material Transparency
- Qualifies for Collaborative for High-Performance Schools CHPS Durable and Low-Maintenance credit
- Third-party certified Environment Product Declaration (EPD)
- Meets requirements for LEED v4 Material Ingredient credit
- Recyclable through the On&On Sustainability Recycling Program
- Helps conserve energy when higher-rated light-reflective colors are selected

DecorArt® Rejuvenations™ Ambigu™
38532 **Impresso** batiste

DIAMOND 10® TECHNOLOGY

HETEROGENEOUS DESIGNER SERIES

DecorArt® Rejuvenations™ TimberLine®

DIAMOND 10 TECHNOLOGY

Indicates Coordinating Wall Base

WB

Indicates Coordinating Weld Rod

S: Solid

Design Repeat

38.98″ x 39.37″
Cherry
Maple
Sidecar
Walnut

Random
38.98″ x 39.37″
Cityscape
Metropolis
Urban Maze

77.95″ x 39.37″
Hickory Run
Impresso
Lithos Stone
Mahogany
Maple Lane
Oak Landing
Rustic Beech
Walnut Street

Random
77.95″ x 39.37″
Alchemy
Keamzie
Solidified

37518 **Oak Landing**
brazilnut
21
S: WS202

37516 **Oak Landing**
peanut
21
S: WS211

37519 **Oak Landing**
acorn
16
S: WS216

37517 **Oak Landing**
pecan
75
S: WS205

37520 **Oak Landing**
chestnut
54
S: WS035

37524 **Maple Lane**
sugarcane
73
S: WS227

37523 **Maple Lane**
agave
22
S: WS228

37525 **Maple Lane**
honeycomb
22
S: WS190

37501 **Maple**
knock knock
20
S: WS236

37502 **Rustic Beech**
sunscreen
73
S: WS232

37503 **Rustic Beech**
sun kissed
22
S: WS221

37504 **Rustic Beech**
tan
60
S: WS233

37528 **Walnut**
lentil
21
S: WS229

37526 **Maple Lane**
golden nectar
19
S: WS226

37537 **Maple Lane**
molasses
76
S: WS199

37527 **Maple Lane**
maple syrup
16
S: WS035

37507 **Hickory Run**
biscotti
24
S: WS207

37508 **Hickory Run**
gingersnap
75
S: WS215

37509 **Hickory Run**
dark pizelle
73
S: WS204

37510 **Hickory Run**
brownie
76
S: WS222

37529 **Walnut**
baked bean
74
S: WS111

37505 **Mahogany**
cardinal
73
S: WS198

37506 **Mahogany**
robin
73
S: WS198

37532 **Walnut Street**
snow capped
73
S: WS238

37533 **Walnut Street**
cabin
73
S: WS203

37534 **Walnut Street**
natural honey
54
S: WS225

37536 **Walnut Street**
deep forest
24
S: WS183

37535 **Walnut Street**
fox
73
S: WS230

37530 **Cherry**
crimson
22
S: WS235

HETEROGENEOUS DESIGNER SERIES

DecorArt® Rejuvenations™ StoneRun™

DIAMOND 10 TECHNOLOGY

Indicates Coordinating Wall Base

WB

Indicates Coordinating Weld Rod

S: Solid

Design Repeat

38.98″ x 39.37″
Cherry
Maple
Sidecar
Walnut

Random 38.98″ x 39.37″
Cityscape
Metropolis
Urban Maze

77.95″ x 39.37″
Hickory Run
Impresso
Lithos Stone
Mahogany
Maple Lane
Oak Landing
Rustic Beech
Walnut Street

Random 77.95″ x 39.37″
Alchemy
Keamzie
Solidified

34509 **Solidified**
salted concrete

S: WS106

34504 **Sidecar**
vacation

S: WS101

34501 **Lithos Stone**
jasmine

S: WS231

34510 **Solidified**
stone

S: WS200

34505 **Sidecar**
navigation

S: WS208

34503 **Lithos Stone**
earl

S: WS131

34511 **Solidified**
asphalt gray

S: WS201

34506 **Sidecar**
roadmap

S: WS234

34512 **Solidified**
pavement



S: WS215

34507 **Sidecar**
destination

S: WS202

DecorArt® Rejuvenations™ TimberLine®
37533 **Walnut Street** cabin

HETEROGENEOUS DESIGNER SERIES

DecorArt® Rejuvenations™ Ambigu™

DIAMOND 10 TECHNOLOGY

Indicates Coordinating Wall Base

WB

Indicates Coordinating Weld Rod

S: Solid

Design Repeat

38.98″ x 39.37″
Cherry
Maple
Sidecar
Walnut

Random
38.98″ x 39.37″
Cityscape
Metropolis
Urban Maze

77.95″ x 39.37″
Hickory Run
Impresso
Lithos Stone
Mahogany
Maple Lane
Oak Landing
Rustic Beech
Walnut Street

Random
77.95″ x 39.37″
Alchemy
Keamzie
Solidified

38501 **Alchemy**
golden treasure

S: WS206

38504 **Alchemy**
regal

S: WS170

38505 **Alchemy**
empress sand



S: WS237

38506 **Alchemy**
royal

S: WS223

38503 **Alchemy**
princess gray

S: WS170

38502 **Alchemy**
gingerly put

S: WS032

38508 **Keamzie**
koala

S: WS210

38509 **Keamzie**
melbourne

S: WS212

38511 **Keamzie**
kangaroo



S: WS131

38512 **Keamzie**
sydney



S: WS197

38513 **Keamzie**
down under

S: WS213

38510 **Keamzie**
g'day mate

S: WS196

38532 **Impresso**
batiste

S: WS170

38535 **Impresso**
tricot

S: WS209

38533 **Impresso**
merino

S: WS224

38534 **Impresso**
bisso

S: WS180

HETEROGENEOUS DESIGNER SERIES

DecorArt® Rejuvenations™ Ambigu™

DIAMOND 10 TECHNOLOGY

Indicates Coordinating Wall Base

WB

Indicates Coordinating Weld Rod

S: Solid

Design Repeat

38.98″ x 39.37″
Cherry
Maple
Sidecar
Walnut

Random 38.98″ x 39.37″
Cityscape
Metropolis
Urban Maze

77.95″ x 39.37″
Hickory Run
Impresso
Lithos Stone
Mahogany
Maple Lane
Oak Landing
Rustic Beech
Walnut Street

Random 77.95″ x 39.37″
Alchemy
Keamzie
Solidified

38517 **Metropolis**
transit

S: WS219

38518 **Metropolis**
garment district



S: WS030

38516 **Metropolis**
tourist

S: WS220

38515 **Metropolis**
new yorker



S: WS192

38519 **Metropolis**
never sleeps



S: WS217

38514 **Metropolis**
broadway

S: WS218

38522 **Urban Maze**
hail a cab

S: WS219

38523 **Urban Maze**
times square



S: WS030

38521 **Urban Maze**
traffic jam

S: WS220

38520 **Urban Maze**
soho

S: WS192

38524 **Urban Maze**
black out

S: WS217

38525 **Urban Maze**
herald square



S: WS218

38528 **Cityscape**
taxi stand

S: WS219

38529 **Cityscape**
manhattan

S: WS030

38527 **Cityscape**
catch the train

S: WS220

38526 **Cityscape**
upper east side

S: WS192

38530 **Cityscape**
ny minute



S: WS217

38531 **Cityscape**
bryant park

S: WS218

Completing Your Specification

Armstrong Flooring has a solution for all your commercial spaces beyond flooring — with finishing touches to complete your job — like Adhesives, Wall Base, Weld Rods, Stair Treads, Transition Strips and Maintenance products. Go to ArmstrongFlooring.com to view our complete line.

Flooring Recommendations Guide

Our flooring recommendations can help you quickly identify products designed to work in specific spaces and beyond. Partner with your Armstrong Flooring sales representative as your trusted resource to help you with all the information you need to successfully select and install the right floor for all types of environments, spaces and buildings.

● Recommended flooring choice(s) for the space	DecorArt® Rejuvenations™ TimberLine®, StoneRun™, Ambigu™ with Diamond 10® Technology coating
HEALTHCARE/HOSPITAL ENVIRONMENTS (a)	
CAFETERIA, DINING AREA (c)	●
CHAPEL	●
COMMERCIAL PARKING GARAGE WALKWAY (COVERED)	
COMPUTER TRAINING ROOM (3)	●
CORRIDOR	●
CRITICAL/INTENSIVE CARE	●
DATA WAREHOUSING	
DIALYSIS (d)	●
DRY PHYSICAL THERAPY	●
ELEVATOR	●
EMERGENCY ROOM	●
EXAM/PROCEDURE ROOM	●
GIFT SHOP	●
HYDRO PHYSICAL THERAPY	2
HYPERBARIC ROOM	3
LABOR DELIVERY ROOM	●
LABORATORY	● f
LAVATORY	●
LOBBY	●
NURSE'S STATION	●
OFFICE/ADMIN/CONFERENCE ROOM	●
OPERATING ROOM (b)	●
PATIENT ROOM	●
PHARMACY	●
RAMP/RAMPED CORRIDOR (DRY)	2
SCRUB AREA	● d
STAIRWAY/LANDING	●
STAFF LOUNGE	●
TELECOM CENTER	
UTILITY/STORAGE/FILING ROOM	●
WAITING ROOM	●
HEALTHCARE/ASSISTED LIVING	
ACTIVITY ROOM/COMMON AREA	●
BEAUTY SALON/BARBER SHOP	●
CORRIDOR	●
MAIN DINING AREAS (c)	●
DOCTOR/DENTIST OFFICE	●
LOBBY	●
RESIDENCE BATHROOM (d)	●
RESIDENCE KITCHEN	●
RESIDENCE ROOM	●

	DecorArt® Rejuvenations™ TimberLine®, StoneRun™, Ambigu™ with Diamond 10® Technology coating
EDUCATIONAL ENVIRONMENTS	
AUDITORIUM	●
CAFETERIA, DINING AREA (c)	●
CLASSROOM/LECTURE HALL	●
COMMERCIAL PARKING GARAGE/WALKWAY (COVERED)	
COMPUTER REPAIR AREA	
COMPUTER TRAINING ROOM (3)	●
CORRIDOR	●
DATA WAREHOUSING	
DORMITORY ROOM	●
ELEVATOR	●
ENTRYWAY/FOYER (d)	
FOOD SERVICE AREA (c)	● d
GYMNASIUM	●
LABORATORY	●
LAVATORY	●
LIBRARY	●
LOCKER ROOM (NO SPIKES)	2
MULTIPURPOSE/CAFETORIUM	●
OFFICE/ADMINISTRATIVE/CONFERENCE ROOM	●
RAMP/RAMPED CORRIDOR (DRY)	2
STAIRWAY/LANDING	●
TEACHER'S LOUNGE	●
TELECOM CENTER	
UTILITY/STORAGE AREA	●
RETAIL/STORE ENVIRONMENTS	
AUTOMOBILE SHOWROOM	●
CHECKOUT/CASH WRAP	●
COMPUTER REPAIR AREA	
ENTRYWAY/FOYER (d)	
FAST FOOD COUNTER (FRONT)	●
FLORAL AREA/GARDEN CENTER	●
FOOD SERVICE (c)	● d
FROZEN FOOD	●
INDOOR MALL COMMON AREA	●
LAUNDROMAT	●
PET SHOP	●
PHOTO PROCESSING	●
PRODUCE AREA	●
SALES FLOOR – DEPARTMENT STORE	●
SALES FLOOR – GROCERY	●
SALES FLOOR – MASS MERCHANT	●

Flooring Recommendations Guide

● Recommended flooring choice(s) for the space	DecorArt® Rejuvenations™ TimberLine®, StoneRun™, Ambigu™ with Diamond 10® Technology coating
CORPORATE ENVIRONMENTS	
CAFETERIA/DINING AREA (c)	●
COMMERCIAL PARKING GARAGE/WALKWAY (COVERED)	
COMPUTER REPAIR AREA	
COMPUTER TRAINING ROOM (3)	●
CORRIDOR	●
DATA WAREHOUSING	
ELEVATOR	●
ENTRYWAY/FOYER (d)	
LAVATORY	●
LOBBY	●
LUNCHROOM (c)	●
OFFICE/ADMINISTRATION/CONFERENCE ROOM	●
STAIRWAY/LANDING	●
TELECOM CENTER	
UTILITY/STORAGE ROOM	●
HOSPITALITY ENVIRONMENTS	
COMMERCIAL PARKING GARAGE/WALKWAY (COVERED)	
CORRIDOR	●
DANCE FLOOR	●
DINING AREA (c)	●
ELEVATOR	●
ENTRYWAY/FOYER (d)	
EXERCISE ROOM	●
GUEST BATHROOM (d)	●
GUEST ROOM	●
LOBBY	●
LOUNGE	●
STAIRWAY/LANDING	●
VENDING AREA (d)	●

	DecorArt® Rejuvenations™ TimberLine®, StoneRun™, Ambigu™ with Diamond 10® Technology coating
LIGHT-INDUSTRIAL ENVIRONMENTS (e)	
CLEAN ROOM	
COMPUTER LAB REPAIR AREA	3
COMPUTER TRAINING ROOM (3)	●
DATA WAREHOUSING	
ELECTRONIC TESTING LAB	3
ELECTRONICS MANUFACTURING	3
ENVIRONMENTAL CONDITIONING LAB (g)	●
OFFICE/CONFERENCE ROOM	●
PHOTO PROCESSING	●
PRODUCTION LABORATORY	●
RESEARCH LABORATORY	●
SMALL PARTS ASSEMBLY	●
STERILE PACKAGING	●
TELECOM CENTER	
MILITARY HOUSING, LIGHT-COMMERCIAL ENVIRONMENTS	
ACTIVITY ROOM/COMMON AREA	●
BEAUTY SALON/BARBER SHOP	●
CORRIDOR	●
DAYCARE AREA	●
DINING AREA (c)	●
DOCTOR/DENTIST OFFICE	●
RESIDENCE BATHROOM (d)	●
RESIDENCE KITCHEN	●
RESIDENCE ROOM/BARRACK	●
PUBLIC ENVIRONMENTS	
OFFICE/RETAIL(AIRPORT/RAILWAY/ BUS TERMINAL)	●
OFFICE/MEETING ROOMS (CIVIC/ CONVENTION CENTER)	●
MUSEUM/CULTURAL CENTER	●

ADDITION TO SPACES LISTED ON THESE CHARTS: Commercial Products from Armstrong Flooring may be used on stairsteps, risers and landings. A manufactured slip-retardant nosing should always be applied on steps; Most commercial sheet floors can be flash coved (integral cove). Most building codes consider flash coving in the same category as baseboard trim with respect to fire rating. Consult applicable codes for the particular project to determine the interpretation of allowable height for flash cove; commercial products from Armstrong Flooring are not recommended for exterior use, for interior spaces where pointed spike golf or track shoes will be used, or in areas where the floor will be subjected to unusually concentrated static or dynamic loads; commercial products from Armstrong Flooring should not be used as wall covering or wall surfacing.

NOTES: Numerical footnotes (1, 2, 3, etc.) apply to the space requirements; Alpha footnotes (a, b, c, etc.) apply to the product's suitability for the space. The numerical and alpha footnotes are consistent across all Recommended Applications Charts. Depending upon the category, product and space requirements, some footnotes may not appear.

(a) In most cases veterinary applications are similar

(b) Only operating rooms not requiring conductive flooring

(c) Commercial products from Armstrong Flooring are not recommended for commercial kitchens and commercial food processing areas, including behind fast-food counters

(d) No standing water, walk-off mats required

(e) Most commercial products from Armstrong Flooring are not recommended for heavy industrial areas

(f) Not recommended in laboratories that require special decontamination procedures on surfaces, including floors

(g) Only homogeneous products are recommended in low-temperature environmental conditioning units NOT below 34° F (10° C)

(h) Welded sheet vinyl is acceptable for ISO-4 (Class 10) through ISO-8 (Class 100,000) classified cleanrooms.

(1) Aseptic Area – Hygienic conditions are of critical importance

(2) Slip Retardant – A more secure walking surface is required for commercial spaces including daycare, beauty salons, and hotel/motel bathrooms

(3) Not recommended in areas that require electrostatic discharge control

DecorArt® Rejuvenations® Ambigu™
38519 **Metropolis** never sleeps; 38524 **Urban Maze** black out

Resistance to Staining Reagents

We extensively test all of our products in order to determine how our different flooring products will perform in use—and in particular, how the flooring will react to staining reagents. Owners and specifiers know the types of substances that may potentially stain surfaces in their building. This chart is designed to provide owners and specifiers with accurate information about a wide variety of cleaners, disinfectants, foods, beverages, oils, organic solvent and other substances that may be found in buildings and affect the performance of the floor.

ORGANIC SOLVENTS

Acetone	0
Chloroform	0
Ethyl Acetate	0
Ethyl (Denatured) Alcohol	0
Ethyl Ether	0
Ethylene Glycol (Antifreeze)	0
Formaldehyde, 10%	0
Gasoline	0
Isopropyl Alcohol	0
Kerosene	0
Methyl ethyl ketone (M.E.K.)	0
Mineral Spirits	0
Toluene	0
Trichloroethylene	0
Turpentine	0
Xylene	1

ALKALI (BASES)

Ammonium Hydroxide, 30%	0
Potassium Hydroxide, 15%	2,D
Sodium Hydroxide, 50%	2,D

ACIDS

Acetic Acid, 28%	0
Acetic Acid, Glacial	0
Hydrochloric Acid, 38%	0
Lactic Acid, 10%	0
Nitric Acid, 15%	0
Phosphoric Acid, 85%	0
Sulfuric Acid, 40%	0
Sulfuric Acid, 10%	0

SALT SOLUTIONS

Calcium Chloride, Sat'd	0
Copper Sulfate, 10%	0
Ferric Chloride, 10%	0
Silver Nitrate, 1%	0

MEDICAL STAINS & REAGENTS

Aniline Blue, 2.5%	0
Auramine Rhodamine	2
Basic Fuchsin	1
Betadine® Skin Cleanser	0
Betadine® Solution, 10%	0
Bromcresol Green	1
Carbol Fuchsin	1
Eosin, 1%	0
Gentian Violet, 2%	3
Glutaraldehyde	0
Iodine Tincture	3
Iodine Gram Stain	2
Iodoform, 1%	0
Lugol's Solution	3
Merthiolate Tincture	0
Methylene Blue	1
Picric Acid, 1%	1
Potassium Permanganate, 0.5%	2
Tincture of Benzoin	2,R
Urea Solution	0
Wright's Blood Stain	2

0: No Stain; 1: Slight; 2: Moderate; 3: Severe; Bl: Bleaching; D: Dulling; S: Softening; R: Reagent left a residue

DISINFECTANTS AND CLEANERS

Ethyl Alcohol-Based Hand Sanitizer, 70%	0
Clorox®	0
Comet® Bathroom Cleaner	0
Hydrogen Peroxide	0
Lysol® Liquid Disinfectant	0

FOOD SERVICE

Catsup	0
Coffee, Hot Black	0
Cola Drink	0
French Dressing	0
Mustard	1
Red Food Color	1
Red Wine	0
Soy Sauce	0
Spaghetti Sauce	0
Tea, Hot Black	0
Tomato Paste	0

OFFICE

Ball Pen Ink	3
Carbon Paper Smudge	2
Fountain Pen Ink	0
Lead Pencil	1
Permanent Black Marker	2
Red Crayon	1
Red Tempura Paint	0

OILS

Beef Tallow, Hot	0
Canola Oil	0
Cottonseed Oil	0
Brake Fluid	0
Dextron Transmission Fluid	0
Mineral Oil	0
Olive Oil	0
SAE #10 Oil	0
30 wt. Non-Detergent Oil	0
Used Motor Oil	0

MISCELLANEOUS

Asphalt Driveway Sealer	0
Blue Chalk	0
Black Rit® Dye	0
Eye Shadow	0
Hair Color	2
Lipstick	0
Perfume	0
Red Candle Wax	0
Red Nail Polish	0
Shoe Polish, Liquid Brown	0
Shoe Polish, Paste Brown	0

Samples were tested as manufactured (no additional surface treatments). All samples were exposed to reagents for four hours (uncovered), then cleaned with a neutral commercial cleaner and cotton cloth. A key for interpreting results is found above. It is important to note that in some cases residual stain, residues and surface dulling may be further reduced or eliminated with different or more aggressive cleaning procedures and or cleaning agents than the common method used for this multi-product comparison. For further details on appropriate cleaning methods and care for specific products, please consult the care and maintenance guidelines for the specific product at ArmstrongFlooring.com/commercial.

National Average Installed Cost

Prices are approximations only. Actual prices will vary based on job conditions and local labor cost. Estimated prices include material and labor figured on a 500 sq. ft. (46.45 m^2) open area installation without any specific cuttings or special subfloor preparation.

	DecorArt® Rejuvenations™ TimberLine® | StoneRun™ | Ambigu™ with Diamond 10® Technology coating
THICKNESS	0.080 in. (2.0 mm)
US DOLLARS/ CANADIAN DOLLARS	$5.00 – $5.75

Light Reflectivity - Why Is It Important

All light reflectivity values listed are based on a percentage system, the higher the percentage (eg. 20-24, 35-39), the higher the light reflectance of the floor. Research indicates reflectance can help drive daylight further into space and reduce reliance on artificial lighting, resulting in reduced electricity usage and costs. Glare from flooring is a characteristic of glossy finishes, not reflectance. Flooring in lighter colors with a matte finish have high reflectance values, but do not add to glare. LEED® encourages project teams to select flooring with high reflectivity values +/- 25%.

	DecorArt® Rejuvenations™ TimberLine® with Diamond 10® Technology coating	DecorArt® Rejuvenations™ StoneRun™ with Diamond 10® Technology coating	DecorArt® Rejuvenations™ Ambigu™ with Diamond 10® Technology coating
0-9	37504, 37506, 37509, 37510, 37520	–	38524, 38530
10-14	37505, 37508, 37517, 37519, 37527, 37528, 37529, 37530, 37534, 37535, 37536	34506, 34512	38510, 38519
15-19	37516, 37518, 37533, 37537	–	38513, 38520, 38523, 38526, 38529
20-24	37503, 37507	–	38509, 38511, 38515, 38518, 38521, 38525, 38527, 38531
25-29	37501, 37526, 37532	–	38504, 38505, 38514, 38516, 38522, 38528, 38535
30-34	37502	34501, 34504, 34511	38506, 38512, 38517, 38534
35-39	37524	–	38503, 38532, 38533
40-44	37523, 37525	–	38501, 38502, 38508
45-49	–	–	–
50-54	–	34503, 34510	–
55-59	–	34507, 34509	–
60-64	–	–	–
65-69	–	–	–
70-74	–	–	–

Adhesives and Installation

Our adhesives and installation options, backed by the Armstrong Flooring Guaranteed Installation System, help create a flooring package that gives you a great warranty, backed by the most trusted, reliable name in flooring. Visit ArmstrongFlooring.com for complete installation guidelines.

Flip® Spray Adhesive

High-Moisture: 95% RH

- High-moisture guarantee
- Recommended for heavy rolling loads
- Simple one-step application process

Open time: varies depending on adhesive coverage
Working time: should not exceed 4 hours
Spread rate (Commercial Sheet): 140–170 sq. ft./bottle

Options: 22 oz. bottle

S-240 Epoxy Adhesive

Epoxy: 90% RH, 8 lbs. MVER

- For use with Commercial sheet, Linoleum sheet, VCT, LVT and Rubber Tiles
- Recommended for heavy loads
- Can be used on multiple substrates

Open time: 10–20 minutes
Working time: 60 minutes
Spread rate: 170–190 sq. ft./gal.
Trowel: fine notch

Options: 3/4 gallon, 1-1/2 gallon

S-599 ChoiceStrong™ Vinyl Sheet Adhesive Premium Commercial

High Moisture: 90% RH, 5lbs. MVER

- Strong bond and shear strength
- Can be used for vinyl-, glass- and felt-backed sheet

Open time: 10–20 minutes over porous
30+ minutes over non-porous
Working time: 60 minutes after dry to touch
Spread rate: 250–300 sq. ft./gal.
Trowel: fine notch

Options: 1 gallon, 4 gallon

S-543 Commercial Sheet Flooring and LVT Adhesive

High-Moisture: 90% RH, 7lbs. MVER for LVT
5lbs. MVER for Sheet

- High-moisture guarantee
- Reduced need for moisture remediation

Open time: 10–20 minutes over porous
30+ minutes over non-porous
Working time: 8 hours after dry to touch
Spread rate: 225–275 sq. ft./gal.
Trowel: fine notch and back roll

Options: 1 gallon, 4 gallon

S-580 Flash Cove Adhesive

- Pressure sensitive adhesive with unlimited working time

Open time: 20–30 minutes
Working time: Unlimited
Spread rate: 200–250 sq. ft./half gal.
Applicator: brush or roller

Options: 1/2 gallon

S-761 Seam Adhesive for Sheet Flooring

- Quick and easy seaming method for vinyl sheet and linoleum sheet
- Excellent seam integrity

Open time: None
Working time: 15 minutes
Spread rate: 144 lin. ft./8 oz. bottle (with 1/8" bead)

Options: 8 oz. bottle

ADHESIVE OPTIONS (Depends on Substrate)		**MOISTURE LIMITS**		
Wood, Concrete, Ceramic, Terrazzo, Marble, Metal, Existing Resilient Floor	**Seams**	**MVER Calcium Chloride Test (lbs./1000 sq. ft./24 hrs.)**	**Relative Humidity In-Situ Probe**	**pH Readings**
S-543 High Moisture, S-599 full-spread, S-240 in heavy static and dynamic load areas, S-580 in flash cove areas, Flip®	Heat weld or seam seal with S-761 Heat weld only with Flip or S-240	5; 8 when using S-240	95% – Flip 90% – S-543, S-240 & S-599	5-9; 5-11 for S-543

Floor Care is Important - Maintenance Options

Our maintenance guidelines can help you protect and improve the appearance of the floor, reducing the effects of wear and abrasion and preserving a fresh look for years. Visit ArmstrongFlooring.com for complete maintenance recommendations.

S-485 Commercial Floor Cleaner

- Neutral floor cleaner at normal dilution, 8.5 pH
- High efficiency allows dilution to as low as 64:1
- Low-foaming formula is great for automatic floor machines, damp-mopping, and/or moderate to heavy scrubbing
- Won't strip polish
- Pleasant fragrance
- Contains no phosphates

Spread Rate: Cleaners and strippers do not have a spread rate; dilute according to instructions for proper pH level

Options: 1 gallon (4 gal./ctn.), 5 gallon

S-495 Commercial Floor Sealer

- Stain-resistant sealer for porous or well-worn floor surfaces
- Provides an excellent base for S-480 or other commercial floor polishes
- High durability for long-lasting protection
- Water-based acrylic emulsion, 7.8 pH
- 16% solids for easy application and excellent leveling
- Semi-permanent for resistance to conventional polish stripping

Spread Rate: 1500–2000 sq. ft. per gallon per coat

Options: 1 gallon (4 gal./ctn.), 5 gallon

S-480 Commercial Floor Polish

- Meets the ASTM D2047 standard for slip-resistance on dry floors
- High durability for long-lasting protection
- Dries bright for areas where buffing is not applicable or desired
- Metal cross-linked acrylic copolymer emulsion polish, 8.5 - 8.75 pH
- 18% solids for easy application and excellent leveling

Spread Rate: 1500–2000 sq. ft. gallon per coat depending on the surface characteristics of the floor
Application: Excellent buffing response for spray-buffing repairs or high-speed burnishing programs (up to 2,000 rpm)

Options: 1 gallon (4 gal./ctn.), 5 gallon

MAINTENANCE OPTIONS

Low Maintenance/No-Polish Option		Traditional	
Spray Buff	Dry Buff	No Buff	Polish
✔		✔	✔

ARMSTRONG FLOOR CARE PRODUCTS

Cleaners	Sealers	Polish
S-485	S-495	S-480

DecorArt® Rejuvenations™ TimberLine™
37526 **Maple Lane** golden nectar

Warranty - Let the Buyer Have Faith

Armstrong Flooring for commercial applications is put through extensive testing to ensure all of our products do what we say they will do. Our floors meet or exceed ASTM International Standards and are tested to any number of 100 plus floor-related tests, many of which are proprietary to Armstrong Flooring.

Products

Armstrong Flooring warrants its regular (first quality) commercial floor products to be free from manufacturing defects from the date of purchase through the limited warranty period (see applicable products and years).

Installation

Armstrong Flooring warrants the installation integrity for products from the date of purchase through the limited warranty period (see applicable products and years) if installed according to the then-current Armstrong Guaranteed Installation Systems manual (F-5061 available at ArmstrongFlooring.com/installationmanual and at floorexpert.com).

Workmanship

Armstrong Flooring does not warrant the installers' workmanship. Workmanship errors should be addressed to the contractor who installed the floor. Your commercial product from Armstrong Flooring should be professionally installed by contractors who have demonstrated expertise in installing commercial floors.

Terms

Within One Year: If a defect covered by this limited warranty is reported to Armstrong Flooring in writing within one year of purchase, Armstrong Flooring will supply new material of the same or similar grade sufficient to repair or replace the defective material. Armstrong Flooring will also pay reasonable labor costs.

Within Two Years: If a defect covered by this limited warranty is reported to Armstrong Flooring in writing after one year but within two years of purchase, Armstrong Flooring will supply new material of the same or similar grade sufficient to repair or replace the defective material. Armstrong Flooring will also pay fifty percent of the reasonable labor costs.

After Two Years: If a defect covered by this limited warranty is reported to Armstrong Flooring in writing after two years but within the limited warranty period (see applicable products and years), Armstrong Flooring will supply new material of the same or similar grade sufficient to repair or replace the defective material. Armstrong Flooring will not pay labor costs.

Armstrong Flooring will not pay labor costs to repair or replace material with defects that were apparent before or at the time of installation.

Exclusions

The following are not covered by this limited warranty: improper installation; differences in color between products and samples or photographs; indentation from failure to use floor protectors; indentation from high heels or spiked shoes; indentation from improper loading of rolling loads, chairs, or other furniture; discoloration; failure of the floor to adhere to the subfloor due to, but not limited to, moisture, alkaline, or hydrostatic pressure from the subfloor; inappropriate end-user activities. Refer to the Armstrong Guaranteed Installation Systems manual (F-5061) at ArmstrongFlooring.com/installationmanual and at floorexpert.com for proper installation, care, and maintenance information for your floor.

THERE ARE NO WARRANTIES BEYOND THIS EXPRESSED LIMITED WARRANTY. ALL OTHER WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. ARMSTRONG FLOORING EXCLUDES ANY LIABILITY FOR LOST PROFITS OR ANY OTHER INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES. THE REMEDIES CONTAINED HEREIN ARE THE ONLY REMEDIES AVAILABLE FOR BREACH OF THIS LIMITED WARRANTY.

NOTE: Some jurisdictions do not allow exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This limited warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Warranty Owner

This limited warranty extends only to the original end-user.

YEARS	PRODUCTS	
10 YEARS	HET	DecorArt® Rejuvenations™ TimberLine®, StoneRun™, Ambigu™ with Diamond 10® Technology coating

DIAMOND 10 TECHNOLOGY

Armstrong® FLOORING Inspiring Great Spaces®

HETEROGENEOUS DESIGNER SERIES

DECORART® Rejuvenations™ TimberLine® | StoneRun™ | Ambigu™

Material
A multi-layered construction consisting of a clear vinyl wear layer and a printed, reinforced fiberglass inner layer on a solid vinyl backing. Protected by a UV-cured, high-performance diamond-infused polyurethane finish, the wear surface has an overall embossed texture. Colors are insoluble in water and resistant to cleaning agents and light.

Size
6 ft. 7 in. W up to 82 ft. L (2.0 m W up to 25 m L)
Maximum Roll Size: 60 yd²
For actual roll size, contact Customer Service.

Gauge (nominal thickness)
Overall 0.080 in. (2.0 mm)

Wear Layer (nominal)
0.022 in. (0.55 mm)

Limitations
Rejuvenations™ with Diamond 10® Technology coating should not be used in the following areas:
- Heavy industrial and exterior areas.
- Commercial kitchens and commercial food processing areas.
- Where pointed spikes such as golf or track shoes will be used.

NOTE: Concentrated static and dynamic loads such as hospital beds, roll-out bleachers, portable x-ray machines, etc., may visibly damage resilient as well as other types of floor coverings. For questions regarding product suitability and detailed instructions for floor preparation and installation in these applications, please contact Armstrong Flooring.

Suitable for Application Over
- Concrete, terrazzo, and other dry, structurally sound monolithic subfloors, which are suspended, on grade, or below grade.
- Suspended wood subfloor construction with approved wood underlayments, and a minimum of 18 in. (45.72 cm) well-ventilated air space below.
- Most metal floors and most existing single-layer resilient floors on approved underlayments.
- Radiant-heated subfloors with a maximum surface temperature of 85° F (29° C).

Unsuitable for Application Over
- Subfloors where excessive moisture or alkali is present.
- Sleeper-constructed wood subfloors, on grade or below grade.
- Lightweight aggregate concrete subfloors having a density of less than 90 lbs. per cu. ft. (1442 kg/m³) or cellular concrete having a plastic (wet) density less than 100 lbs. per cu. ft. (1602 kg/m³) [94 lbs. per cu. ft. (1506 kg/m³) dry weight], or concrete having a compressive strength of less than 3500 psi (24 MPa). Concrete slabs with heavy static and/or dynamic loads should have higher design strengths and densities calculated to accommodate such loads.

Concrete curing agents, sealers, hardeners, or parting agents should be removed.

TECHNICAL DATA

Shipping Weight
6.08 lbs./sq. yd. (3.3 kg/m²)

Gloss (typical value)
60 degrees specular: approximately 2-15

International Specifications
ASTM F 1303, Type I, Grade 1, Class B backing
ISO 10582, Type I

Static Load Limit
750 lbs./sq. in. (52.73 kg/cm²)
ASTM F 970
NOTE: Floors should be protected from sharp-point loads and heavy static loads. High-heeled traffic [1000 psi (70.3 kg/cm²) or more] may visibly damage wood, resilient and other floor coverings.

For questions regarding product suitability and detailed instructions for floor preparation and installation in these applications, please contact ArmstrongFlooring.com.

Fire Test Data
ASTM E 648 Flooring Radiant Panel Critical Radiant Flux – 0.45 watts/cm² or more – Class I

ASTM E 662 Smoke Chamber Specific Optical Smoke Density – 450 or less

CAN/ULC S102.2 Surface Burning Characteristics of Flooring, Floor Covering and Miscellaneous Materials and Assemblies.

Flame Spread Rating – 5 / Smoke Developed Classification – 70
Numerical flammability ratings alone may not define the performance of the product under actual fire conditions. These ratings are provided only for the use in the selection of products to meet the specified limits.

INSTALLATION

Job Conditions
Subfloors/underlayments shall be dry, clean and smooth. They shall be free of dust, solvents, varnish, paint, wax, oil, grease, residual adhesive, adhesive removers, permanent markers and other foreign materials that might affect the adhesion of resilient flooring or cause a discoloration of the flooring from below.

Spray paints, permanent markers and other indelible ink markers must not be used to write on the back of the flooring material or used to mark the concrete slab as they could bleed through, telegraphing up to the surface and permanently staining the flooring material. If these contaminants are present on the substrate, they must be mechanically removed prior to the installation of the flooring material.

For more detailed requirements of concrete, wood and metal subfloors, as well as trowelable and wood underlayments, refer to the installation instructions at ArmstrongFlooring.com.

Moisture testing must be performed on all concrete slabs regardless of their age or grade level including areas where resilient flooring has already been installed. Moisture Vapor Emission Rate (MVER) using Calcium Chloride (ASTM F1869) and/or percent internal relative humidity (ASTM F 2170) tests must be conducted in strict accordance with the most current edition of the ASTM test method. Following are the Armstrong maximum allowable moisture limits:

- When using S-599 ChoiceStrong™ Adhesive, moisture test results shall not exceed a MVER of 5.0 lbs. /1000 sq. ft. /24 hours per ASTM F 1869 and/or 90% RH per ASTM F 2170.
- When using S-543 Adhesive, moisture test results shall not exceed a MVER of 5.0 lbs. /1000 sq. ft. /24 hours per ASTM F 1869 and/or 90% RH per ASTM F 2170.
- When using S-240 Adhesive, moisture test results shall not exceed a MVER of 8.0 lbs. /1000 sq. ft. /24 hours per ASTM F 1869 and/or 90% RH per ASTM F 2170.
- When using Flip® Spray Adhesive, moisture test results shall not exceed 95% RH per ASTM F 2170.

On installations where both the Moisture Vapor Emission Rate and percent internal relative humidity tests are conducted, results for both tests shall comply with the allowable limits listed above.

Before installation concrete floors should also be tested for pH following procedures in ASTM F 710. When testing for pH, the allowable readings for the installation of Armstrong heterogeneous sheet flooring are 5 to 9 when using S-599 ChoiceStrong and/or S-240 and 5 to 11 when using S-543 or Flip Spray Adhesive.

Bond Tests should also be conducted for compatibility with the substrate.

Temperature shall be maintained at a minimum of 65° F (18° C) and a maximum of 100° F (38° C) for 48 hours prior to installation, during installation and 48 hours after completion when using S-599 ChoiceStrong, S-543 or Flip Spray Adhesive. When using S-240, the temperature shall be maintained at a minimum of 65° F (18° C) and a maximum of 85° F (29° C) for 48 hours prior to installation, during installation and 48 hours after completion. A minimum temperature of 55° F (13° C) shall be maintained thereafter. Condition all flooring materials and adhesives to room temperature for at least 48 hours prior to starting installation. Protect all materials from the direct flow of heat from hot-air registers, radiators or other heating fixtures and appliances.

Procedure
Rejuvenations with Diamond 10 Technology coating must be installed full spread using Armstrong S-599 ChoiceStrong Adhesive, S-543 High Moisture Adhesive or Flip Spray Adhesive with the option to use S-580 Adhesive in flash cove areas. Seams must be heat welded or adhered with Armstrong S-761 Seam Adhesive. In areas with heavy concentrated static or dynamic loads, it may be necessary to install with S-240 High Performance Epoxy Flooring Adhesive or Flip Spray Adhesive. Detailed installation instructions can be found at ArmstrongFlooring.com/commercial.

MAINTENANCE
Rejuvenations is designed to be maintained with a No Polish/No Buff maintenance system or by traditional resilient flooring maintenance methods, which include the use of polishes, spray-buffing techniques and appropriate high-speed maintenance systems.

Initial Maintenance Immediately After Installation
- Sweep or vacuum thoroughly.
- Damp mop with a very diluted neutral detergent solution such as Armstrong S-485 Floor Cleaner. Do not wet wash the floor for at least four or five days after installation. Black marks and dirty spots can be treated by spot scrubbing (use nothing more abrasive than a 3M blue or green pad or equal).

Ongoing Maintenance
For specific, ongoing maintenance procedures and options visit ArmstrongFlooring.com

LIMITED WARRANTY
Armstrong Flooring warrants its regular (first quality) DecorArt® Rejuvenations™ with Diamond 10® Technology coating to be free from manufacturing defects for 10 years from the date of purchase. Armstrong also warrants the installation integrity of its commercial floor for ten years from the date of purchase, if installed according to the installation and maintenance instructions at ArmstrongFlooring.com. This warranty extends only to the original end user. Refer to Warranty inside this brochure or visit ArmstrongFlooring.com for warranty details,limitations and exclusions.

FSC www.fsc.org MIX Paper from responsible sources FSC® C074728

FP7440F10072-318
Printed in United States of America
© 2018 AFI Licensing LLC
Armstrong® and Armstrong Logo are trademarks of AWI Licensing LLC.
FloorScore® is a registered trademark of the Resilient Floor Covering Institute.
LEED® is a registered trademark of the United States Green Building Council.
3M is a trademark of 3M
Betadine® is a trademark of Purdue Frederick Company.
Clorox® is a trademark of The Clorox Company
Comet® is a trademark of Comet Cleaners Holdings, INC
Lysol® is a trademark of Reckitt Benckiser LLC.
Rit® is a trademark of Nakoma Products, LLC.
Spartan® and SquareOne® are registered by Spartan Chemical Company, Inc.
All other marks are trademarks of Armstrong Flooring, Inc., or its subsidiaries.

Colors pictured in this brochure are as accurate as possible but may not be identical to the actual product due to the printing process.
For true color representation, order product samples before specifying.

ArmstrongFlooring.com/commercial | 1 888 276 7876

ISO 9001 Quality Management Standard
ISO 14001 Environmental Management Standard
EPD APD
LOW VOC
OP FREE