

adore®

REGENT

SOLID RIGID CORE

MONARCH

flooring

MONARCHX

featuring an attached pad

SOVEREIGN

commercial & residential click down flooring



WATERPROOF • LIFEPROOF • FOOLPROOF

ADORE® REGENT™ SOLID RIGID CORE...RISE ABOVE THE STANDARD.





Adore® Floors, a leader in flooring industry innovation, introduces Regent™ Solid Rigid Core, a new flooring category that raises the standard in beautiful, high performance resilient flooring.

Regent™ Solid Rigid Core is constructed on a single, homogeneous platform that unites impressive visuals with unprecedented strength, dimensional stability and damage resistance to create an outstanding solution for commercial and residential installations.

Regent™ Solid Rigid Core combines a high polymer content with today's most popular visuals. Melded under heat and pressure into solid planks, Regent's™ manufacturing process results in a flooring product with a density much greater than that of traditional composites, superior indentation resistance, a waterproof core, and greater overall dimensional stability.

REGENT™ SOLID RIGID CORE....RISE ABOVE THE STANDARD.

MONARCH | MONARCHX | SOVEREIGN



WATERPROOF CORE



Regent™ Solid Rigid Core is waterproof -- perfect for installation in bathrooms, kitchens, foyers and areas where topical moisture can present problems.

In the face of normal water-related hazards such as flooding, overflows and leakage, Regent™ will not swell but instead maintains its original appearance through superior dimensional stability.

Even Regent's™ acoustical layer is waterproof. The high quality polymer based closed cell pad is resistant to water damage, mold and mildew and outperforms other pad options in its category.

Regent™ Solid Rigid Core insures your flooring remains stable in the presence of water and other topical liquids. Regent™ Monarch, Monarch X, and Sovereign all carry a lifetime waterproof warranty.

REGENT™ IS WATERPROOF!





ENGINEERED LIFEPROOF

The density of Regent™ Solid Rigid Core is much greater than that of traditional composite flooring. The result is enhanced dimensional stability, damage resistance and indentation resistance.

Regent's advanced composition allows for installation over radiant heat and remains dimensionally stable in indoor areas exposed to sunlight. Plus, with surfaces fortified by Adore®'s Duramond™ technology, Regent™ is pet friendly, stands up to dirt, drops, and spills, and is resistant to the wear and tear of everyday living

Engineered with over 40 years of manufacturing experience, Regent™ Solid Rigid Core works with your life.

Scratch Resistant
Scuff Resistant
Temperature Durable
Pet Proof
Drop Proof
Easy to Clean
Easy to Maintain...

REGENT™ IS LIFEPROOF!







FOOLPROOF INSTALLATION




Regent™ Solid Rigid Core is the fastest, most secure and easiest click (glueless) installation in its category.

All Regent™ offer a strong, stable, easy-to-click I4F 3L Angle-Drop locking system.

Regent's™ density nearly eliminates telegraphing and allows for installation over existing floors including concrete, hardwood, ceramic and vinyl. Additionally, the superior dimensional stability significantly improves heat and light resistance and requires no pre-installation acclimation time in moderate temperature zones*.

Rigidity, squareness and accurate profiling make installation without the use of transitional strips possible in large expanses (up to 4000 ft² or 63 linear feet). Plus, the very structure of the product facilitates the installation speed and process.

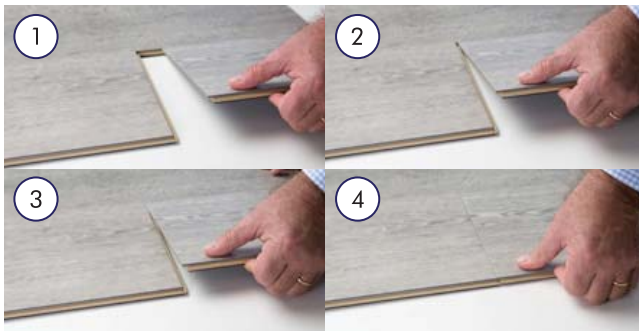

REGENT™....FAST, SECURE, FOOLPROOF!



*Moderate temperatures = 50 - 90° F, 10 - 33° C

3

PRODUCT
LINES

COMMERCIAL & RESIDENTIAL

MONARCH | MONARCHX | SOVEREIGN

Regent™ floors share the same beautiful visuals over 3 separate product lines specifications: Monarch, Monarch X and Sovereign.

Monarch & Monarch X: 5.9" x 48.0", 150 mm x 1220 mm, 3.8 mm core gauge with angle-drop click locking system suitable for home, multi-residential and light commercial use. Monarch X offers the attached 1 mm IXPE acoustic pad option, bringing its total gauge to 4.8mm overall.

Sovereign: 7" x 48", 181 mm x 1220 mm, 6 mm gauge with the fast, secure angle-drop locking system, comes standard with the attached 1.5 mm IXPE acoustical underlayment and is suitable for everything from home to full commercial use.

Regent™ products are FloorScore® certified, orthophthalate free and 100% recyclable.



SCS Global Services

COMFORTABLE, WARM AND QUIET UNDERFOOT, ADORE® REGENT™ OFFERS THE INDUSTRY'S BEST ACOUSTIC UNDERLAYMENT PAD



The unique uniform micro closed-cell technology offers a water proof backing that is mold and mildew resistant and provides for:

- GREATER SOUND ABSORPTION
- SUPERIOR SHOCK ABSORPTION
- STABILITY & RESILIENCE
- SUPERIOR INSULATION
- DECREASED TELEGRAPHING
- MOISTURE RESISTANCE
- ANTIBACTERIAL RESISTANCE
- MOLD & MILDEW RESISTANCE



FAIRBRIGHT OAK

MONARCH MON-N626 | MONARCH X MON-X626 | SOVEREIGN SOV-X626



KNOTTED HEARTWOOD

MONARCH MON-N607 | MONARCH X MON-X607 | SOVEREIGN SOV-X607



WHEATON GOLD

MONARCH MON-N604 | MONARCH X MON-X604 | SOVEREIGN SOV-X604



SALTED OAK

MONARCH MON-N608 | MONARCH X MON-X608 | SOVEREIGN SOV-X608



NORSE COUNTRY BARK

MONARCH MON-N620 | MONARCH X MON-X620 | SOVEREIGN SOV-X620



SMOKED CYPRESS

MONARCH MON-N602 | MONARCH X MON-X602 | SOVEREIGN SOV-X602



CINDERED COBALT

MONARCH MON-N629 | MONARCH X MON-X629 | SOVEREIGN SOV-X629



RIVERBANK GRAY

MONARCH MON-N606 | MONARCH X MON-X606 | SOVEREIGN SOV-X606



SUMMER STORM

MONARCH MON-N628 | MONARCH X MON-X628 | SOVEREIGN SOV-X628



SEASIDE MYRTLE

MONARCH MON-N622 | MONARCH X MON-X622 | SOVEREIGN SOV-X622





RUFFLED DOVE

MONARCH	MON-N631
MONARCH X	MON-X631
SOVEREIGN	SOV-X631

SEASONED KHAKI

MONARCH	MON-N632
MONARCH X	MON-X632
SOVEREIGN	SOV-X629



LUMINOUS IVORY

MONARCH	MON-N633
MONARCH X	MON-X633
SOVEREIGN	SOV-X633

DIAMOND STEEL

MONARCH	MON-N634
MONARCH X	MON-X634
SOVEREIGN	SOV-X634



REGENT SOLID RIGID CORE SPECIFICATIONS

SOVEREIGN

commercial click down flooring

7.0" x 48.0" nominal plank dimensions
12.0" x 24.0" nominal tile dimensions
6.0 mm total thickness
4.0 mm core gauge
22 mil (0.55mm) wear layer
Luxurious 1.5 mm attached IXPE pad
Industry-leading click down installation
Duramond™ surface enhancement
Orthophthalate-free construction
100% recyclable after use

Planks - 10 planks / 23.75 ft² (nom.)
Tiles - 12 tiles / 24.00 ft² (nom.)

15 Year Commercial Warranty
Lifetime Residential Warranty

MONARCHX

featuring an attached pad

5.9" x 48.0" nominal plank dimensions
12.0" x 24.0" nominal tile dimensions
4.8 mm total thickness
3.5 mm core gauge
12 mil (0.3mm) wear layer
Class-leading 1.0 mm attached IXPE pad
Industry-leading click down installation
Duramond™ surface enhancement
Orthophthalate-free construction
100% recyclable after use

Planks - 16 planks / 31.51 ft² (nom.)
Tiles - 16 tiles / 32.00 ft² (nom.)

10 Year Light Commercial Warranty
Lifetime Residential Warranty

MONARCH

premium click down planks & tiles

5.9" x 48.0" nominal plank dimensions
12.0" x 24.0" nominal tile dimensions
3.8 mm total thickness
3.5 mm core gauge
12 mil (0.3mm) wear layer
Industry-leading click down installation
Duramond™ surface enhancement
Orthophthalate-free construction
100% recyclable after use

Planks - 16 planks / 31.51 ft² (nom.)
Tiles - 16 tiles / 32.00 ft² (nom.)

10 Year Light Commercial Warranty
Lifetime Residential Warranty

SPECIFICATION TESTING FOR RIGID SOLID CORE

	Standard	Sovereign Result	Monarch Result	Monarch X Result
Total Thickness	ASTM F-386	6.0mm	3.8mm	4.8mm w/pad
Wear Layer Thickness	ASTM F-410	0.55 mm/22 mil	0.3mm/12 mil	0.3mm/12 mil
Critical Radiant Flux	ASTM E-648	Class I	Class 1	Class 1
Chemical Resistance	ASTM F-925	No change 24 hours	No change 24 hours	No change 24 hours
Static Load Limit	ASTM F-970	1,500 psi	1,500 psi	1,500 psi
Heat Stability	ASTM F-1514	<8.0 Delta E	<8.0 Delta E	<8.0 Delta E
Light Stability	ASTM F-1515	<8.0 Delta E	<8.0 Delta E	<8.0 Delta E
Residual Indentation	ASTM F-1914	<0.002 Inch	<0.002 inch	<0.002 inch
Size Change	ISO 23999	Pass	Pass	Pass
Size and Squareness	ASTM F-2421	<0.25%	<0.25%	<0.25%
Static Coefficient of Friction	ASTM D2047	Meets or exceeds 0.6	Meets or exceeds 0.6	Meets or exceeds 0.6
Cupping/Curling	ISO 23999	≤0.10mm	<0.05mm	<0.05mm
Impact Sound Transmission (IIC)	ASTM E-492	IIC 63	IIC 43	IIC 63
Airborne Sound Transmission (STC)	ASTM E-90	STC 53	STC 53	STC 53
Impact Sound Reduction (ΔIIC)	ASTM E-2179	ΔIIC 24	ΔIIC 10	ΔIIC 24



adore.
REGENT
SOLID RIGID CORE

ADOREFLOORS.COM

877-359-5095 | 631-843-0900