TEKNOFLOR®

HIGH PERFORMANCE FLOORING

ICON TILE HPD

HIGH PERFORMANCE DESIGN • U.S.A. MADE LUXURY VINYL TILE

VERSATILE. DURABLE. BEAUTIFUL.

Teknoflor Icon Tile HPD was designed to bring a new dimension of design to any commercial setting. The line hosts 22 skus in three distinct and beautiful visuals for countless design options. Feathered Concrete is true to its name and offers a strong industrial, yet soft aesthetic while San Tropez offers a carpet-like textile that is destined to turn heads; both in a 12” x 24” format. Denim offers a denim-like visual in a 7.08” x 47.24” plank format with bold lines and subtle hues. Constructed and designed to coordinate and accentuate with your favorite wood looks, its 2.5mm thickness will sit next to our Forest Plank HPD or our resilient sheet products without the need for a transition strip. Teknoflor Icon Tile HPD is proudly made in America.

DURABLE AND LOW MAINTENANCE	• No Wax, No Buff and no sealers or finishes needed; easily cleaned by damp mopping or auto-scrubbing • 2.5 mm gauge for enhanced performance in heavy traffic areas • Maintenance savings results in investment payback in approximately two years
ENVIRONMENTALLY FRIENDLY	• No buff floors mean no bacteria, dust or wax particles are thrown into the air during cleaning • No odors from finishes or strippers; no wax flushed into sewer system • Complies with REACH requirements for Substances of Very High Concern • No antimicrobial agents added • Made with 100% Virgin Vinyl • Floorscore Certified
SAFE	• ADA Compliant • Compliant for emergency egress areas - NFPA 101
OVERALL THICKNESS	• 2.5 mm overall thickness • 28 mil wear layer thickness
WARRANTY	• 20-year non-prorated commercial warranty
APPLICATIONS	• Ideal for Healthcare, Senior Living, Retail, Corporate/Office, Hospitality, Academic and Educational Environments

SAN TROPEZ COLLECTION (12”x24”)

5301-1 Calcite

5301-2 Sand

5301-3 Garnet

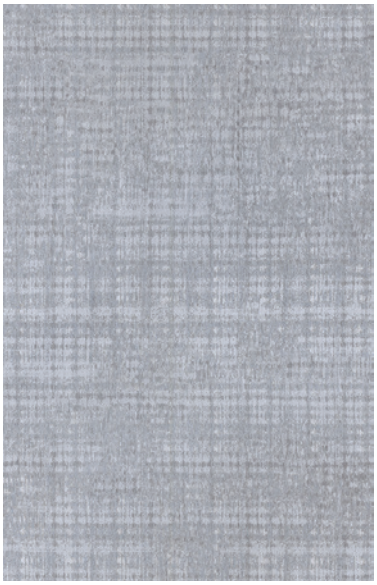

5301-4 Topaz

5301-5 Copper Ore

5301-6 Granite

5301-7 Barite

5301-8 Mica

5301-9 Citrine

5301-10 Sapphire

5301-5 Copper Ore

FEATHERED CONCRETE COLLECTION (12”x24”)

5311-2 Obsidian

5311-4 Desert Sand

5311-5 Volcanic Ash

5311-6 Feldspar

5311-2 Obsidian

DENIM COLLECTION (7.08”x47.24”)

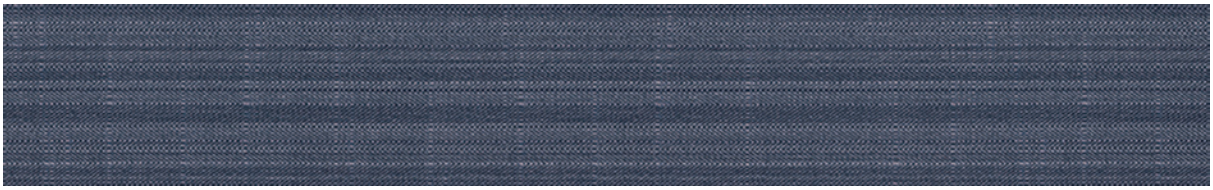

5771-1 Lolite

5771-2 Lapis

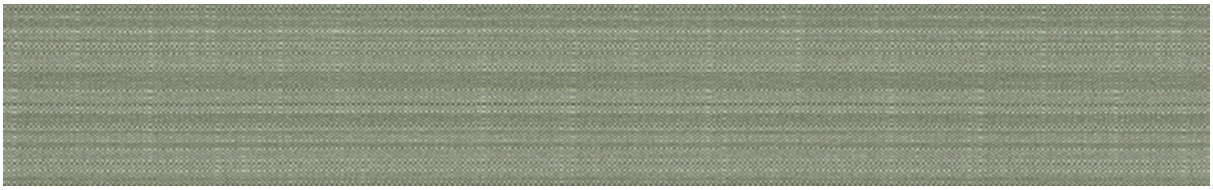

5771-3 Olivine

5771-4 Coral Sand

5771-5 Moonstone

5771-6 Pyrite

5771-7 Agate

5771-8 Jasper

TEKNOFLOR® ICON TILE HPD

HIGH PERFORMANCE DESIGN • U.S.A. MADE LUXURY VINYL TILE

PRODUCT DATA			
STANDARD SPECIFICATION	Commercial - ASTM F1700	DIMENSIONS	12" x 24" TILE 7.08" X 47.24" PLANK
CLASSIFICATION	Class III, Type B	PCS / CARTON	18 (TILE) 15 (PLANK)
COMPOSITION	Virgin PVC, No outside recycled content and Phthalate Free	SQ. FT / CARTON	36 SF/Carton TILE 34.88 SF/Carton PLANK
TOP COAT	HP Urethane Coating with Ceramic Bead	WEAR LAYER THICKNESS	28 mils (0.7mm)
WARRANTY	20-Year Commercial	OVERALL THICKNESS	2.5 mm (0.098")

SAFETY & PERFORMANCE	TEST METHOD	STANDARD REQUIREMENT	RESULT
CRITICAL RADIANT FLUX	ASTM E648	Class I: ≥ 0.45 w/cm2	Passes Requirements
SMOKE DENSITY	ASTM E662	< 450 Flaming & Non-Flaming	Passes Requirements
REACH Substances of Very High Concern (SVHC)	REACH SVHC	SVHC's tested must be < 0.1% by product weight	Passes Requirements
FLOORSCORE			SCS-FS-04933 Certified
HEAVY METALS	ASTM F963	Refer to Standard	No Concern with Heavy Metal Content
PHTHALATES	ASTM D7823 / CPSC-CH-C1001-09.3	Refer to Consumer Product Safety Improvement Act (CPSIA)	Passes Requirements
COEFFICIENT OF FRICTION (STATIC, DRY)	ASTM D2047	≥ 0.5 SCOF Dry	≥ 0.6 SCOF Dry
CASTOR CHAIR	ISO 4918	198 lbs. Load 25,000 cycles / Rating Scale 1-5 / 5-No Change / 1 - Severe Change	25,000 cycles - 4.5 - Slight Change
BODY VOLTAGE	ANSI ESD STM97-2	Average (Abs): ≤2.0kV	Passes Requirements

MANUFACTURING & USAGE	TEST METHOD	STANDARD REQUIREMENT	RESULT
SHORT-TERM INDENTATION	ASTM F1914	Maximum: 0.012"	Surpasses Requirements
STATIC LOAD LIMIT	ASTM F970	PSI ≥ 175: Commercial	Surpasses Requirements (≥1,000 PSI)
FLEXIBILITY	ASTM F137	No cracks/breaks from 0.25" (6.4mm) Mandrel	Passes Requirements
CHEMICAL RESISTANCE	ASTM F925	No more than "Slight Change"	Passes Requirements
RESISTANCE TO HEAT	ASTM F1514	Average & Max ΔE < 8.0	Passes Requirements
RESISTANCE TO LIGHT	ASTM F1515	Average & Max ΔE < 8.0	Passes Requirements
COMPLIANT FOR EMERGENCY EGRESS AREAS - NFPA 101			

GSA Schedule GS-27F-0504H • GS-27F-0036V GS-27F-0015V

ISO 9001 QUALITY SYSTEM 14001 ENVIRONMENTAL MANAGEMENT

floor score certified by SCS Global Services

mindful MATERIALS

hpdc

TEKNOFLOR®

hq: 1005 South 60th Street Milwaukee, WI 53214 | tel: 800.522.9166 | fax: 414.944.0550 | web: teknoflor.com