


Karndean
Designflooring

Product Selector



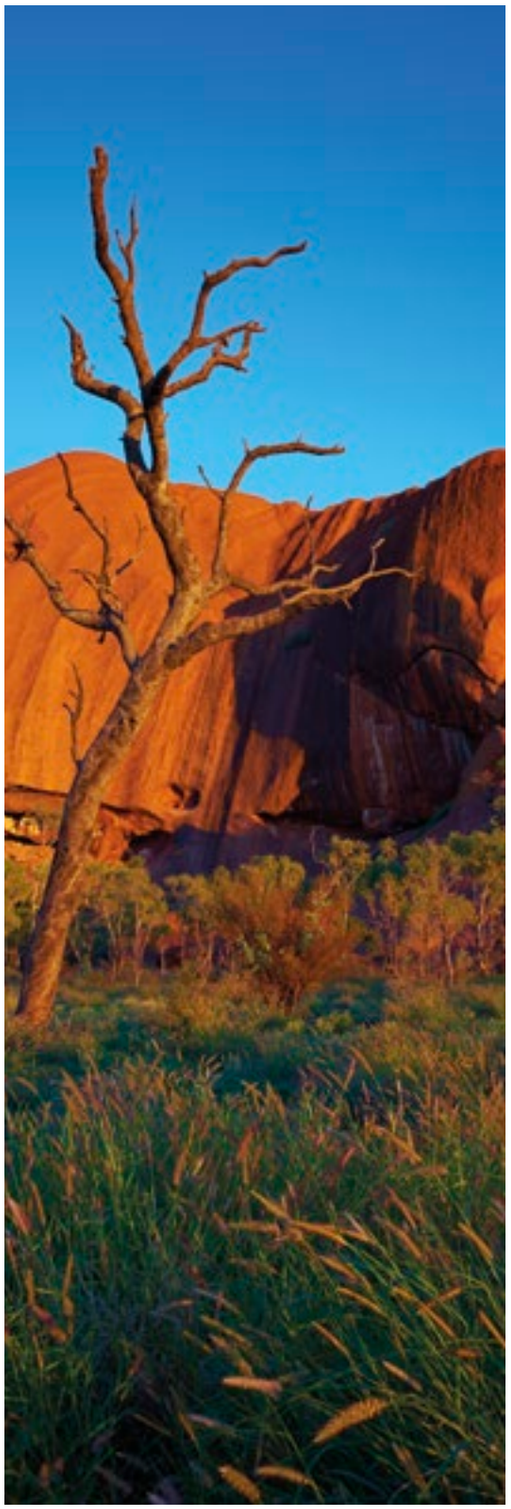


Cover image: Tenebra Walnut **WP330** and Fumo **SP216** with DS07 3mm and 10mm design strips

At Karndean, we see flooring differently...

We travel the world in our quest to bring you exceptional floors that inspire and delight. From the ancient forests of Europe, to the remote Australian outback and beyond, we seek out expressive and intriguing forms in the natural world to influence our unique floor designs. By combining these original features with cutting edge design, we create simply beautiful floors that bring your vision to life.

We see flooring differently...

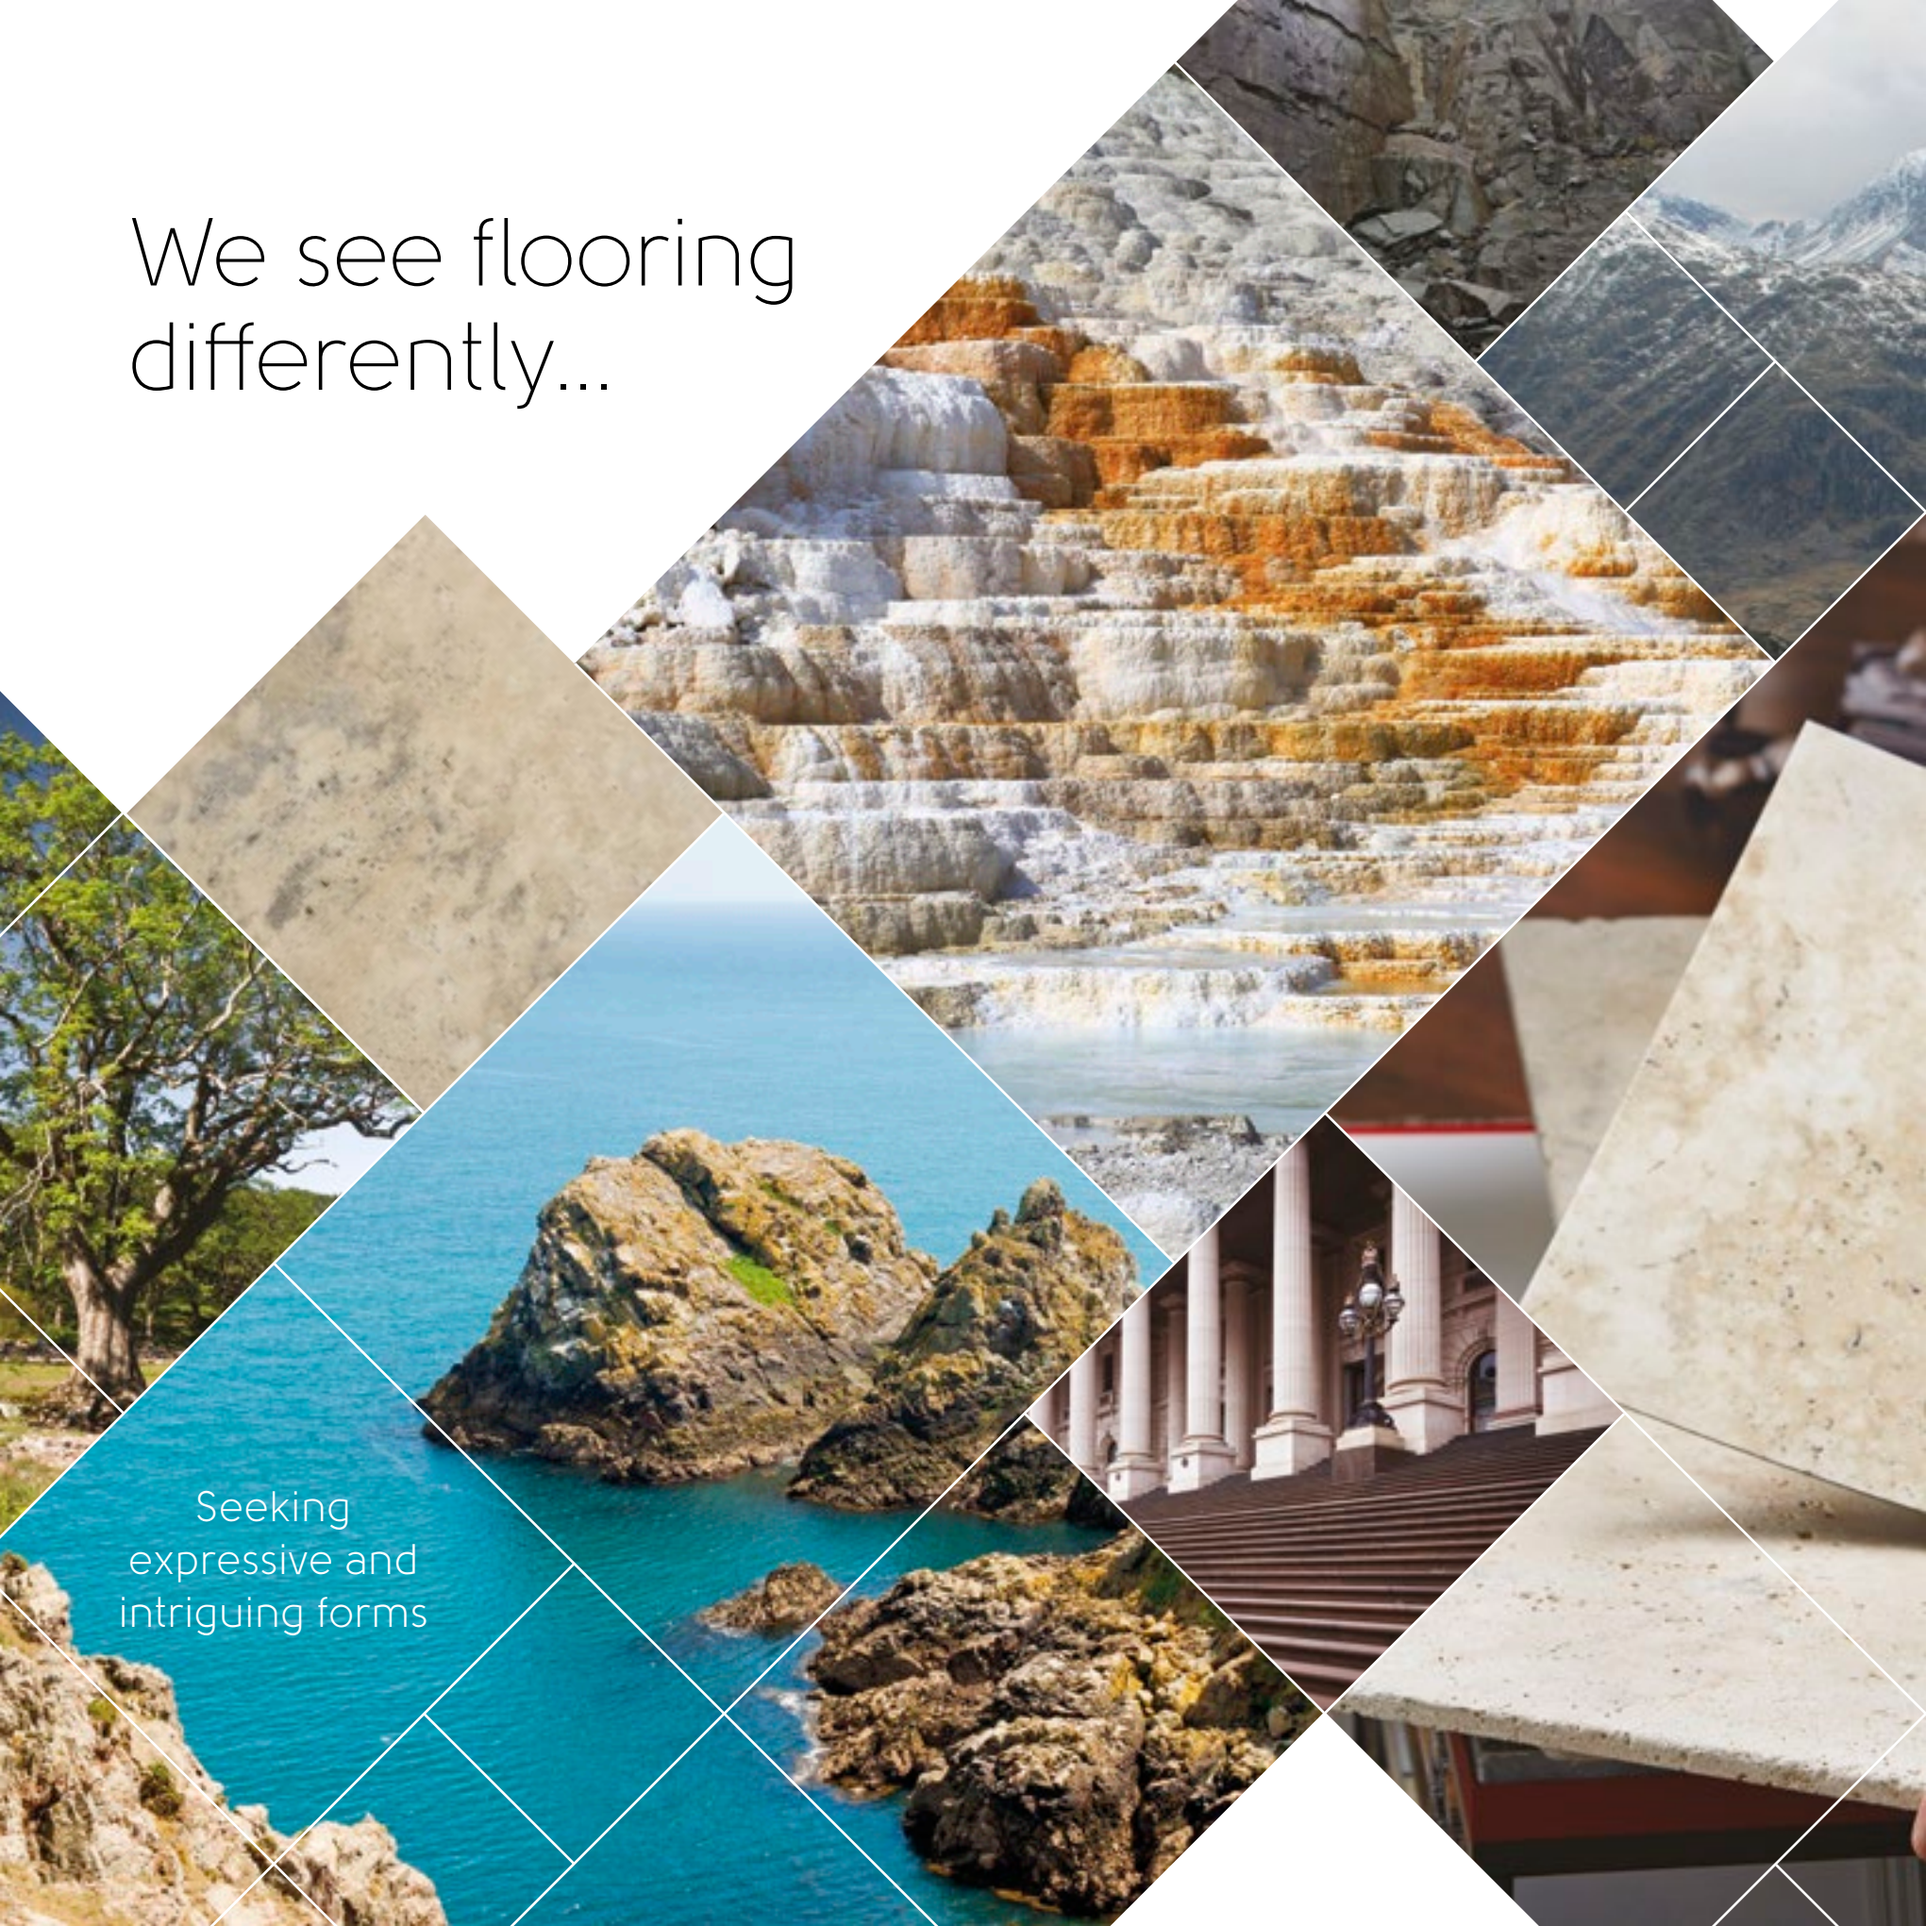


Creating simply beautiful floors that bring your vision to life
Traveling the world
Developing unique floor designs
Karndean Designflooring
Karndean Designflooring

Using this book

We have created this Product Selector with your specification needs in mind. As the only company specializing in LVT and offering all major LVT categories, we truly have the perfect floor for any situation. Our vast collection of colors, designs and formats allows us to offer you the widest range of choice, while tools such as this Product Selector help you find the product that is just right for you.

In this book you will find our full gluedown, loose lay and rigid core offering: carefully selected with features such as beveled edges, different emboss types and effects such as liming and handscraping, all designed to enhance the natural beauty of the original woods and stones that inspired each product.

Use this guide to quickly find what you need:

All ranges - at a glance, with both wood and stone - pages 18 and 22

Image gallery, including case study images - pages 26, 252 and 316

Gluedown products, with its own ‘at a glance’ for wood and stone - page 261


Technical overview, so you can easily compare our gluedown ranges - page 262

Global environmental statement, including our global initiatives - page 10

Loose lay products, with its own 'at a glance' and technical overview - page 251

Rigid core products, with its own 'at a glance' and technical overview - page 262

Index, in both product name and product code order - page 396

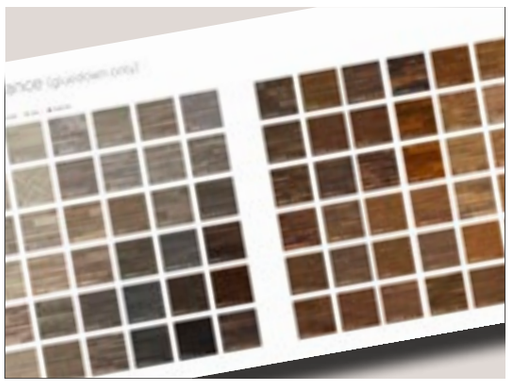





Contents

Our inspiration ... 3
Using this book ... 6
Contact us ... 8
Sectors we work in ... 9
Global environmental statement ... 10
Digital tool suite ... 12
Our product formats ... 14
Wood at a glance (all product formats & ranges) ... 18
Stone at a glance (all product formats & ranges) ... 22

Gluedown ... 25
Image gallery ... 26
Designflooring explained ... 34
Lay patterns ... 38
Pattern guide ... 40
Wood at a glance (gluedown only) ... 42
Stone at a glance (gluedown only) ... 46
Technical overview ... 48
Gluedown ranges wood
- Art Select ... 50
- Da Vinci ... 76
- Van Gogh ... 94
- Opus ... 128
- Knight Tile ... 154

Gluedown ranges stone
- Art Select ... 178
- Da Vinci ... 196
- Opus ... 212
- Knight Tile ... 224

Design components ... 239
Design strips ... 240
Decorative borders ... 242
Custom cutting ... 244
Kaleidoscope ... 246
Solid colors ... 248

Loose lay ... 251
Image gallery ... 252
Pattern guide ... 258
Wood at a glance (loose lay only) ... 260
Stone at a glance (loose lay only) ... 261
Technical overview ... 262
Loose lay ranges
- Karndean LooseLay Longboard ... 264
- Karndean LooseLay wood ... 284
- Karndean LooseLay stone ... 304

Rigid core ... 315
Image gallery ... 316
Wood at a glance (rigid core only) ... 322
Pattern guide ... 323
Technical overview ... 324
Rigid core ranges
- Korlok Select ... 326
- Korlok Reserve ... 356
- Van Gogh ... 370

Resources ... 387
Adhesives & sundries ... 388
Cleaning & maintenance ... 390
Customer support ... 392
CEUs ... 393
Sample service ... 394
Warranty ... 395

Index ... 396

Contact

For the information, materials and help you need to design and specify Karndean Designflooring, or to find your local Commercial Business Manager, please contact us.

Phone: **888-266-4343** | Email: **info@karndean.com** | Website: **www.karndean.com**











Sectors we work in


Retail

Whether a small town boutique or suburban superstore, eye-catching floor designs that guide consumers throughout the space are essential. Our unique design capabilities allow for the creation of zoning/wayfinding.



Healthcare

Cleanliness and durability are important in healthcare environments. With Karndean, you can have a durable, easy to maintain floor that creates a home-like atmosphere, contributing to a calm healing environment.

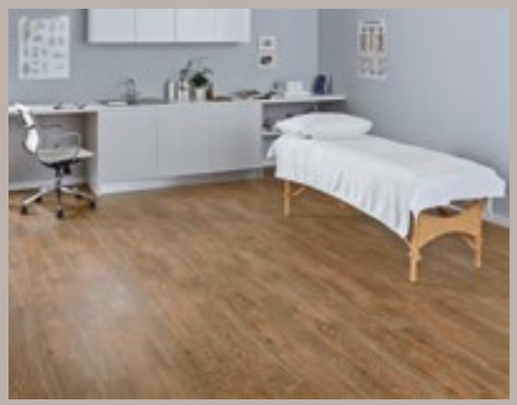

Corporate

Offices are places for thought, discussion and creativity. Choosing Karndean Designflooring for the boardroom, reception area or office is the key to creating a space that's comfortable, inspiring and practical.



Education

Durable and low maintenance, Karndean Designflooring helps you to create safe and inspiring educational environments for students of all ages.



Hospitality

In a sector where style, resilience and ease of keeping floors clean is vital, Karndean Designflooring is a proven choice for the demands of hotels, bars, restaurants, tourist attractions and leisure facilities.



Multifamily

Quality flooring adds value to new developments, and with Karndean, property managers benefit from a versatile, hardwearing, durable floor attracting more tenants and improving your bottom line.



Global environmental statement

Karndean Designflooring and the environment

Sustainable raw materials

The key raw material in our product, PVC, is derived from a truly sustainable resource: salt. In addition to some renewable bio-based raw material, the minerals used to reinforce our products are naturally plentiful in the earth's crust and can be considered sustainable.

Raw materials are purchased in bulk and sourced as locally to our factories as possible. They are also sourced from ISO 14001/ISO 9001 certified raw material suppliers where possible.

Safe products

Our products are based on vinyl (PVC); the same tried and tested material used in vital medical equipment, from blood bags to dialysis tubing, heart and lung bypass tubing, surgical gloves to pill packets. The same material we put our trust in for pipes, wire and cable protection and window frames. Indeed, it is the most widely used polymer in building and construction.

In the USA, our products comply with California's 'Proposition 65' and are free from chemicals known to cause cancer, birth defects or other reproductive harm. They require no warning labels when offered for sale throughout the USA.

Air quality

All Karndean products have been tested for contribution to indoor air quality and independent testing proves that our products are very low emitting in terms of VOCs (volatile organic compounds), meeting the strictest standards for air quality.

Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)



Proven low environmental impact

Many of our products, including each of our gluedown and loose lay ranges, have an Environmental Product Declaration (EPD). An EPD is an independently verified and registered objective report based on a life cycle assessment (LCA). Its purpose is to communicate transparent and comparable information about the life cycle environmental impact of products, including: global warming potential, ozone depletion potential, and fossil fuel depletion potential.

Leadership in Energy & Environmental Design (LEED) is the most widely used building environmental certification program used in the USA. Our products help achieve points by virtue of specific EPDs, contribution to indoor air quality, recycled/reusable content and sustainable materials.



LEED System	Applicable Category and LEED Credit Name
NC (New Construction)	EQ4.3 Low Emitting Products - Flooring Systems
EB (Existing Buildings)	MR3. Sustainable Purchasing - Facility Alterations
H (Home)	MR2. Environmentally Preferable Products

Karndean's recent achievements

- Several of our products have been successfully certified to NSF/ANSI 332. This is the foremost US standard by which to evaluate and certify the sustainability of resilient floor coverings across the entire product life cycle, including both environmental and social aspects of the production and use of LVT.
- All products supplied into the USA are phthalate free.
- Our products are listed on the 'mindful MATERIALS' database, which allows architects and designers access to transparent environmental information about our products.

Environmental organizations/accreditations

We are members of:


- United States Green Building Council (USGBC)
- Green Building Council of Australia (GBCA)
- New Zealand Green Building Council (NZGBC)
- Flooring Manufacturers Sustainability Alliance



Digital tool suite

To ensure you have everything you need from Karndean for your projects, visit our website:

Technical datasheets • Style finder • BIM & CAD files • Blogs

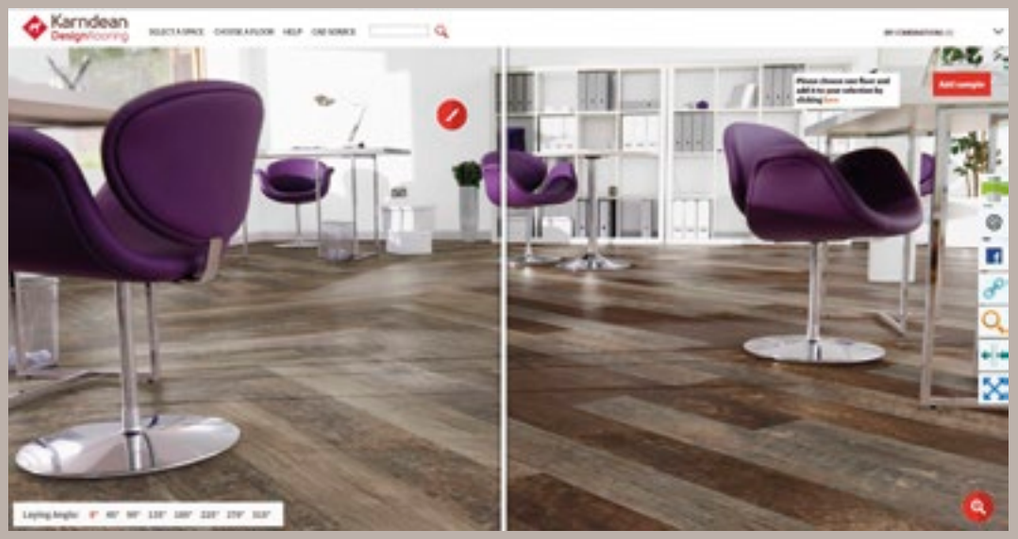

Floorstyle floor designer

This interactive room viewer lets you visualize our wide range of floors in typical commercial settings. With improved usability, sector specific settings, access to CAD files, side-by-side comparison, and the option to request samples, you can discover our stylish and practical flooring in a platform that is easy to use and even easier to share.

www.karndean.com/commercialfloorstyle

Product Selector online


Available at www.karndean.com/productselector, the Product Selector page turner is an online version of this book which is regularly updated as new Karndean products are launched.

For phone, tablet and desktop, there are two ways to use the online Product Selector:

- **Browse online** – bookmark the link above to readily access the online page turner from any device with a web connection.
- **Download** – from the online page turner, you have the option to download a PDF version of the book to your local device, meaning you can always have it available as a reference even without a connection to the internet.

www.karndean.com/productselector



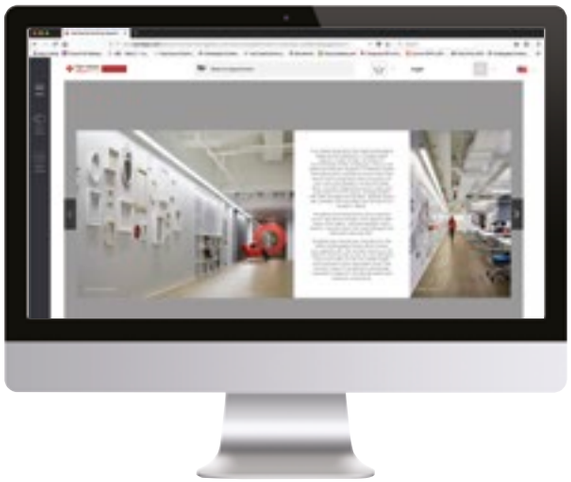

Case studies

Our continually expanding library of inspiring case studies gives you a glimpse into how our products are used in commercial applications, large and small.

Visit the case studies section of our commercial website to view real world Karndean Designflooring installations across a variety of sectors.

www.karndean.com/commercialcasestudies

Augmented reality app

Our augmented reality app allows you to visualize any of our floors in a commercial or residential space of your choice.

Each product can be viewed up close, allowing you the flexibility to select and demonstrate floor designs both on-site and in the office.

Available on the App Store



Moodboards

While browsing the Karndean website, click on and save products you like and create different moodboards to reflect different styles and projects.

With this tool, you can build a collection of different ideas by sector or room, which can be easily accessed and shared anytime with clients.

www.karndean.com/commercialmoodboards



ARCAT

ARCAT provides information on building materials for architects, designers, specification writers, engineers and contractors and includes a SpecWizard to automatically configure a complete CSI 3-Part formatted specification in minutes. Visit Karndean Designflooring on ARCAT for further product specification information.

www.arcat.com



Our product formats

We offer three types of products: gluedown, loose lay and rigid core.

We are proud to say all our products offer essential benefits that make Karndean Designflooring the ideal choice for all spaces, from large commercial specifications to small residential rooms. On the following pages, you will see the individual benefits of our three distinct product formats: gluedown, loose lay and rigid core. The following benefits apply to all Karndean Designfloors:



Low maintenance

A regular sweep and mop with Karndean Clean is all you need to keep your Karndean floor looking great. With Karndean, you also don't have to worry about any sanding, refinishing, staining or varnishing.

Hygienic

Unlike carpets, our floors don't hold dust, dirt, pollen or other allergens. Our cleaning products also kill 99.9% of environmental germs.

100% recyclable

We do everything we can to meet and exceed legislation and environmental guidelines in every region we sell our products, meaning you can count on the fact you're choosing a safe and environmentally-friendly flooring.

Waterproof

Unlike laminate and engineered hardwoods, our floors are impervious to water and will not swell, crack or warp when wet, making them perfect for restaurants, hotels and other areas prone to spills and heavy foot traffic.

Comfortable underfoot

Our products are much warmer and quieter underfoot, giving you the look of real wood and stone but without the drawbacks of cold tiles or clicking shoes.



Durable

Unlike other flooring alternatives, Karndean Designflooring gives you the look and feel of natural products but with the durability and resilience of luxury vinyl.

K-Guard+

Each of our floors is finished with K-Guard+, adding extra protection against scuffs and scratches, and making it even easier to clean and look after.

Acoustic qualities

All Karndean Designflooring products aid in the reduction of noise transfer and are tested for acoustic impact sound reduction. Please see technical data sheets for supporting documentation.

Compatible with underfloor heating

Karndean flooring is already warm underfoot, but for added warmth, Karndean is perfectly suitable for underfloor heating systems up to 81°F.

Resists indentation

Our products will retain their shape under the weight of heavy objects and fixtures.

Product warranties

All Karndean floors are covered by warranty (10-20 years), giving you and your clients peace of mind.

Gluedown

Our gluedown ranges offer our widest choice of colors and sizes. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Karndean Designflooring and highlight the faithful replication of the original wood and stone that inspired each of our products.


Wide selection of sizes: from the **18" x 3"** planks of Art Select parquet to the extra large **48" x 9"** planks in the Opus range; and tiles ranging from **12" x 12"** squares in Knight Tile to Opus's large **18" x 36"**.



Available in a wide range of designs, colors, textures and sizes

No expansion gap required

Can be personalized with design strips or corresponding borders

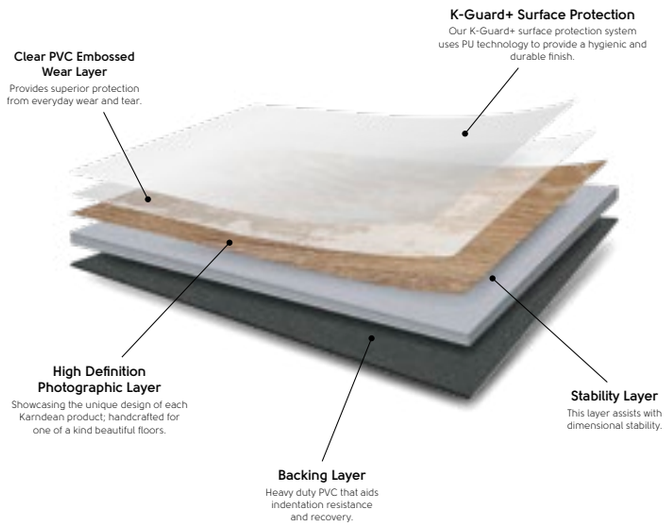



Loose lay

Karndean LooseLay features our K-Wave friction grip backing which helps hold the product to the subfloor without adhesive, making it quick and easy to install. Ideal for underfloor access panels and temporary roomsets, each plank can be lifted individually where required.

Karndean LooseLay is available in two plank sizes and one tile:

Karndean LooseLay | **41" x 10"** and **19.7" x 24"**

Karndean LooseLay Longboard | **59" x 10"**






Easy access to underfloor panels



Reduces noise transfer to room below by 16dB



Quick and easy to install

Rigid core

Equipped with our proprietary K-Core technology, rigid core is ideal for installations where acoustics, uneven subfloors or preservation of existing hard floors need to be considered. Click-locking mechanisms allow for quick installation and the pre-attached backing eliminates the need for a separate underlayment.

Korlok Select | **56" x 9"** and **24" x 6"** | **$_5$G®** and **$_2$G locking mechanisms**


Korlok Reserve | **48" x 7"** | **$_2$G locking mechanism**

Van Gogh | **48" x 7"** | **Click-locking mechanism**










Installs over existing hard floors




Reduces noise transfer to room below by up to 22dB




Suitable for <95% RH

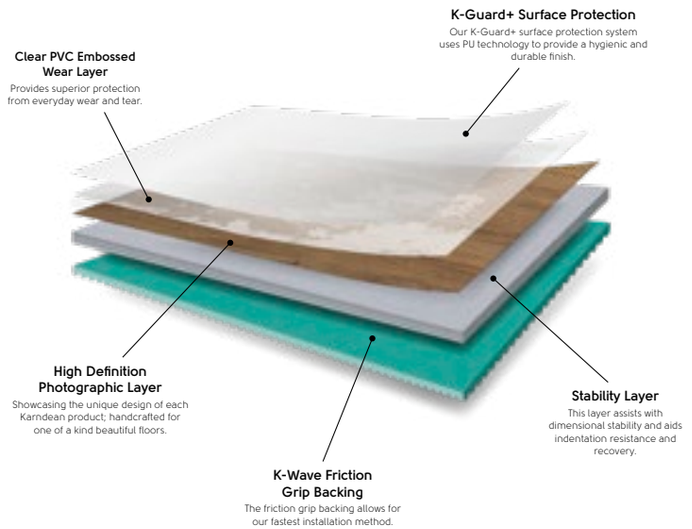

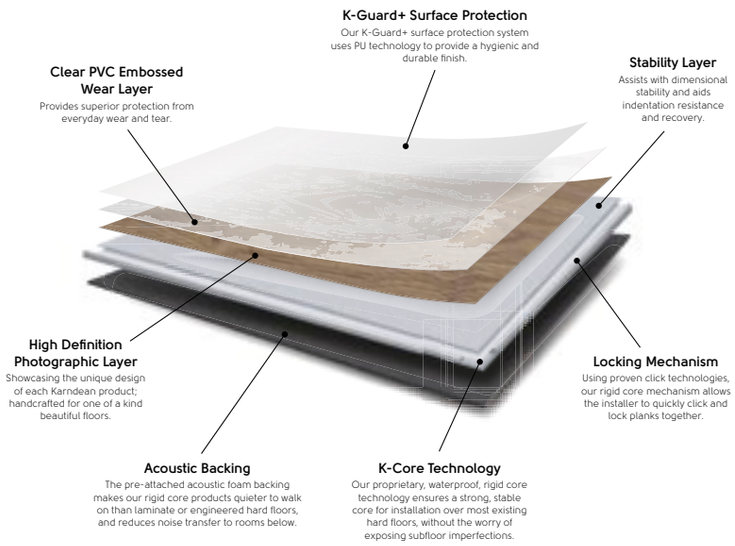



Wood at a glance (all product formats & ranges)

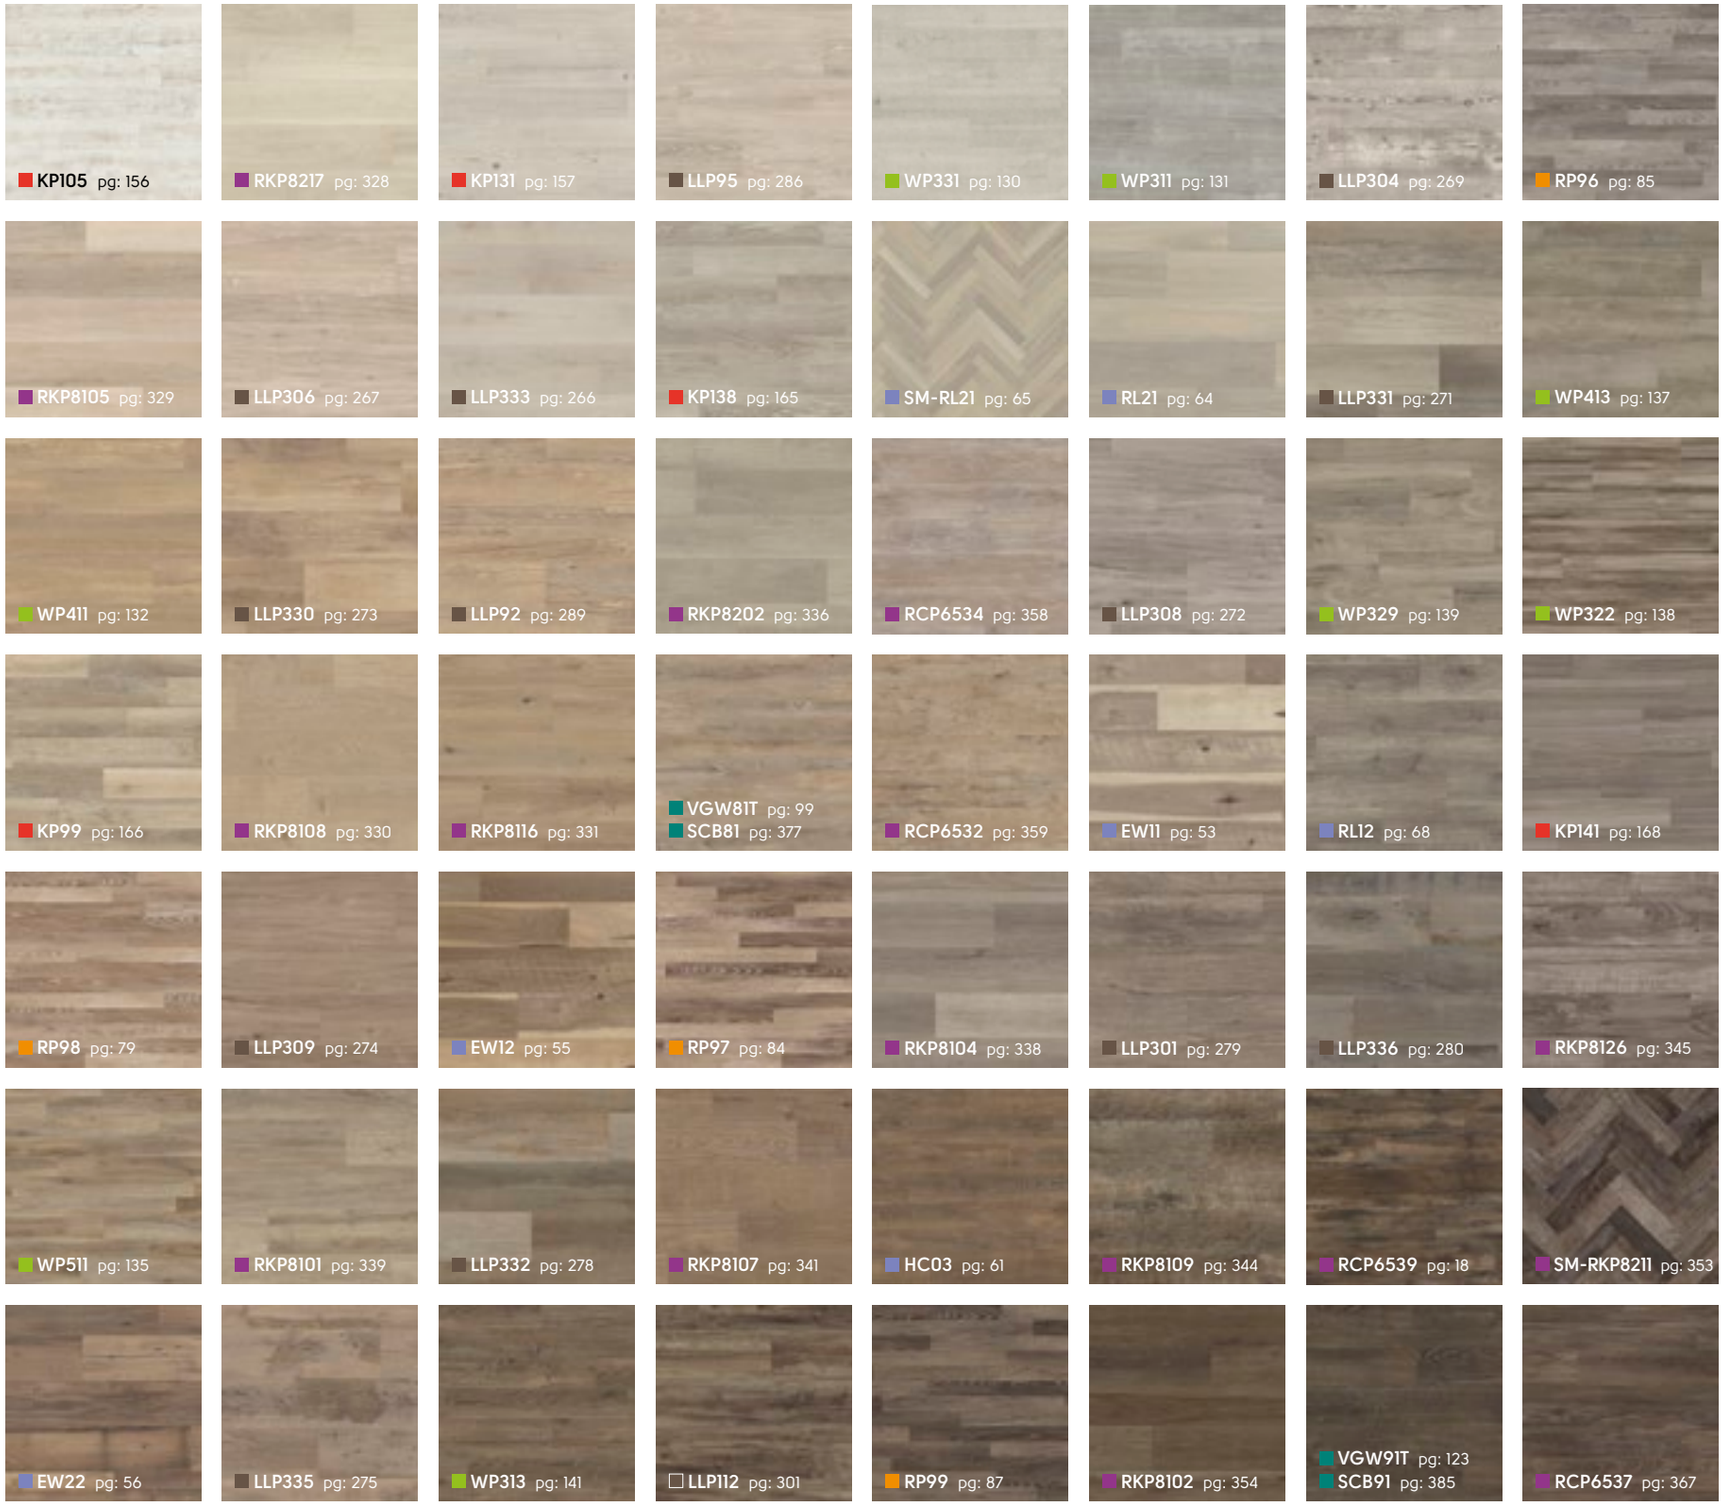



Gluedown: Art Select | Da Vinci | Van Gogh | Opus | Knight Tile


Loose lay / Rigid core: Karndean LooseLay | Korlok | Van Gogh

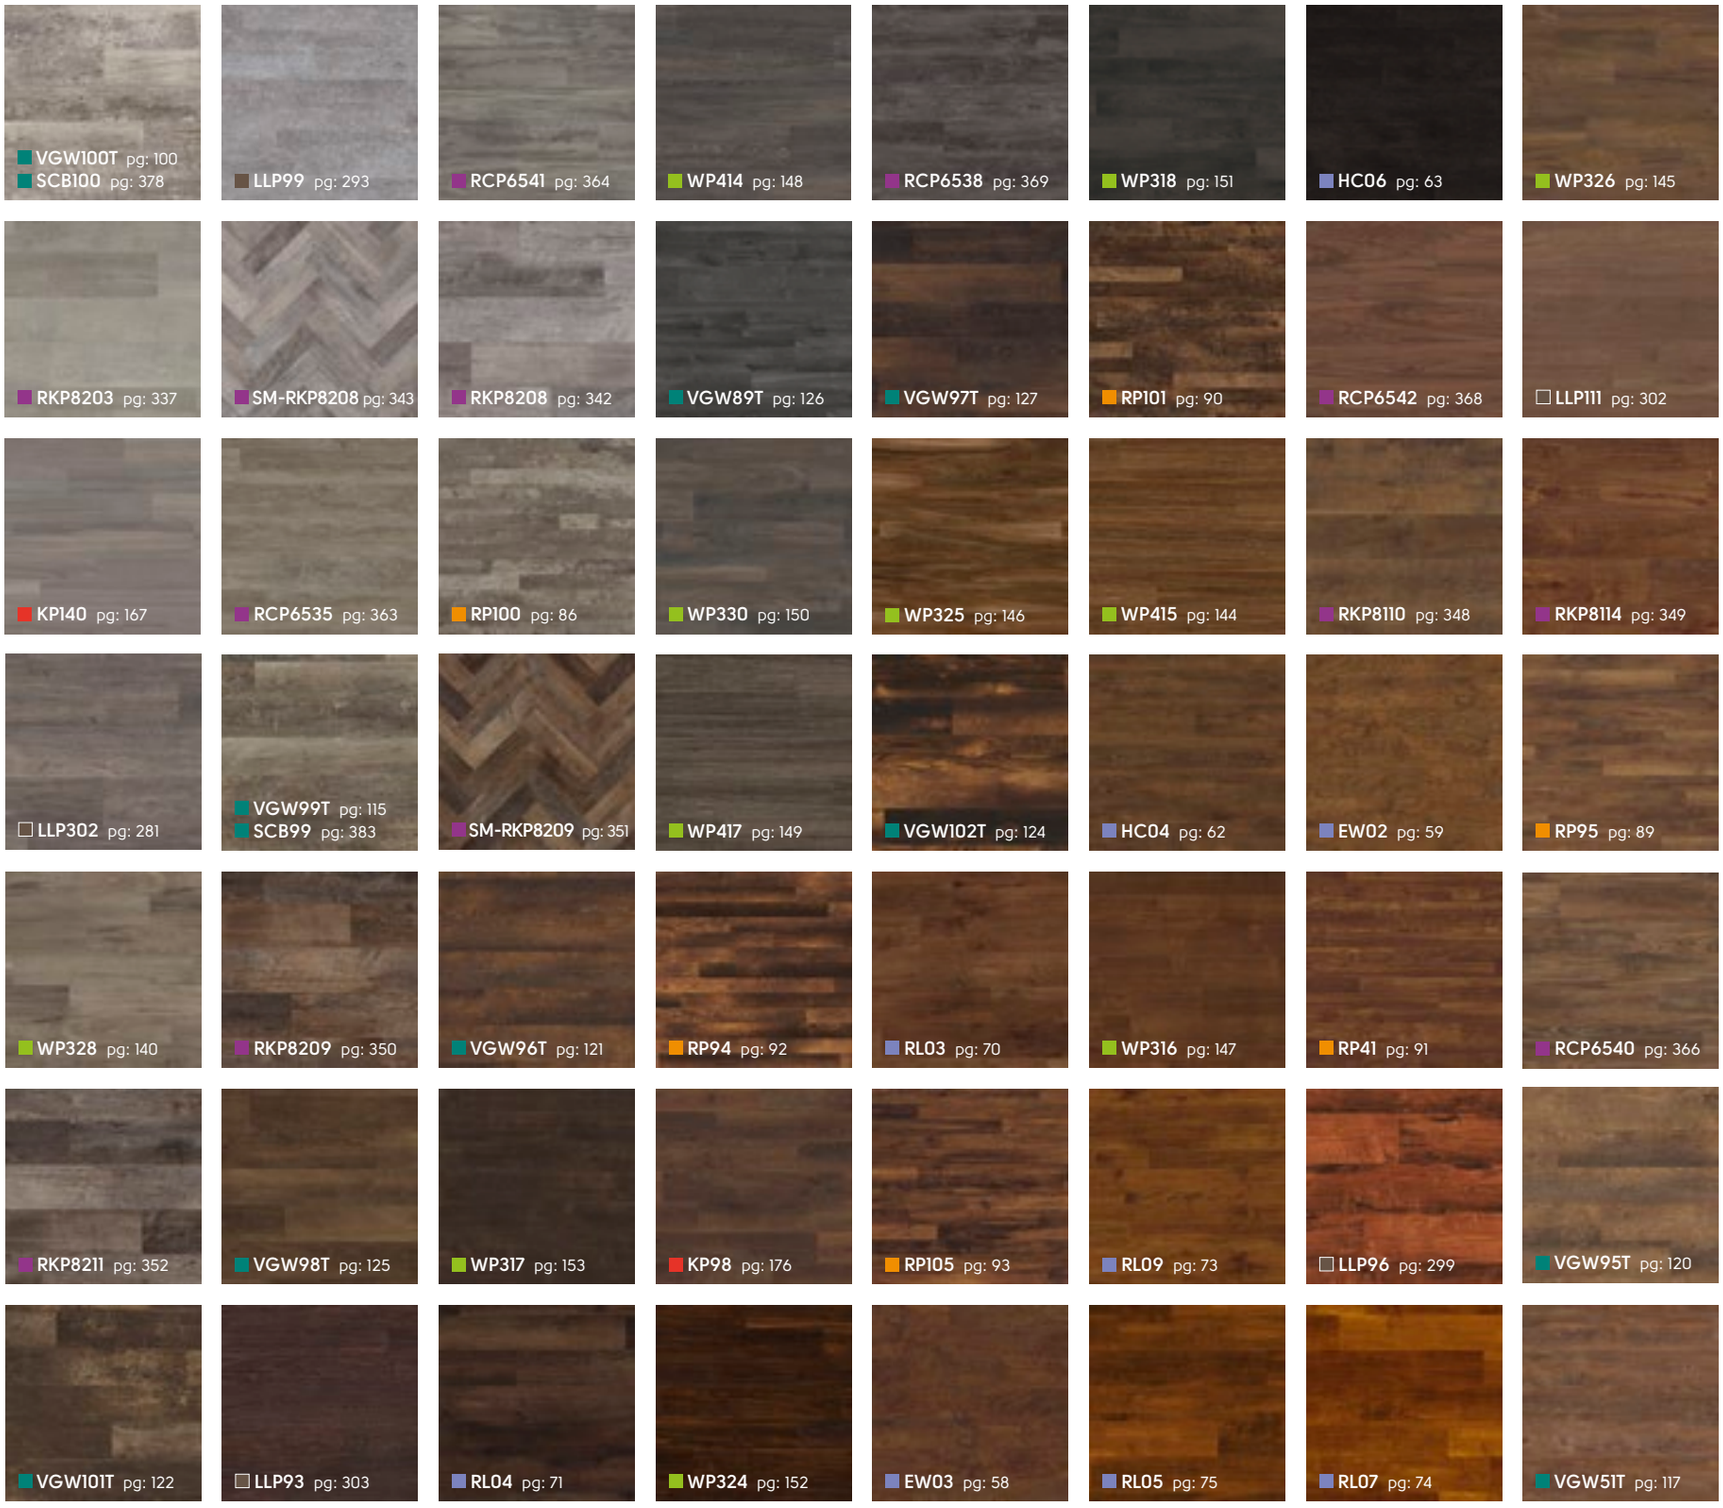




RKP8124 pg: 346



KP96 pg: 169


RCP6531 pg: 362



LLP109 pg: 294



KP94 pg: 164



RCP6533 pg: 360


LLP307 pg: 276



VG1-7 pg: 116



LLP5-7 pg: 295



LLP305 pg: 277



VG5-7 pg: 106



VGW93T pg: 113
SCB93 pg: 382



RCP6536 pg: 361



VGW94T pg: 105


LLP303 pg: 283



LLP315 pg: 282



RP91 pg: 83



KP97 pg: 170



EW21 pg: 54



VGW76T pg: 108
SCB76 pg: 376



RKP8206 pg: 340



VGW54T pg: 118



HC01 pg: 60



VGW70T pg: 114
SCB70 pg: 384



KP67 pg: 171



VGW53T pg: 107
SCB53 pg: 380



KP69 pg: 173



RP73 pg: 82



KP70 pg: 175



EW01 pg: 57



KP93 pg: 174



RL02 pg: 69



KP107 pg: 172



VGW86T pg: 112
SCB86 pg: 381



VGW44T pg: 111
SCB44 pg: 379


LLP91 pg: 300


LLP110 pg: 298


VGW41T pg: 119


RL11 pg: 72


WP513 pg: 143

WP321 pg: 142

VGW49T pg: 102

RP104 pg: 88

RKP8122 pg: 347

VGW92T pg: 110

LLP97 pg: 297


VGW33T pg: 109

LLP33 pg: 296


LLP39 pg: 292


Gluedown: Art Select | Da Vinci | Van Gogh | Opus | Knight Tile


Loose lay / Rigid core: Karndean LooseLay | Korlok | Van Gogh


RKP8215 pg: 334



LLP94 pg: 290



RP102 pg: 80



RKP8103 pg: 332



VGW85T pg: 97
SCB85 pg: 374



WP416 pg: 134



KP36 pg: 163



RKP8111 pg: 333



LLP113 pg: 287



RL01 pg: 67



WP315 pg: 136



LLP317 pg: 270



KP37 pg: 161



EW13 pg: 52



LLP108 pg: 288



RKP8115 pg: 335



KP39 pg: 162



KP35 pg: 160



LLP310 pg: 268



KP90 pg: 158



VGW42T pg: 104
SCB42 pg: 373



VGW71T pg: 101
SCB71 pg: 375



WP312 pg: 133


RL23 pg: 66



RP103 pg: 81



LLP38 pg: 291


VGW50T pg: 96



RP61 pg: 78


VGW39T pg: 103
SCB39 pg: 372


VGW40T pg: 98


KP32 pg: 159

Stone at a glance (all product formats & ranges)

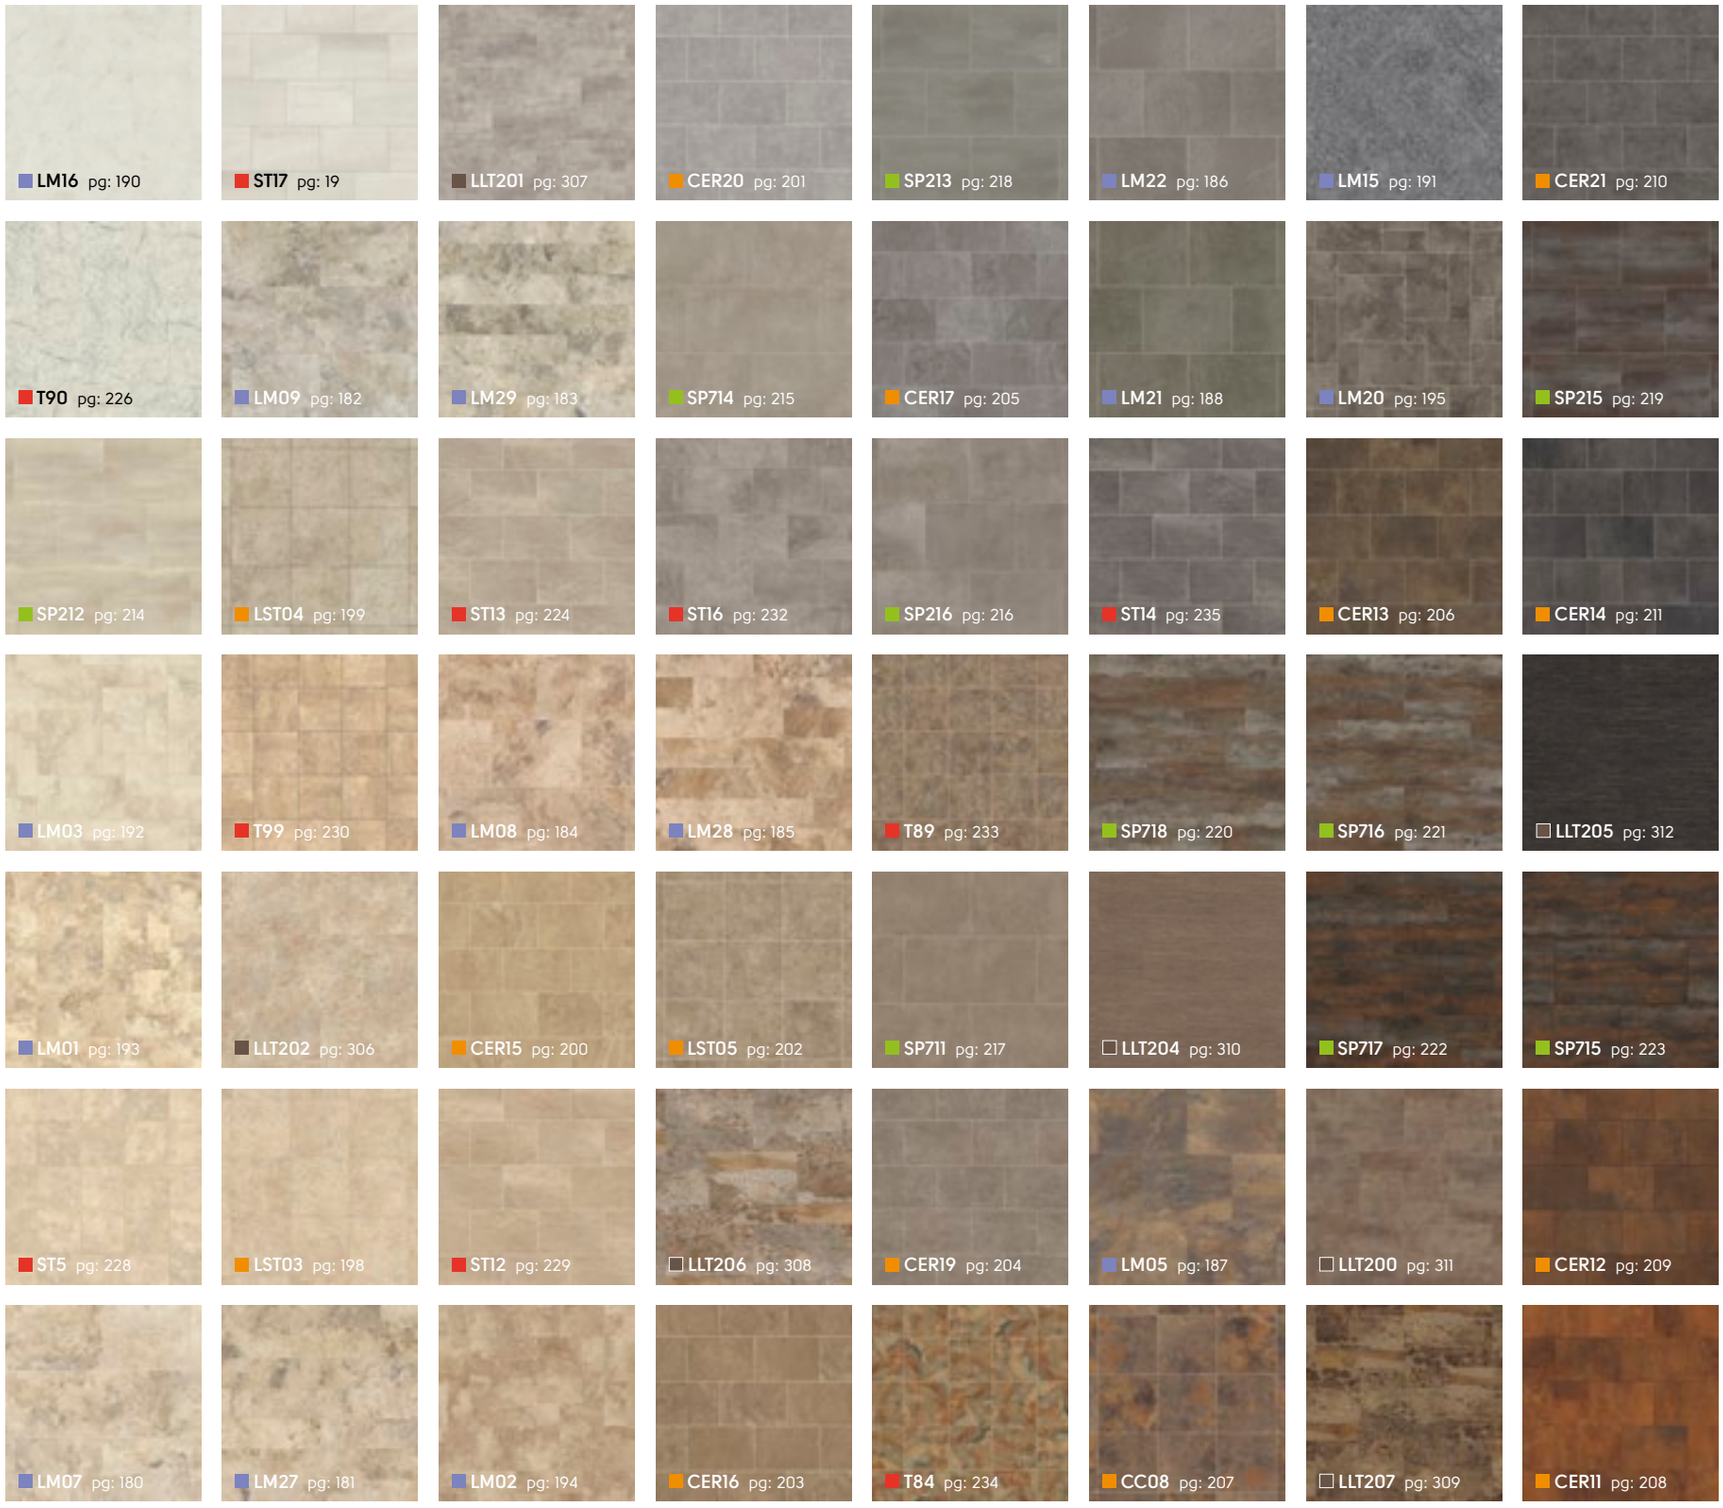

Gluedown: Art Select | Da Vinci | Opus | Knight Tile


Loose lay: Karndean LooseLay



LLT203 pg: 313



T74 pg: 236



LM06 pg: 189



Russus **SP716** | Robigo **SP717** with AF01 3mm design strip




Gluedown



Caldera **LM08** | **LM28**



Aurego **SP716**



Classic Hickory **EW13**




Urban Spotted Gum **KP141**



Scorched Oak **RP94**



Cubix with ■ **SP111** (custom) | **SP213** | **SP114** (custom)

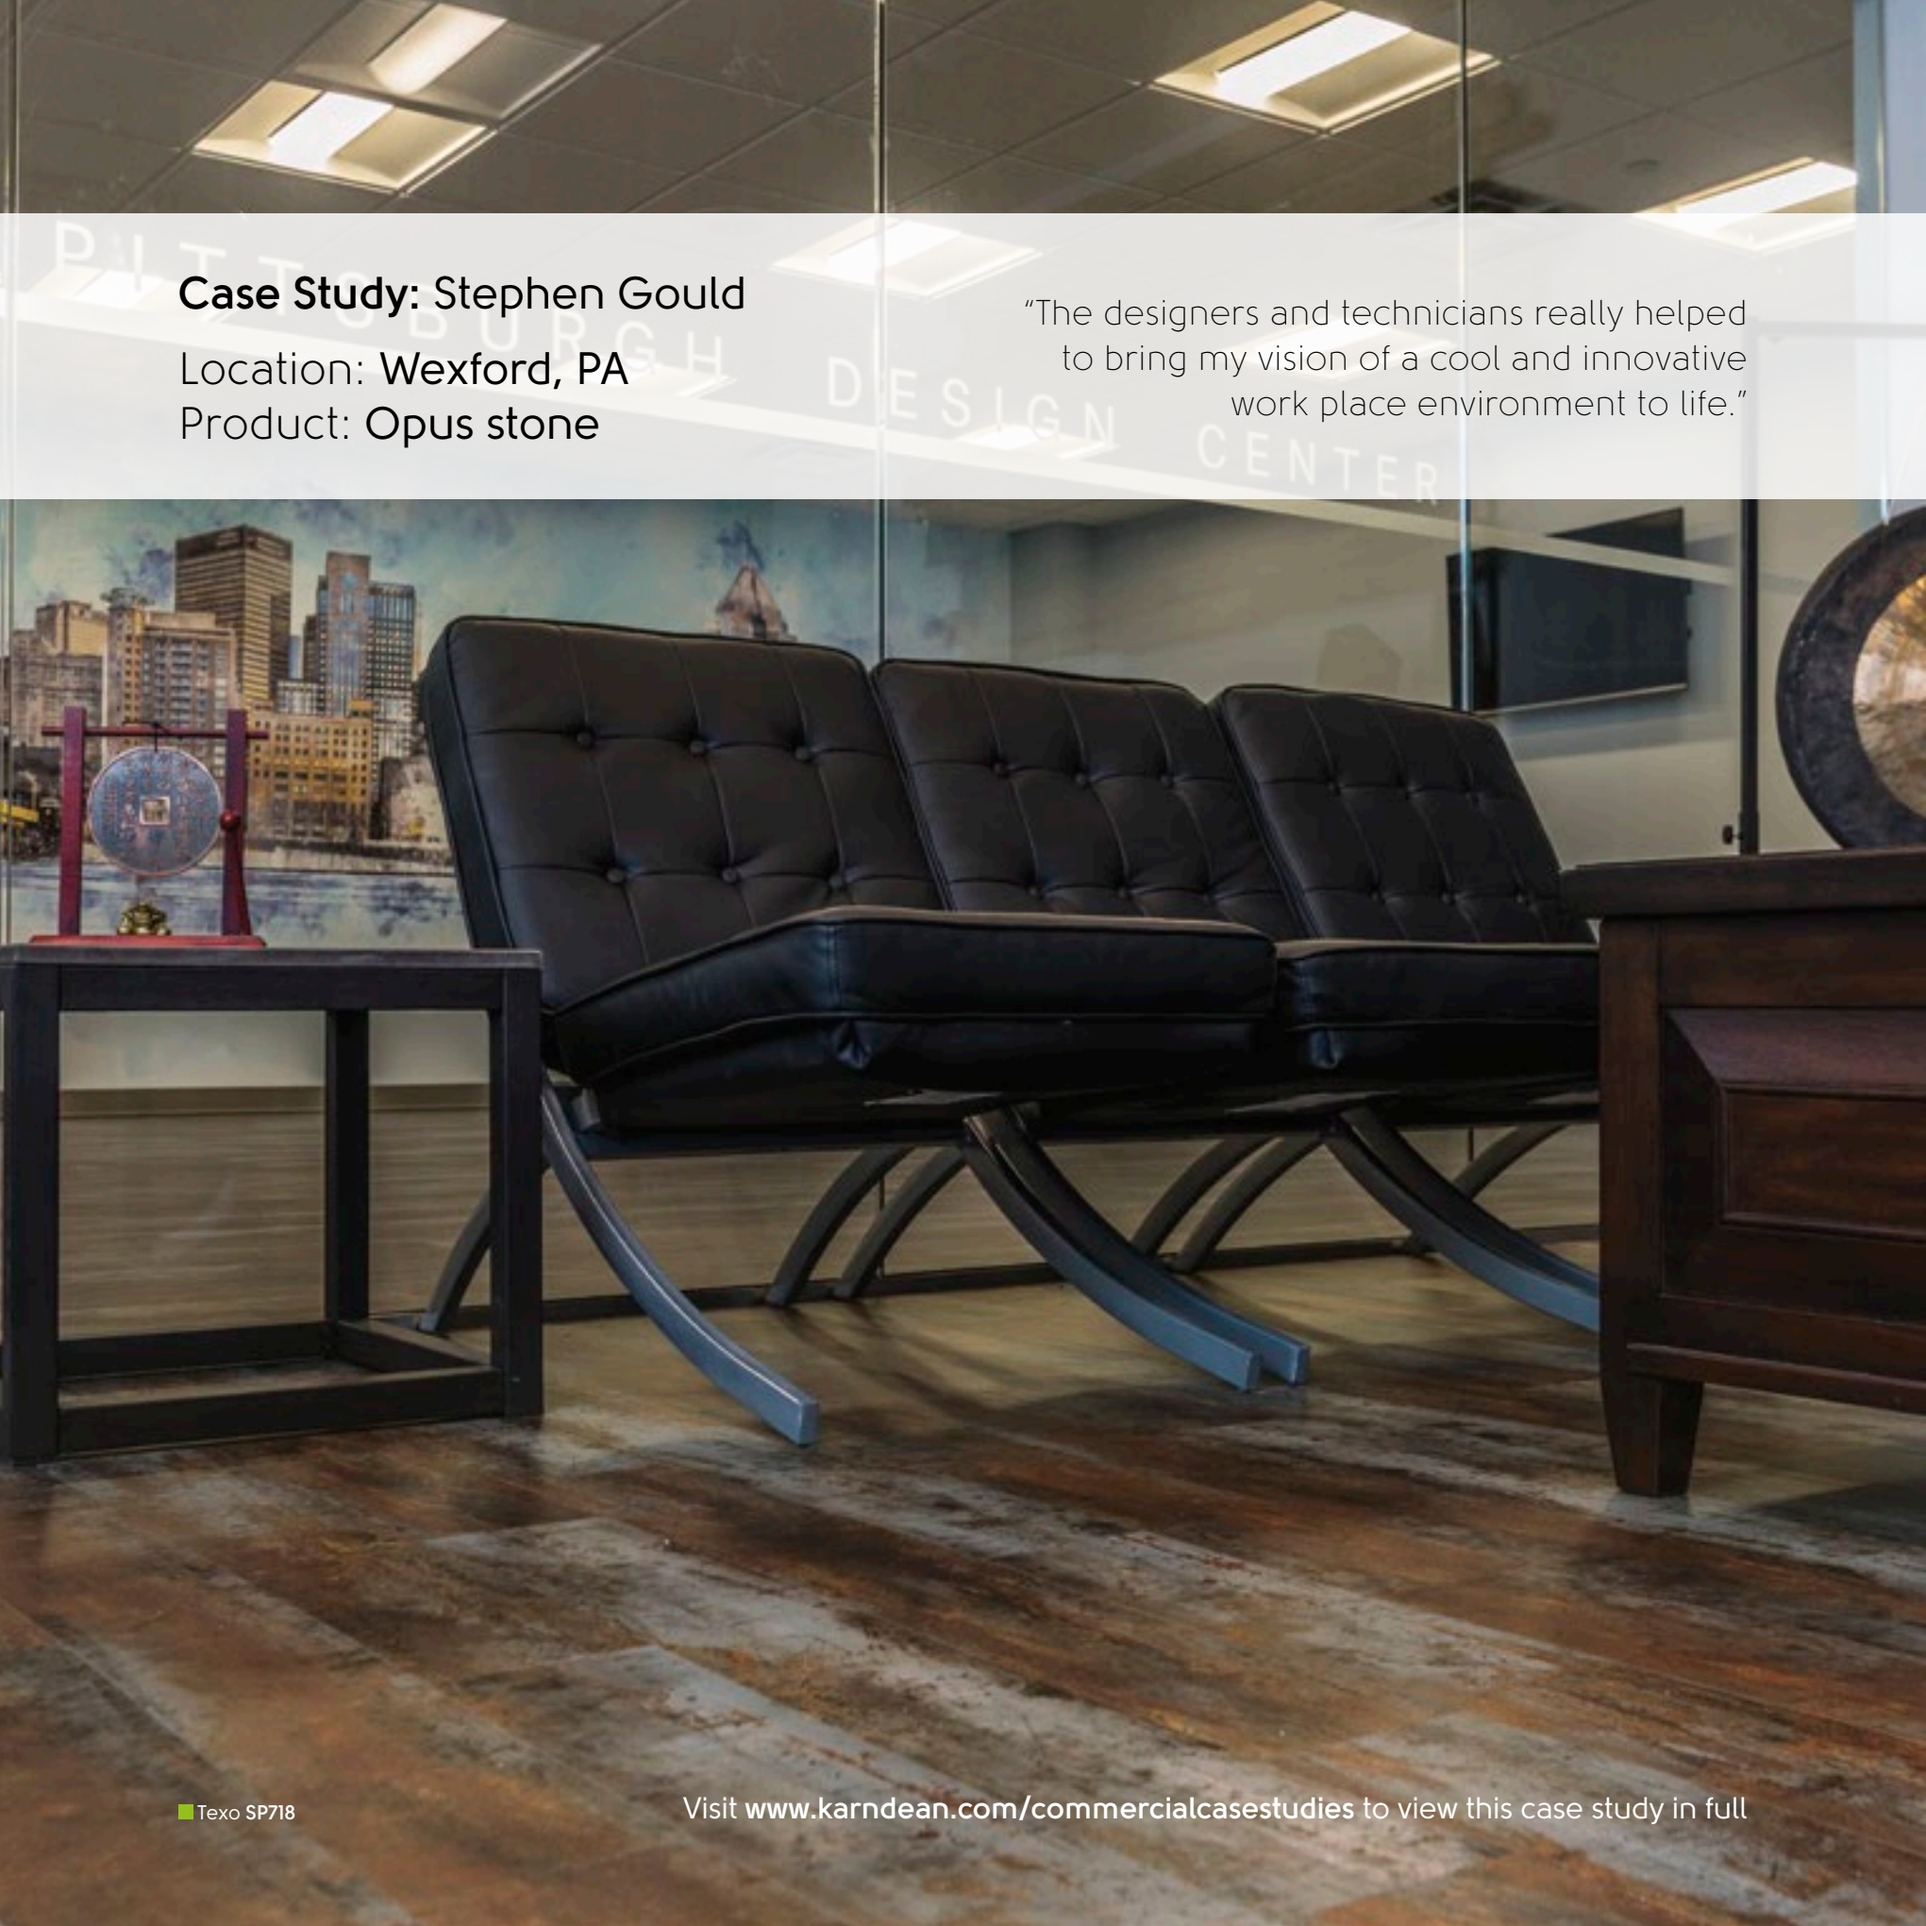


Case Study: Stephen Gould

Location: **Wexford, PA**
Product: **Opus stone**

"The designers and technicians really helped to bring my vision of a cool and innovative work place environment to life."

Texo **SP718**

Visit **www.karndean.com/commercialcasestudies** to view this case study in full

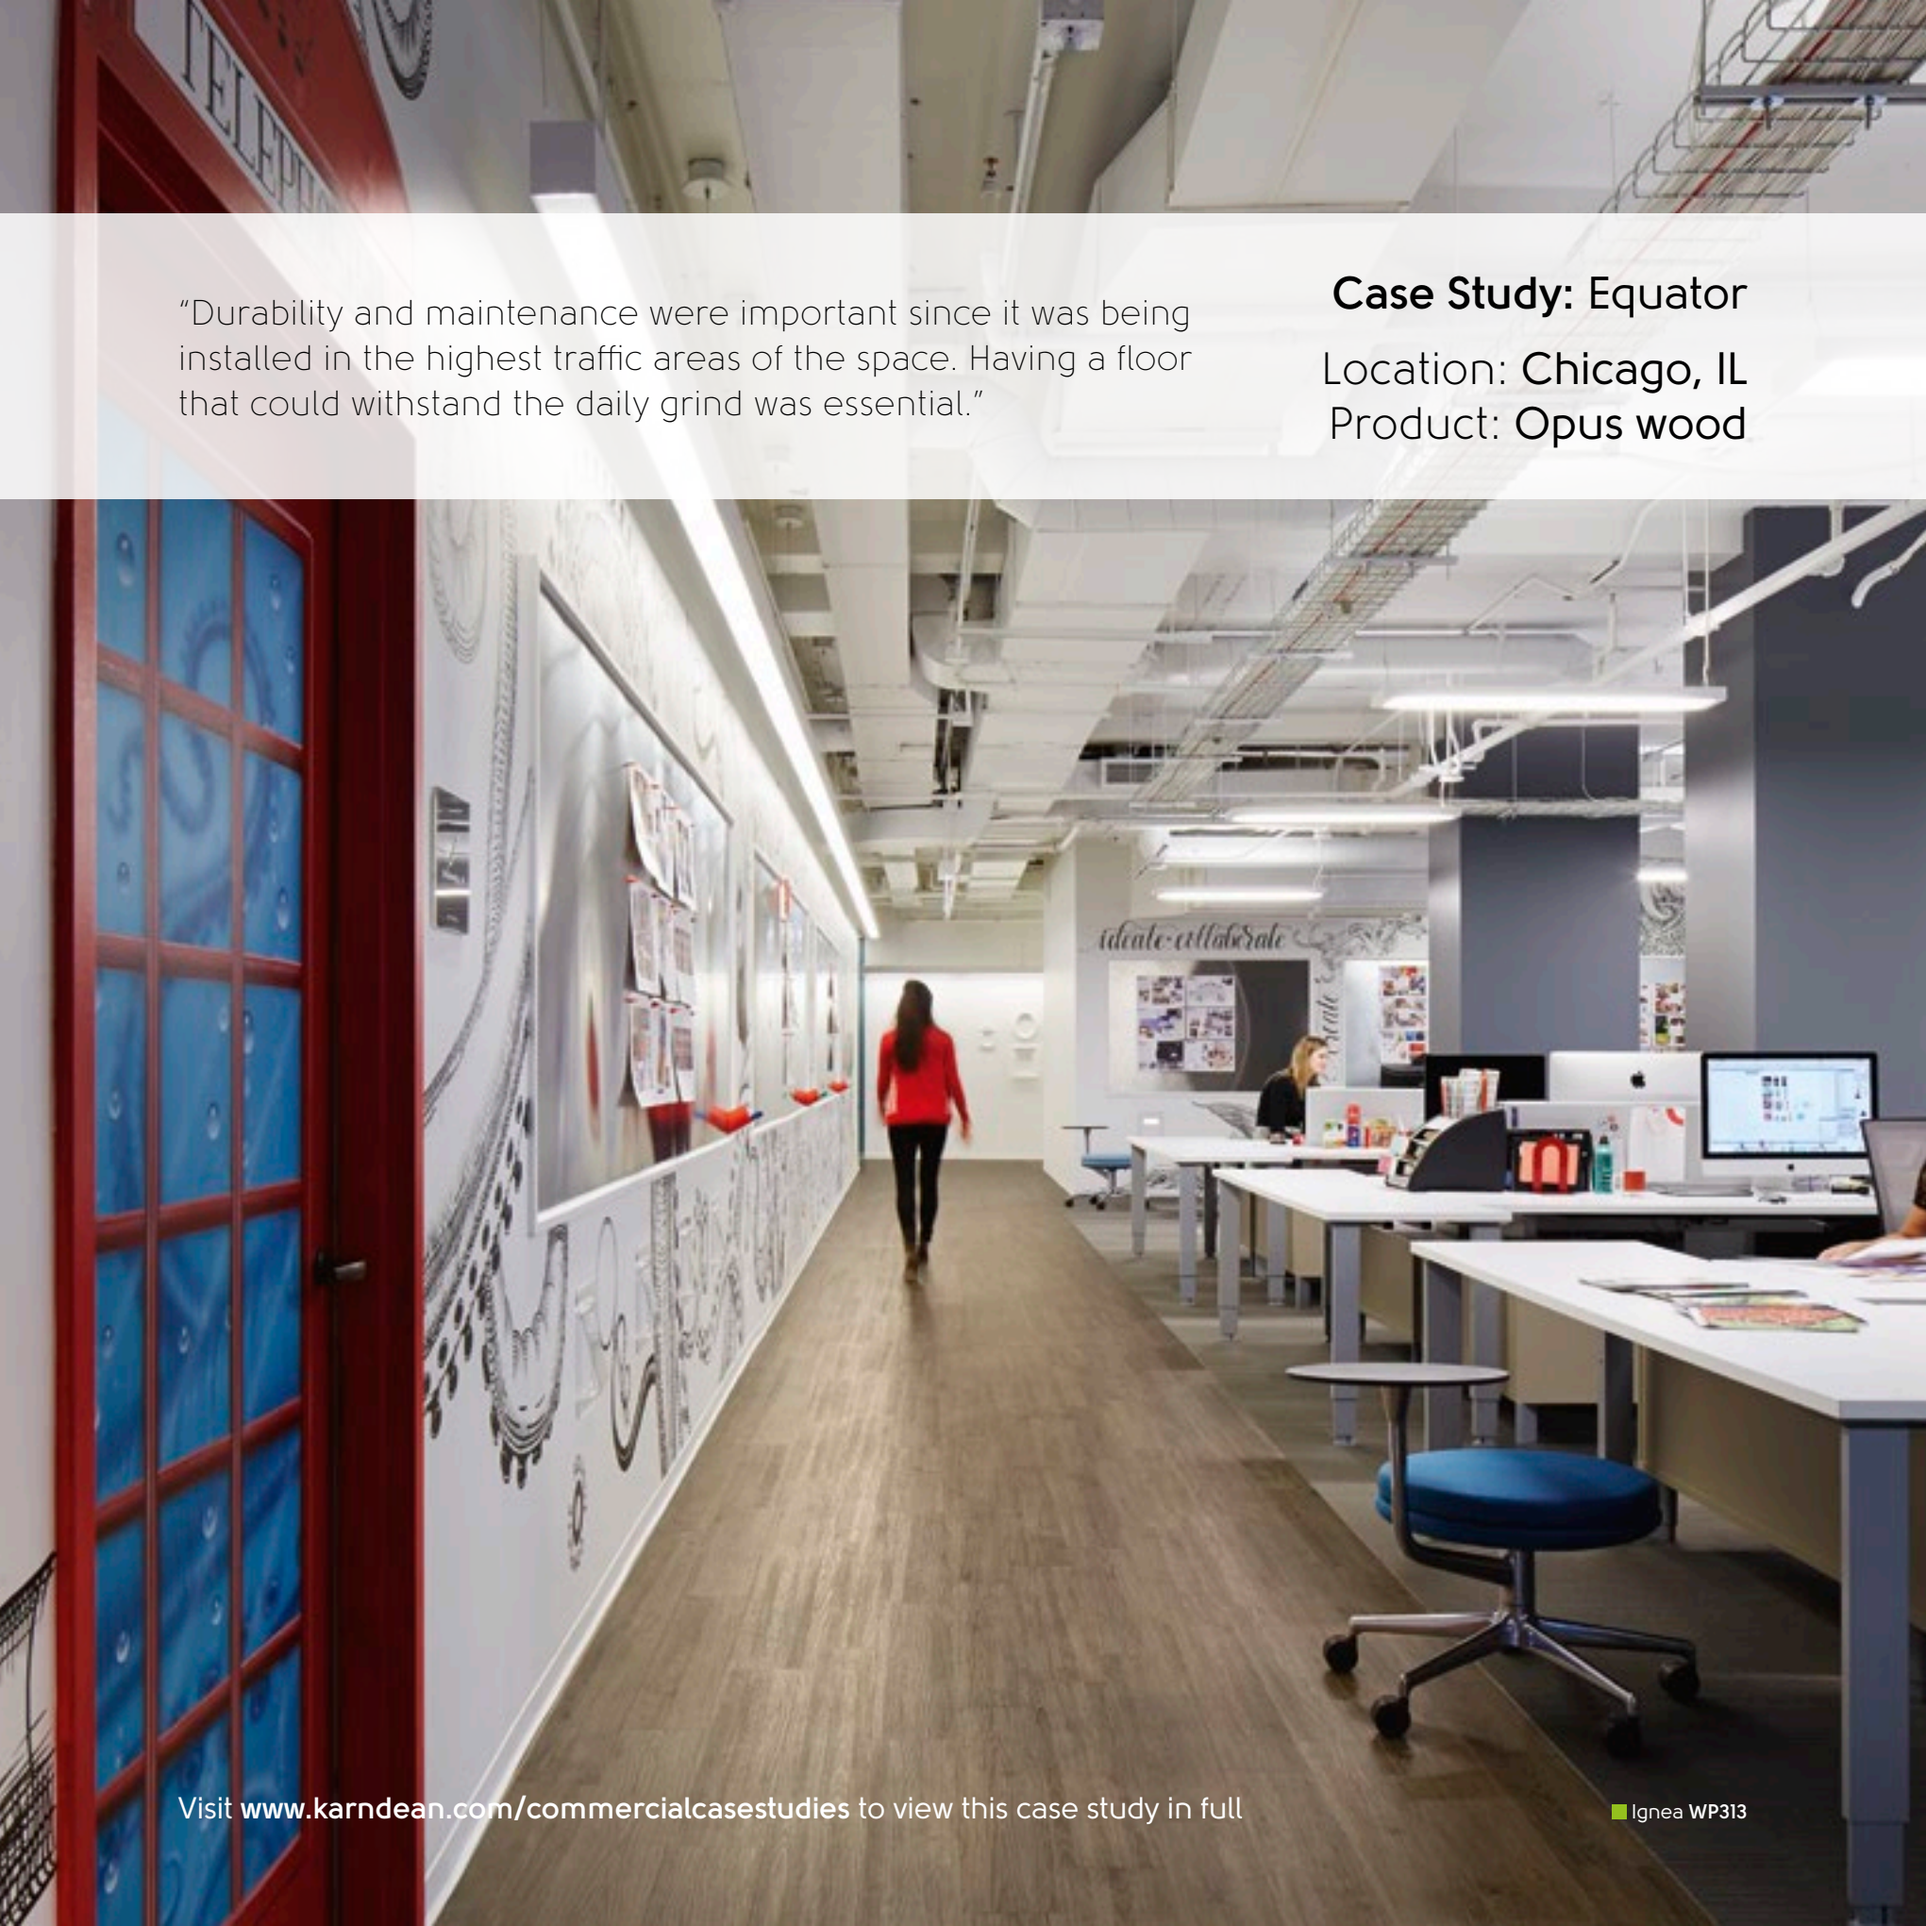

"Durability and maintenance were important since it was being installed in the highest traffic areas of the space. Having a floor that could withstand the daily grind was essential."

Case Study: Equator

Location: **Chicago, IL**

Product: **Opus wood**

Visit **www.karndean.com/commercialcasestudies** to view this case study in full


Designflooring explained

Designflooring is the use of modular components to customize your project. The beauty of Karndean Designflooring is its versatility - the design possibilities are endless. Define a space and add visual interest by designing with one or more of our 200+ product choices. Integrate design strips, borders, a custom logo, or simply blend two colors together to create a truly unique project.








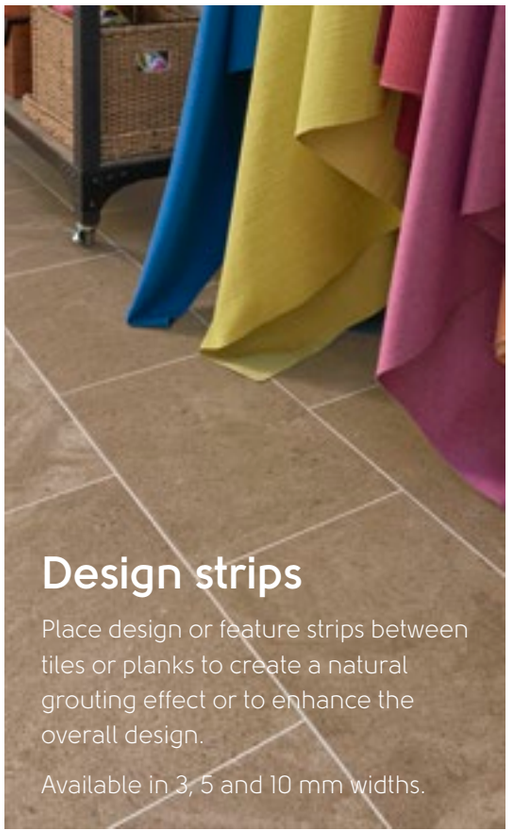

Design strips

Place design or feature strips between tiles or planks to create a natural grouting effect or to enhance the overall design.

Available in 3, 5 and 10 mm widths.

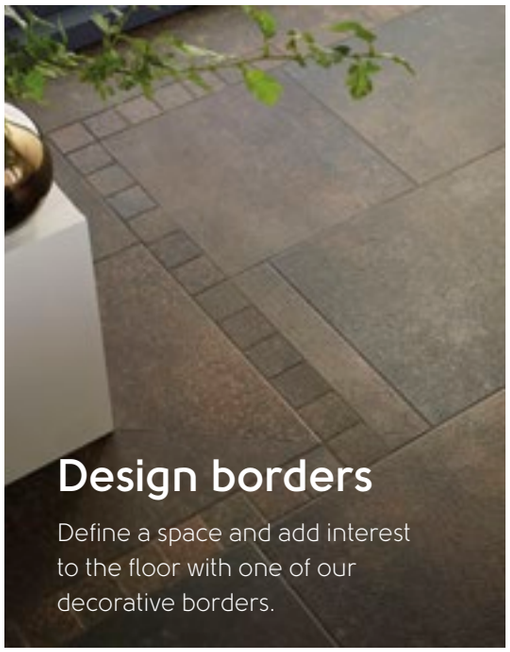

Design borders

Define a space and add interest to the floor with one of our decorative borders.

Design features

Whether your project requires a company logo, a name to inset into the floor or a special design to produce, we can help to bring your ideas to life.



Kaleidoscope

Explore a world of patterns and shapes with Kaleidoscope, our collection of wood, stone and solid colors custom cut in geometric formats.

For more about the Kaleidoscope program, go to page 246.




Designflooring in commercial environments

Visit the Video Hub on **www.karndean.com/commercialvideohub** to view more Designflooring tips

With increasing competition, it's more important than ever to create an engaging customer experience. In today's digital age, the floor has become the maximum impact zone due to our constant engagement with hand-held technology. Experiment with a combination of colors, sizes and textures to break up a space and add visual interest, while enhancing the overall design.

Zoning

Easily highlight key sections or displays and separate front and back of house areas by mixing products or by incorporating design strips and inlays.

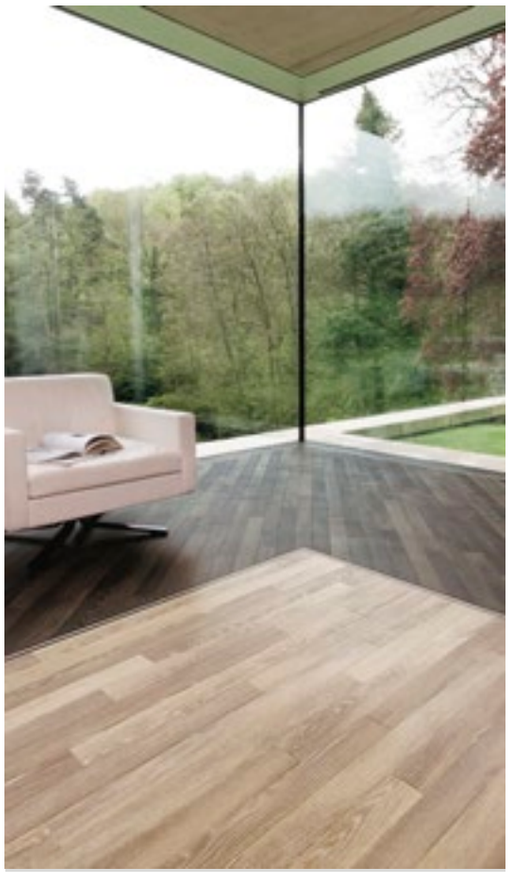


Wayfinding

Flexibility in flooring allows you to add walkways and create paths that facilitate customer, resident or employee traffic flow.



Blending

Incorporate compatible products into one design to achieve a balance of color tones or a custom look.

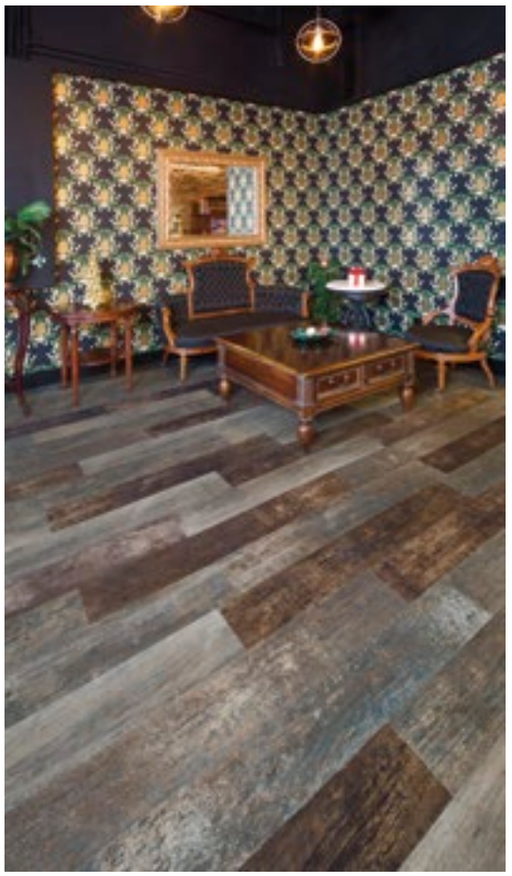




Urbus **SP213**

Lay patterns


Karndean Designflooring products are very versatile and are designed to accommodate the growing desire for zoning individual spaces and matching 'room to room' designs. With Karndean it is possible to specify stone and wood products side by side, lay the flooring at different angles, or use different sizes of the same product to create more interest.



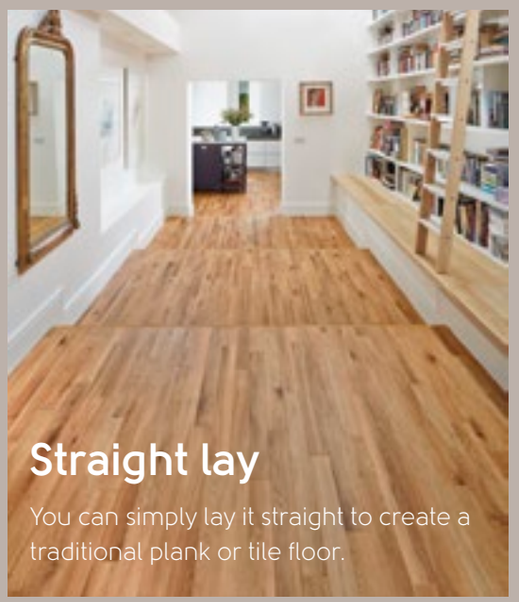

Straight lay

You can simply lay it straight to create a traditional plank or tile floor.

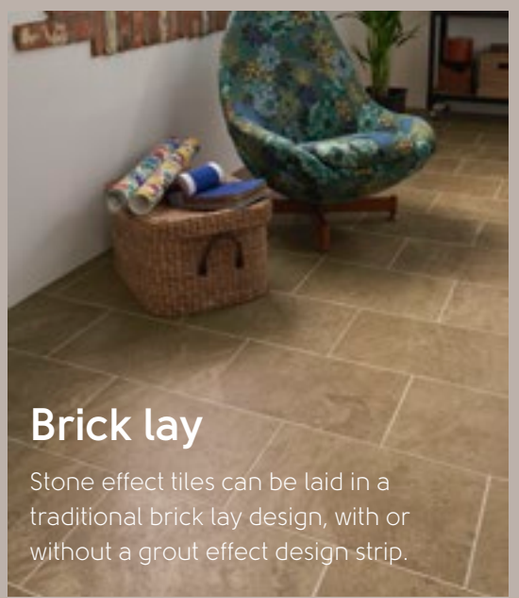


Brick lay


Stone effect tiles can be laid in a traditional brick lay design, with or without a grout effect design strip.


Herringbone

Try laying large planks or tiles in a herringbone style for a dramatic effect or for a more traditional look go for narrow planks or parquet.



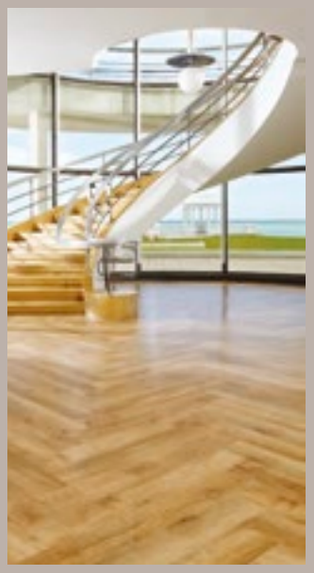


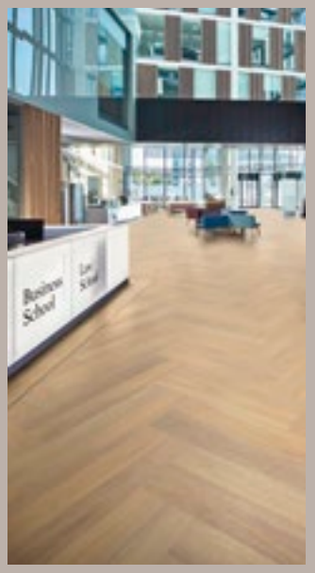

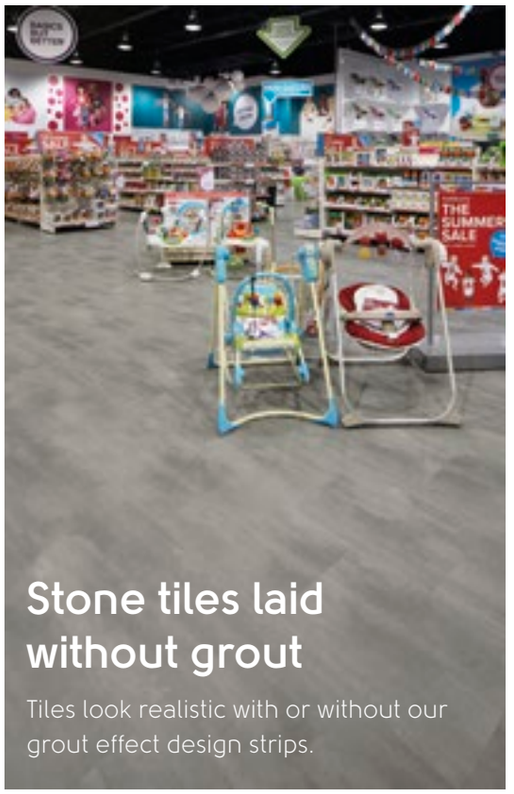

Stone tiles laid without grout

Tiles look realistic with or without our grout effect design strips.

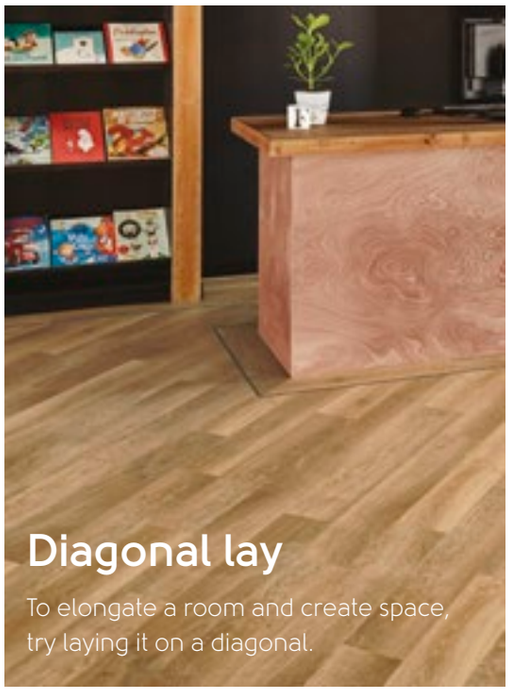

Diagonal lay

To elongate a room and create space, try laying it on a diagonal.



Mixing wood and stone designs

Specifying Karndean in a project allows you to easily mix wood and stone effect designs. Unlike the natural products, there are no issues of movement or height transitions when you place stone and wood effect designs from the same product range next to each other.

Pattern guide

It's not just the floor you lay, but how you lay it that makes a lasting impression. We offer numerous pattern possibilities to make the most of your space. Add design strips and borders for a truly unique look.



Wood layouts



Herringbone



Chevron



Broken Herringbone



Staggered



Ship Lap



Striped




Basket Weave



Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these designs into a future project.

Stone layouts

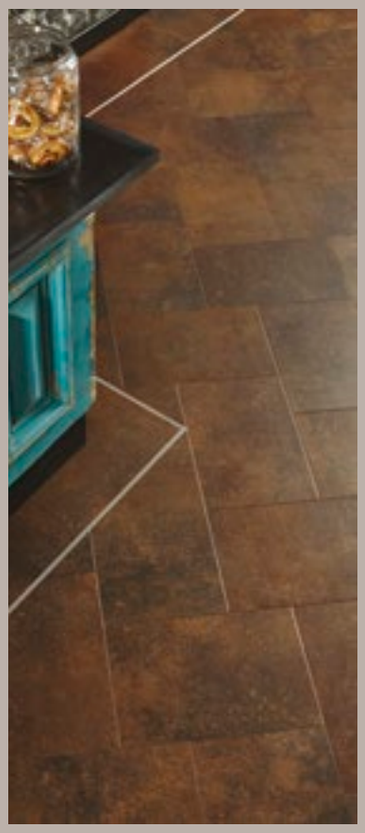

Brick Lay



Diagonal



Diamond



Herringbone




Striped



Pinwheel



Mixed layouts

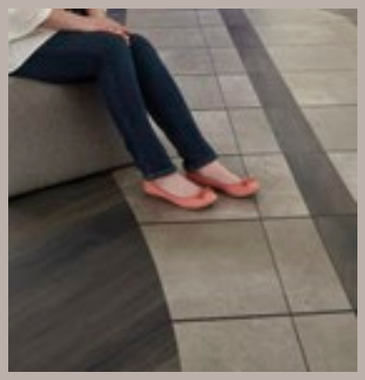

Plaid



Alternating



Striped




Wood at a glance (gluedown only)

Gluedown: Art Select | Da Vinci | Van Gogh | Opus | Knight Tile






















































































































VGW101T pg: 122



WP415 pg: 144



VGW96T pg: 121



VGW102T pg: 124



RL09 pg: 73



HC01 pg: 60



VGW95T pg: 120


VGW98T pg: 125



EW03 pg: 58



WP316 pg: 147



RL05 pg: 75



VGW70T pg: 114



VG5-7 pg: 106



VGW86T pg: 112



RP101 pg: 90



KP98 pg: 176



RP94 pg: 92



RL07 pg: 74



KP97 pg: 170



KP69 pg: 173



VGW53T pg: 107



RP105 pg: 93



RP95 pg: 89



EW01 pg: 57



KP93 pg: 174



EW21 pg: 54



KP67 pg: 171


RL02 pg: 69


HC04 pg: 62



WP326 pg: 145



EW02 pg: 59



VGW51T pg: 117



WP513 pg: 143



RL11 pg: 50



VGW92T pg: 110


RL03 pg: 70


RP41 pg: 91


VGW54T pg: 118



WP325 pg: 146


KP70 pg: 175


VGW41T pg: 119

RP104 pg: 88



VG1-7 pg: 116



KP96 pg: 169



VGW76T pg: 108



KP94 pg: 164



WP416 pg: 134



RP102 pg: 80



VGW93T pg: 113



RP91 pg: 83


KP36 pg: 163



RP103 pg: 81



VGW85T pg: 97



EW13 pg: 52



VGW42T pg: 104



VGW39T pg: 103



KP39 pg: 162


RL01 pg: 67


VGW50T pg: 96



KP90 pg: 158



RP73 pg: 82



KP35 pg: 160


VGW71T pg: 101



WP312 pg: 133



KP32 pg: 159



RL23 pg: 66



VGW33T pg: 109


WP321 pg: 142



WP315 pg: 136



VGW40T pg: 98


RP61 pg: 78


KP107 pg: 172


VGW44T pg: 111


KP37 pg: 161


VGW49T pg: 102



Grey Scandi Pine **KP131**

Stone at a glance (gluedown only)

Gluedown: Art Select | Da Vinci | Opus | Knight Tile












































































































LM15 pg: 191



CER21 pg: 210



LM06 pg: 189



SP215 pg: 219


CER14 pg: 211


T74 pg: 236


SP715 pg: 223


SP717 pg: 222


CER12 pg: 209


Fumo SP216

Technical overview (gluedown only)

	Standard	Art Select (see pages 50 and 178)	Da Vinci (see pages 76 and 196)
Thickness		3.0 mm	3.0 mm
Size		Various, see individual product pages	Various, see individual product pages
Box quantity		Various, see individual product pages	Various, see individual product pages
Wear layer		30 mil* (0.7 mm)	30 mil* (0.7 mm)
Surface treatment		K-Guard+ PU coating	K-Guard+ PU coating
Warranty*	Commercial Residential	20 Years Lifetime	20 Years Lifetime
Beveled edge		Standard	Standard
Classification	ASTM F1700	Class III Type B	Class III Type B
Reaction to fire	ASTM E648-06	Class 1	Class 1
Smoke density	ASTM E662-06	Pass (<450)	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass	Pass
Light fastness	ASTM F1515	Pass △E = 3.3	Pass △E = 3.3
Abrasion resistance	ASTM D3884	115000 cycles	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi	1000 psi
Flexibility	ASTM F137	Pass	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM	DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable	Suitable
Phthalate free		Yes	Yes

* Nominal.
** Subject to terms, see page 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

	Van Gogh (see page 94)	Opus (see pages 128 and 212)	Knight Tile (see pages 154 and 224)
	3.0 mm	2.5 mm	2.0 mm
	48" x 7" (1219 mm x 178 mm)	Various, see individual product pages	Various, see individual product pages
	15 Planks/35 sq.ft.	Various, see individual product pages	Various, see individual product pages
	20 mil (0.5 mm)	20 mil (0.5 mm)	12 mil (0.3 mm)
	K-Guard+ PU coating	K-Guard+ PU coating	K-Guard+ PU coating
	15 Years Lifetime	15 Years Lifetime	10 Years Lifetime
	Micro	Micro	No
	Class III Type B	Class III Type B	Class III Type B
	Class 1	Class 1	Class 1
	Pass (<450)	Pass (<450)	Pass (<450)
	Pass	Pass	Pass
	Pass (Dry 0.89)	Pass (Dry 0.89)	Pass (Dry 0.88)
	Pass	Pass	Pass
	Pass △E = 3.3	Pass △E = 5.0	Pass △E = 1.3
	115000 Cycles	124000 Cycles	42000 Cycles
	Pass -0.002"/lin.ft	Pass -0.004"/lin.ft	Pass 0.0012"/lin.ft
	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	△IIC = 4 dB IIC = 44 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	△IIC = 4 dB IIC = 43 dB (6" slab w/drop ceiling) IIC = 70 dB (6" slab w/drop ceiling + QuietChoice)
	1000 psi	2000 psi	2000 psi
	Pass	Pass	Pass
	DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM	DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM	DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
	Suitable	Suitable	Suitable
	Yes	Yes	Yes

Art Select **Wood**


Oak Royale


48" x 7" (1219mm x 178mm)


Page: 67
Spring Oak **RL01**


Page: 69
Summer Oak **RL02**


Page: 70
Autumn Oak **RL03**


Page: 71
Winter Oak **RL04**


Page: 68
Storm Oak **RL12**

56" x 9" (1420mm x 228mm)


Page: 64
Glacier Oak **RL21***



Page: 66
Savannah Oak **RL23**

Oak Premier

36" x 6" (915mm x 152mm)



Page: 60
Dawn Oak **HC01**


Page: 61
Dusk Oak **HC03**


Page: 62
Sundown Oak **HC04**



Page: 63
Midnight Oak **HC06**

18" x 3" (457mm x 76mm)


Page: 65
Glacier Oak **SM-RL21***

Maple

4", 5", 7" (102mm, 127mm and 178mm) widths in random lengths


Page: 73
Coffee Maple **RL09**


Page: 72
Toasted Maple **RL11**

Handcrafted

36" x 6" (915mm x 152mm)


Page: 57
Hickory Paprika **EW01**


Page: 59
Hickory Peppercorn **EW02**


Page: 58
Hickory Nutmeg **EW03**

56" x 9" (1420mm x 228mm)


Page: 53
Weathered Hickory **EW11**


Page: 55
Vintage Hickory **EW12**


Page: 52
Classic Hickory **EW13**



Page: 54
Reclaimed Chestnut **EW21**


Page: 56
Salvaged Chestnut **EW22**

Cherry Royale

48" x 7" (1219mm x 178mm)


Page: 75
Spanish Cherry **RL05**


Page: 74
Santina Cherry **RL07**

*Same colour available in different formats, see product page for details.

Art Select **Wood**

Art Select | GLUEDOWN

Full of charm and character, our premium Art Select wood collection brings the natural beauty of real wood to life in your commercial space. Through meticulous attention to detail and careful selection of some of the most beautiful and inspiring natural woods, our Art Select wood collection includes our most intricate designs and realistic embosses. Everything a beautiful floor should be, and so much more, each of our Art Select woods tells its own story.



Vintage Hickory **EW12**

	Standard	Result
Thickness		3.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+ PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 3.3
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.
** Subject to terms, see page 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Classic Hickory **EW13**

Karndean Designflooring



Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW13
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Hickory **EW11**

Karndean Designflooring



Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW11
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed Chestnut **EW21**

Karndean Designflooring



Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
EW21
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Vintage Hickory **EW12**

Karndean Designflooring

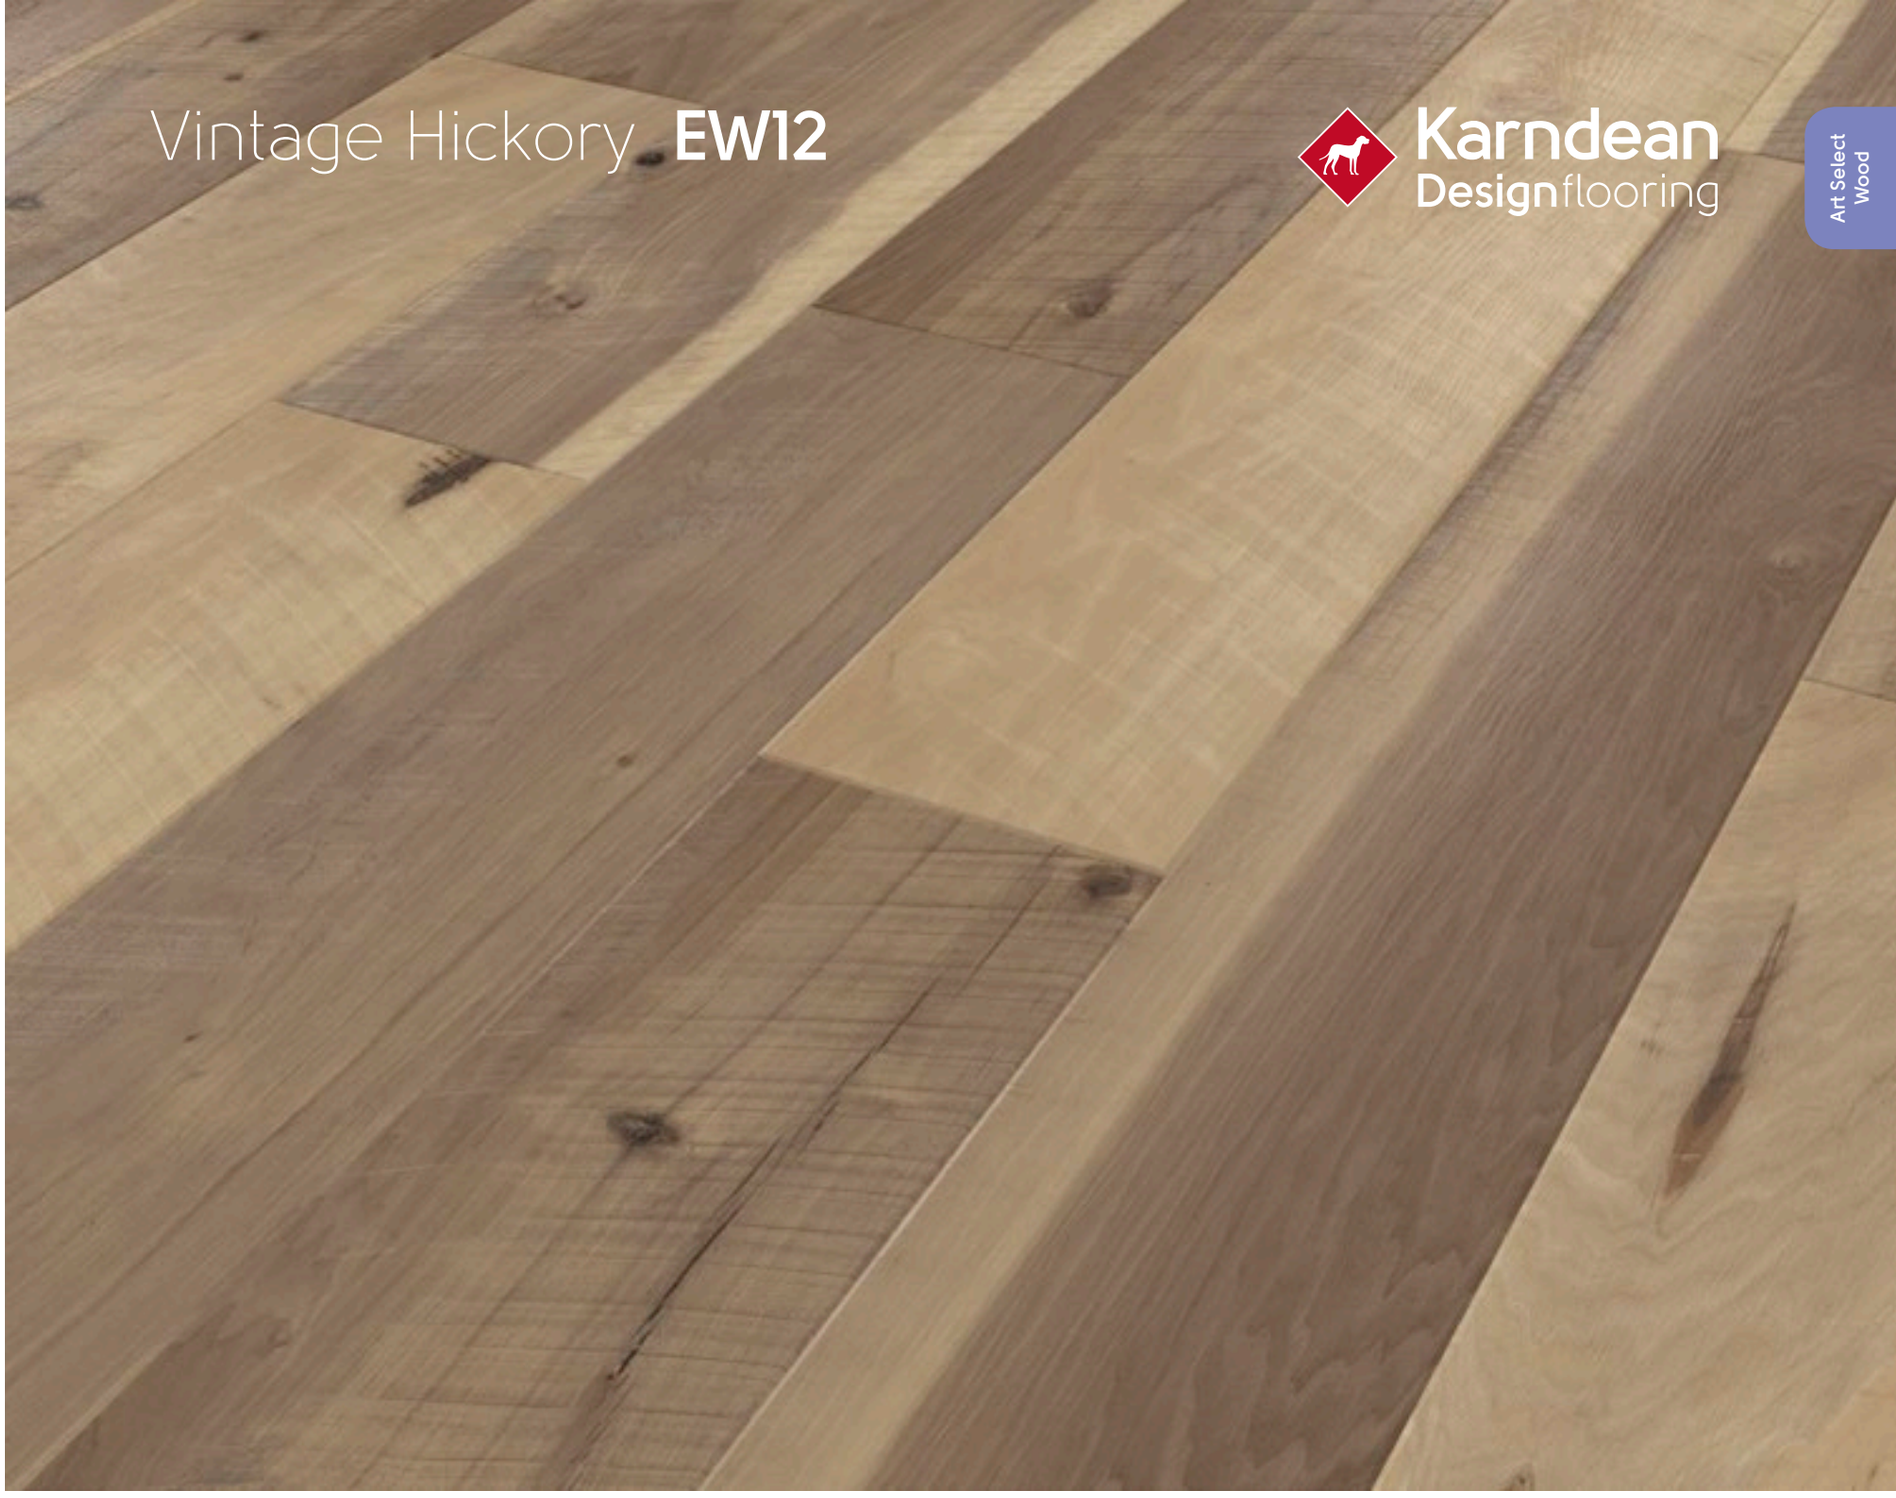

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
EW12
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Salvaged Chestnut **EW22**

Karndean
Designflooring

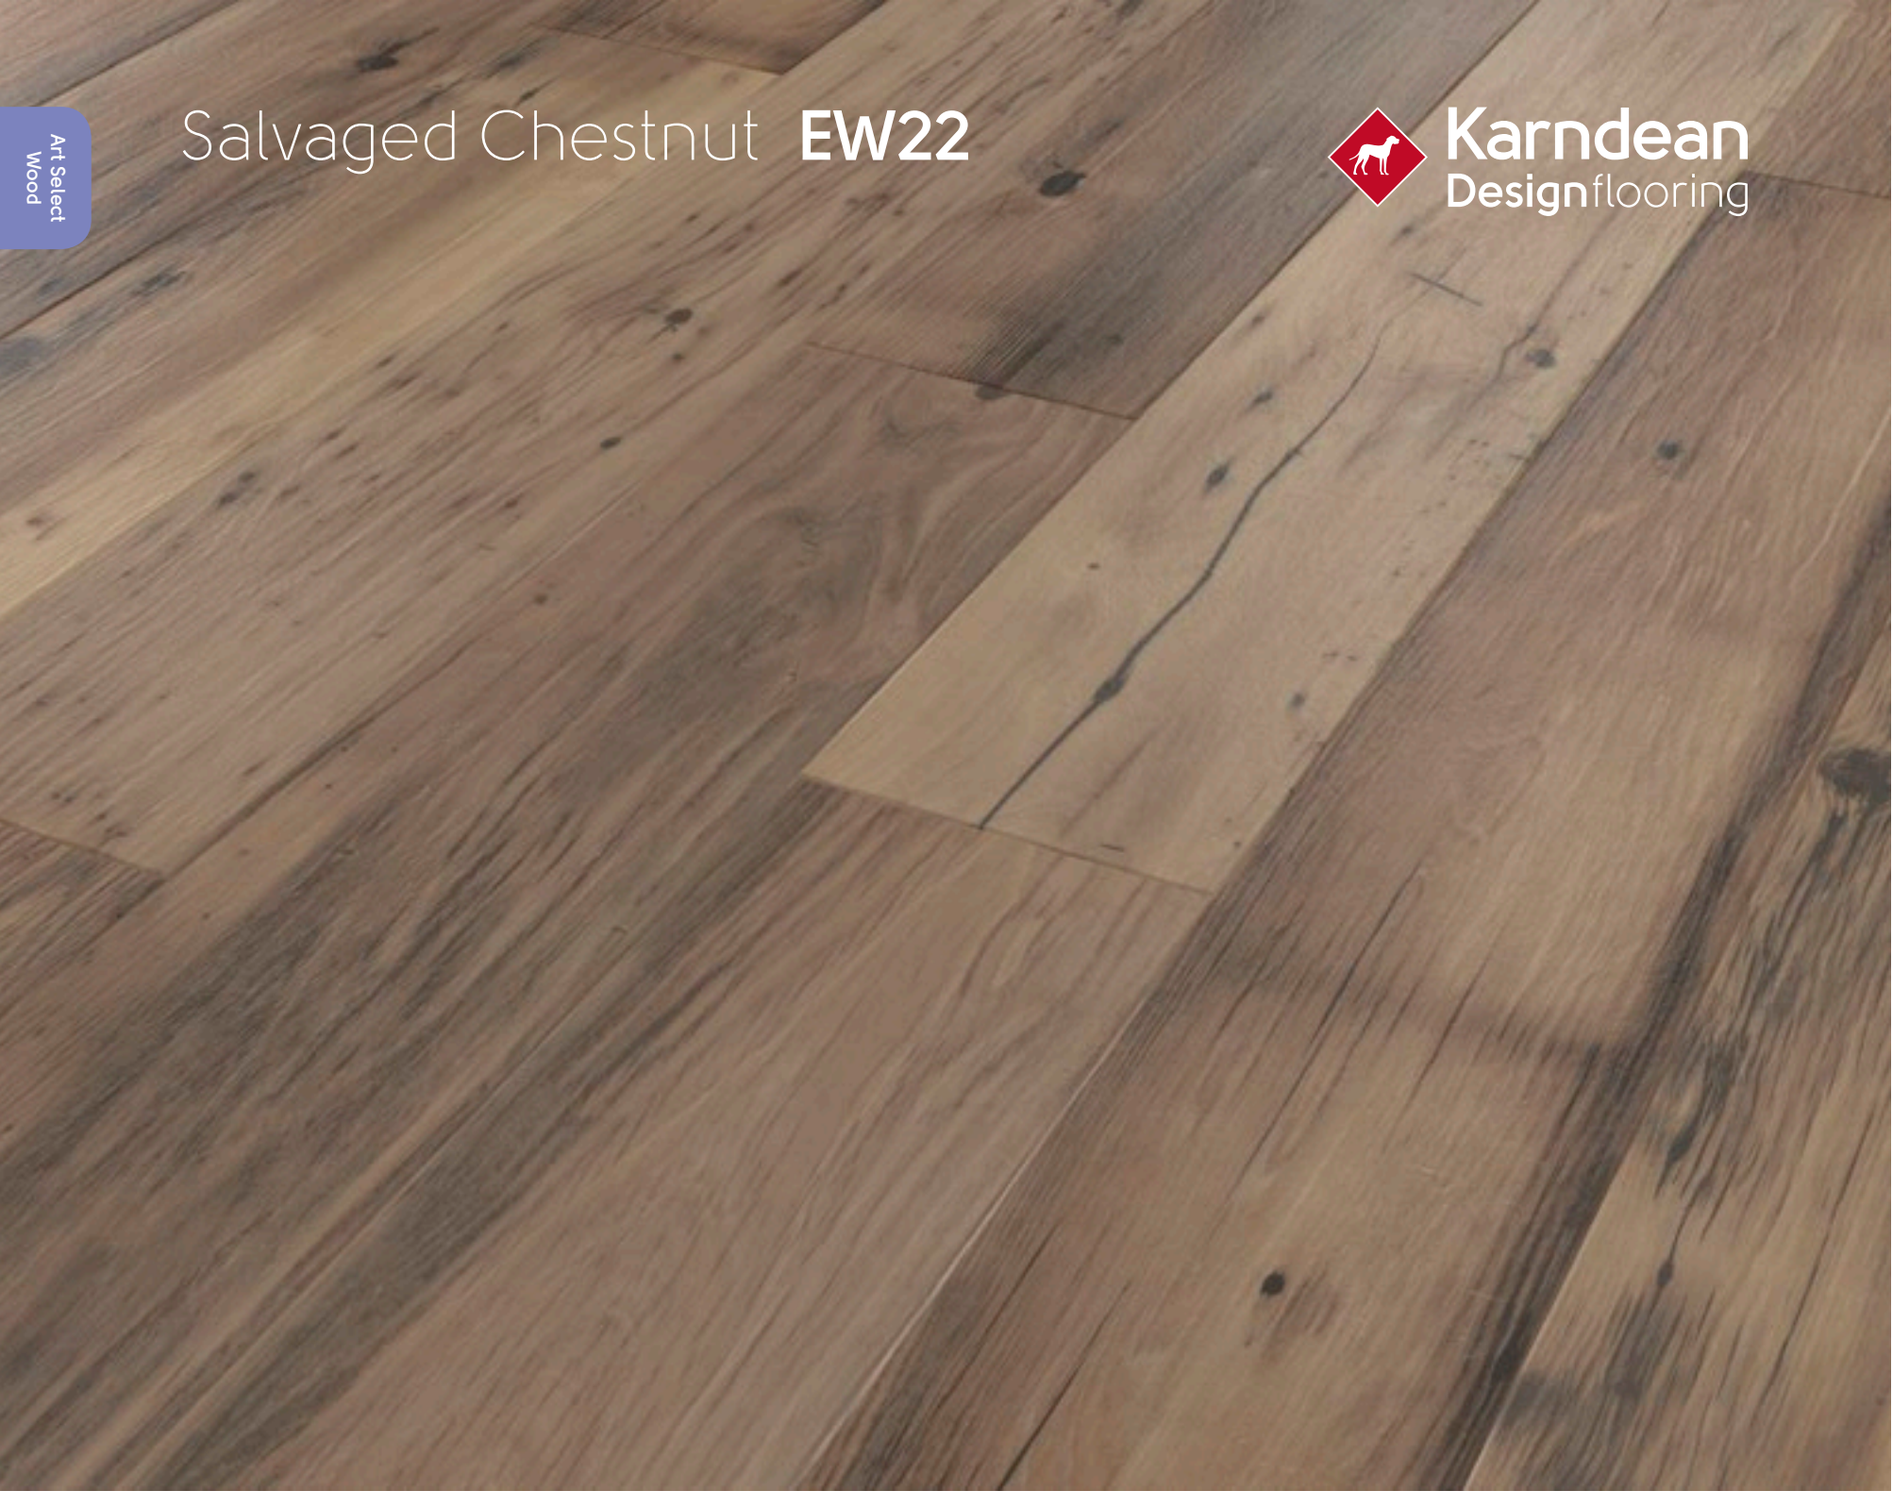

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW22
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hickory Paprika **EW01**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW01
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hickory Nutmeg **EW03**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW03
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hickory Peppercorn **EW02**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:


ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW02
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Dawn Oak **HC01**

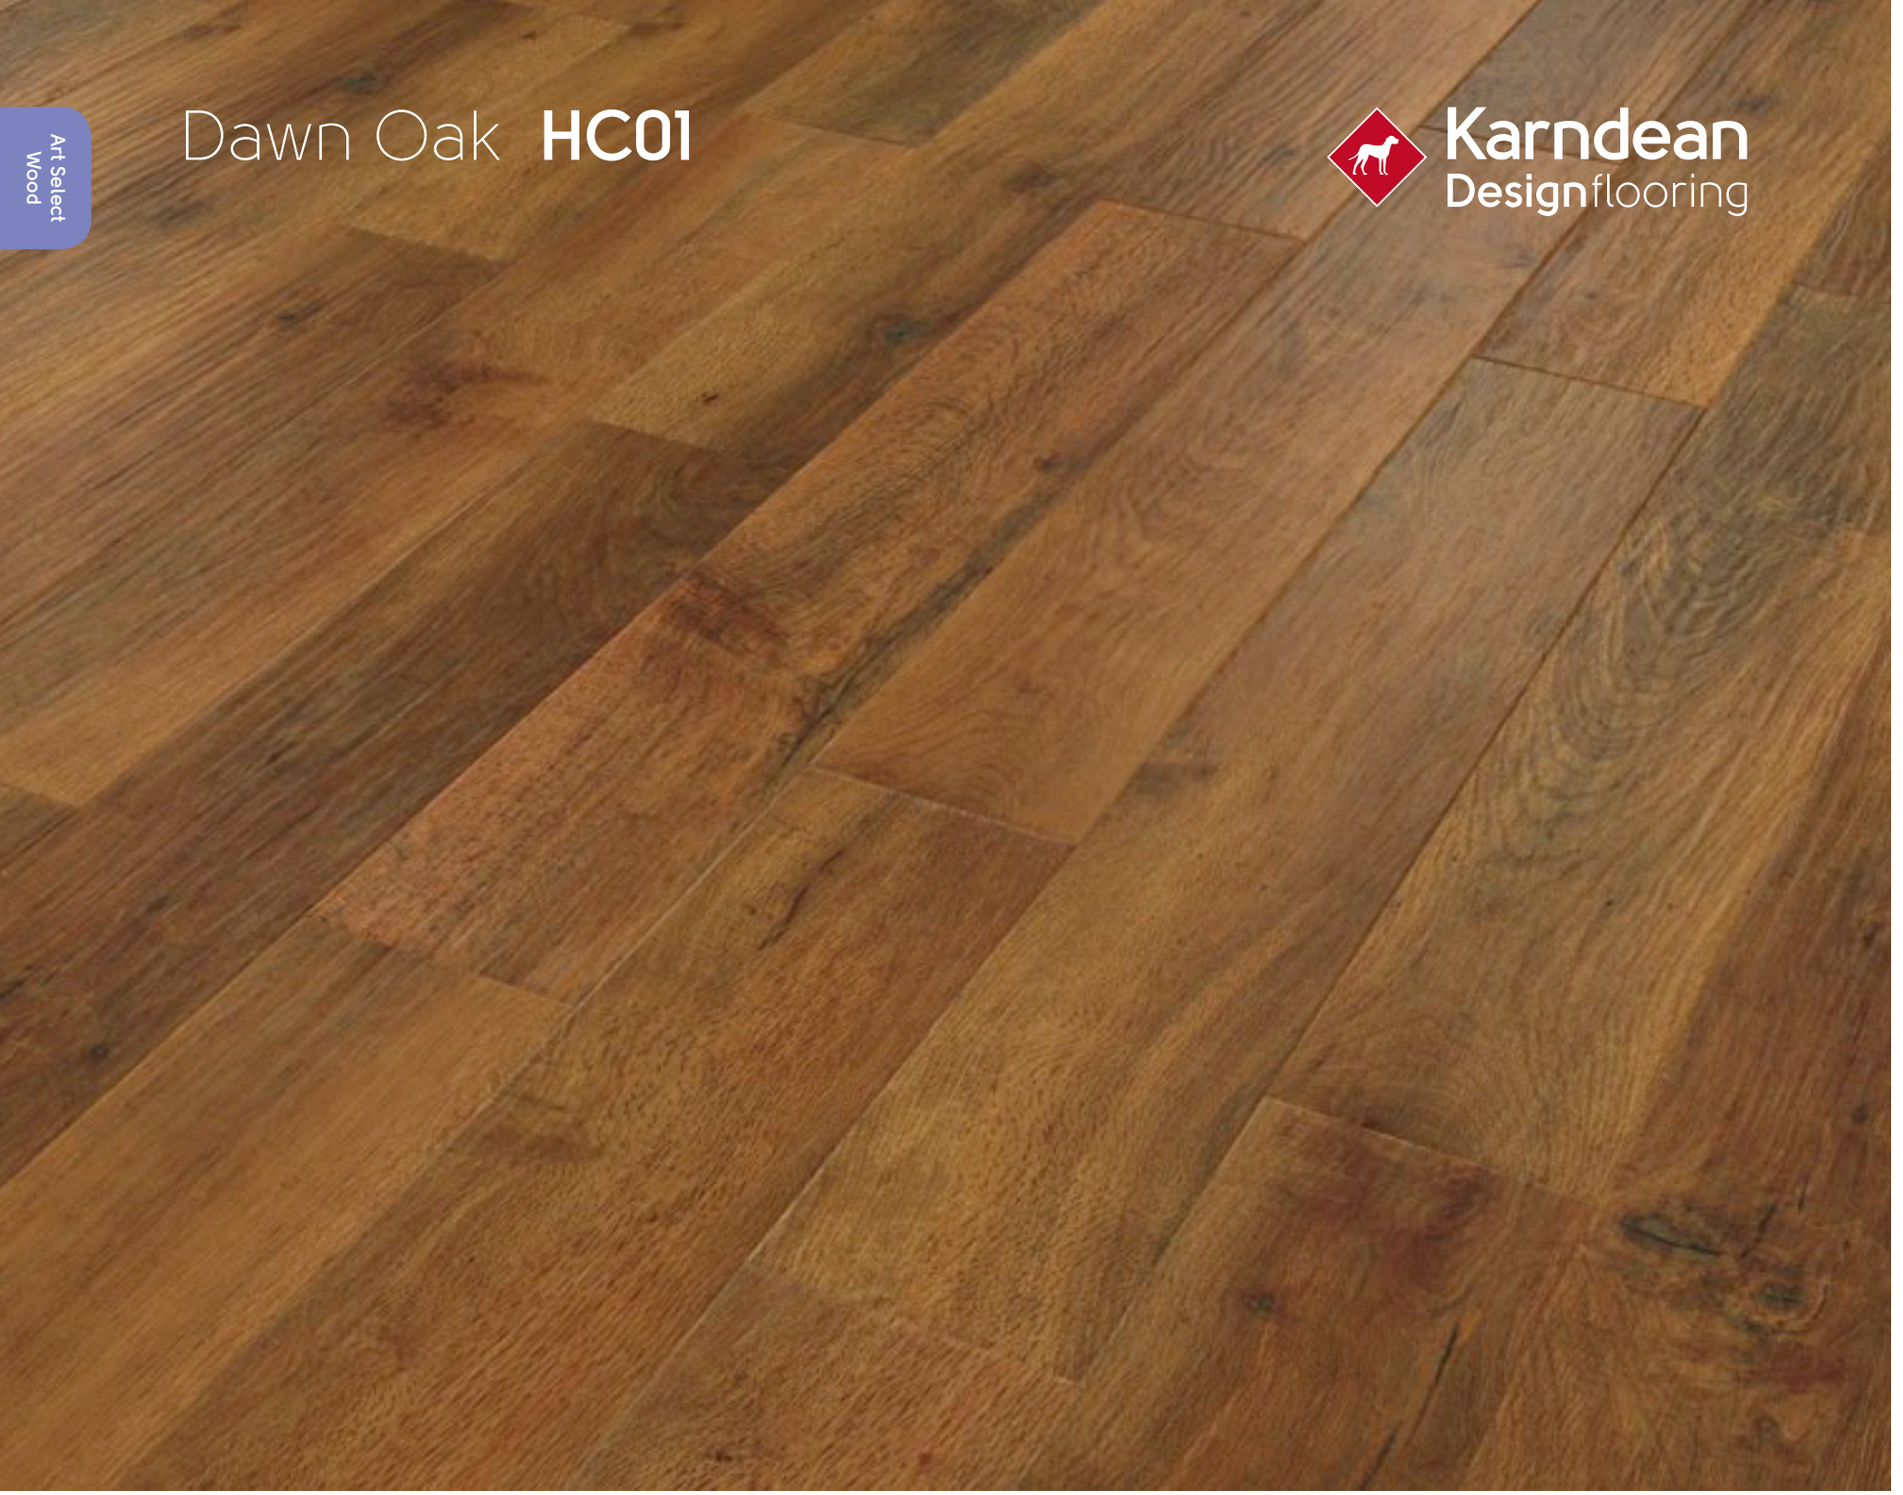

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC01
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Dusk Oak **HC03**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC03
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Sundown Oak **HC04**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC04
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Midnight Oak **HC06**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
HC06
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Glacier Oak **RL21**

Karndean Designflooring

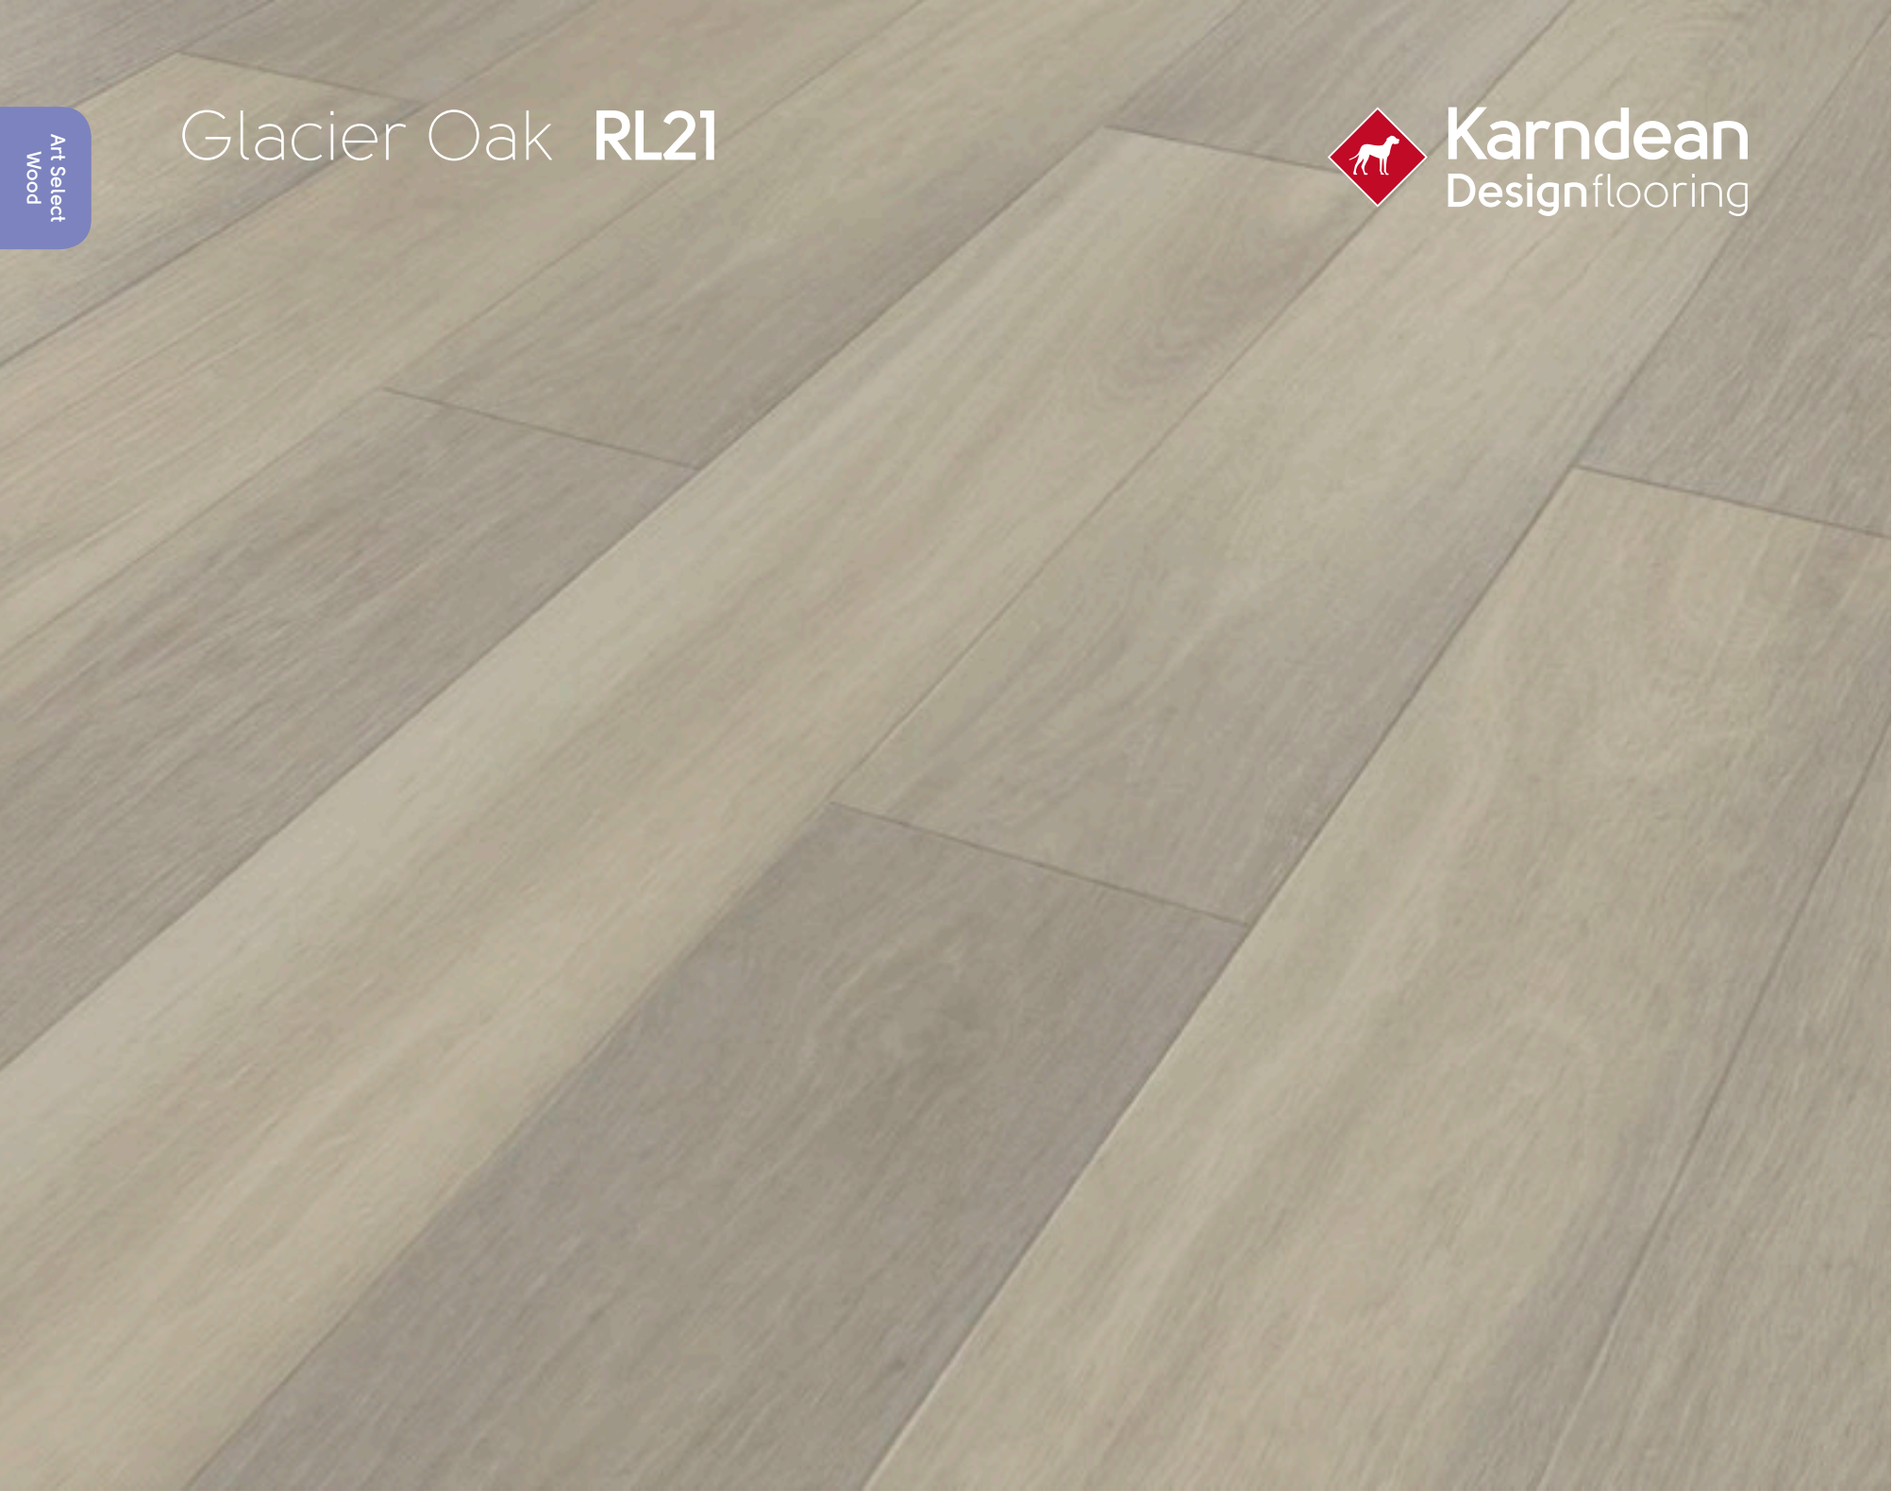

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:


Page: 51

This product is also available in parquet format. See page opposite.

TEXT
RL21
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Glacier Oak **SM-RL21**

Karndean Designflooring

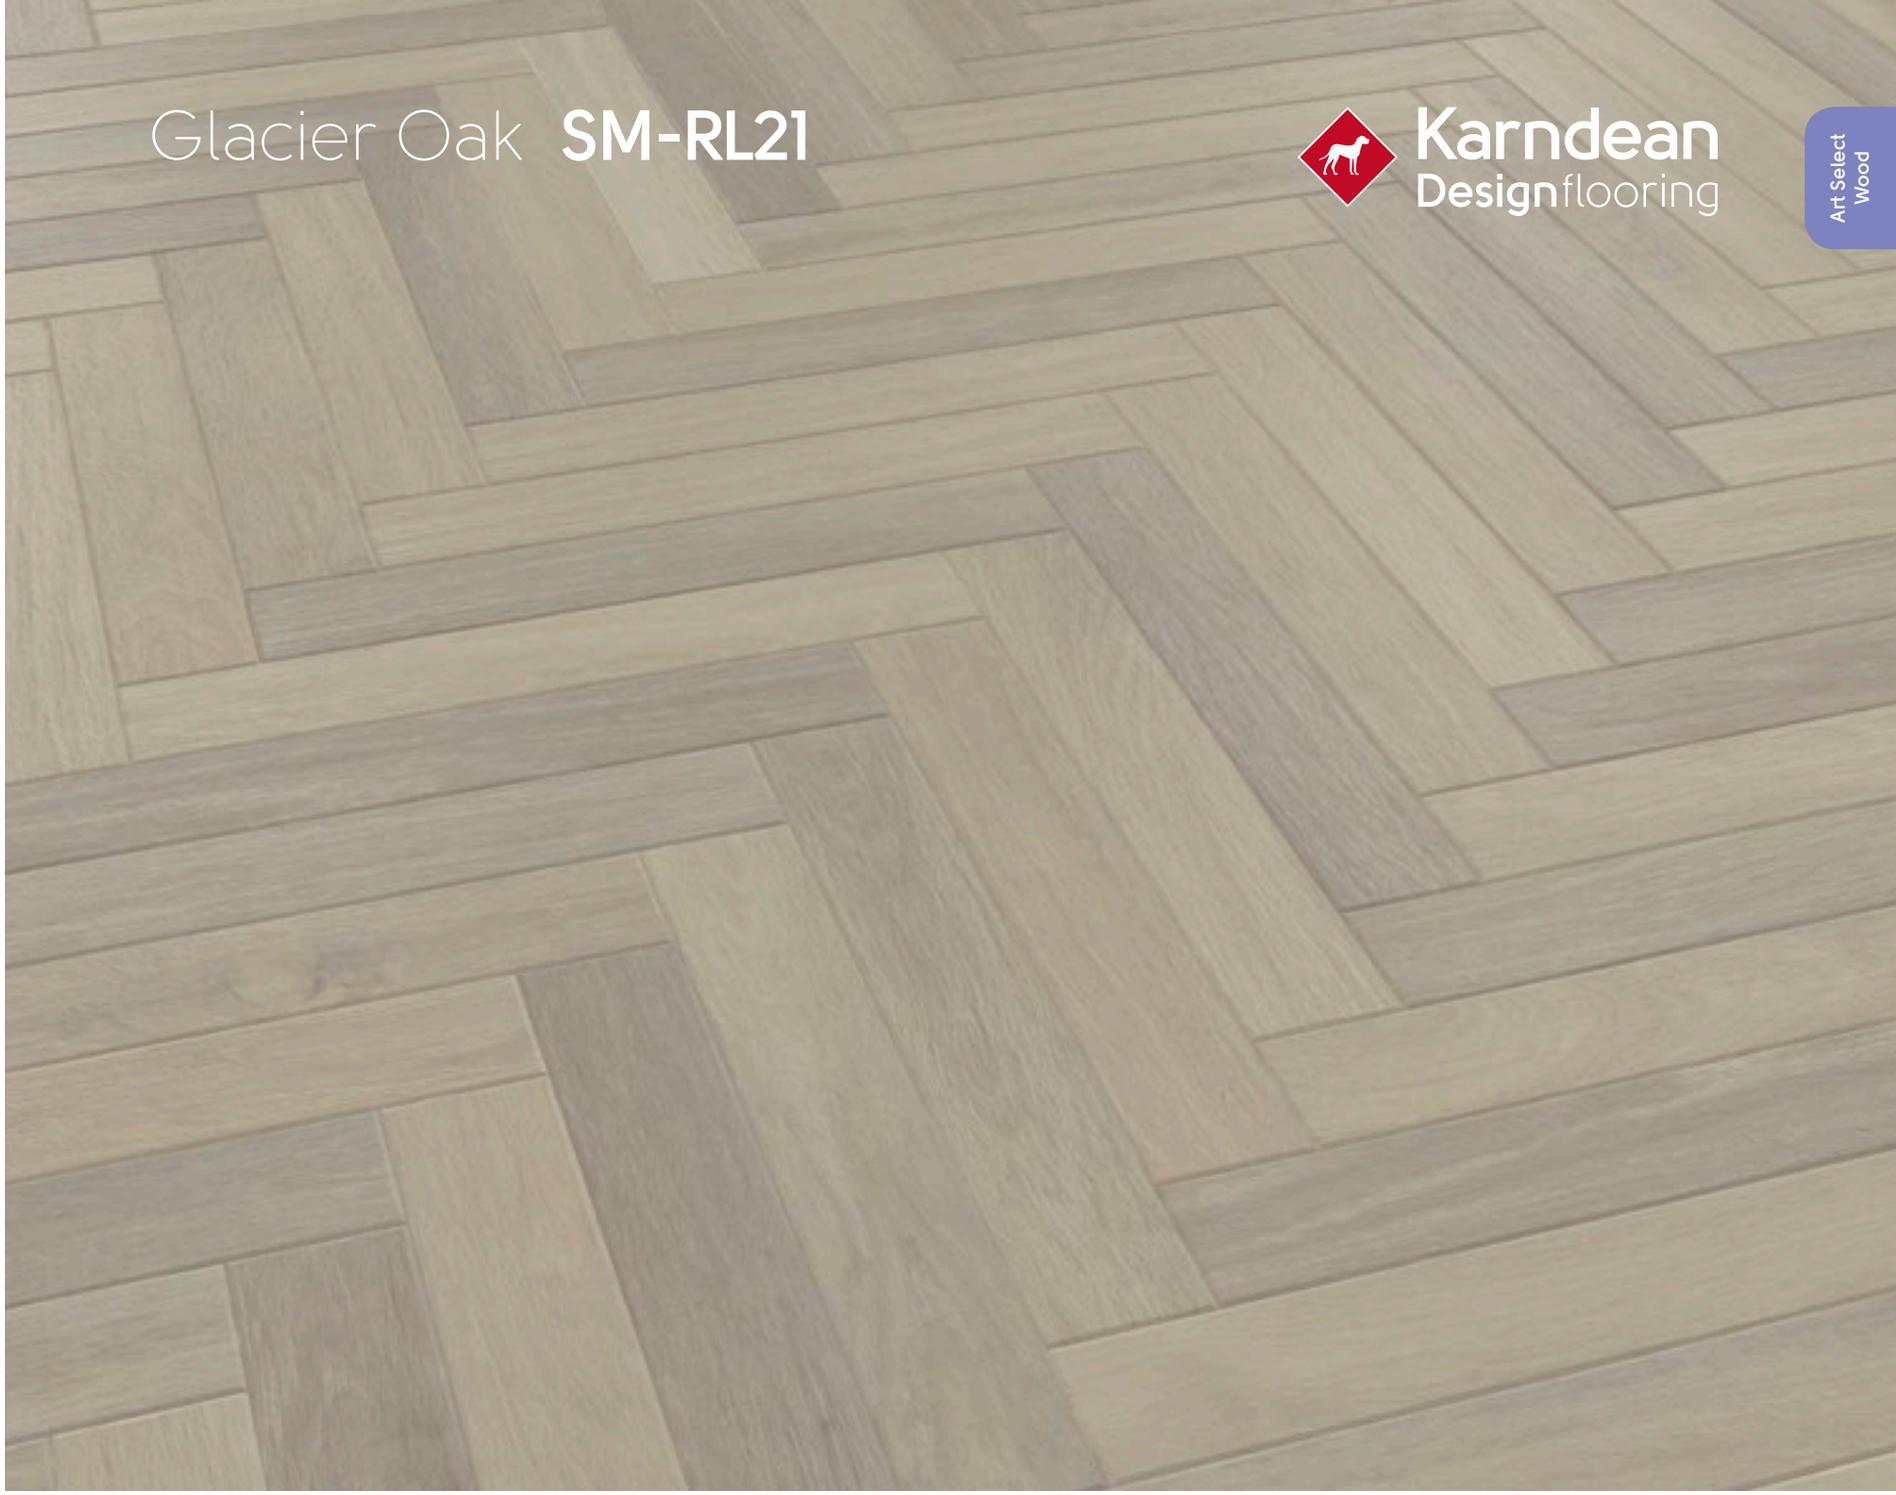

Size	18" x 3" (457mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	96 Pieces/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

This product is also available in parquet format. See page opposite.

TEXT
SM-RL21
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Savannah Oak **RL23**

Karndean Designflooring



Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
RL23
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Spring Oak **RL01**

Karndean Designflooring

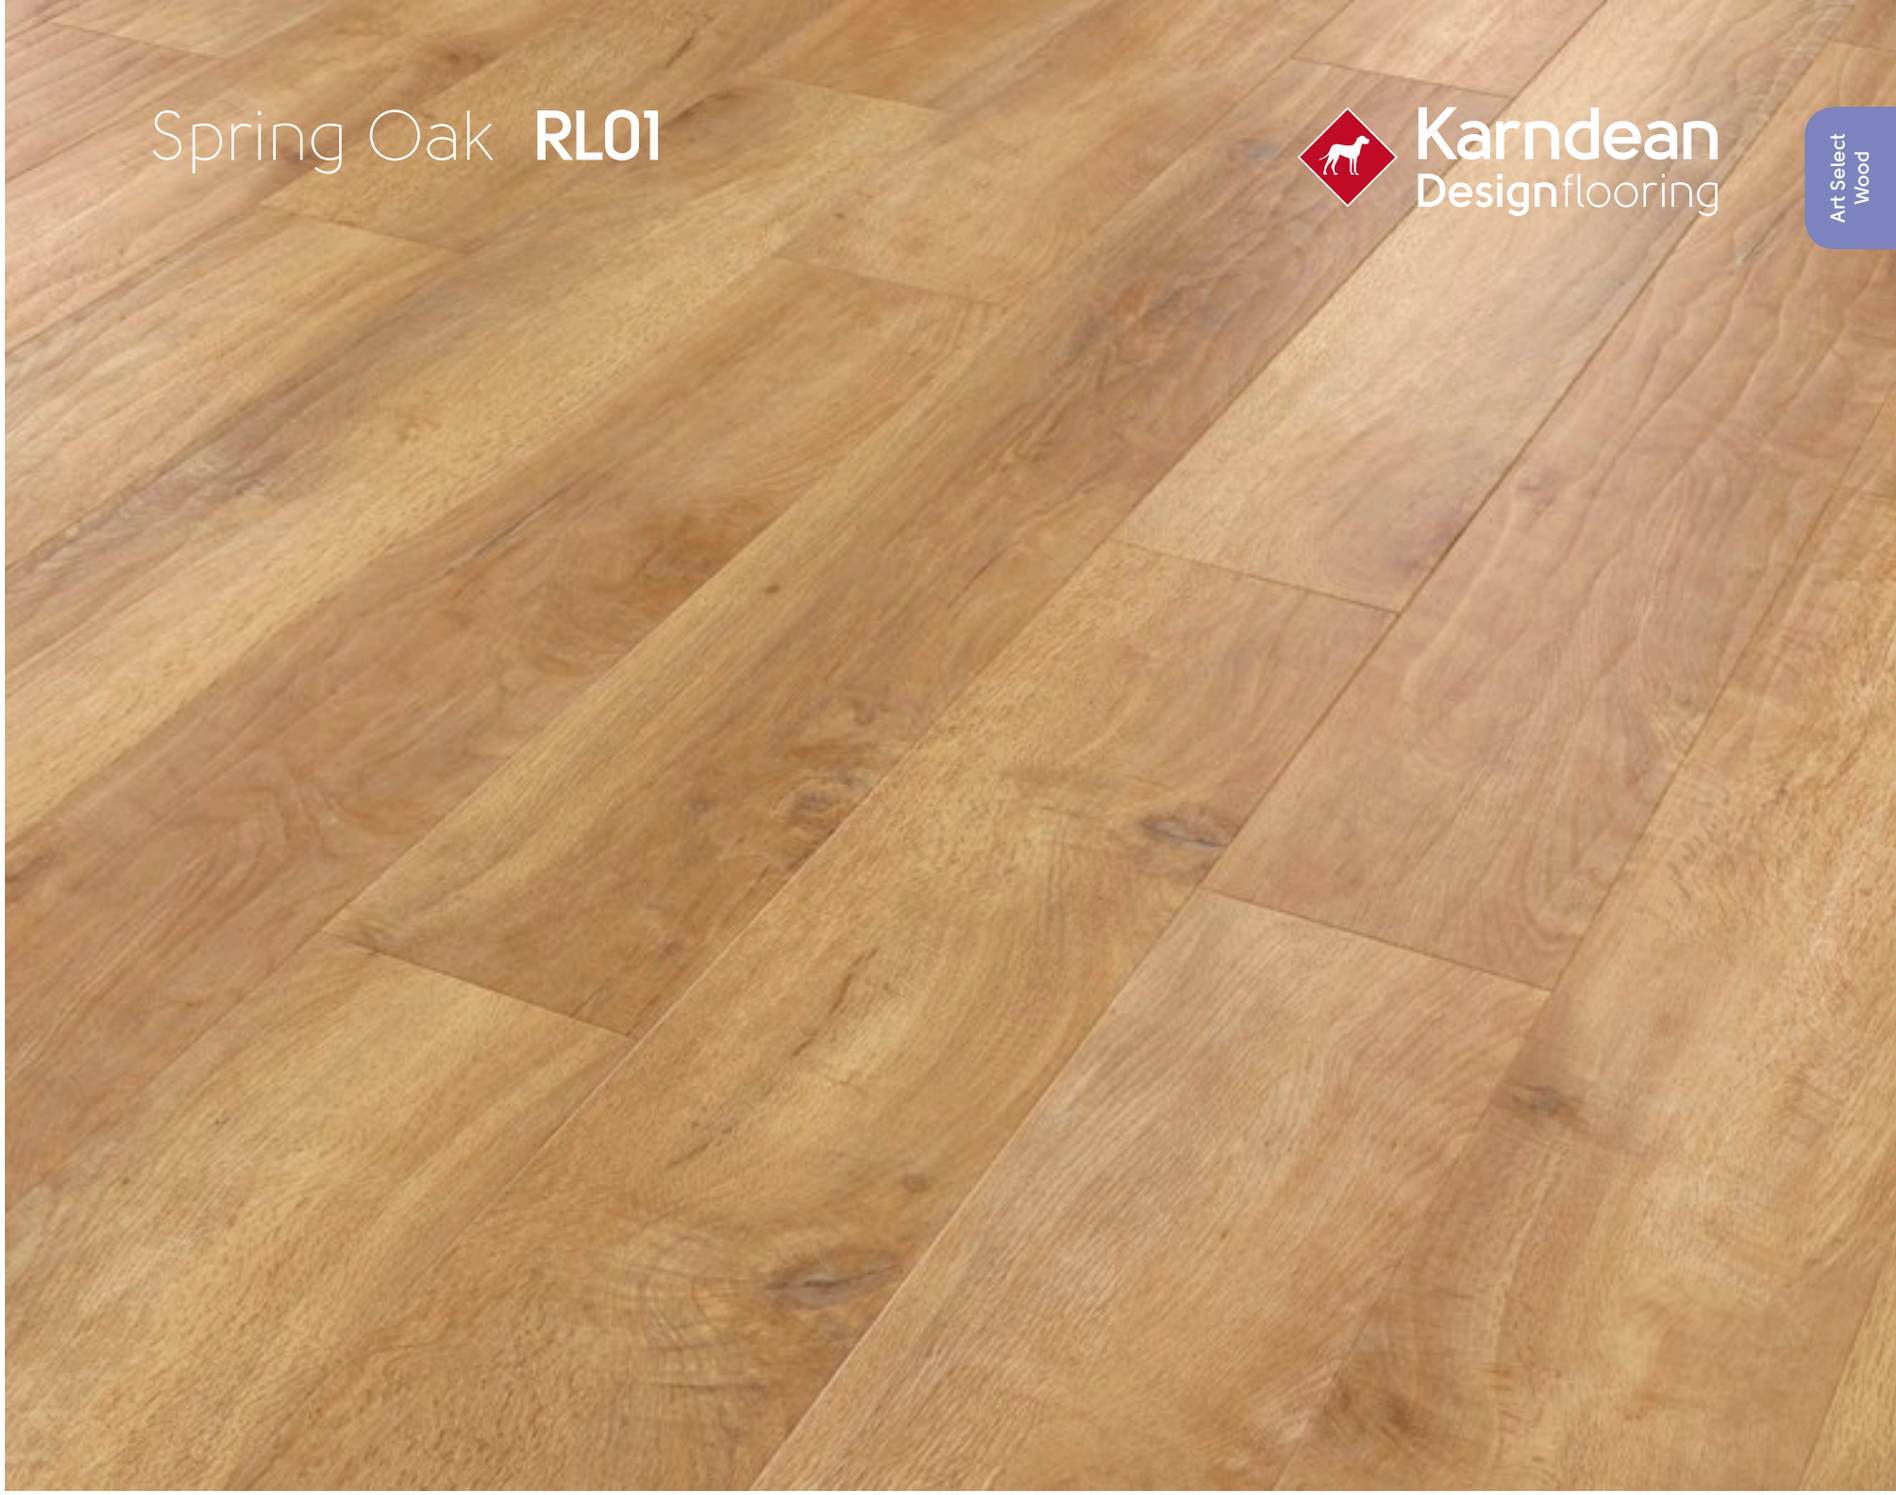

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL01
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Storm Oak **RL12**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
RL12
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Summer Oak **RL02**

Karndean Designflooring

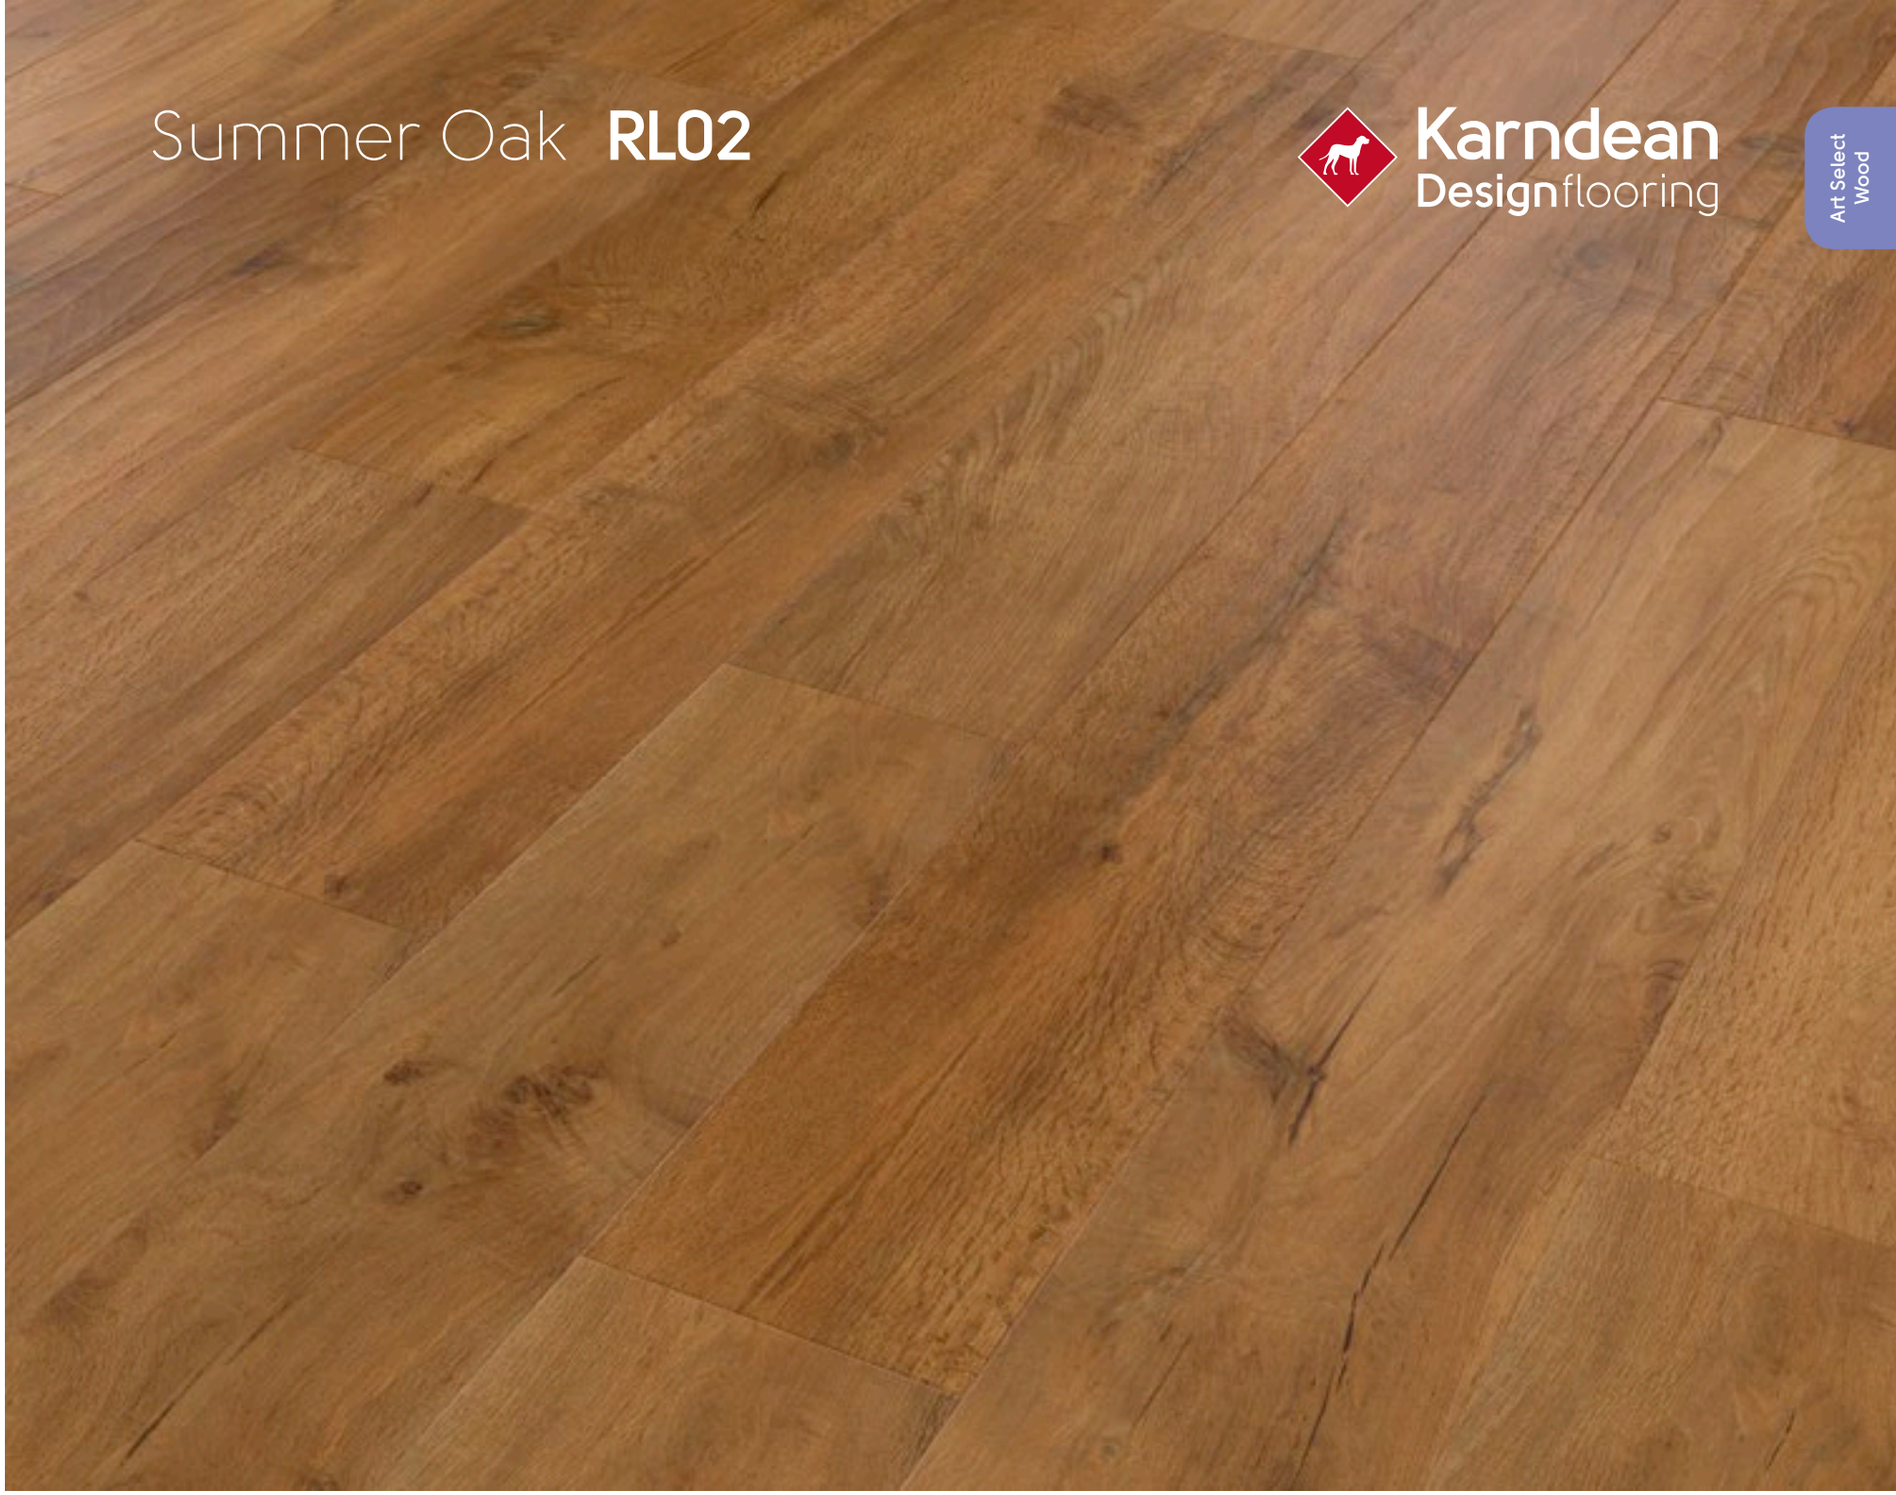

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL02
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Autumn Oak **RL03**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
RL03
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Winter Oak **RL04**

Karndean Designflooring

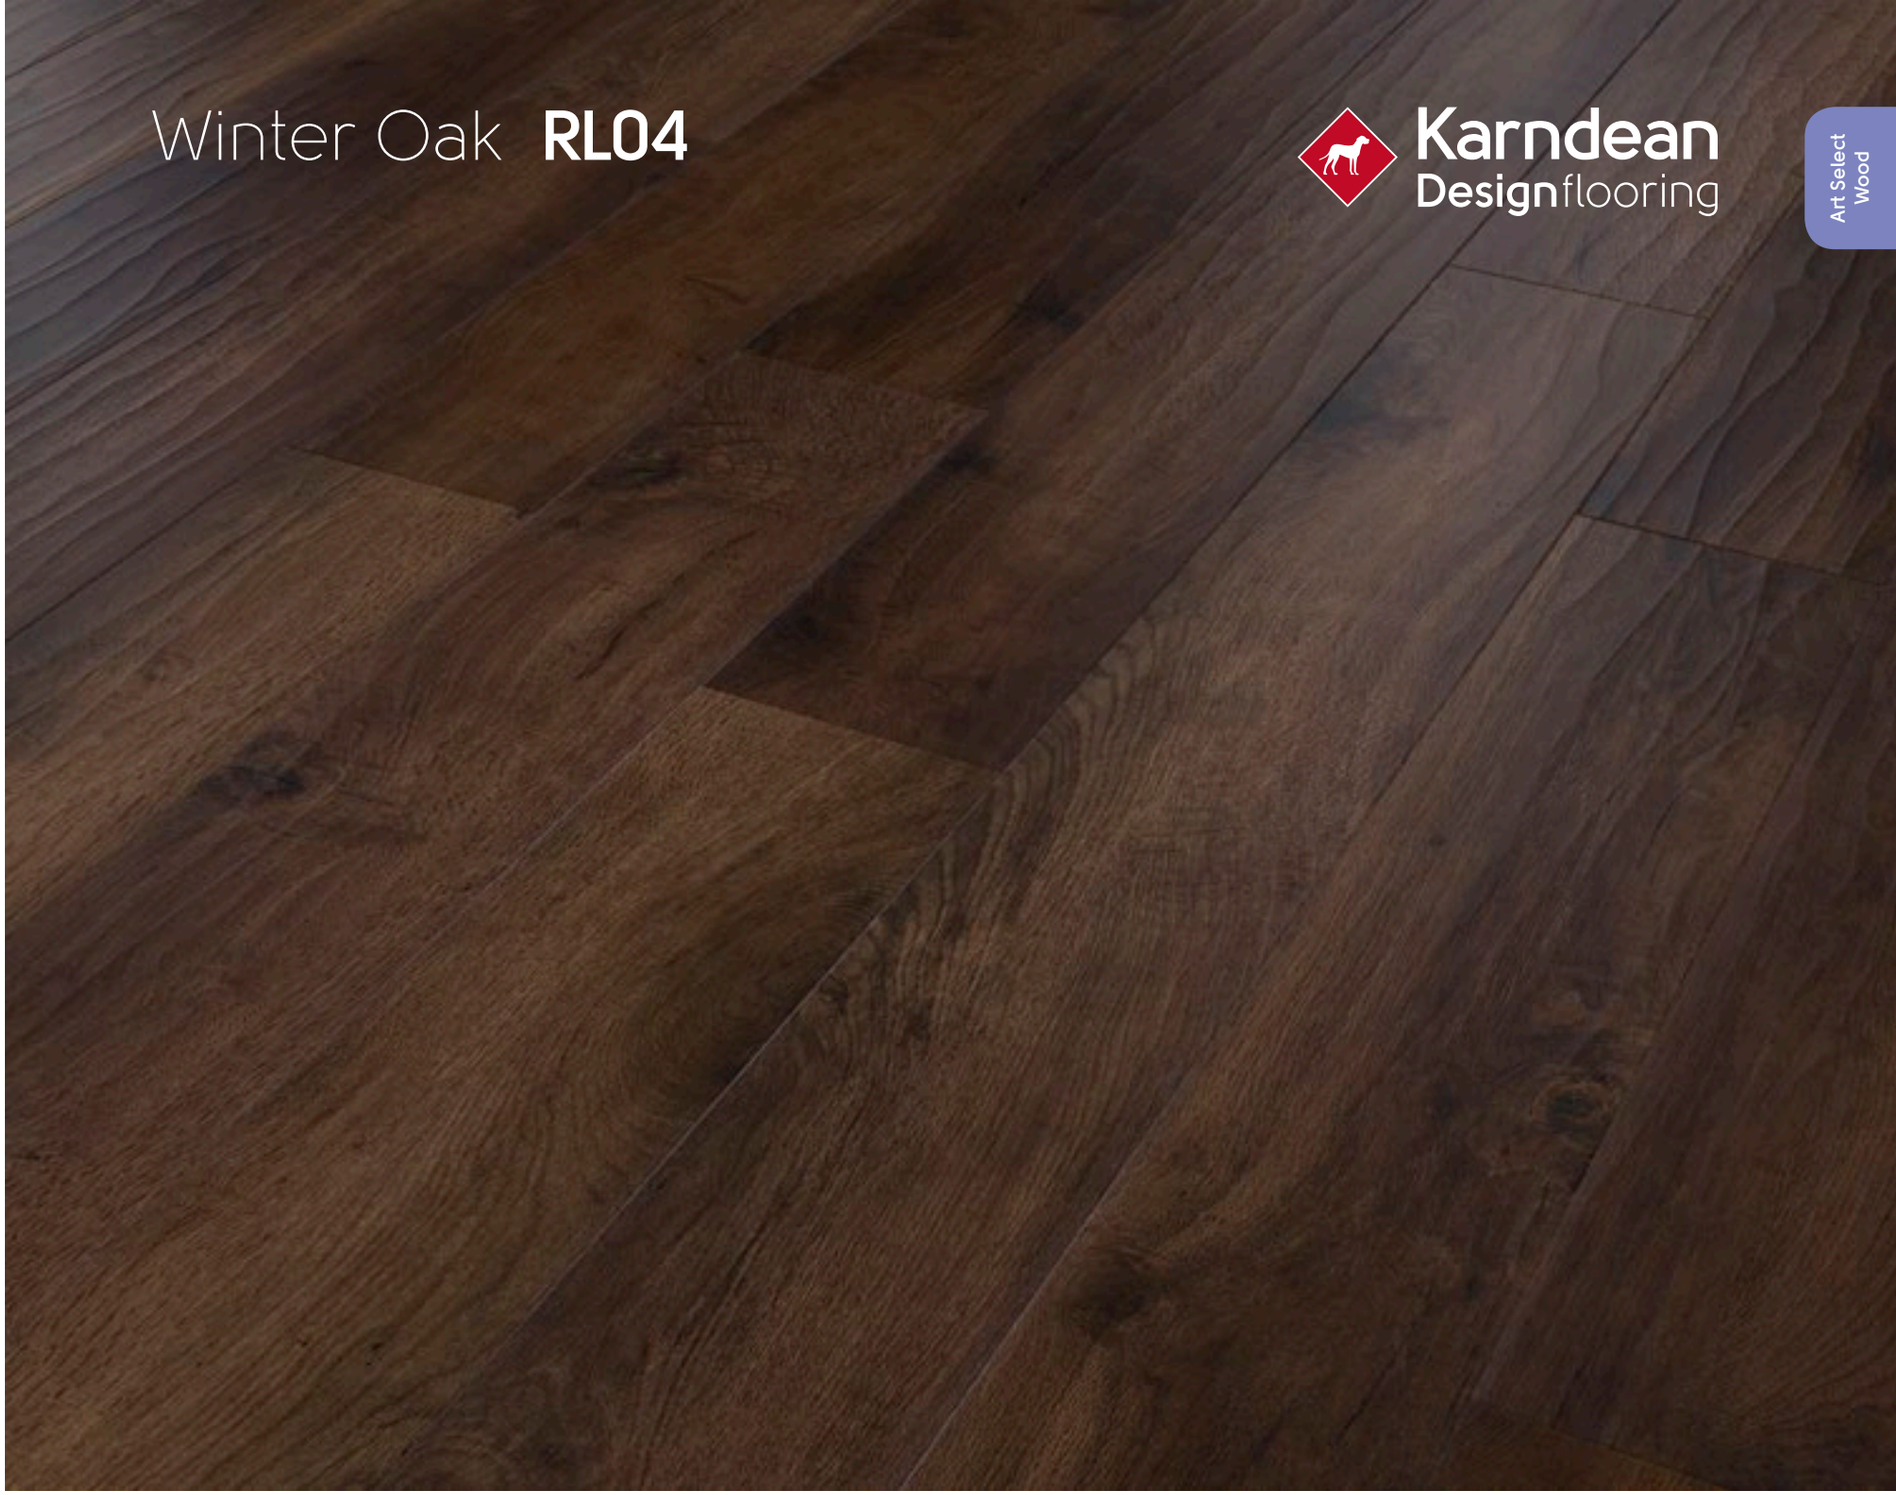

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL04
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Toasted Maple **RL11**

Karndean
Designflooring



Size	4", 5" and 7" (102mm, 127mm and 178mm) widths in random lengths
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	22 Planks/24 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
RL11
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Coffee Maple **RL09**

Karndean Designflooring

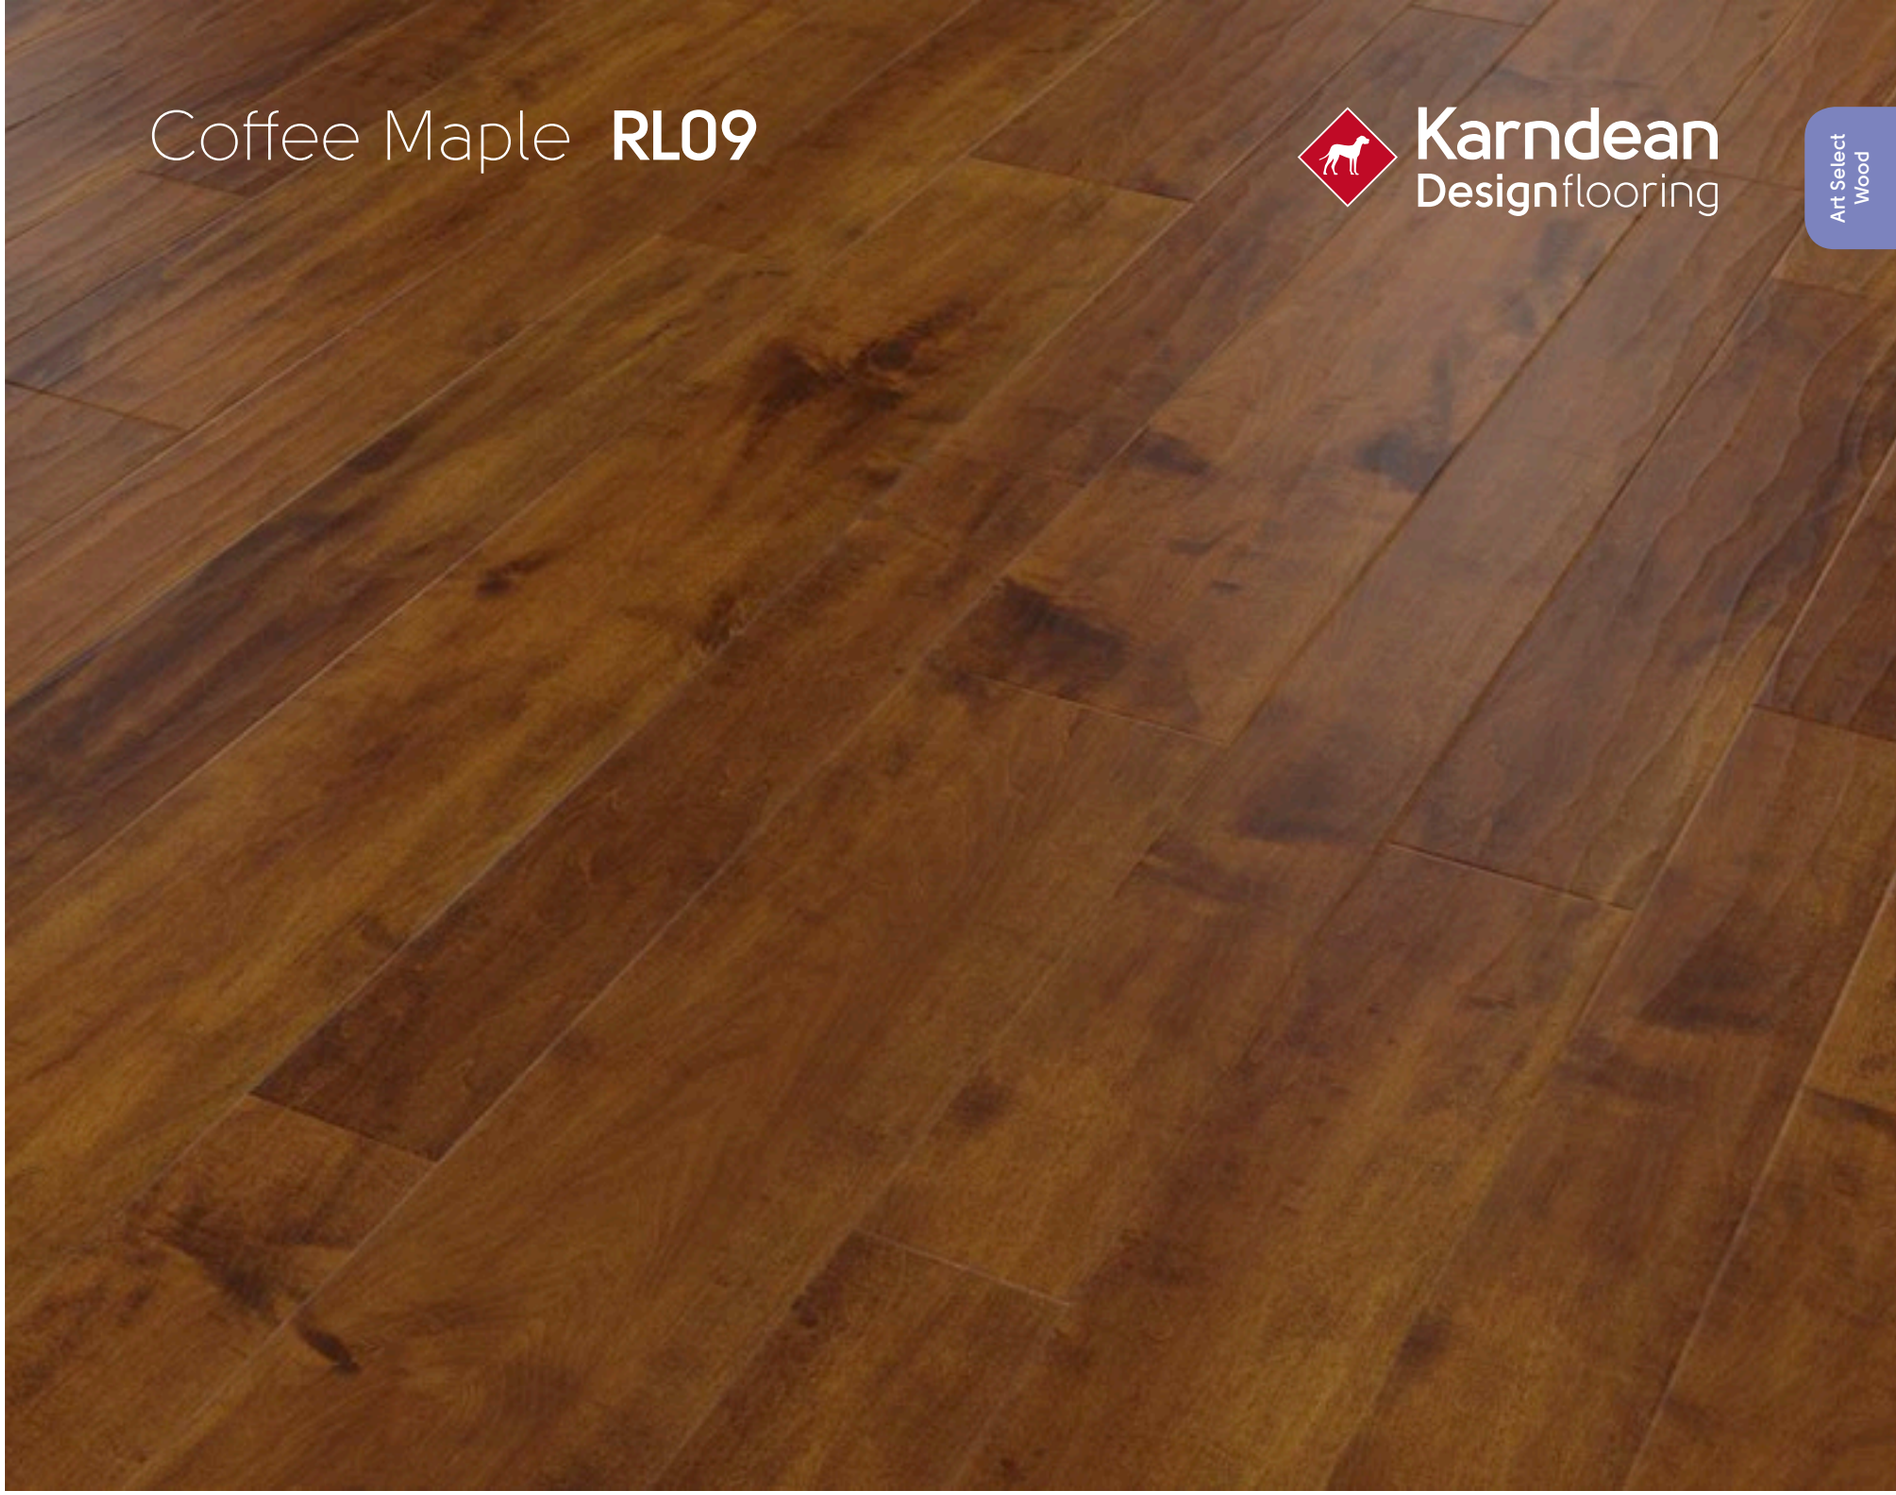

Size	4", 5" and 7" (102mm, 127mm and 178mm) widths in random lengths
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	22 Planks/24 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 51

TEXT
RL09
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Santina Cherry **RL07**

Karndean Designflooring

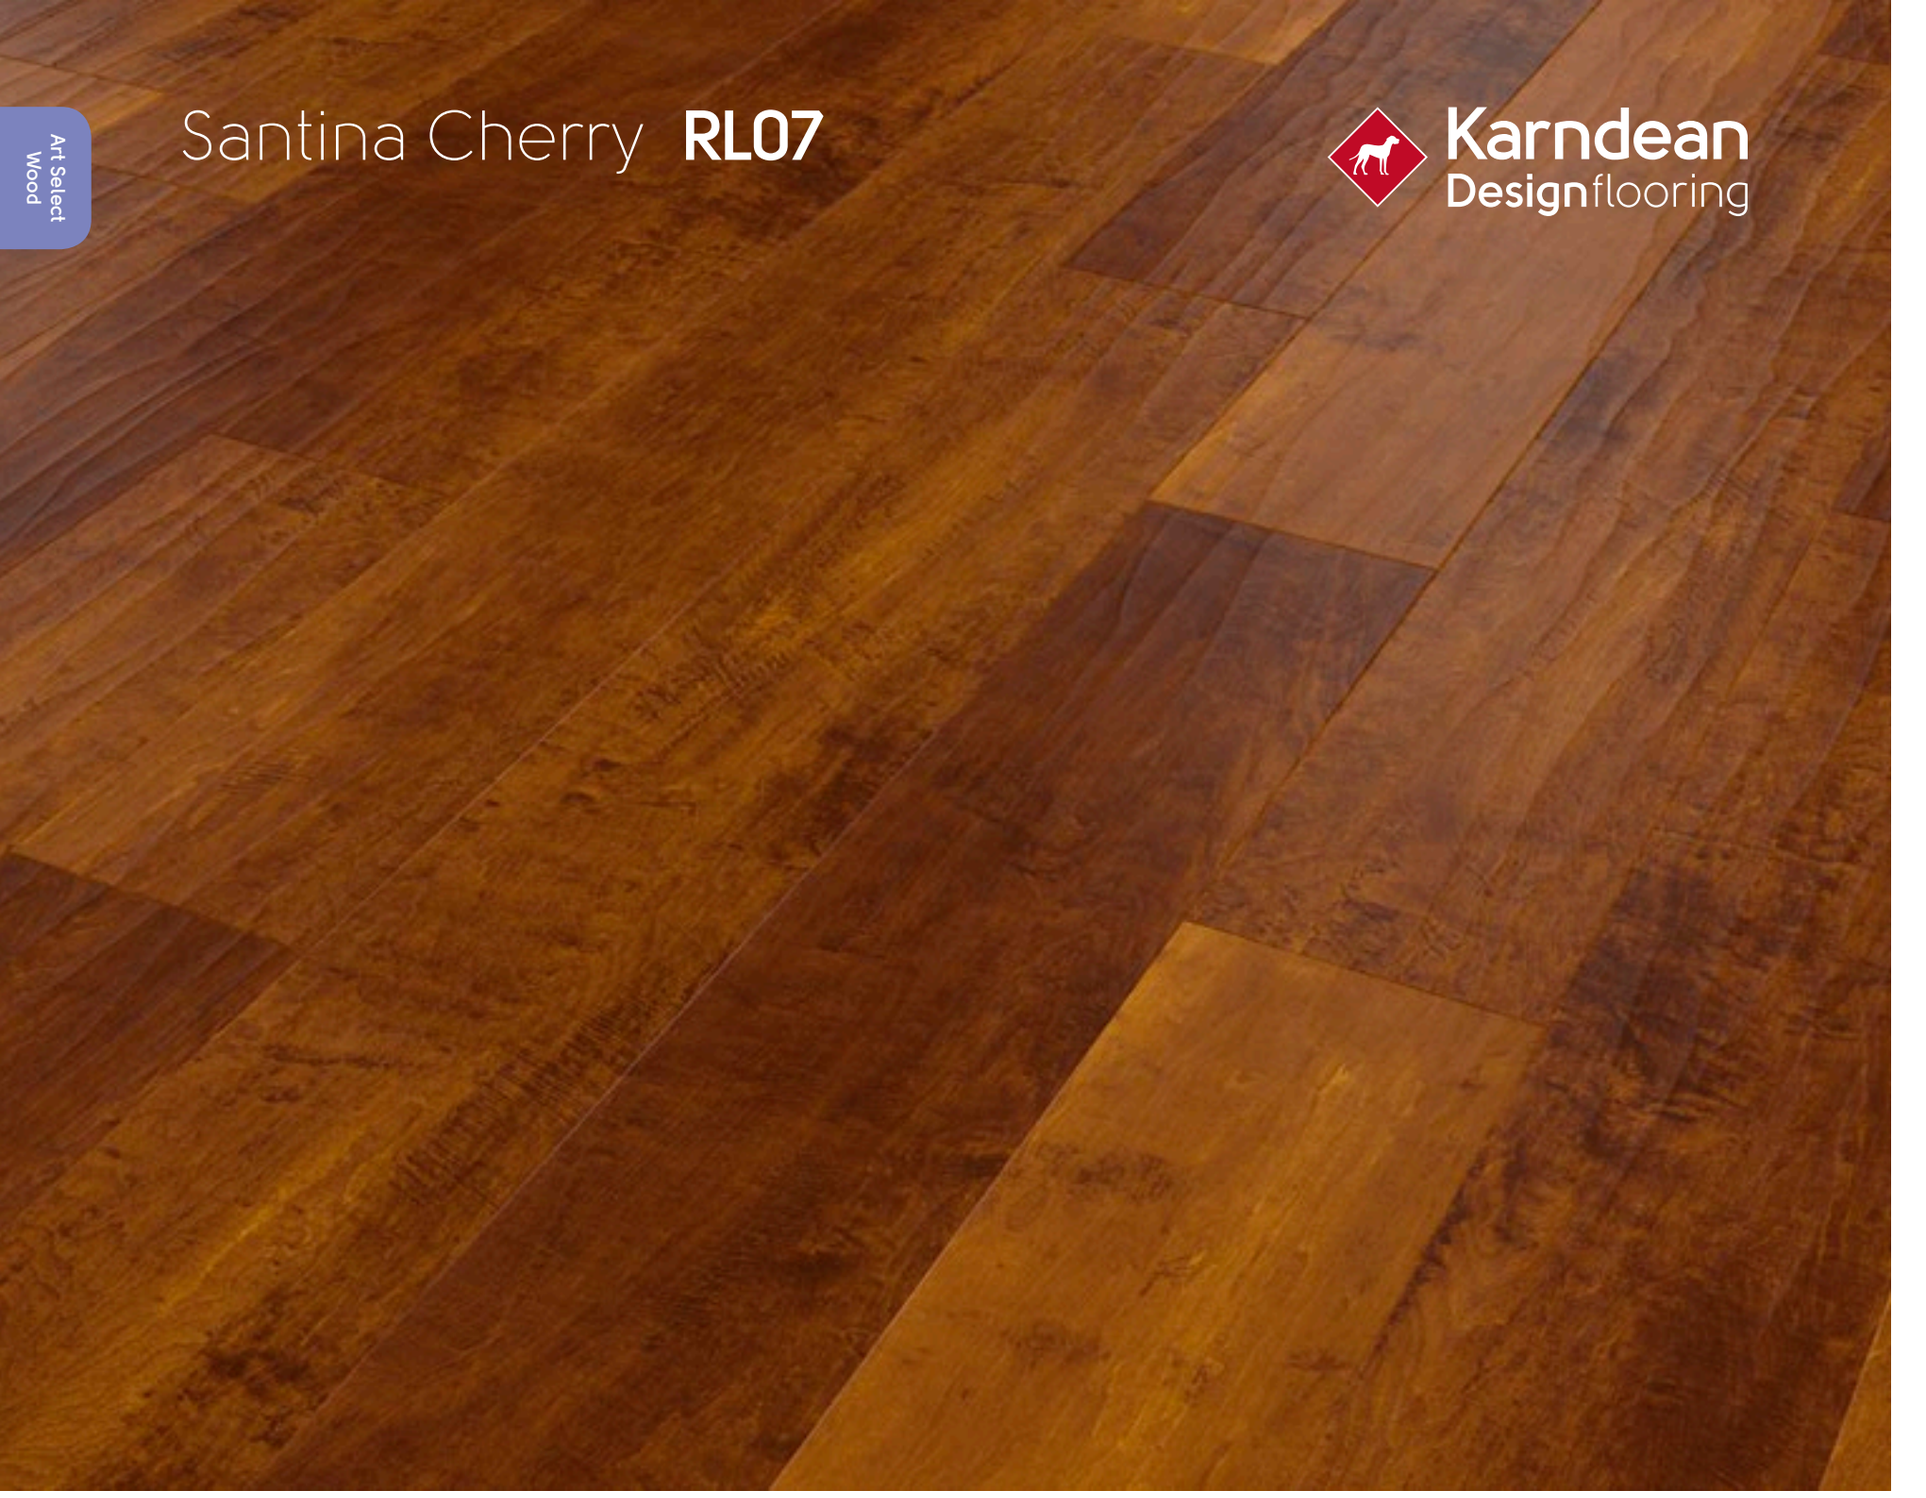

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL07
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Spanish Cherry **RL05**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL05
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Da Vinci **Wood**

36" x 3" (915mm x 76mm)


Page: 91
Australian Walnut **RP41**


Page: 78
Canadian Maple **RP61**


Page: 82
Kenyan Tigerwood **RP73***


Page: 83
Lorenzo Warm Oak **RP91**


Page: 92
Scorched Oak **RP94***


Page: 89
Blended Oak **RP95***


Page: 85
Limed Silk Oak **RP96***


Page: 84
Limed Jute Oak **RP97***


Page: 79
Limed Linen Oak **RP98***


Page: 87
Limed Cotton Oak **RP99***


Page: 86
Coastal Driftwood **RP100***


Page: 90
Beach Driftwood **RP101***


Page: 80
Natural Oak **RP102**


Page: 81
Harvest Oak **RP103**


Page: 88
Single Smoked Acacia **RP104***


Page: 93
Double Smoked Acacia **RP105***

* Please note: as a feature of the design, these products incorporate a high color variation between individual planks.

Da Vinci **Wood**

Da Vinci | GLUEDOWN

Each of our Da Vinci wood planks features a distinctive beveled edge and light surface finish, creating a traditional and elegant look. With a wide range of colors and designs, from the pale tones of Canadian Maple to the richness of Australian Walnut, there's something to suit any décor.

Our Da Vinci collection is also known for its variety of complementary borders, perfect to create a truly unique space (see page: 242 for borders).




Limed Silk Oak **RP96**

	Standard	Result
Thickness		3.0 mm
Size		36" x 3" (915 mm x 76 mm)
Box quantity		48 Planks/36 sq.ft.
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+ PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 3.3
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.
** Subject to terms, see page: 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Canadian Maple **RP61**

Karndean Designflooring

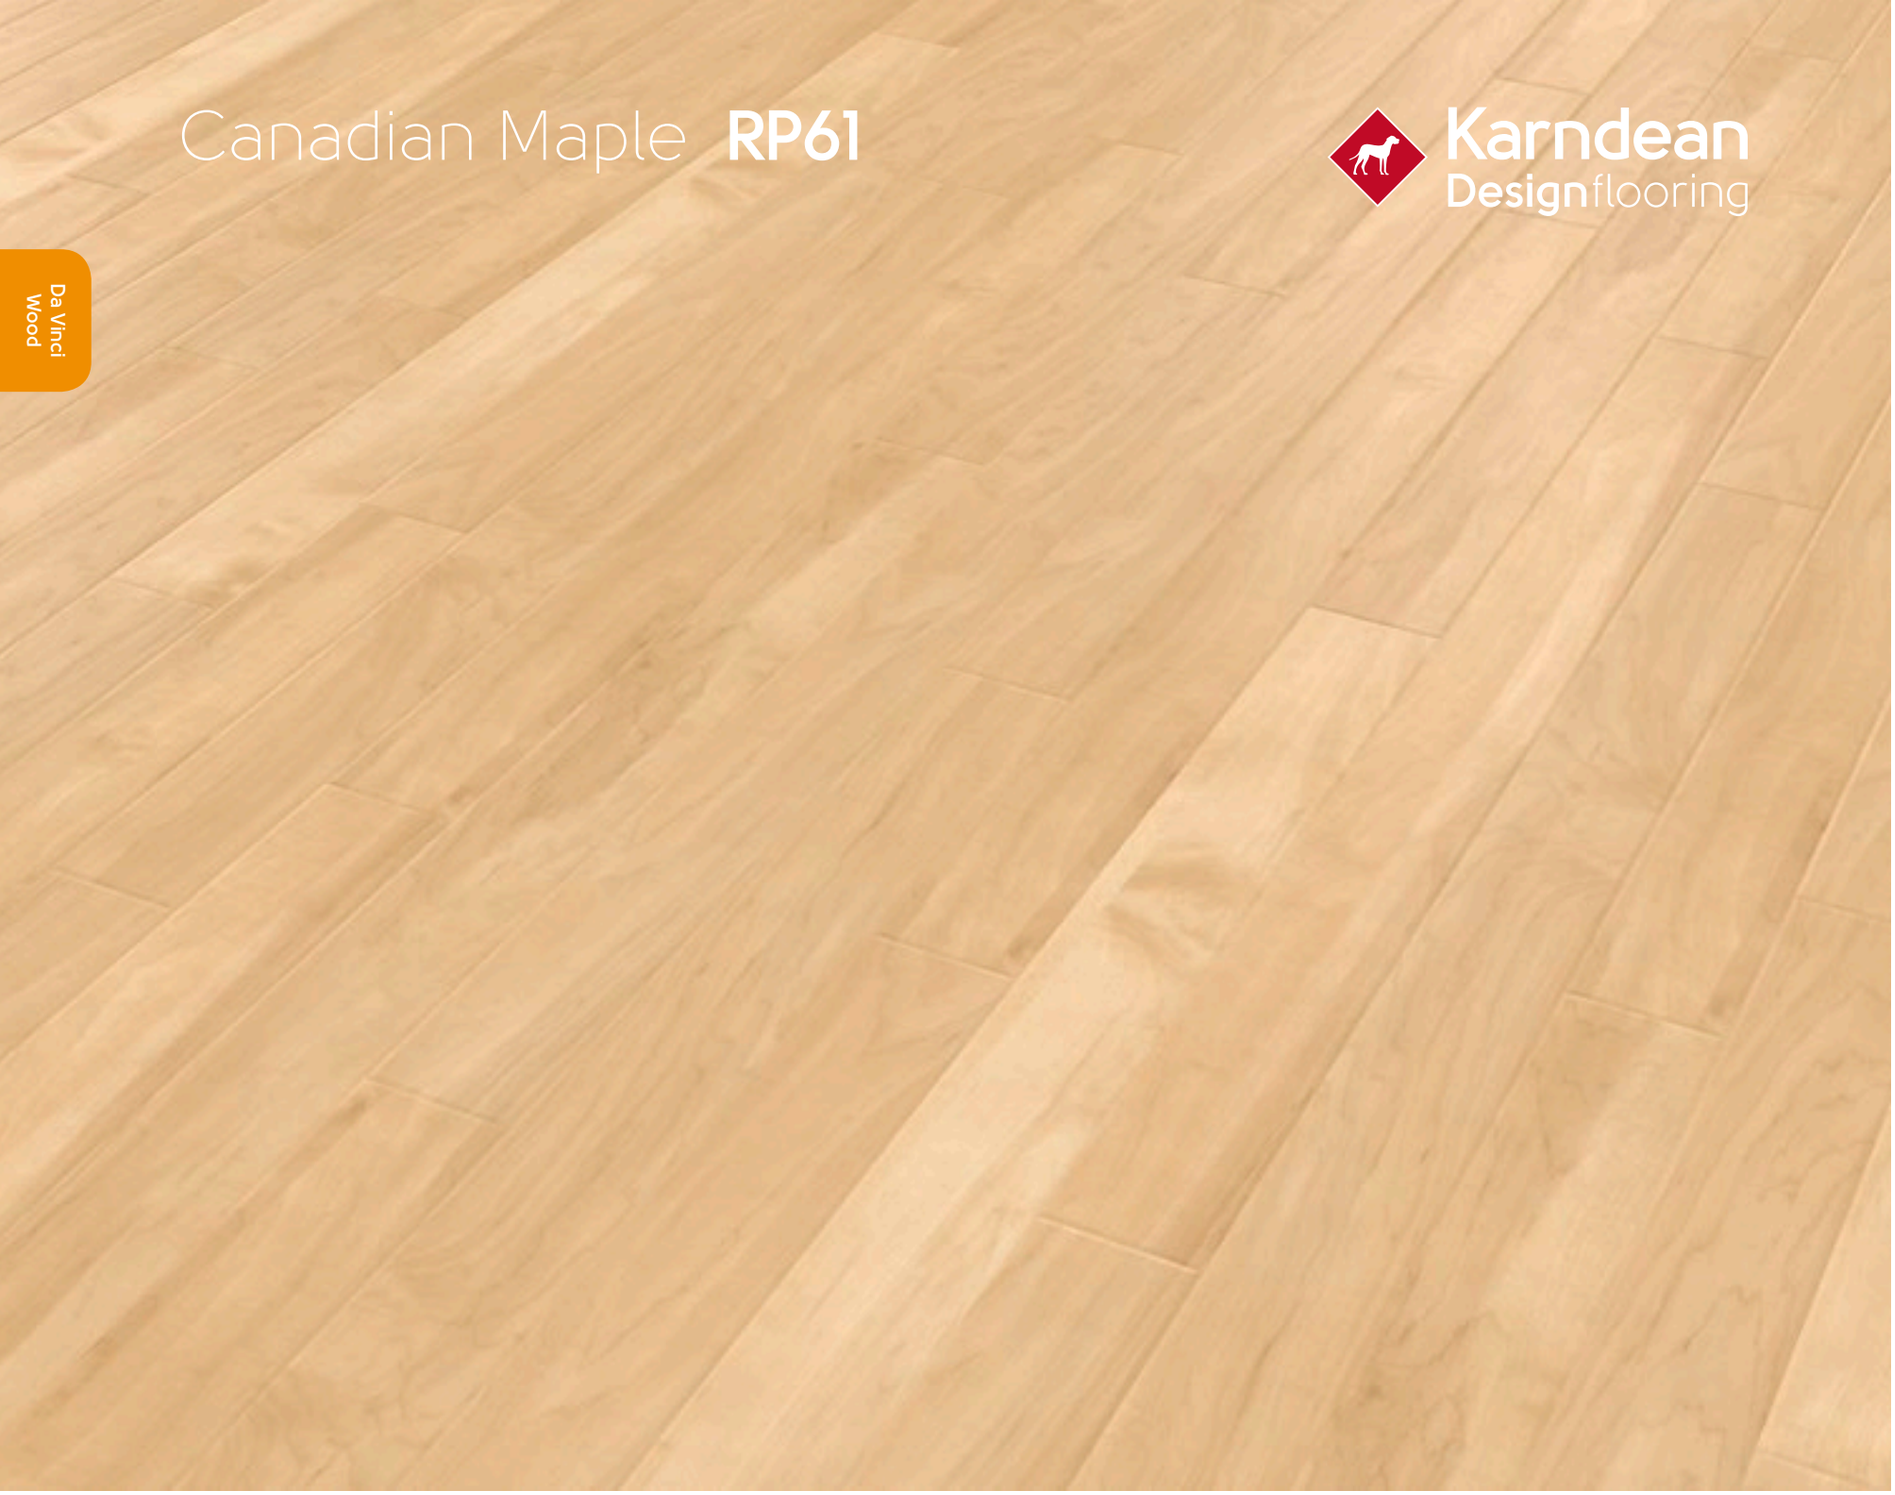

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP61
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Limed Linen Oak **RP98**

Karndean Designflooring



Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP98
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Natural Oak **RP102**

Karndean Designflooring

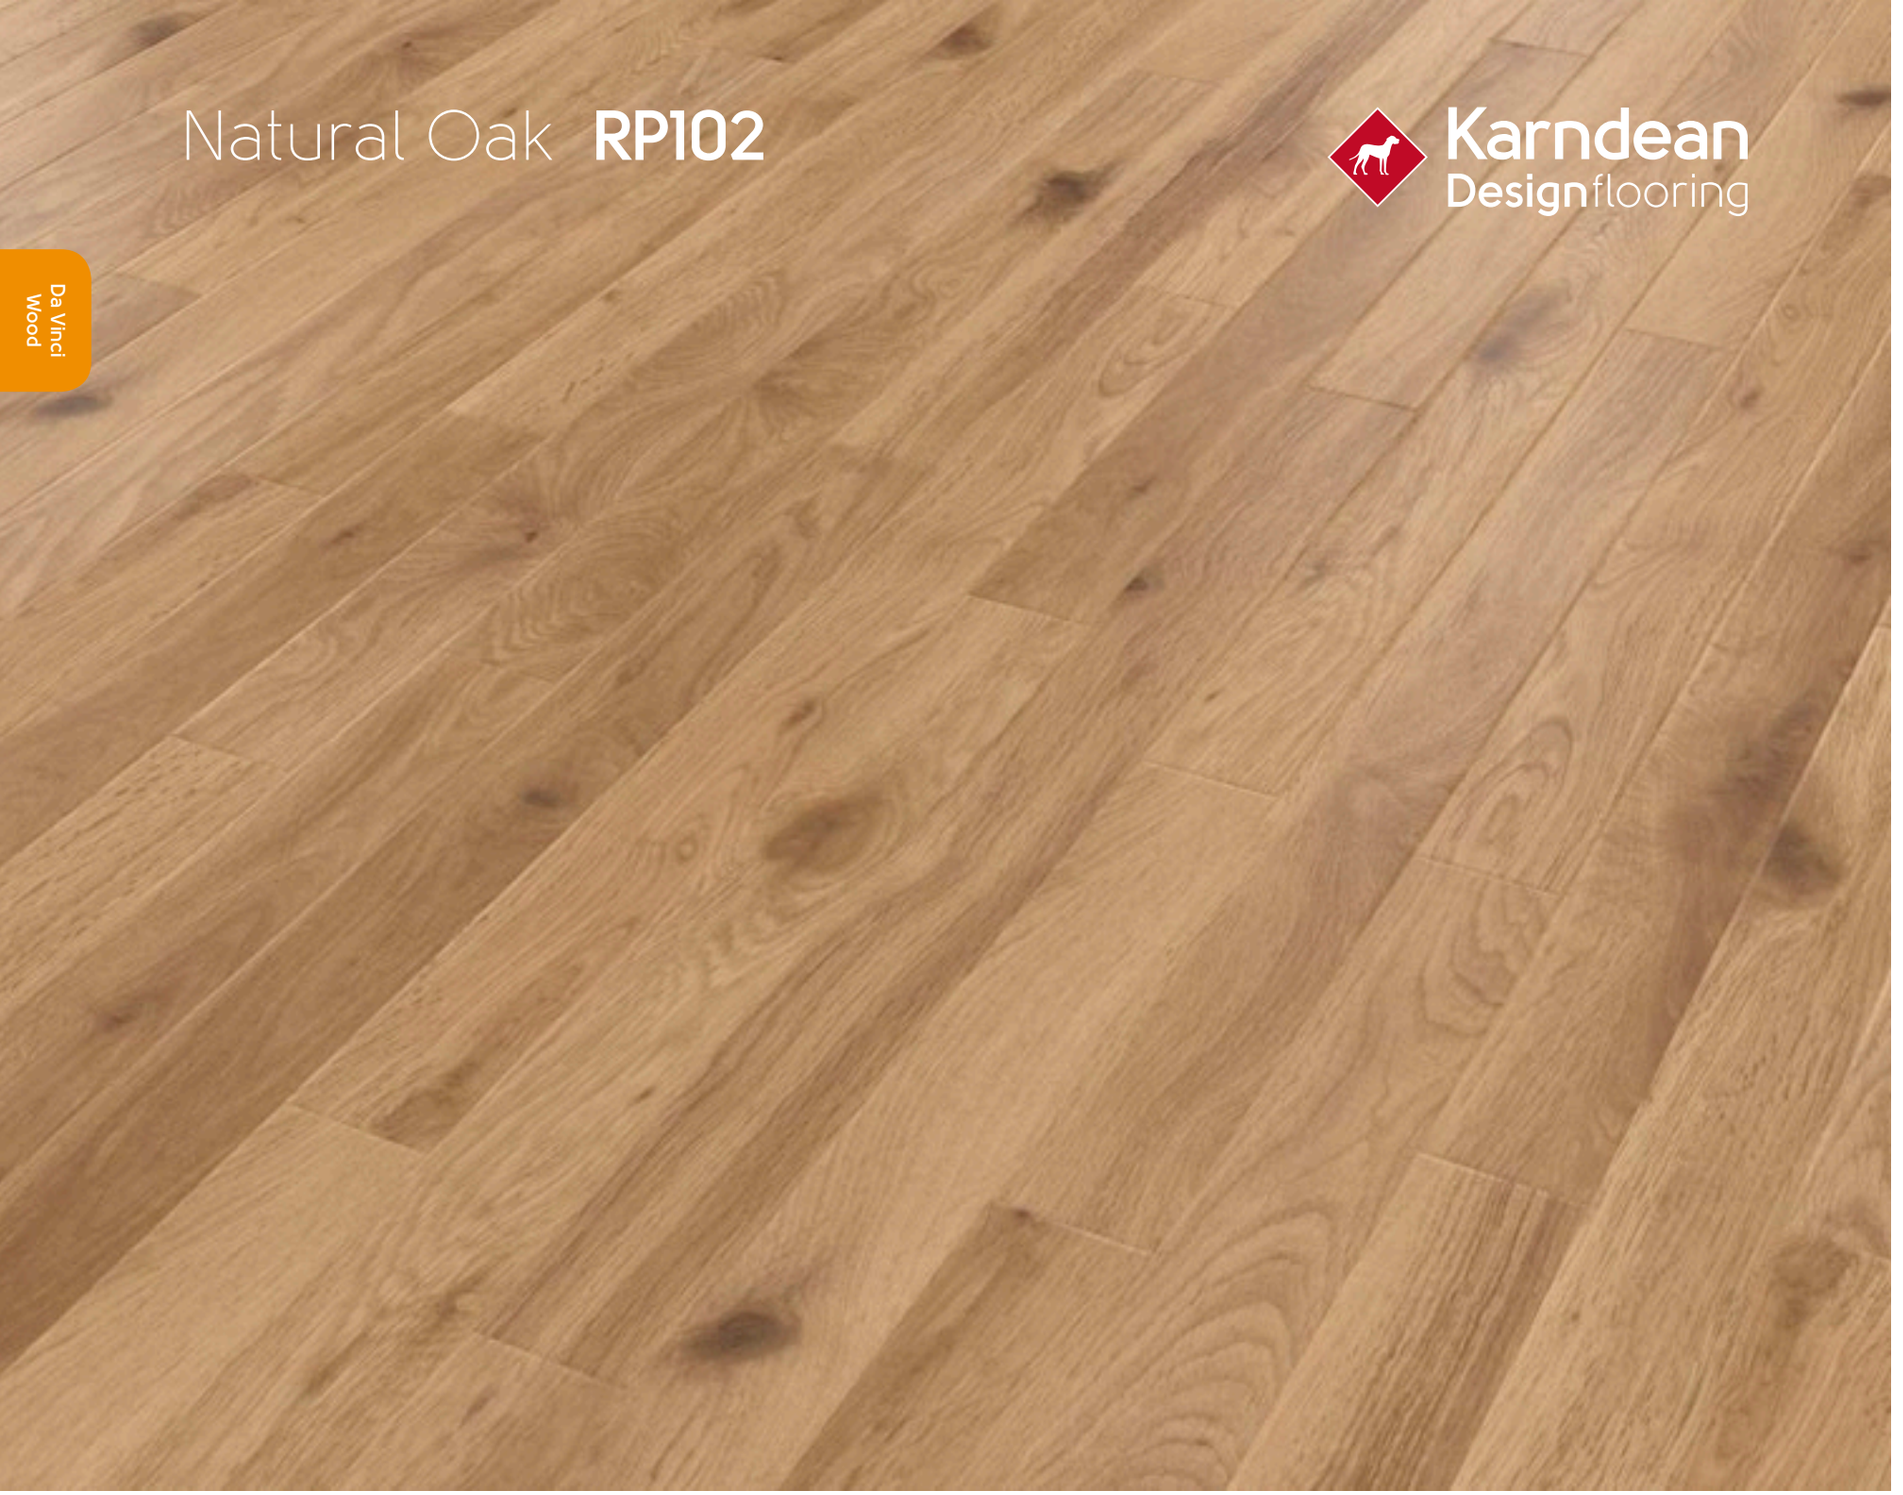

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP102
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Harvest Oak **RP103**

Karndean Designflooring

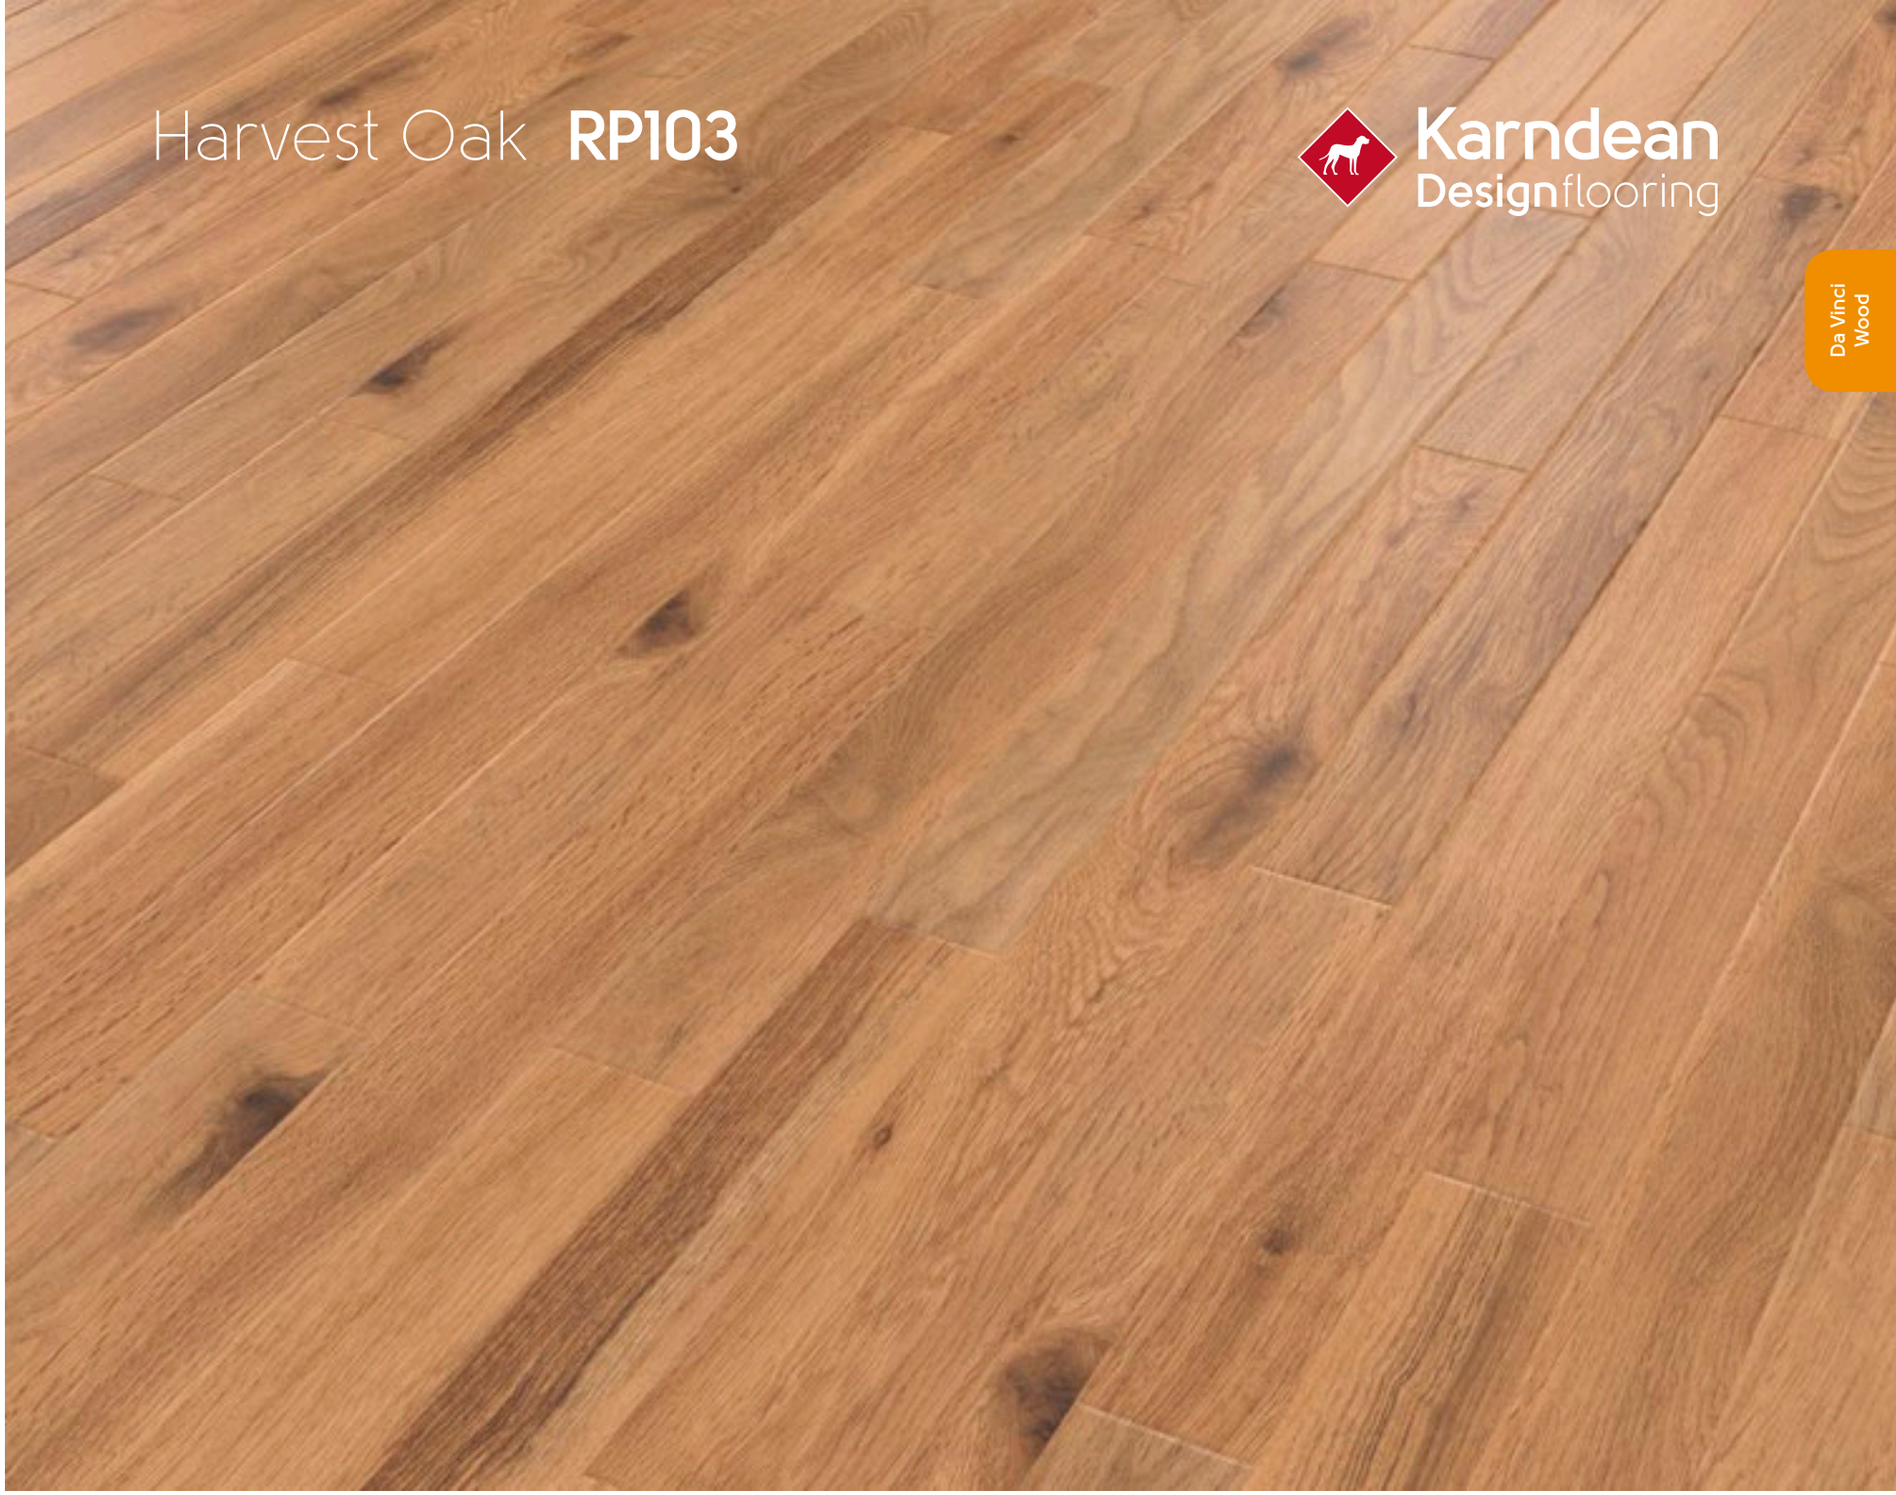

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP103
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Kenyan Tigerwood **RP73**

Karndean Designflooring

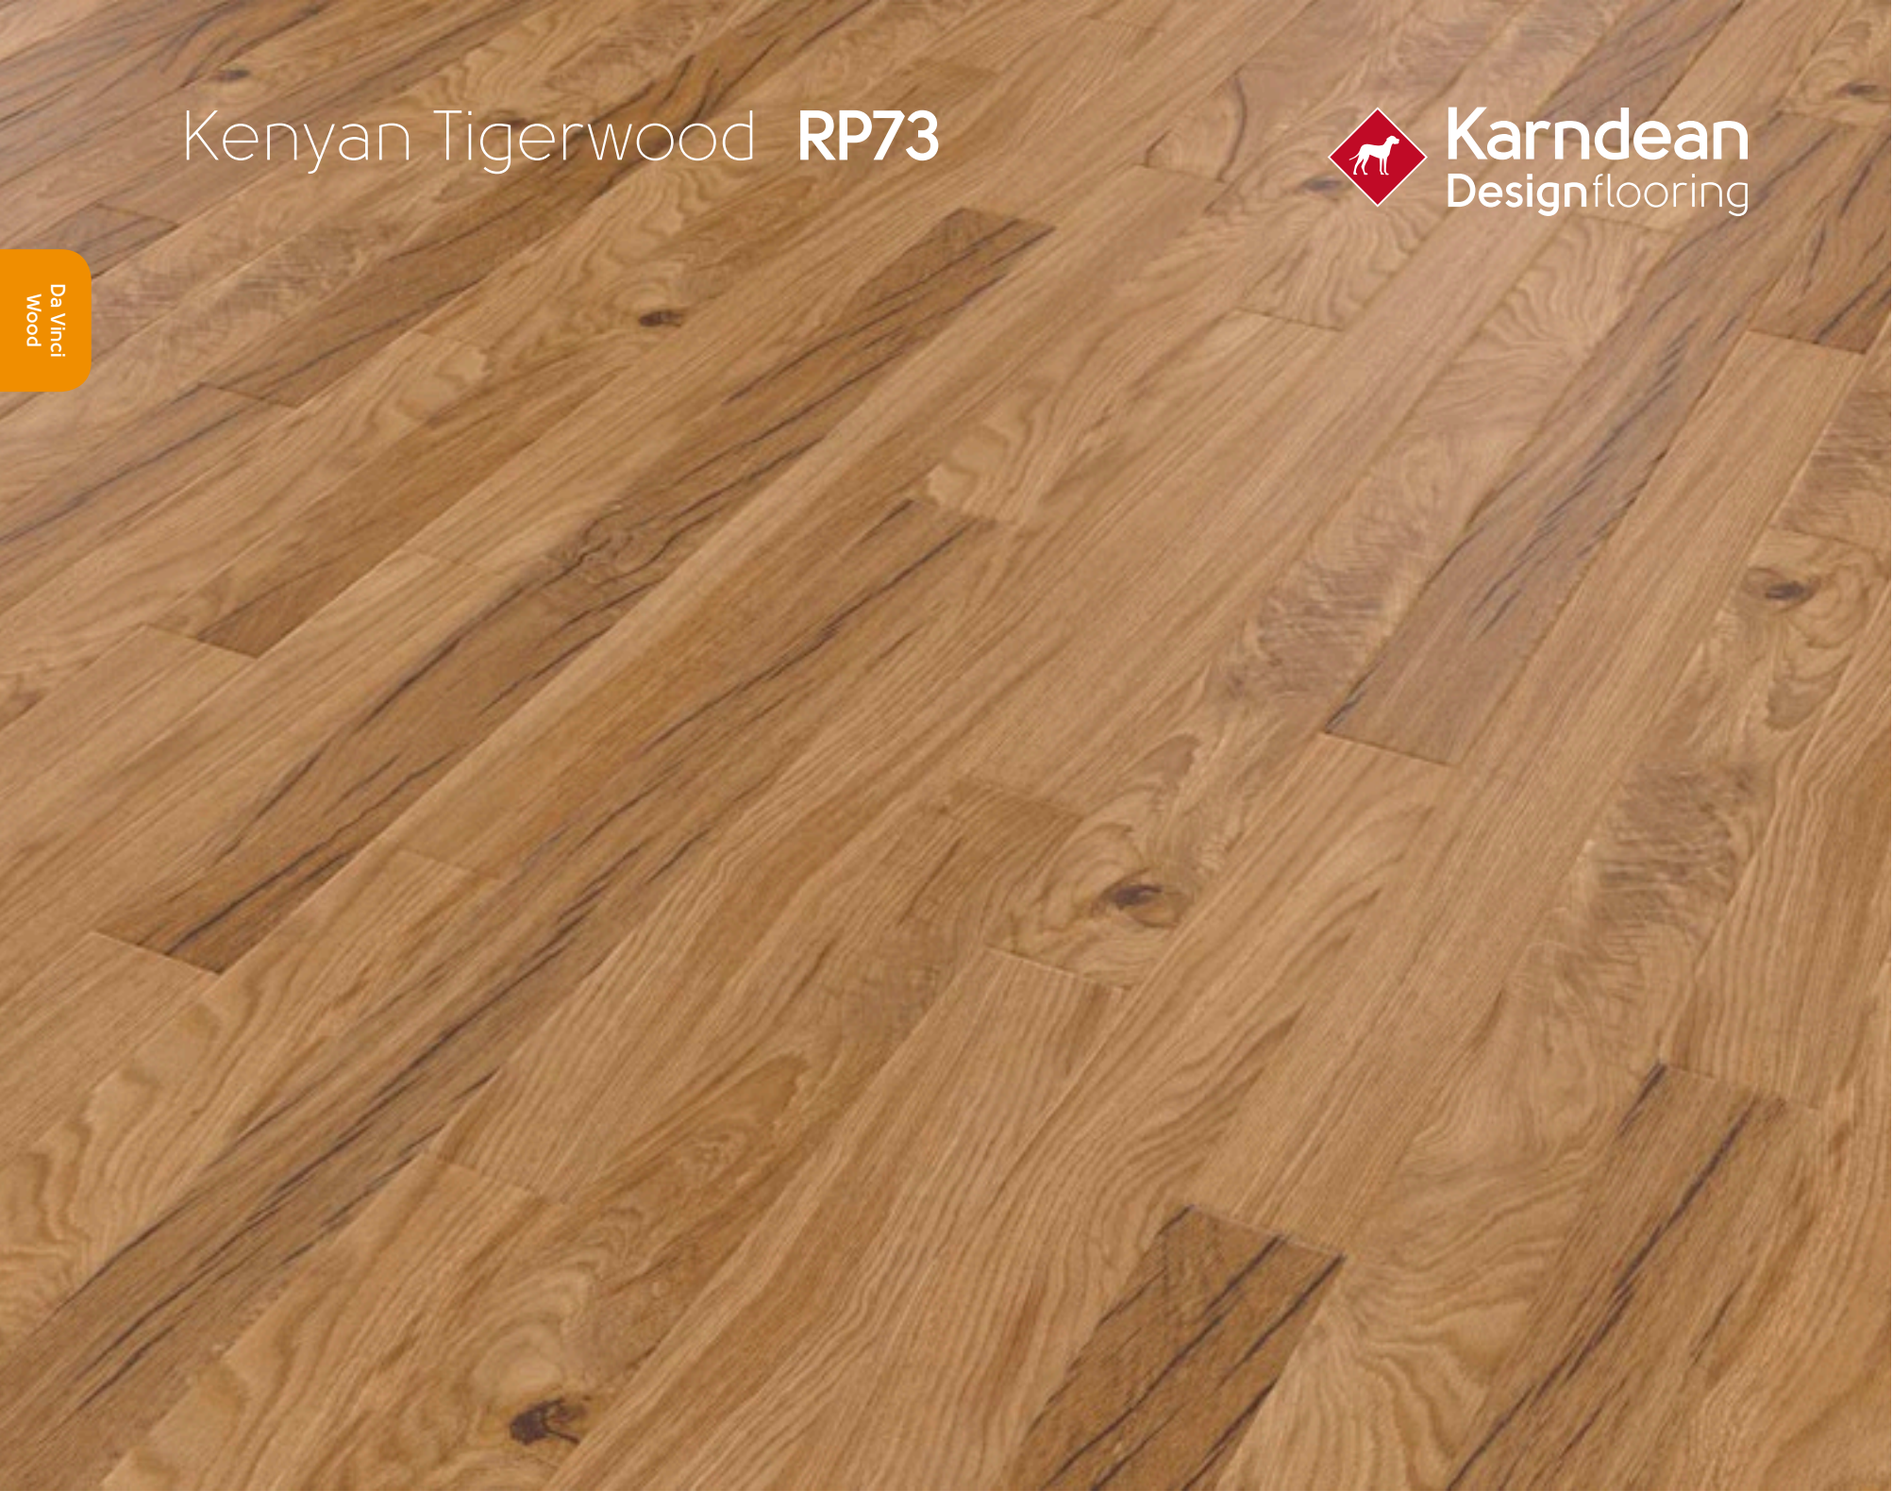

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP73
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lorenzo Warm Oak **RP91**

Karndean Designflooring

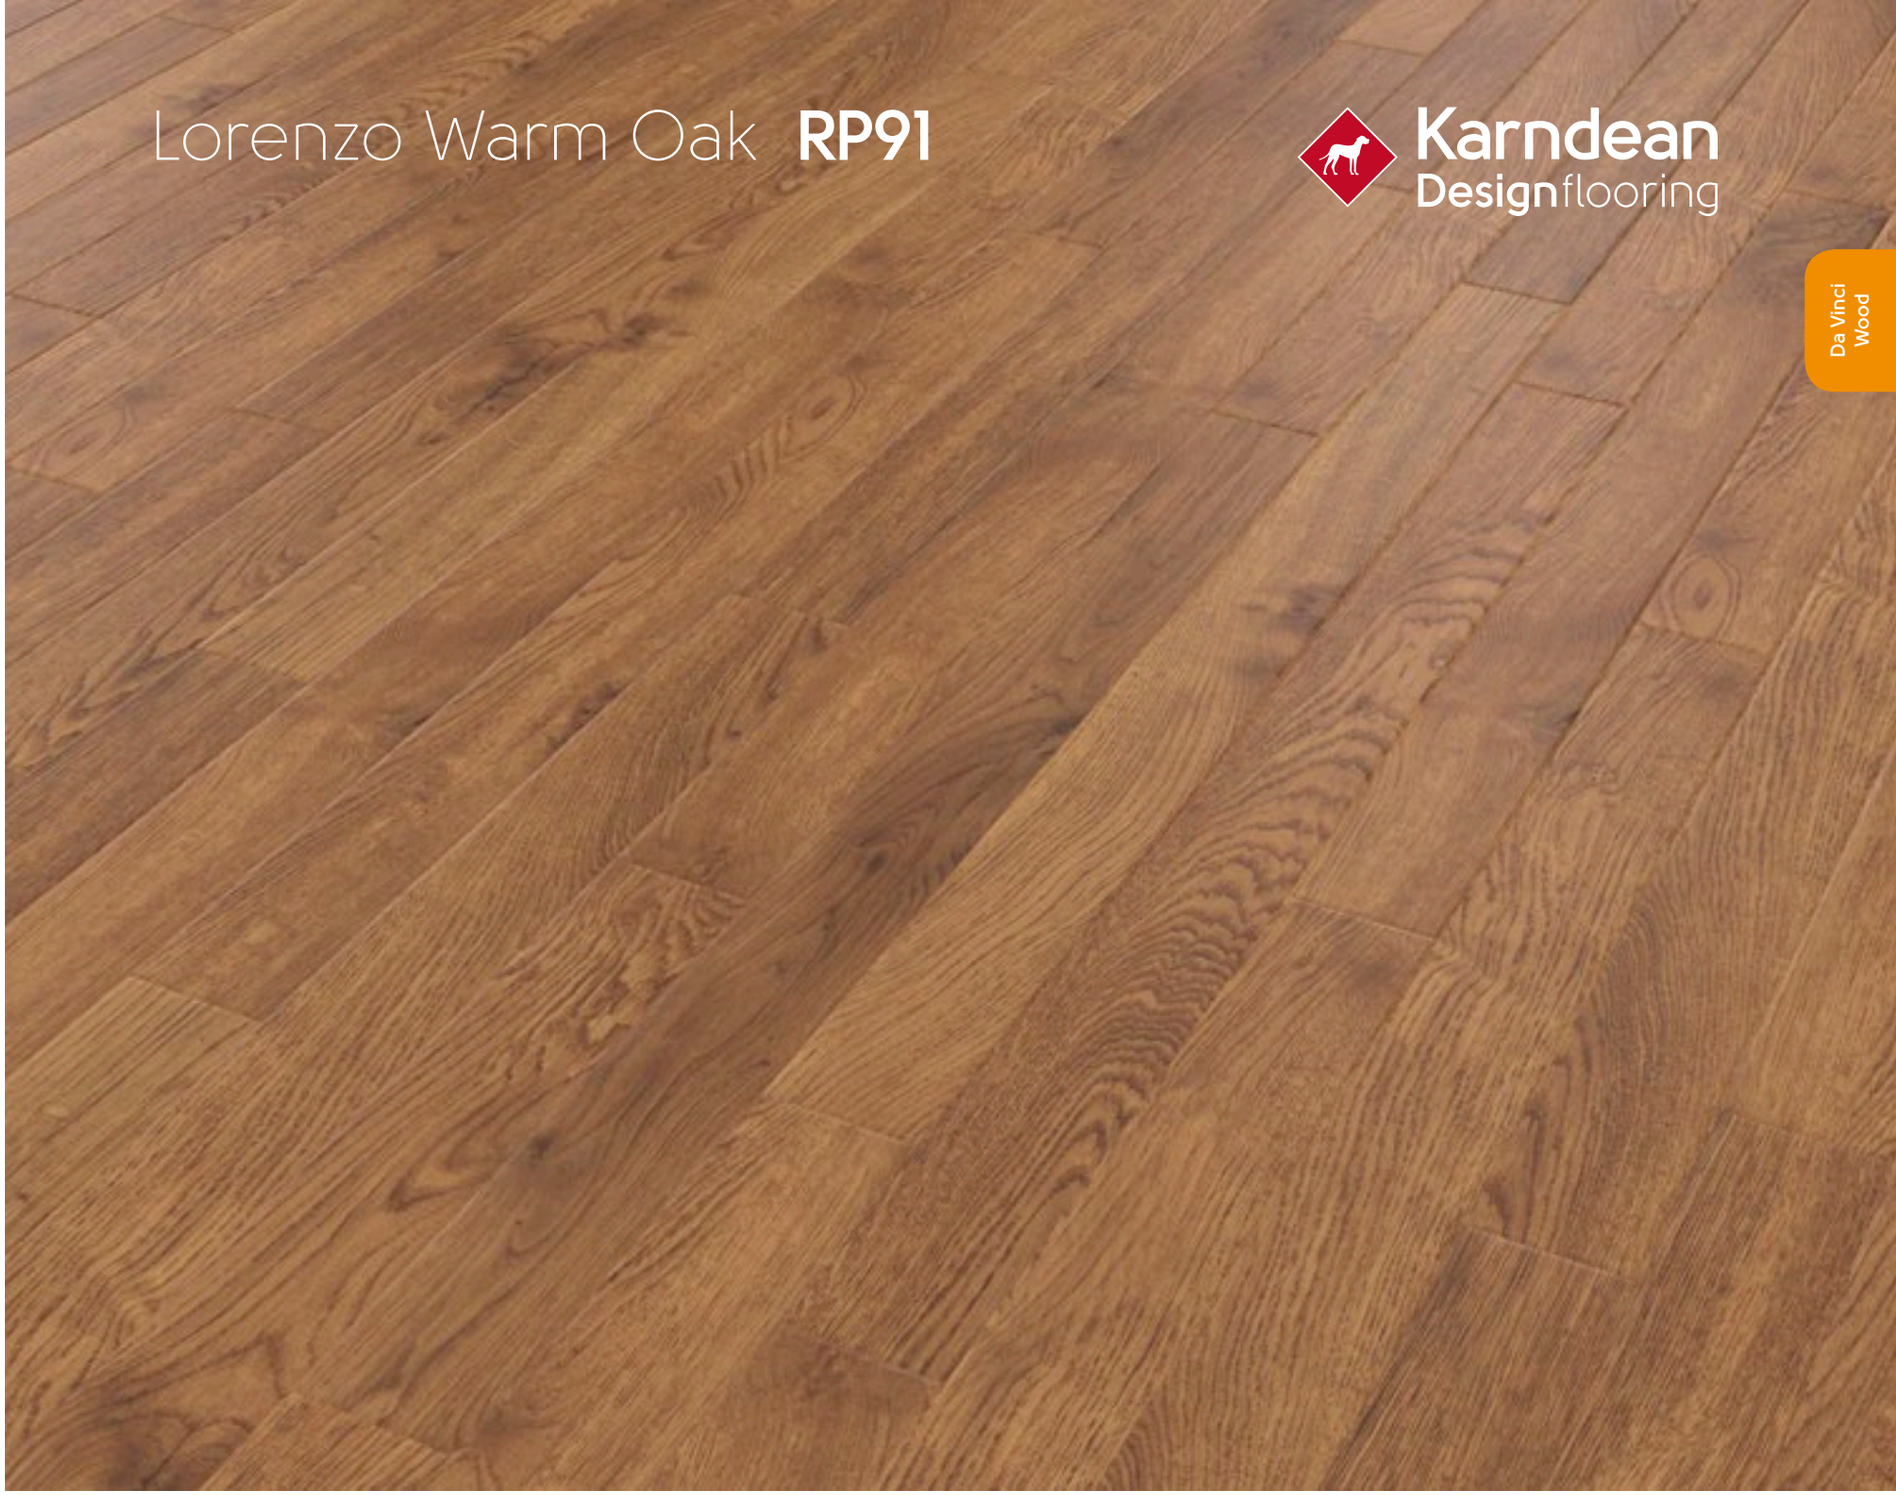

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP91
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Limed Jute Oak **RP97**

Karndean Designflooring



Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP97
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Limed Silk Oak **RP96**

Karndean Designflooring

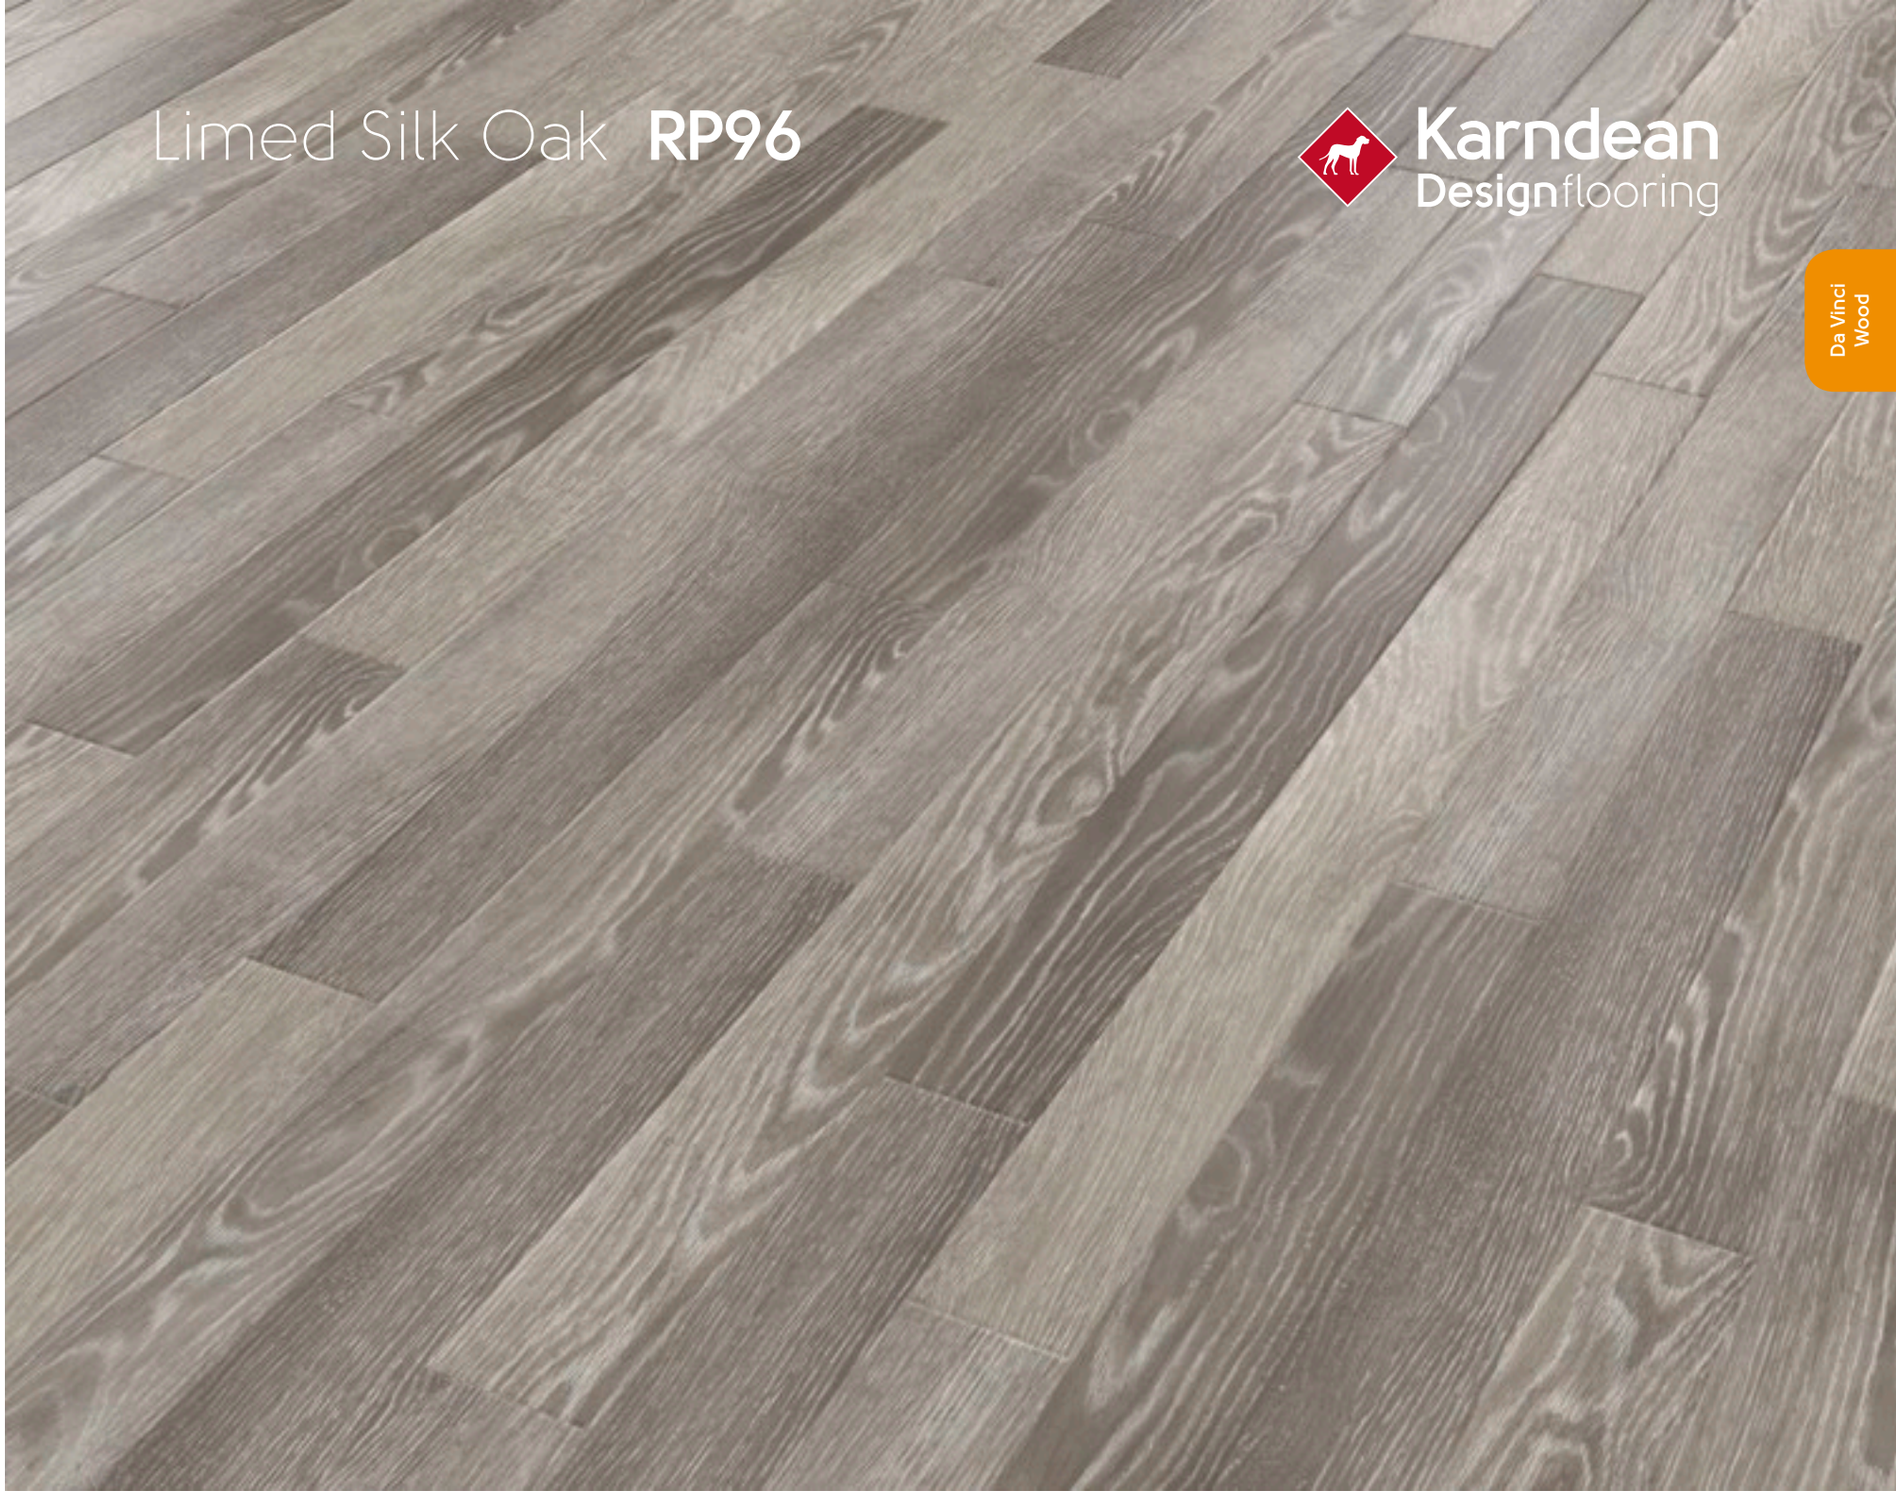

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP96
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Coastal Driftwood **RP100**

Karndean Designflooring

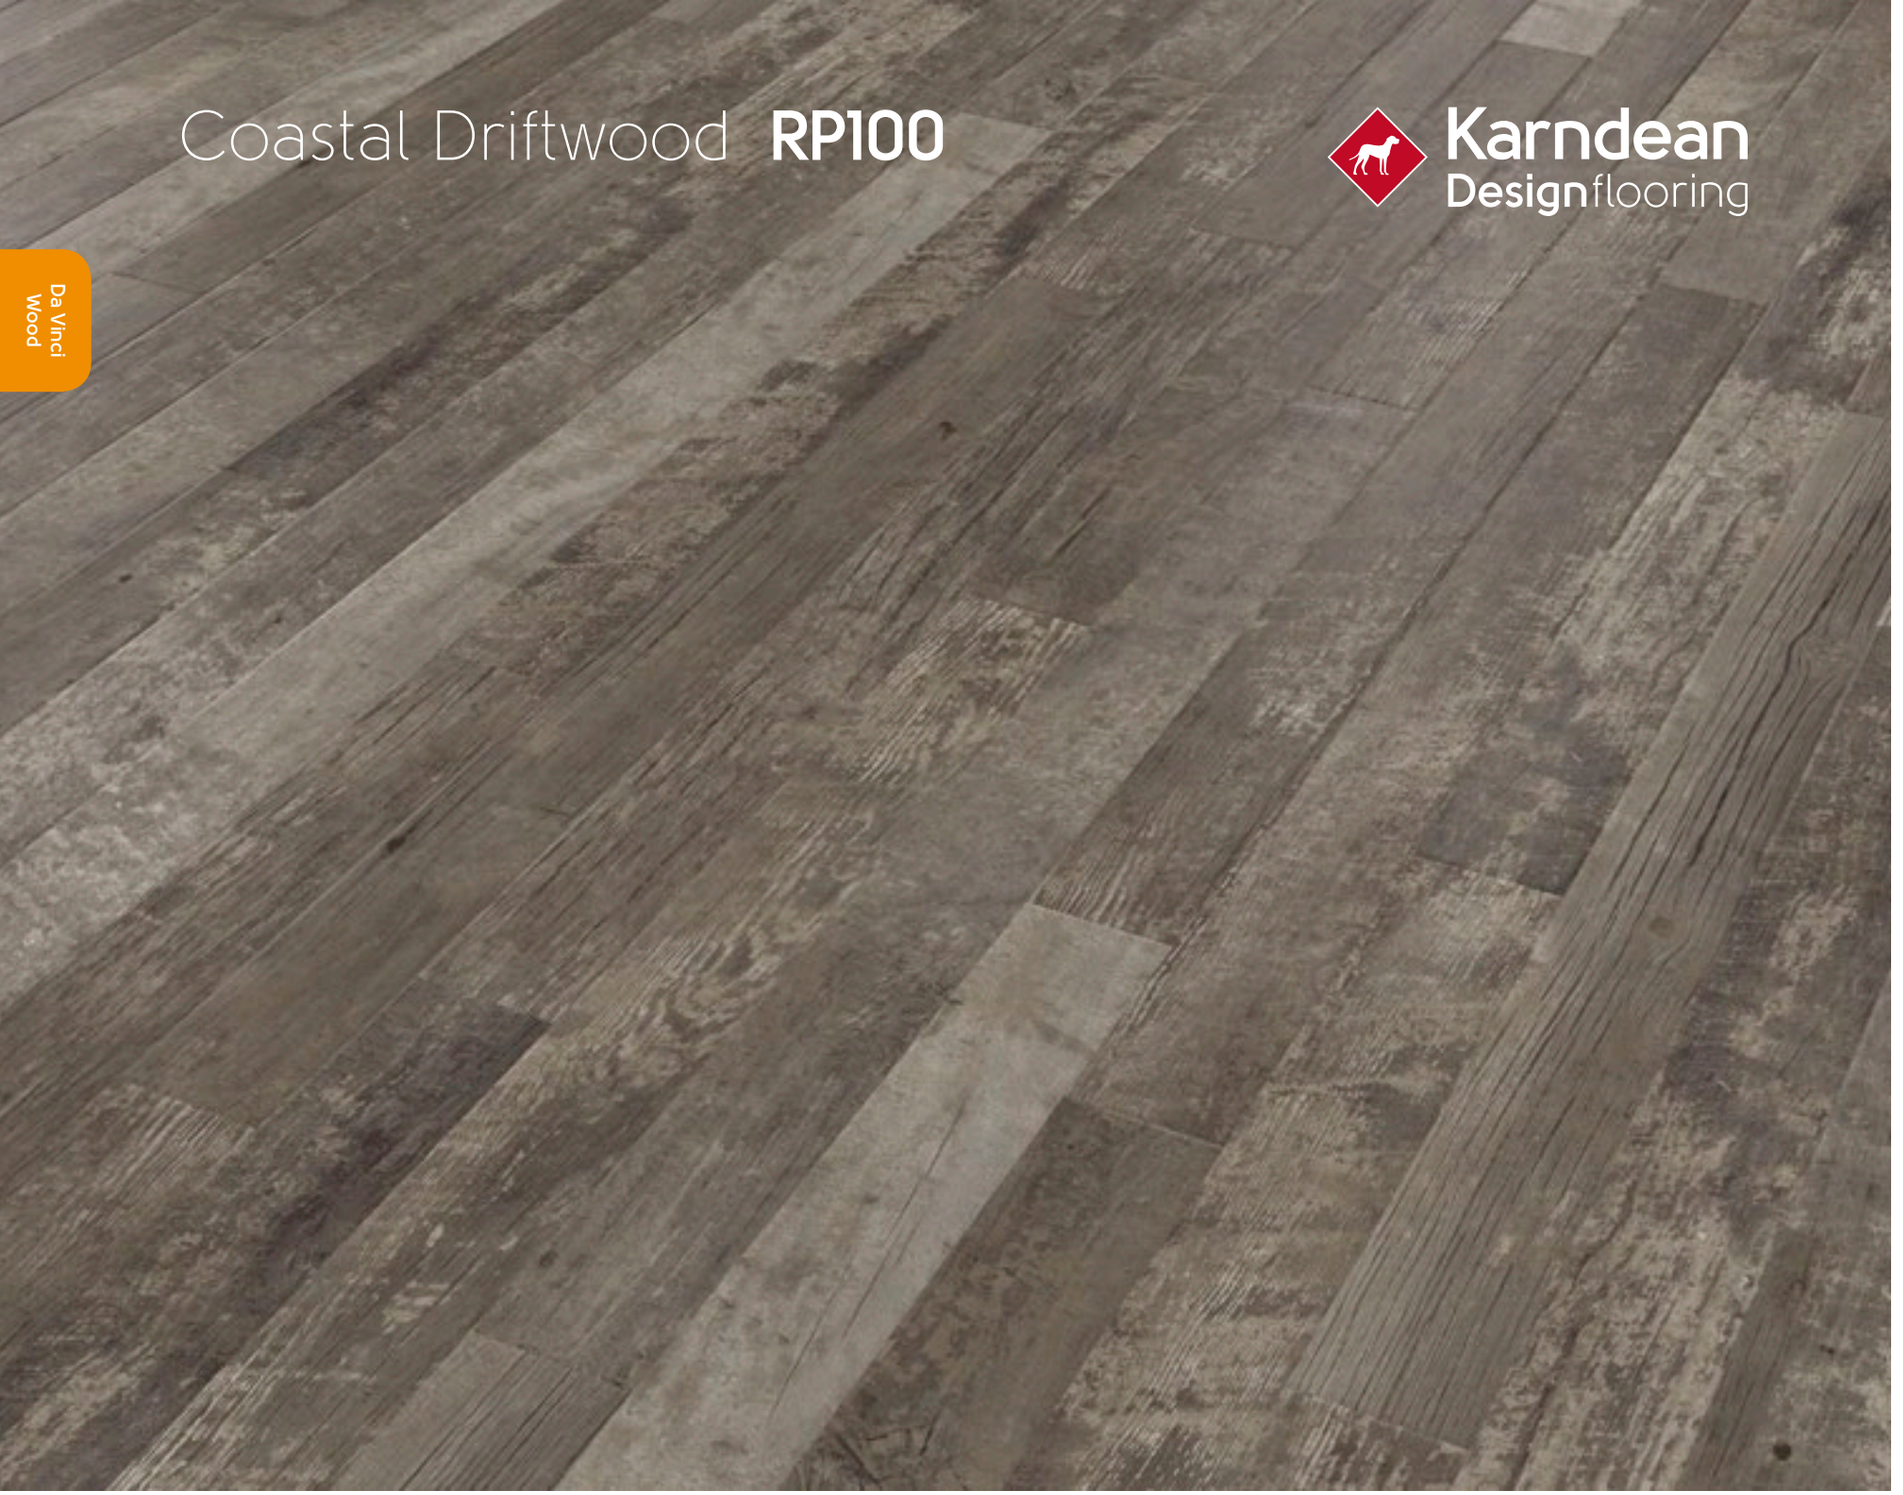

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP100
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Limed Cotton Oak **RP99**

Karndean Designflooring

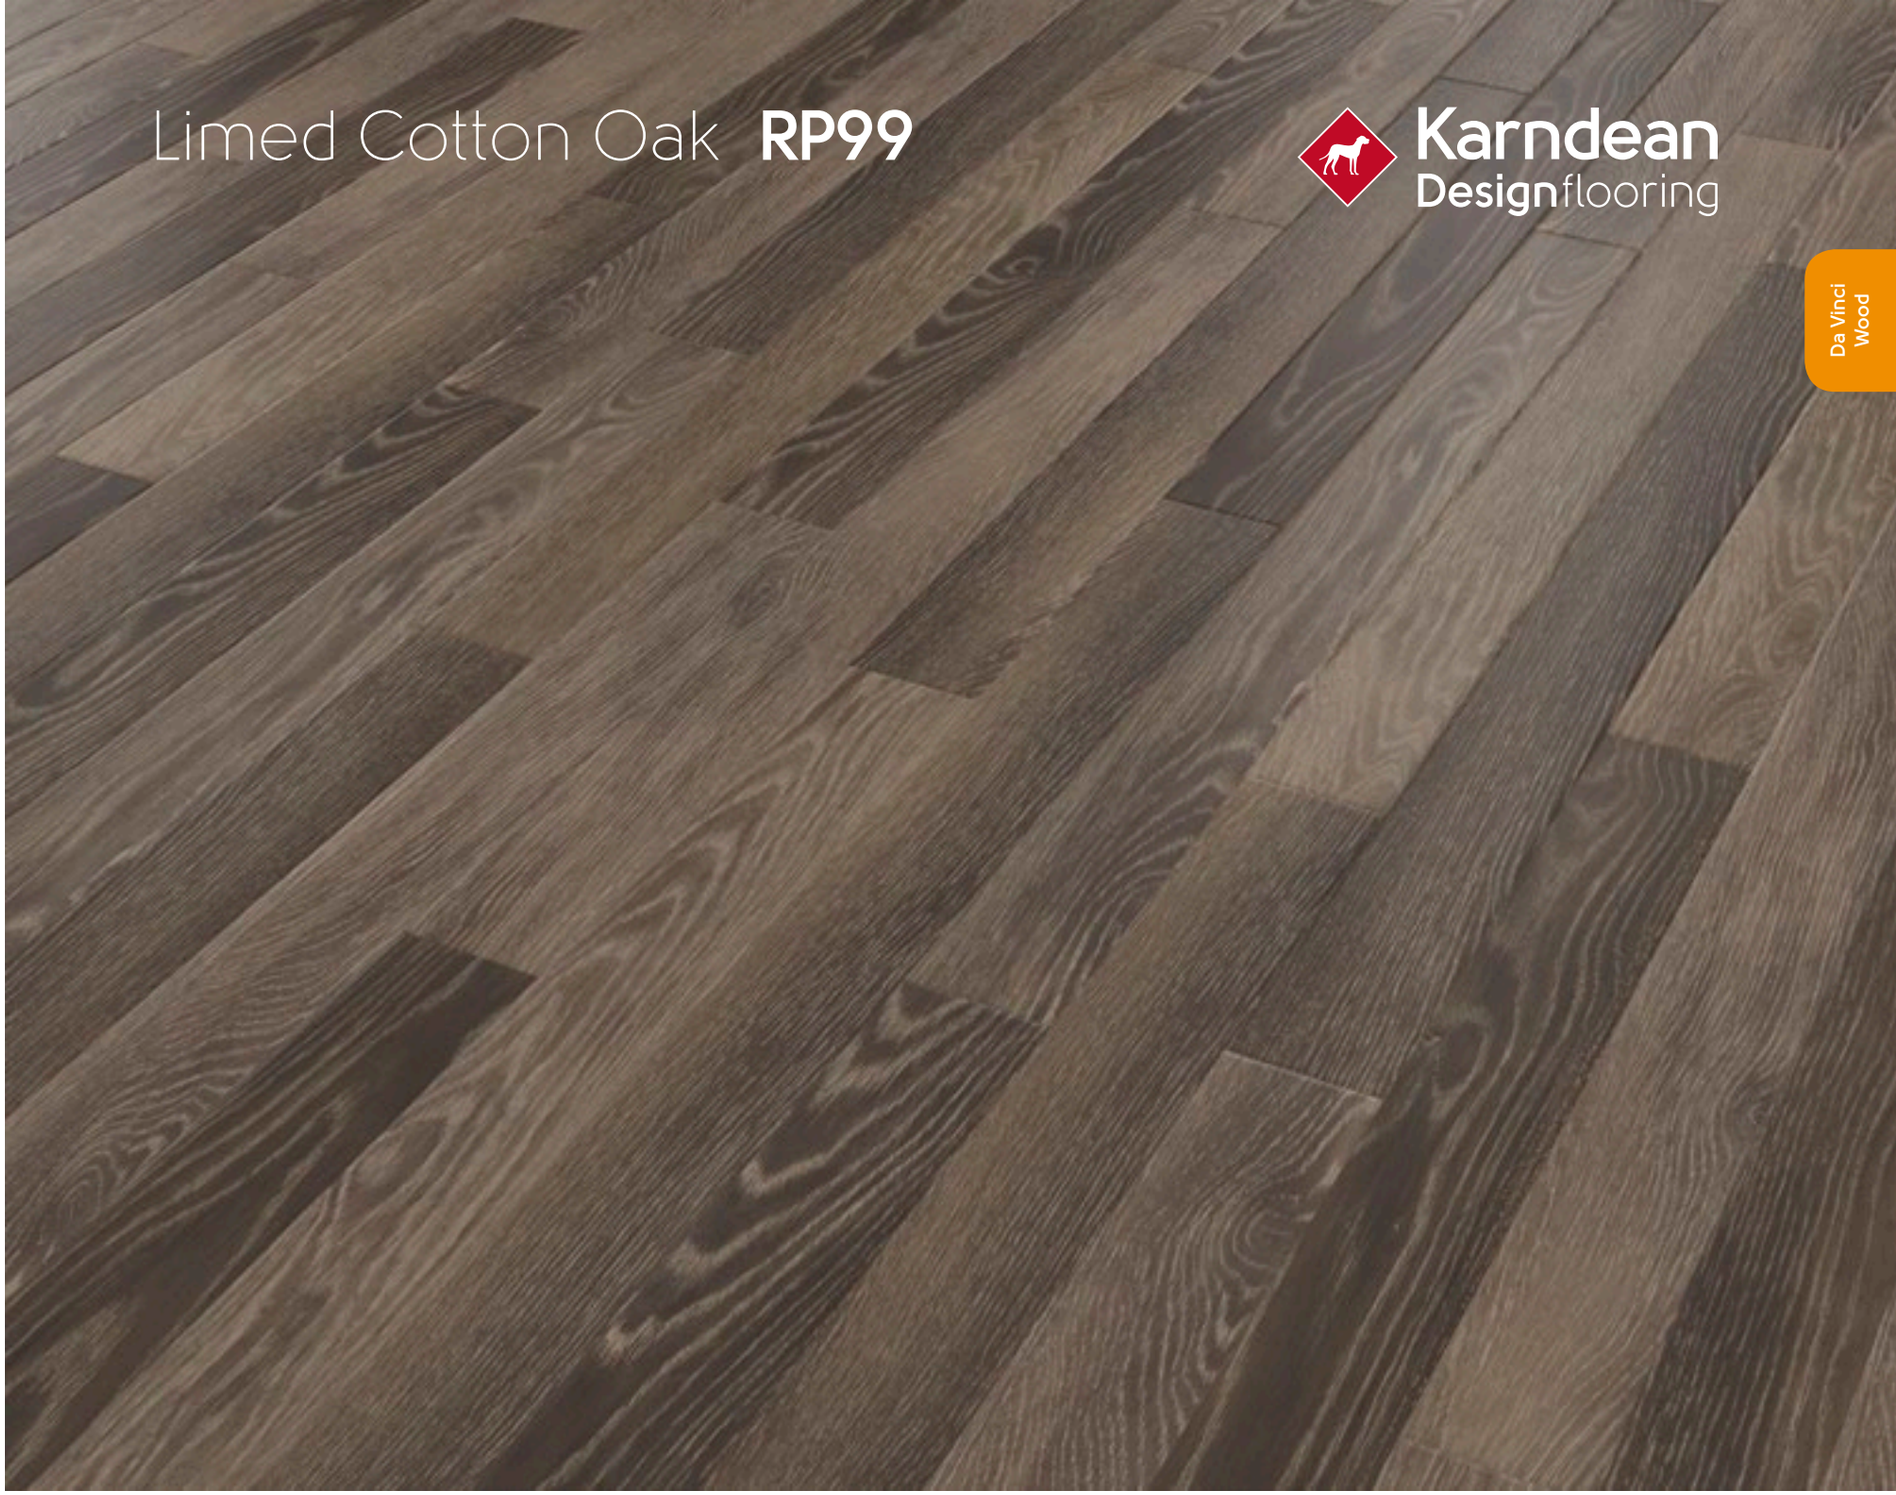

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP99
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Single Smoked Acacia **RP104**

Karndean Designflooring

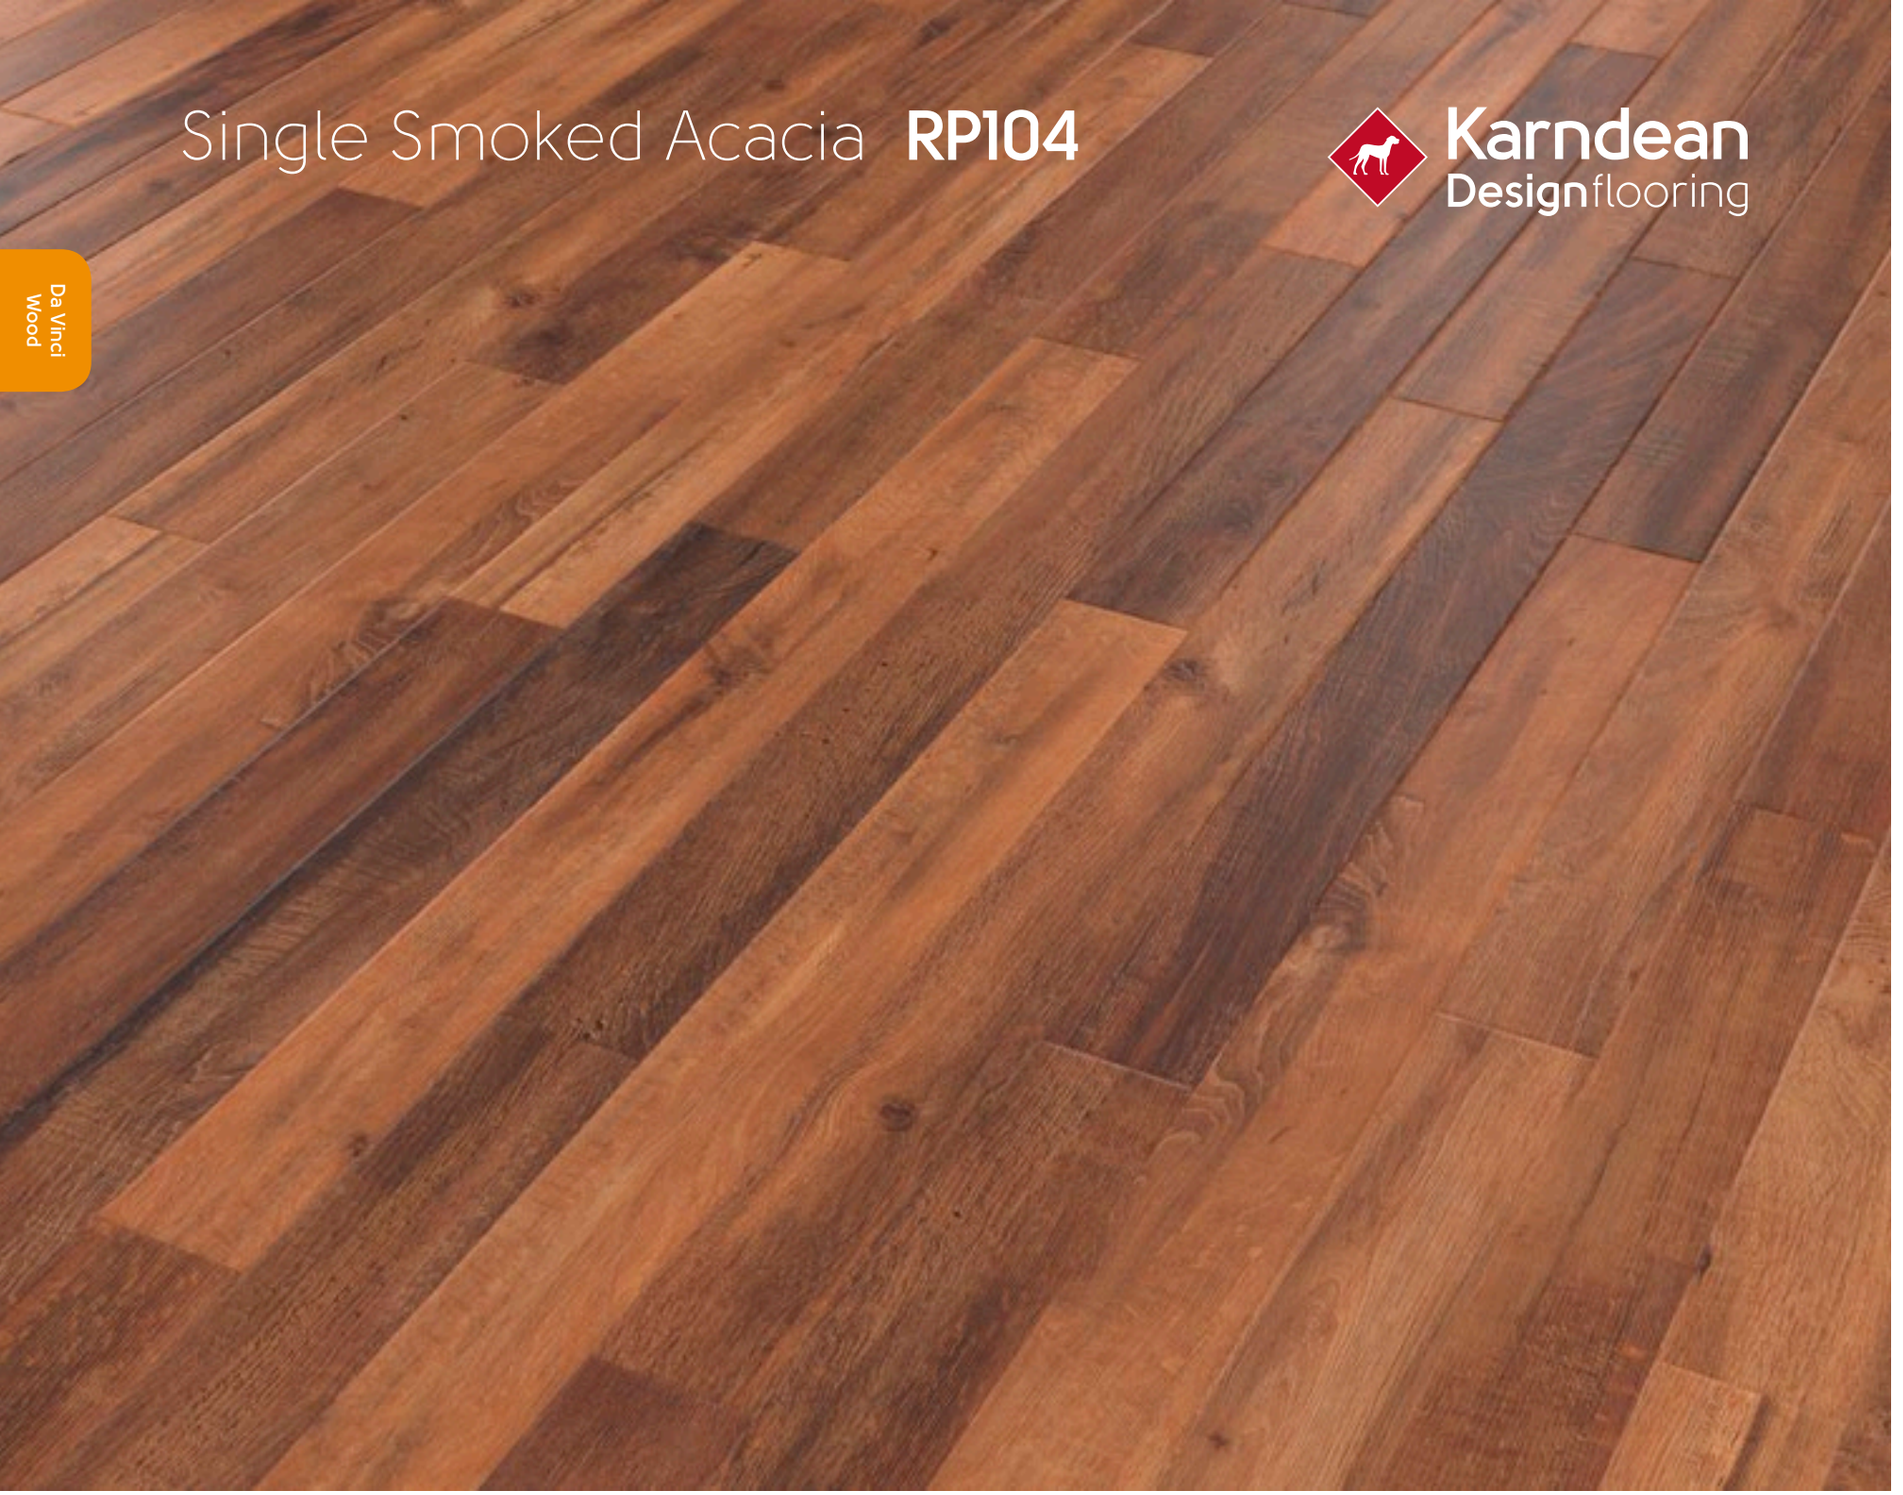

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP104
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Blended Oak **RP95**

Karndean Designflooring

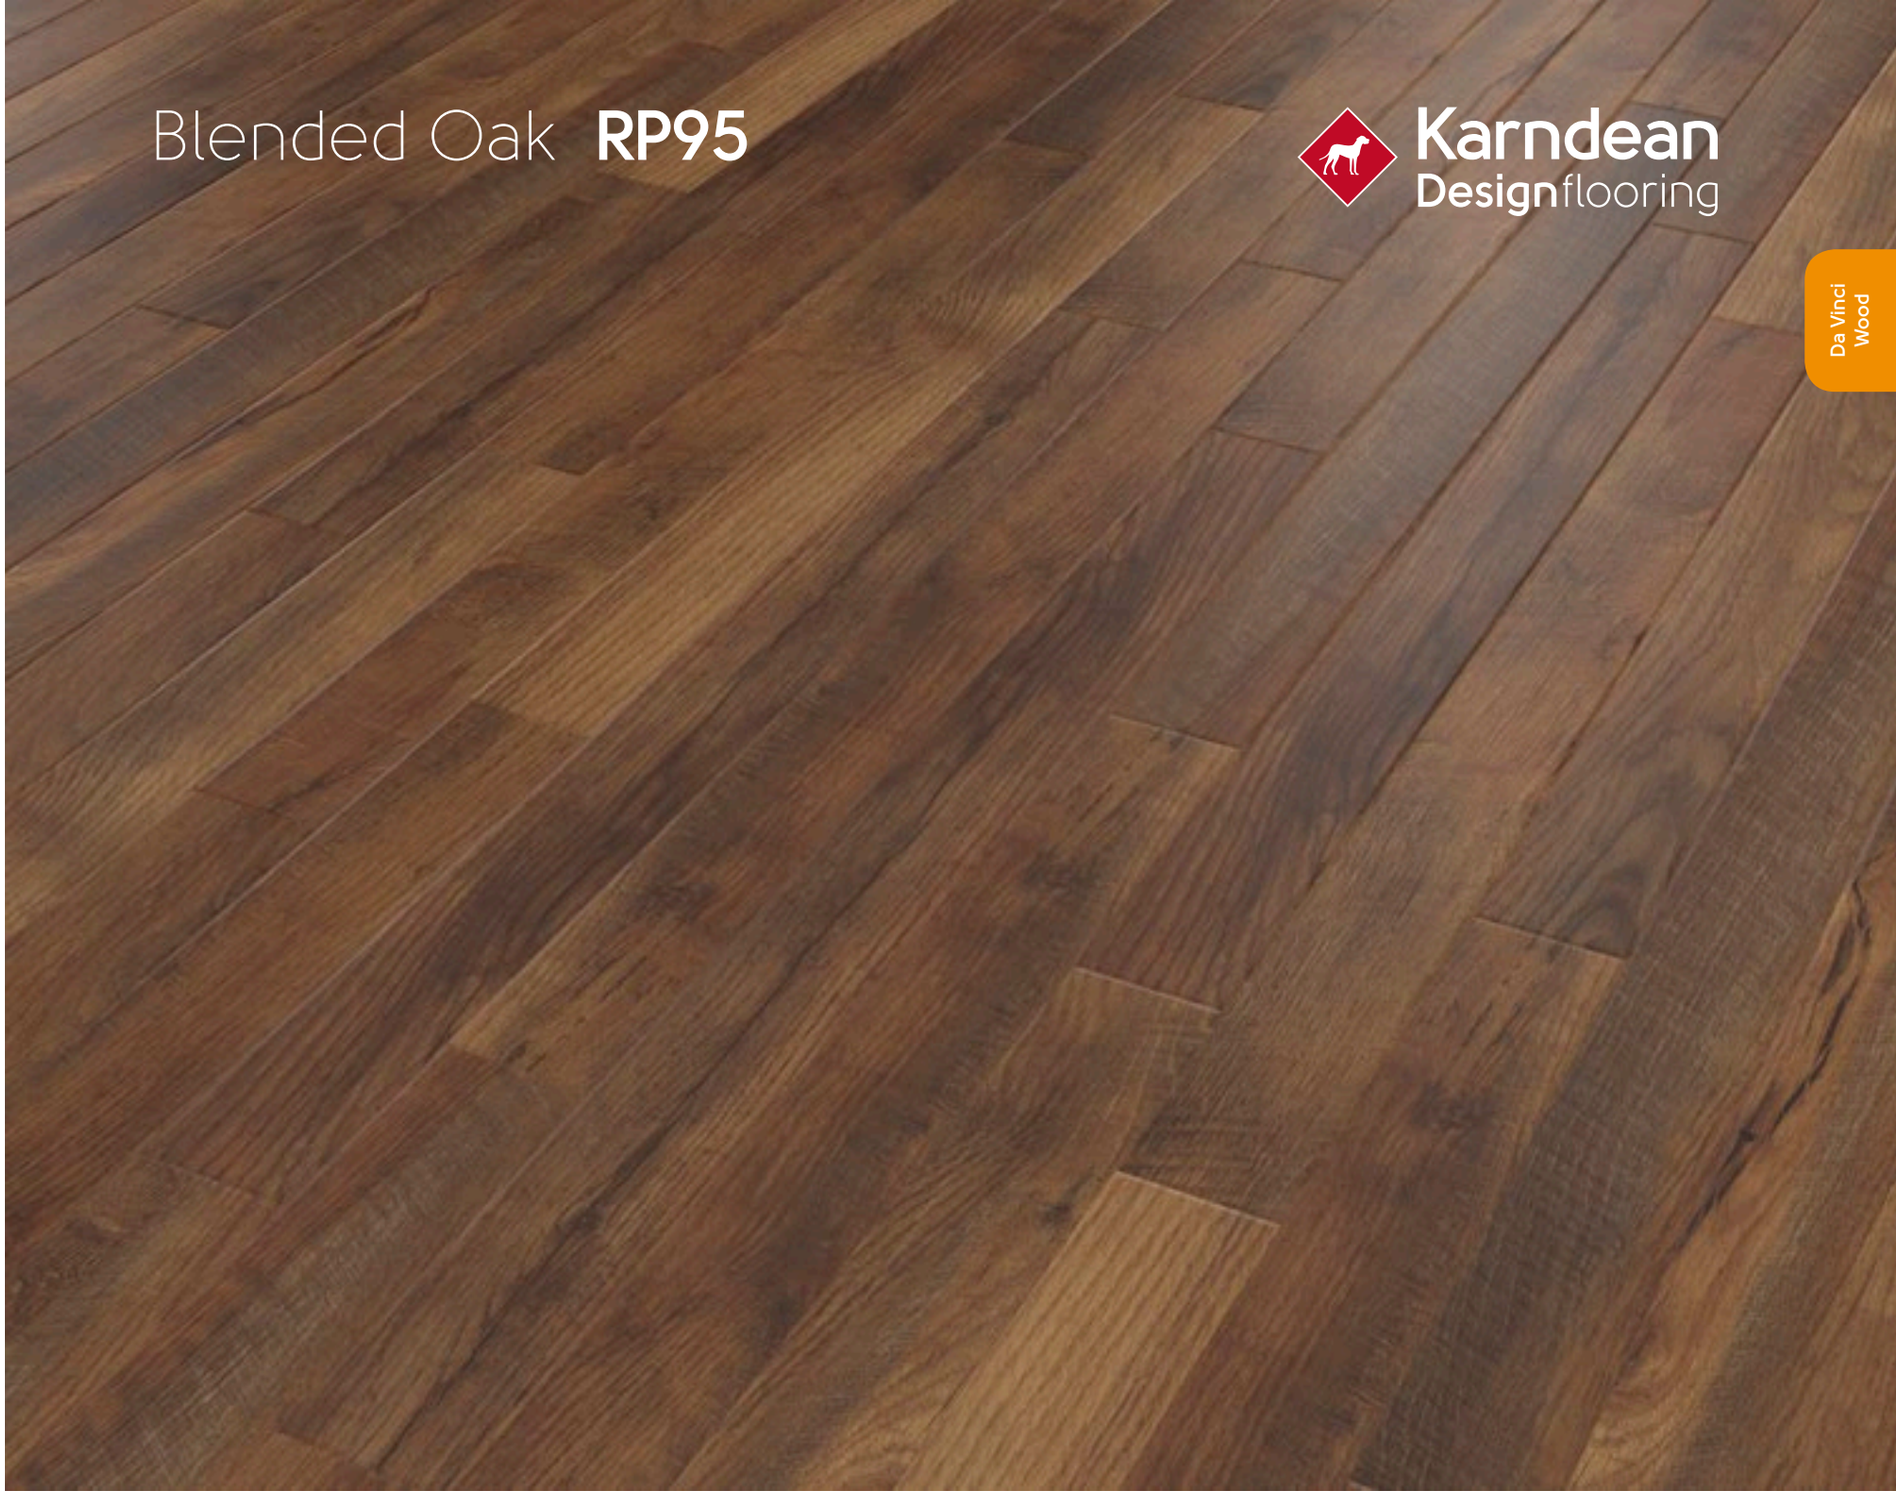

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP95
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Beach Driftwood **RP101**

Karndean Designflooring

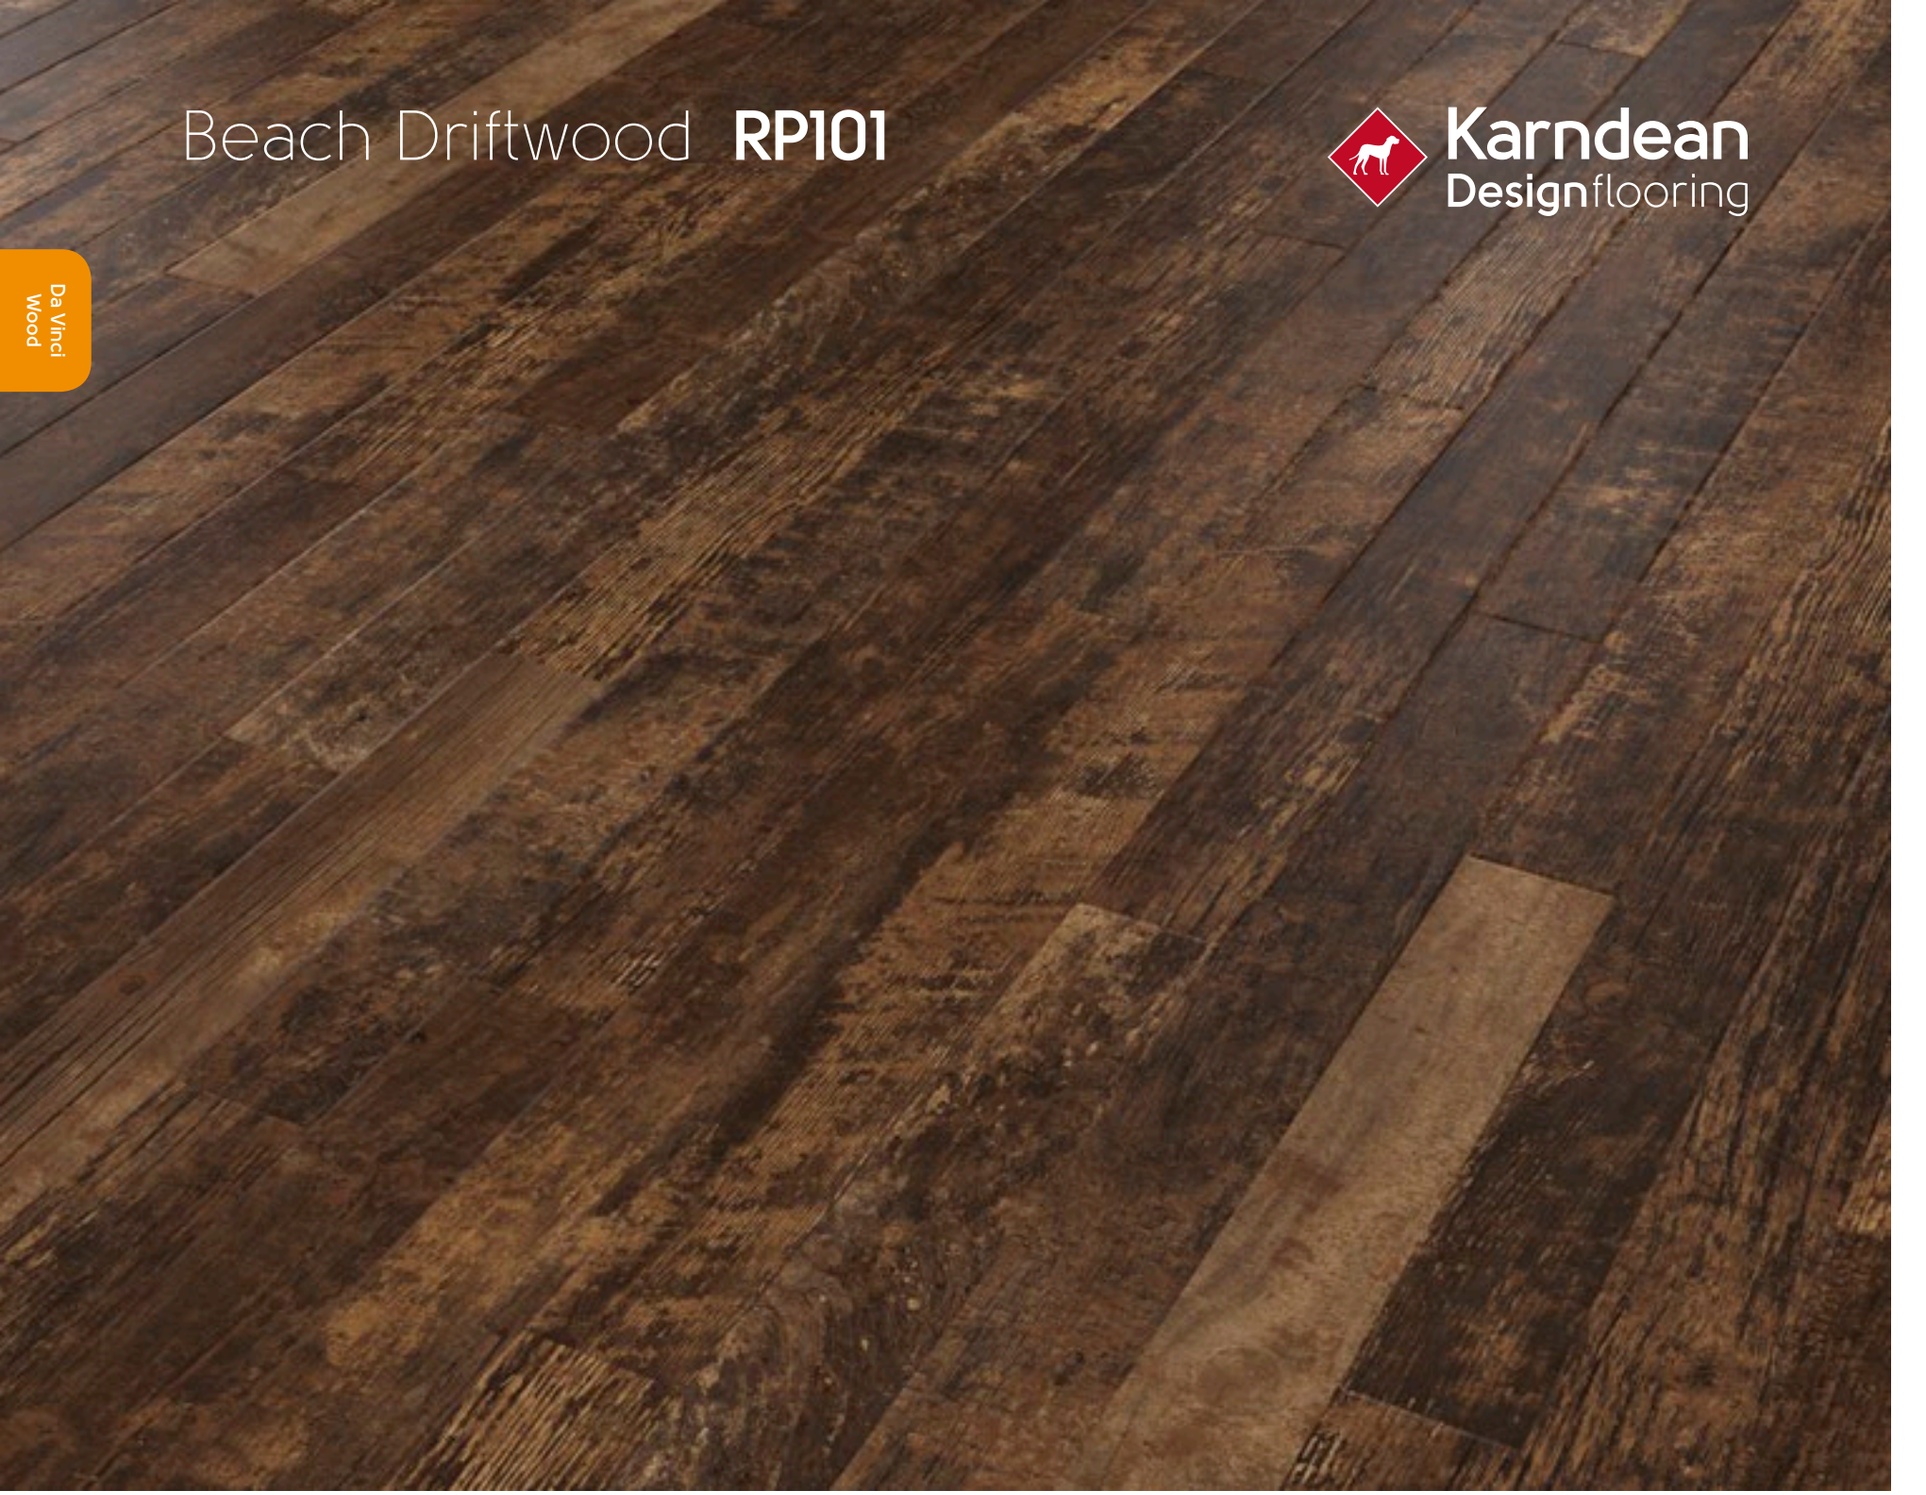

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP101
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Australian Walnut **RP41**

Karndean Designflooring



Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP41
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Scorched Oak **RP94**

Karndean Designflooring

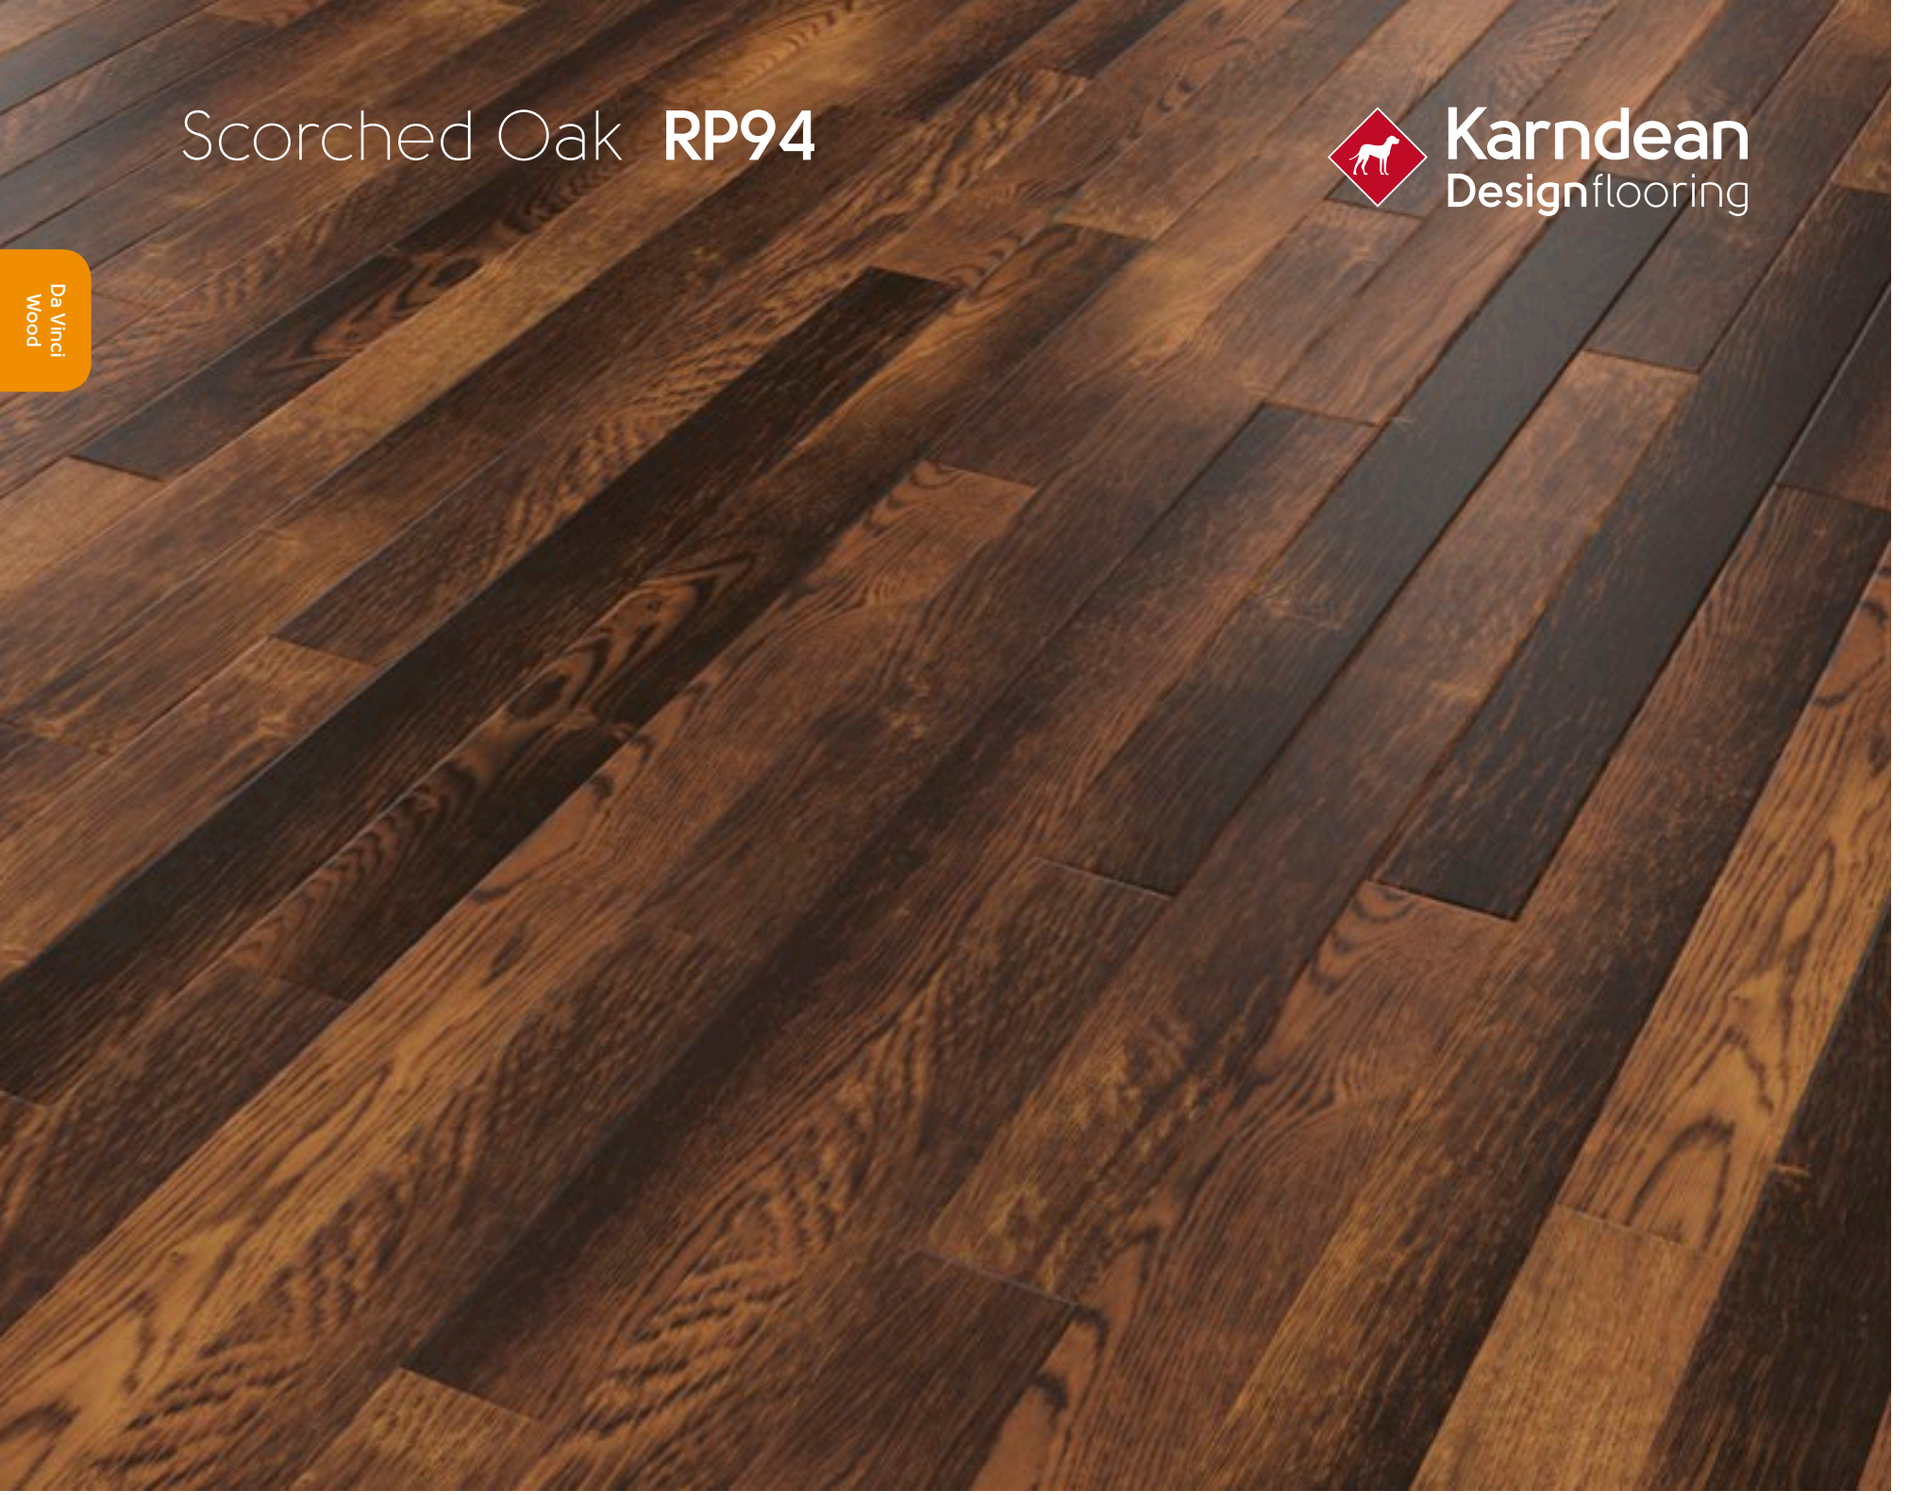

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 77

TEXT
RP94
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Double Smoked Acacia **RP105**

Karndean Designflooring

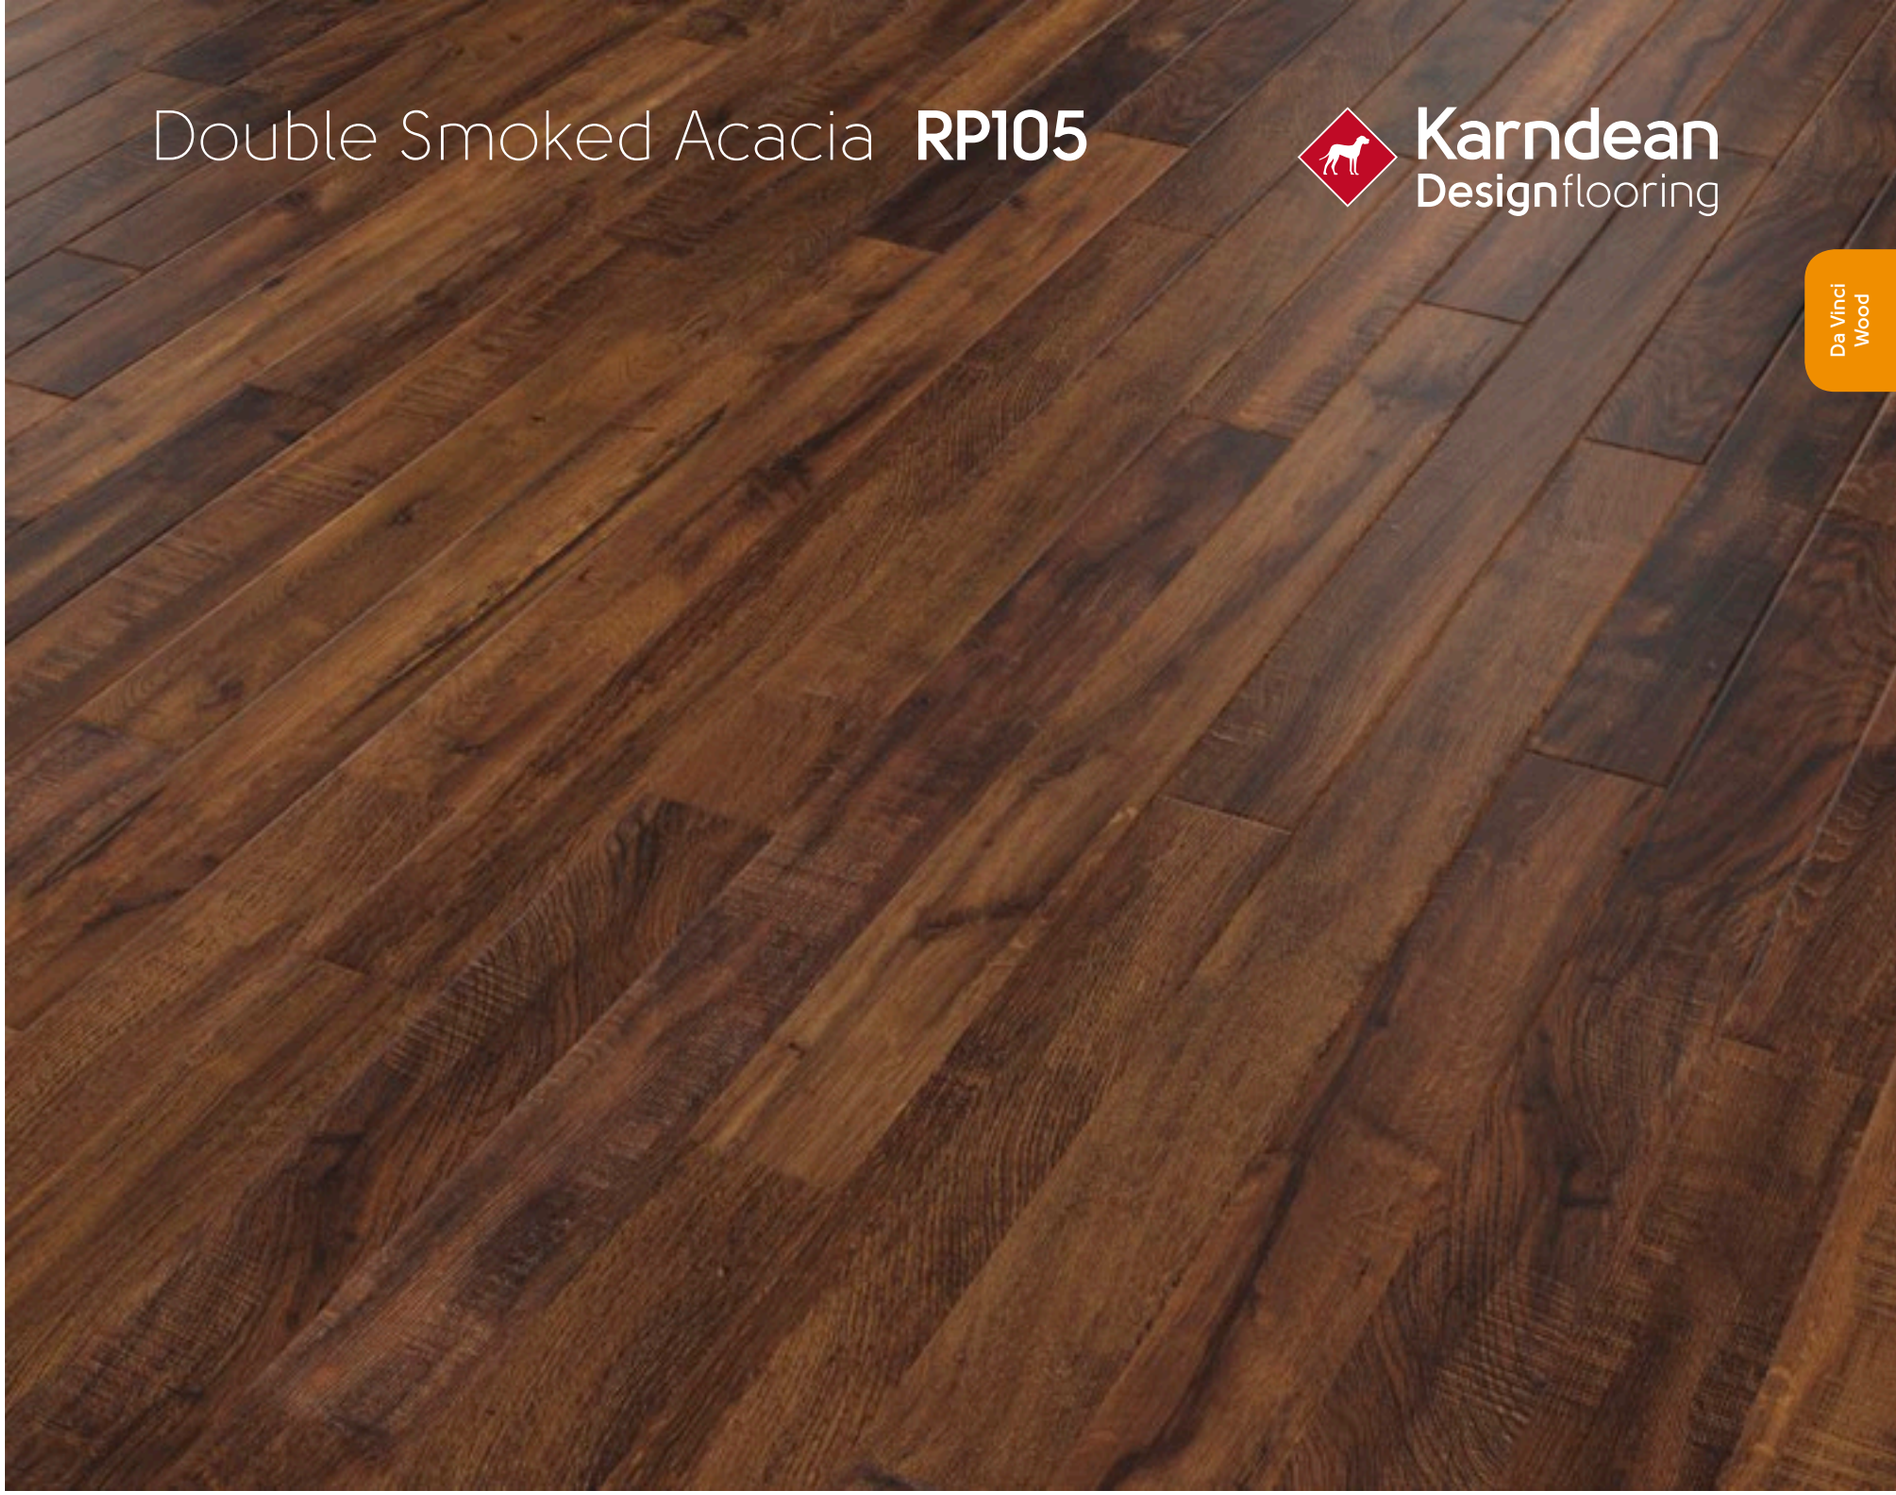

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP105
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Van Gogh **Wood**

48" x 7" (1219mm x 178mm)


Page: 116
Bracken **VG1-7**


Page: 106
Burnt Ginger **VG5-7**


Page: 109
Copper Gum **VGW33T**


Page: 103
Antique Karri **VGW39T**


Page: 98
Melbourne Larch **VGW40T**


Page: 119
Merbau **VGW41T***


Page: 104
Jatoba **VGW42T***



Page: 111
Lancewood **VGW44T***


Page: 102
Rimu **VGW49T**


Page: 96
Macrocapra **VGW50T**


Page: 117
Aged Kauri **VGW51T**


Page: 107
Wellington Oak **VGW53T***


Page: 118
Christchurch Oak **VGW54T***


Page: 114
Smoked Oak **VGW70T**


Page: 101
Reclaimed Maple **VGW71T**


Page: 108
Vintage Pine **VGW76T***


Page: 99
Country Oak **VGW81T**


Page: 97
French Oak **VGW85T**


Page: 112
Classic Oak **VGW86T**


Page: 126
Ebony **VGW89T**


Page: 123
Tawny Oak **VGW91T**


Page: 110
Burgundy Oak **VGW92T**


Page: 113
Hessian Oak **VGW93T**


Page: 105
Honey Oak **VGW94T**


Page: 120
Lime Washed Cypress **VGW95T**


Page: 121
Burnished Cypress **VGW96T**



Page: 127
Burnished Beech **VGW97T**


Page: 125
Smoked Beech **VGW98T**


Page: 115
Reclaimed Redwood **VGW99T***


Page: 100
Aged Redwood **VGW100T***


Page: 122
Salvaged Redwood **VGW101T***


Page: 124
Charred Oak **VGW102T***

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Van Gogh **Wood**

Van Gogh GLUEDOWN

Our popular Van Gogh collection captures the look of real wood in a variety of colors and designs from traditional rustic to cool contemporary. Large plank sizes, distinctive grain details and a subtle texture create a look that works in any space.

The Van Gogh range is a wood-only collection made up of 32 large-scale 48" x 7" planks. With its depth, wear layer and texture, Van Gogh is one of our most popular ranges and is perfect for areas with high foot traffic, such as retail, education and hospitality environments, as well as in the home.



Bracken **VG1-7**

	Standard	Result
Thickness		3.0 mm
Size		48" x 7" (1219 mm x 178 mm)
Box quantity		15 Planks/35 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.89)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 3.3
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Macrocapra **VGW50T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW50T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

French Oak **VGW85T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW85T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Melbourne Larch **VGW40T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW40T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Country Oak **VGW81T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW81T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aged Redwood **VGW100T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 95

TEXT
VGW100T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed Maple **VGW71T**

Karndean Designflooring

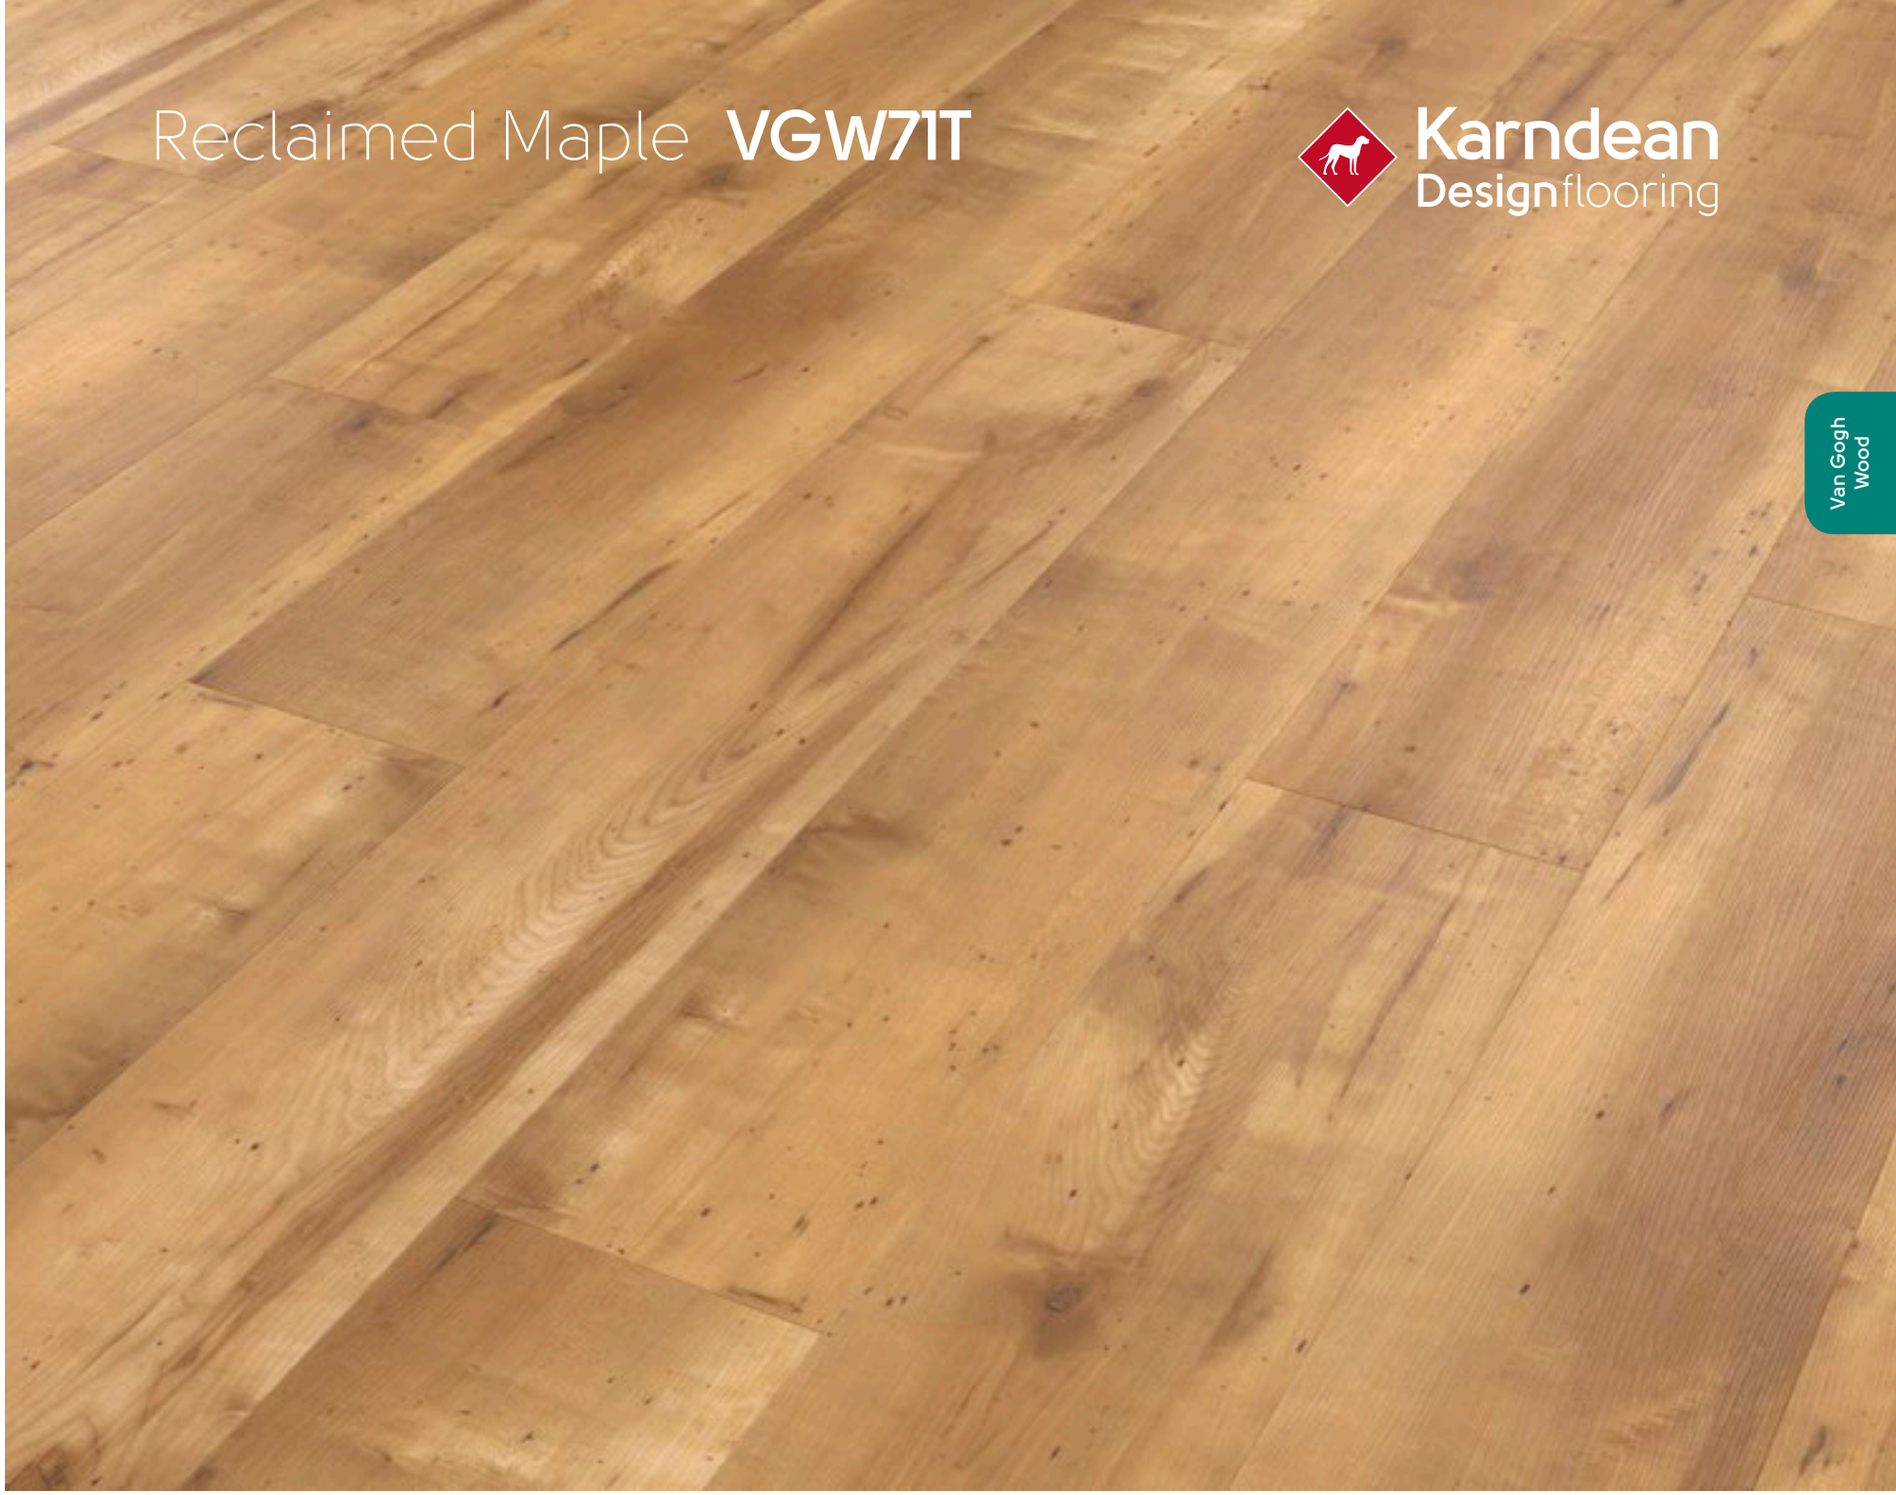

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW71T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Rimu **VGW49T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW49T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Antique Karri **VGW39T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW39T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Jatoba **VGW42T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW42T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Honey Oak **VGW94T**



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW94T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burnt Ginger **VG5-7**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VG5-7
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Wellington Oak **VGW53T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW53T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Vintage Pine **VGW76T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW76T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Copper Gum **VGW33T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW33T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burgundy Oak **VGW92T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW92T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lancewood **VGW44T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW44T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Classic Oak **VGW86T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW86T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hessian Oak **VGW93T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW93T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Smoked Oak **VGW70T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW70T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed Redwood **VGW99T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW99T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Bracken **VG1-7**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 95

TEXT
VG1-7
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aged Kauri **VGW51T**

Karndean Designflooring

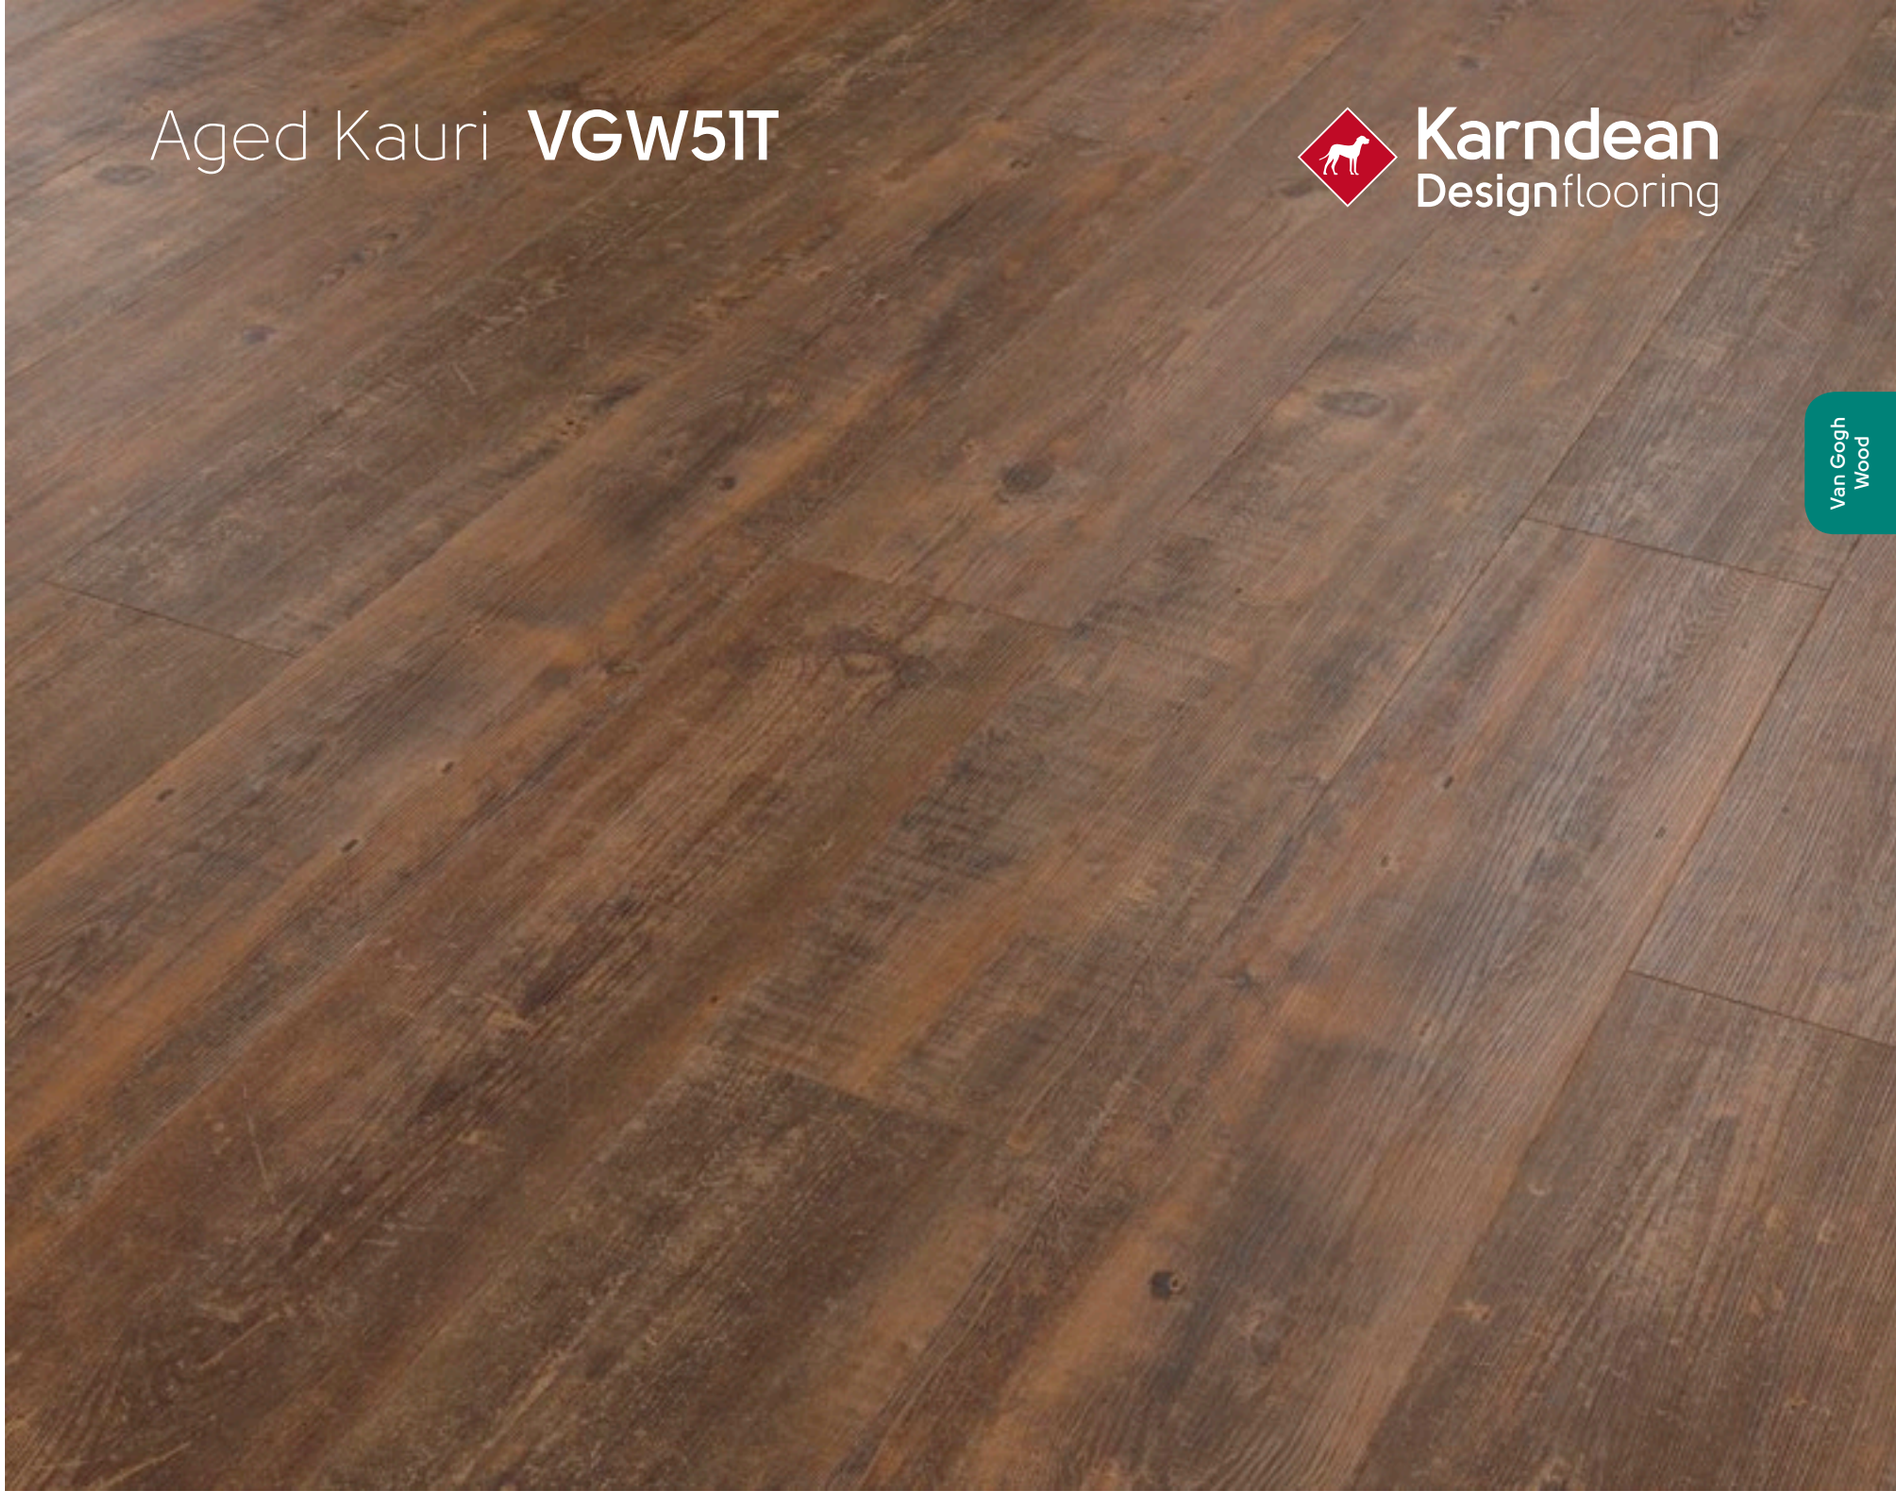

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW51T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Christchurch Oak **VGW54T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 95

TEXT
VGW54T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Merbau **VGW41T**

Karndean Designflooring

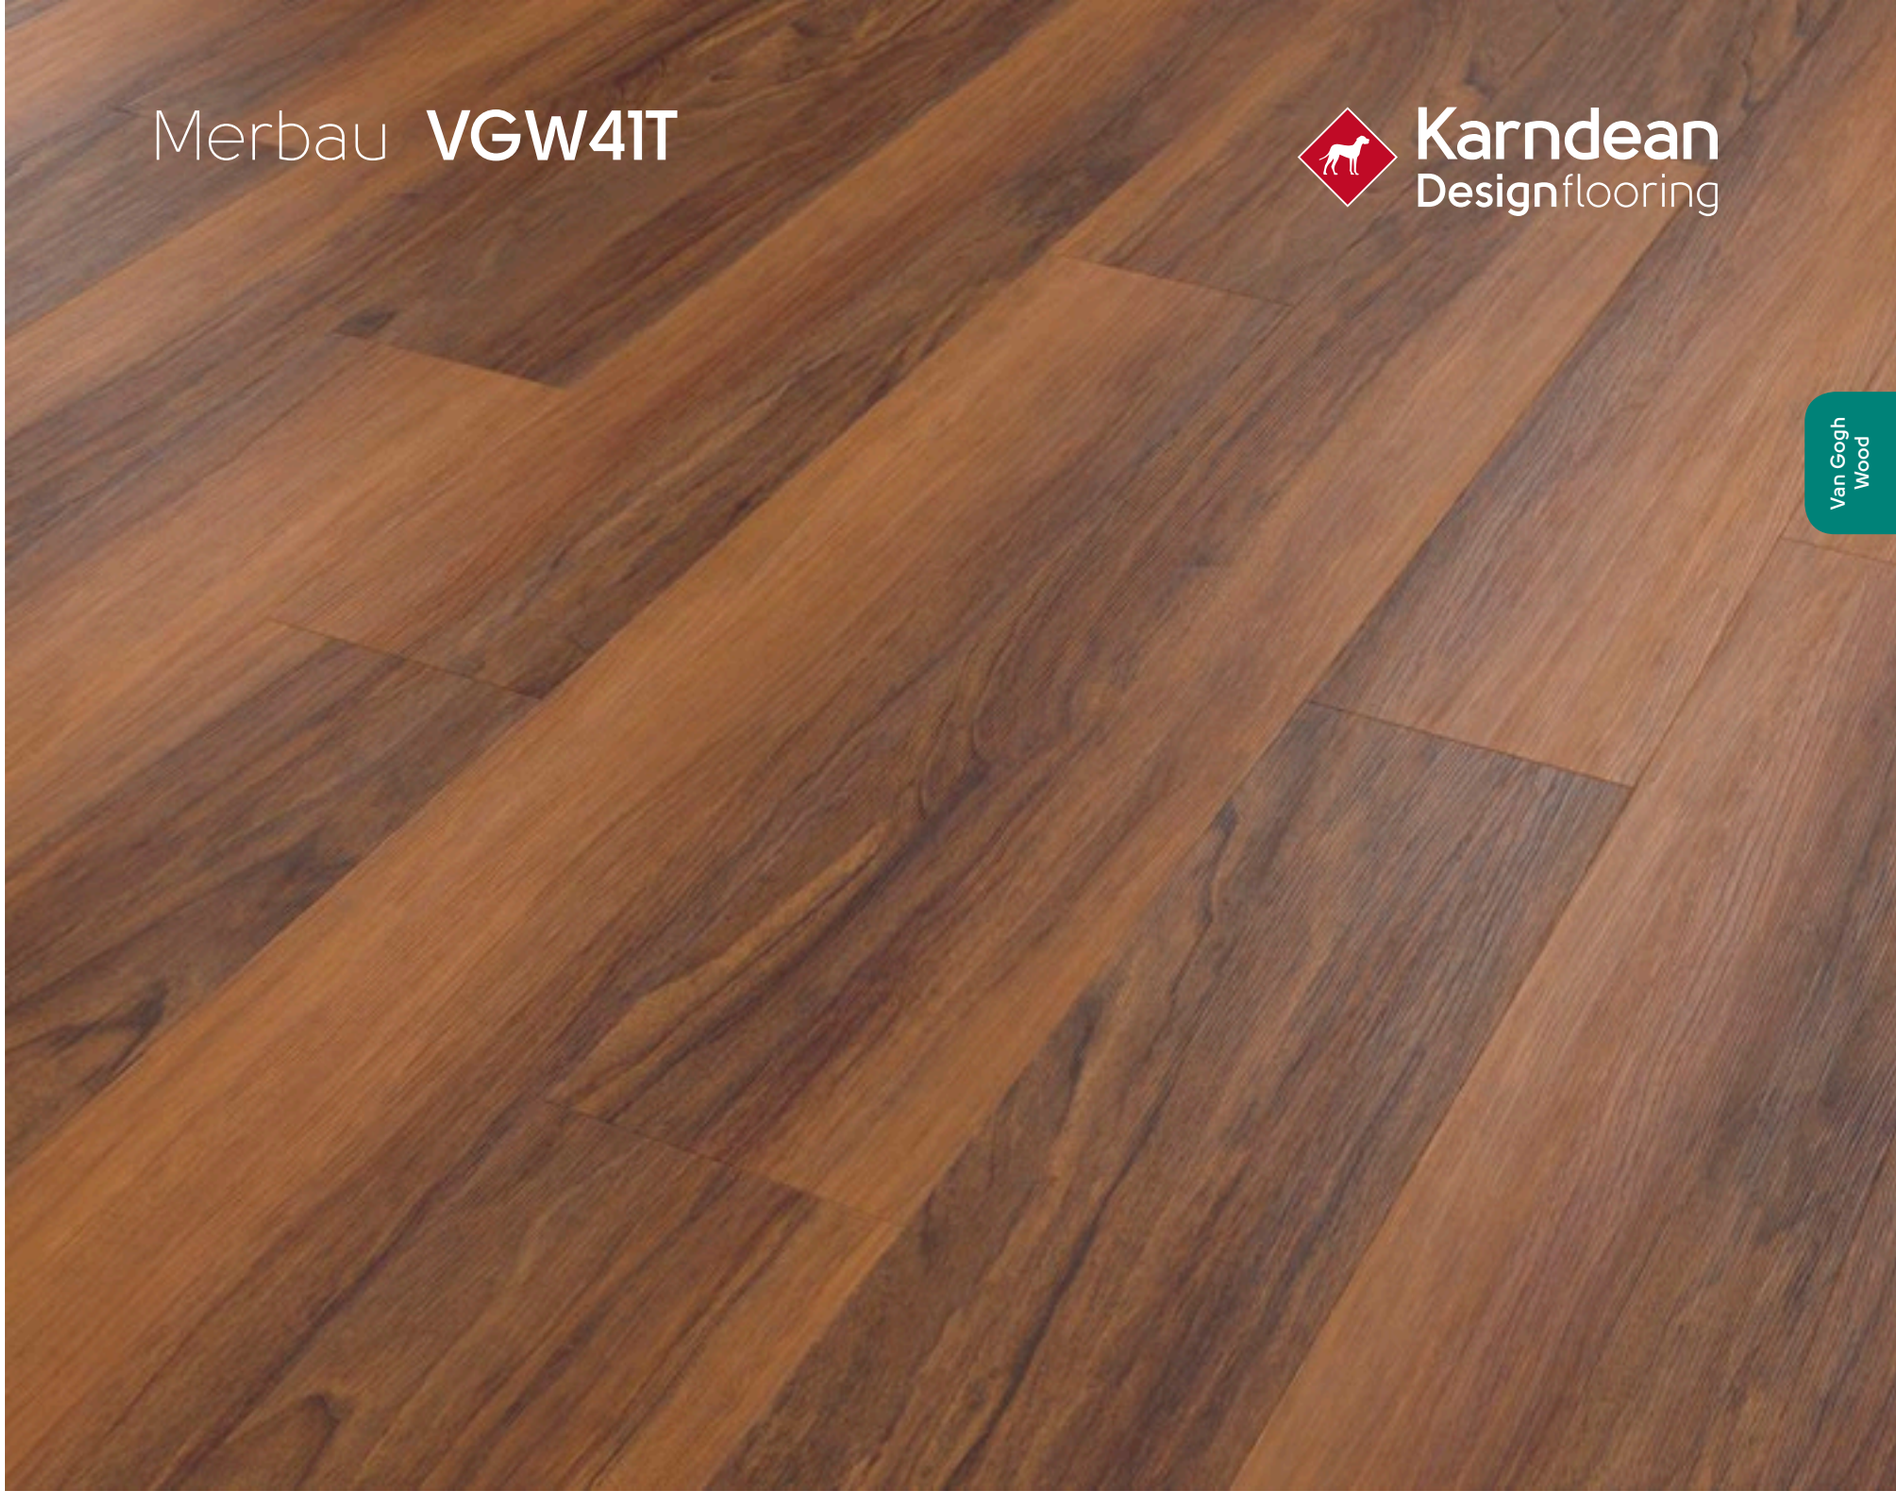

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW41T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lime Washed Cypress **VGW95T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 95

TEXT
VGW95T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burnished Cypress **VGW96T**

Karndean Designflooring

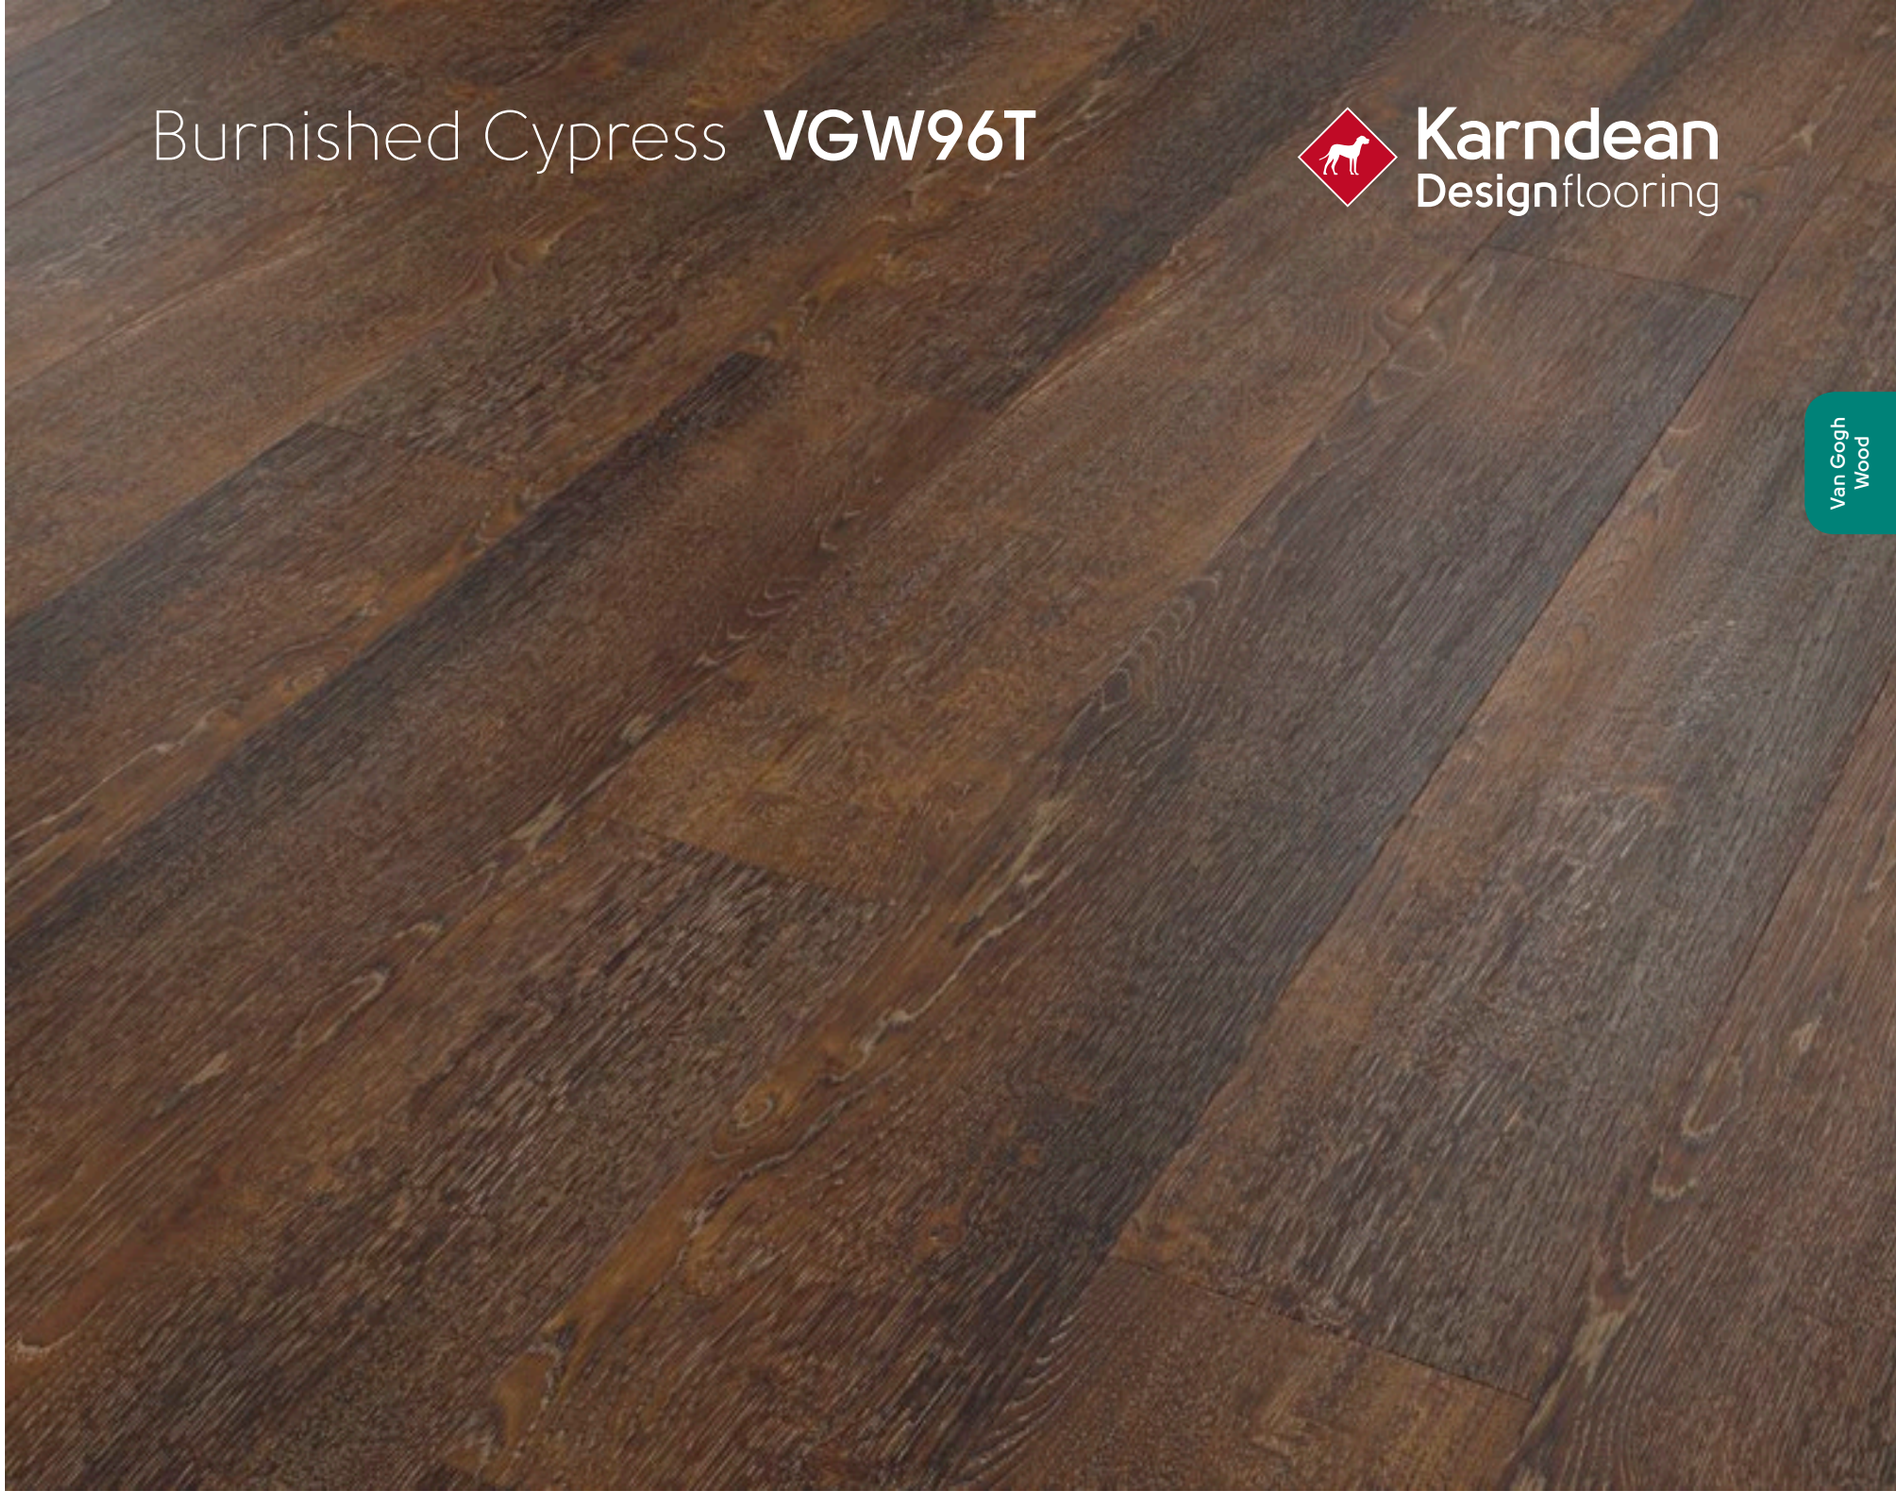

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW96T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Salvaged Redwood **VGW101T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW101T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Tawny Oak **VGW91T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW91T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Charred Oak **VGW102T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 95

TEXT
VGW102T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Smoked Beech **VGW98T**

Karndean Designflooring

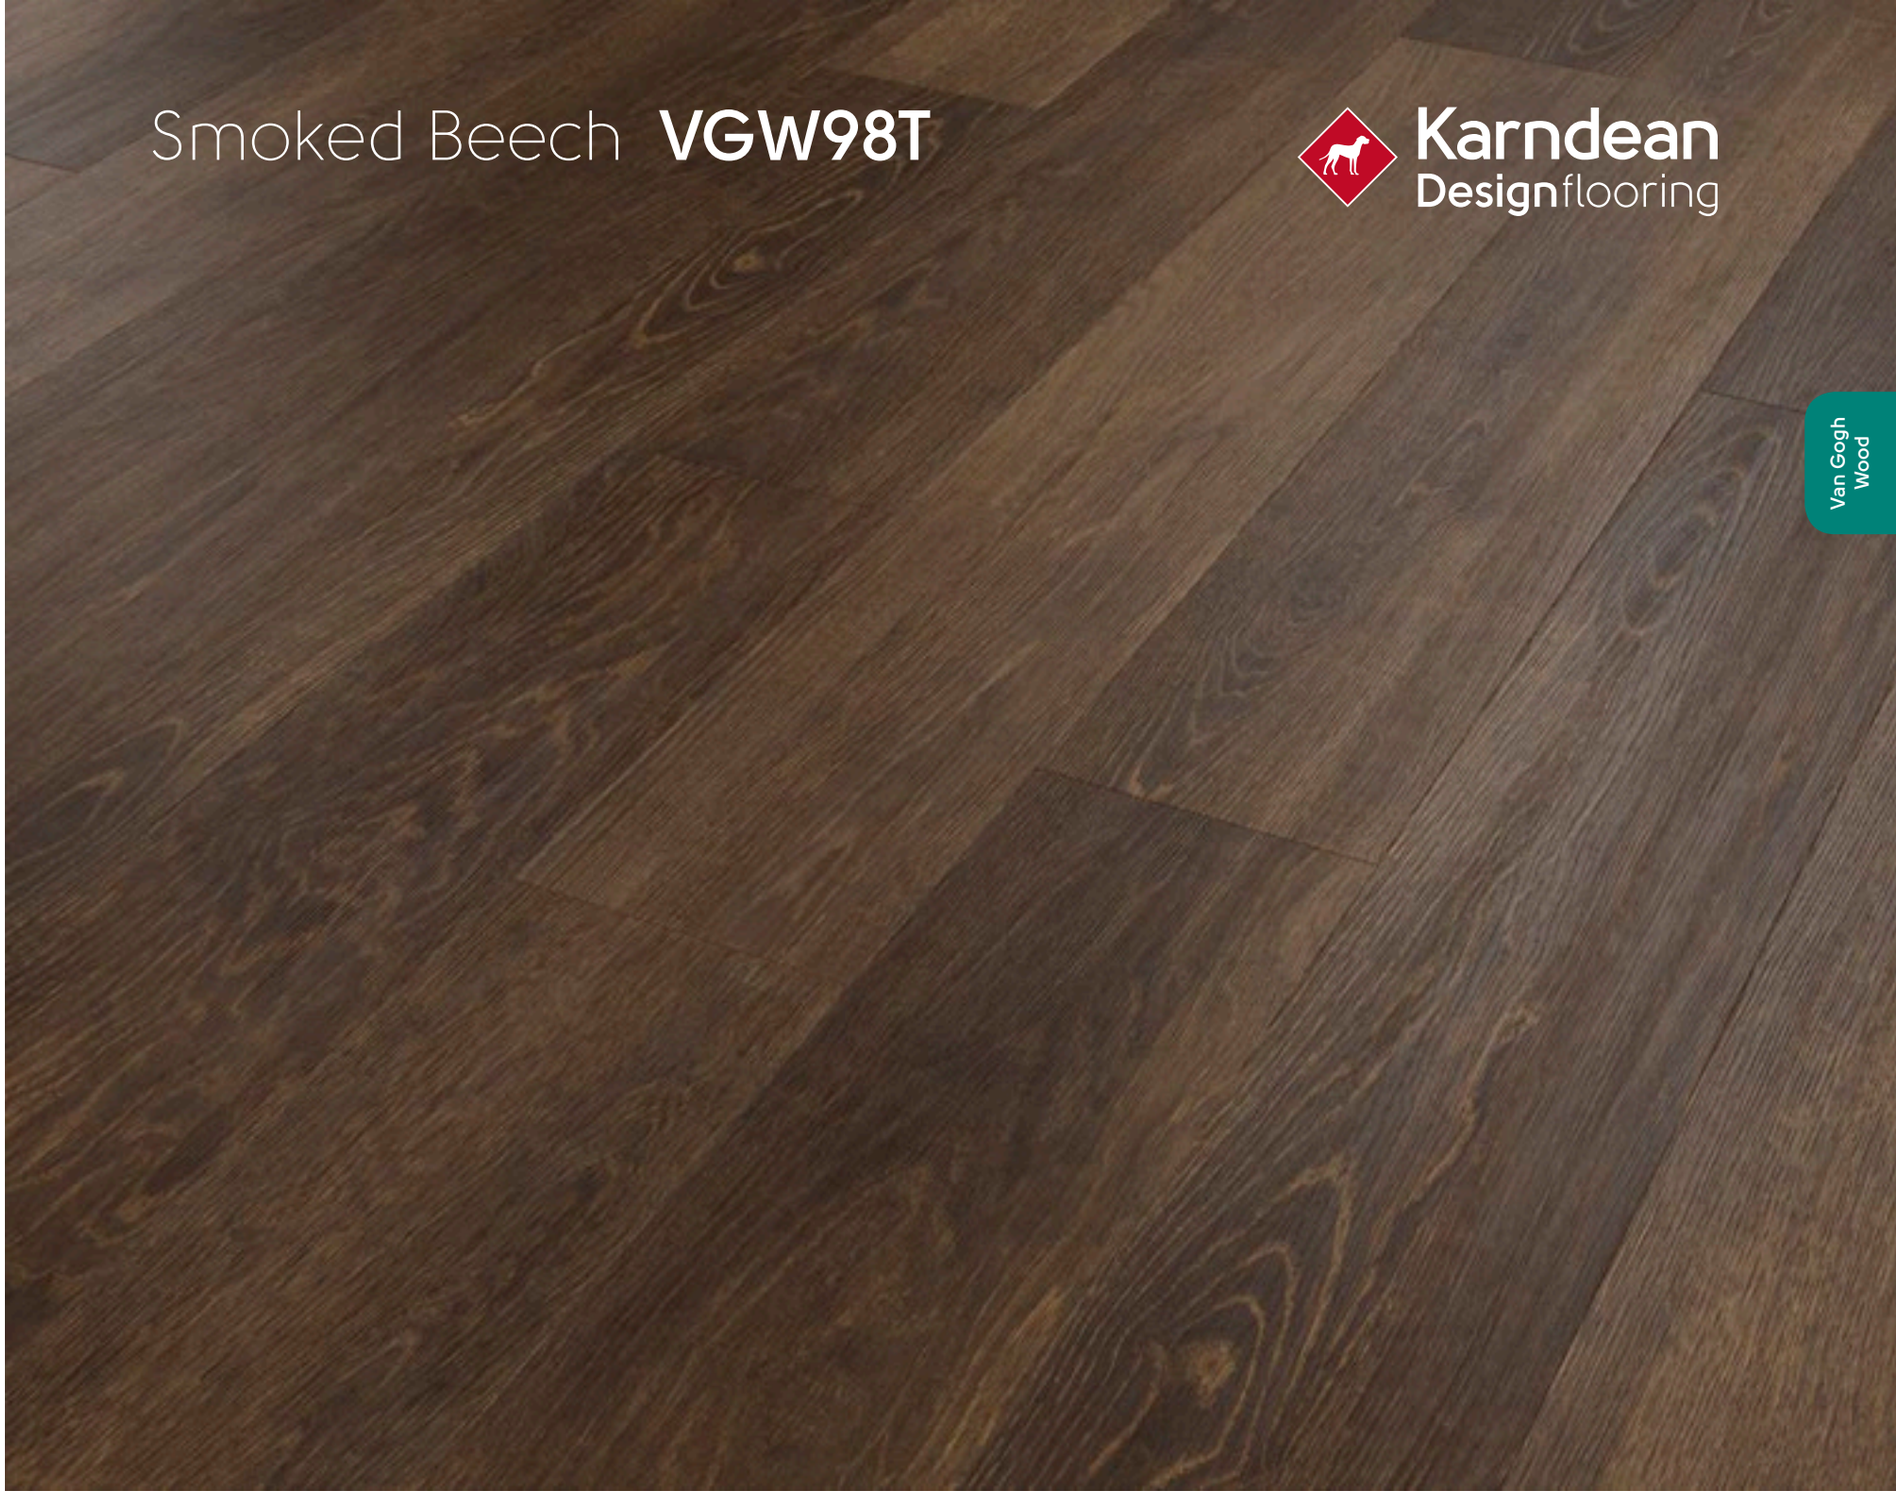

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW98T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Ebony **VGW89T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW89T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burnished Beech **VGW97T**

Karndean Designflooring



Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW97T
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Opus **Wood**

Opus Enhance

Our most popular Opus products are available with enhanced slip resistance.
Ask your Karndean Commercial Business Manager for more information.

36" x 6" (915mm x 152mm)


Page: 131
Grano **WP311**


Page: 133
Palleo **WP312**


Page: 141
Ignea **WP313**


Page: 136
Aurum **WP315**


Page: 147
Rubra **WP316**


Page: 153
Atra **WP317**


Page: 151
Carbo **WP318**


Page: 142
Luteus **WP321**


Page: 138
Canitia **WP322**


Page: 152
Tergo **WP324**


Page: 146
Arrado **WP325**


Page: 145
Natural Walnut **WP326**


Page: 140
Washed Walnut **WP328**


Page: 139
Bleached Grey Walnut **WP329**


Page: 150
Tenebra Walnut **WP330**


Page: 130
Textum **WP331**

36" x 4" (915mm x 102mm)


Page: 135
Weathered Elm **WP511**


Page: 143
Golden Teak **WP513**

48" x 9" (1219mm x 228mm)


Page: 132
Niveus **WP411**


Page: 137
Magna **WP413**


Page: 148
Argen **WP414**


Page: 144
Ordo **WP415**


Page: 134
Linea **WP416**


Page: 149
Sylva **WP417**

Opus **Wood**

Opus | GLUEDOWN

Our Opus woods offer fresh, contemporary visuals across a wide range of plank sizes, from 36" x 4" to 48" x 9". Unique to this range is Textum, a hybrid abstract visual that can act as a wood, a stone with a woven overlay or a stained concrete. From the rustic, neutral Ignea to the clean, modern look of Washed Walnut, the Opus range has a look to fit any project.



Linea **WP416**

	Standard	Result
Thickness		2.5 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.89)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 5.0
Abrasion resistance	ASTM D3884	124000 Cycles
Dimensional stability	ASTM F2199	Pass -0.004"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 4 dB IIC = 44 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Textum **WP331**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP331
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Grano **WP311**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP311
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Niveus **WP411**

Karndean Designflooring



Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP411
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Palleo **WP312**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP312
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Linea **WP416**

Karndean Designflooring

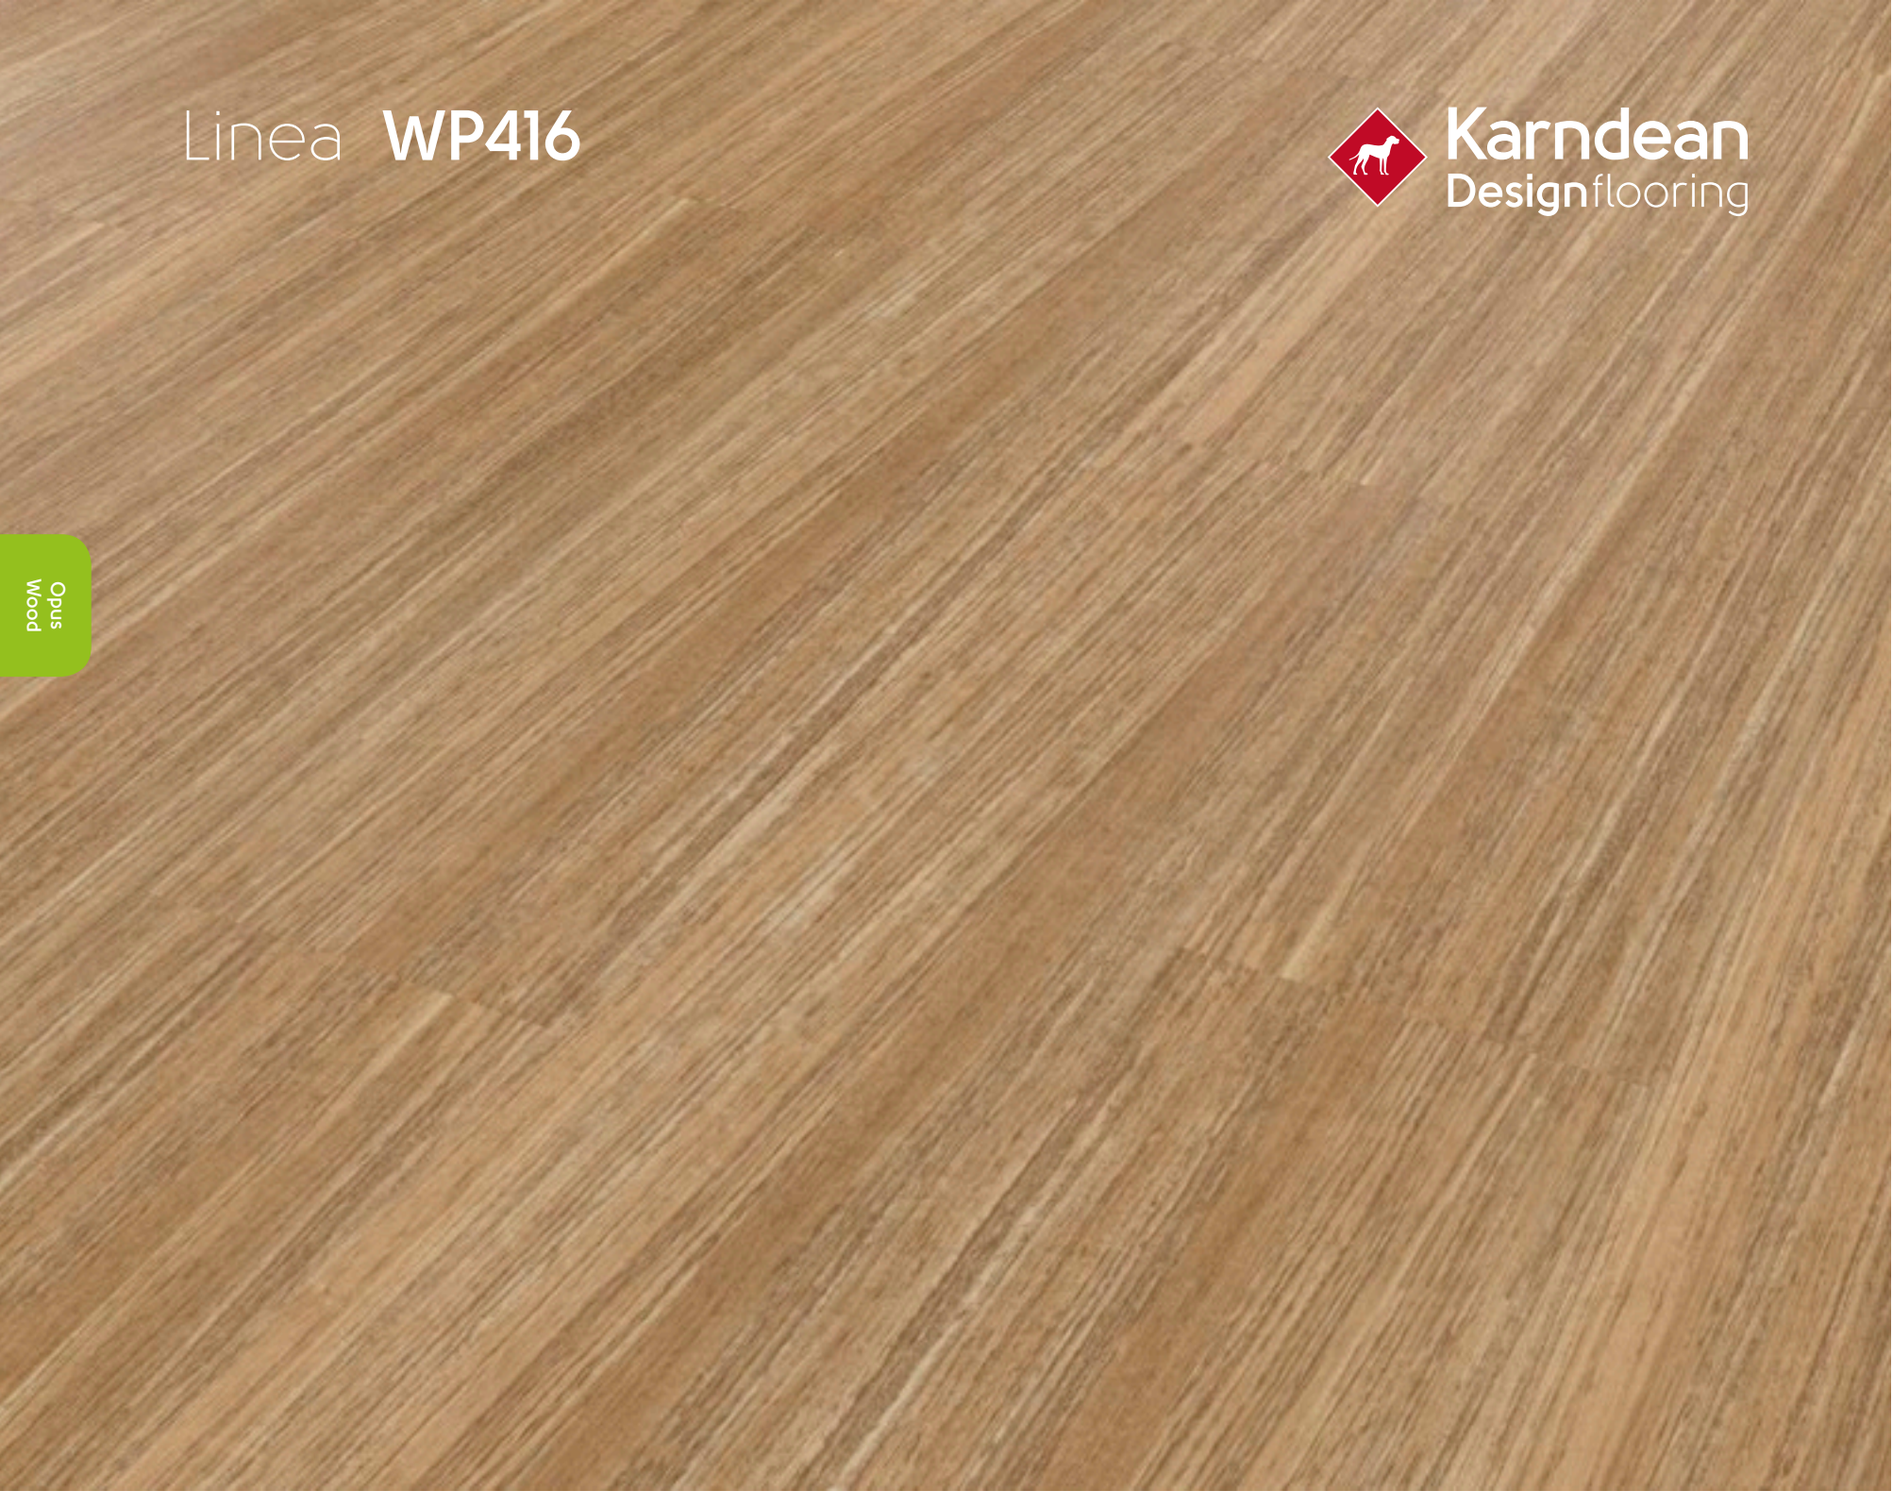

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP416
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Elm **WP511**

Karndean Designflooring



Size	36" x 4" (915mm x 102mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP511
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aurum **WP315**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP315
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Magna **WP413**

Karndean Designflooring



Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP413
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Canitia **WP322**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP322
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Bleached Grey Walnut **WP329**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP329
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Washed Walnut **WP328**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP328
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Ignea **WP313**

Karndean Designflooring

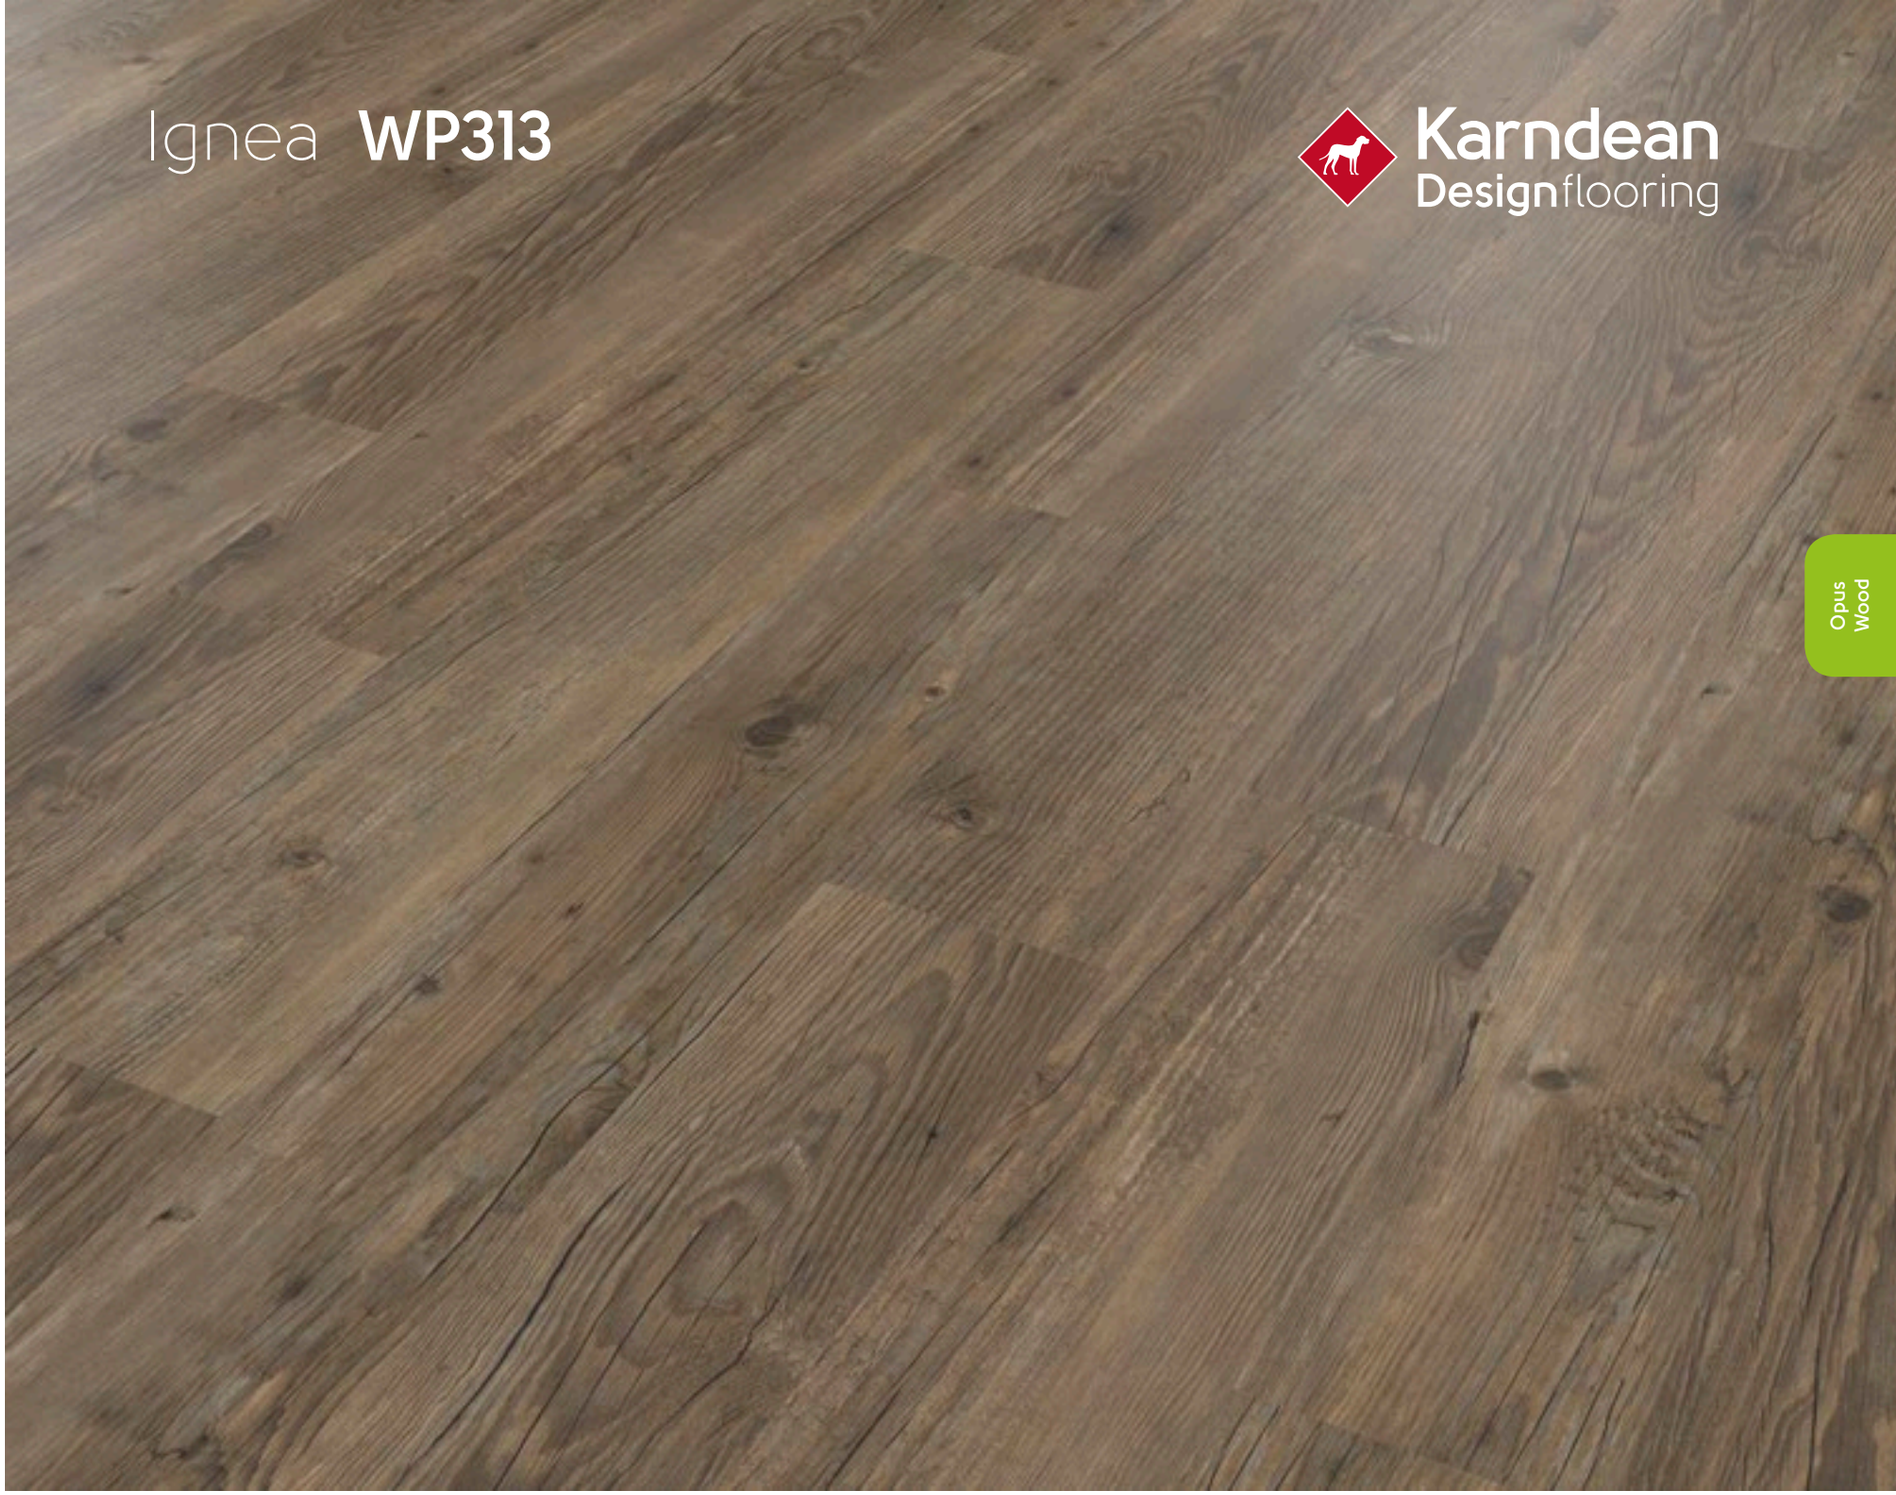

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP313
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Luteus **WP321**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP321
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Golden Teak **WP513**

Karndean Designflooring



Size	36" x 4" (915mm x 102mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP513
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Ordo **WP415**

Karndean Designflooring

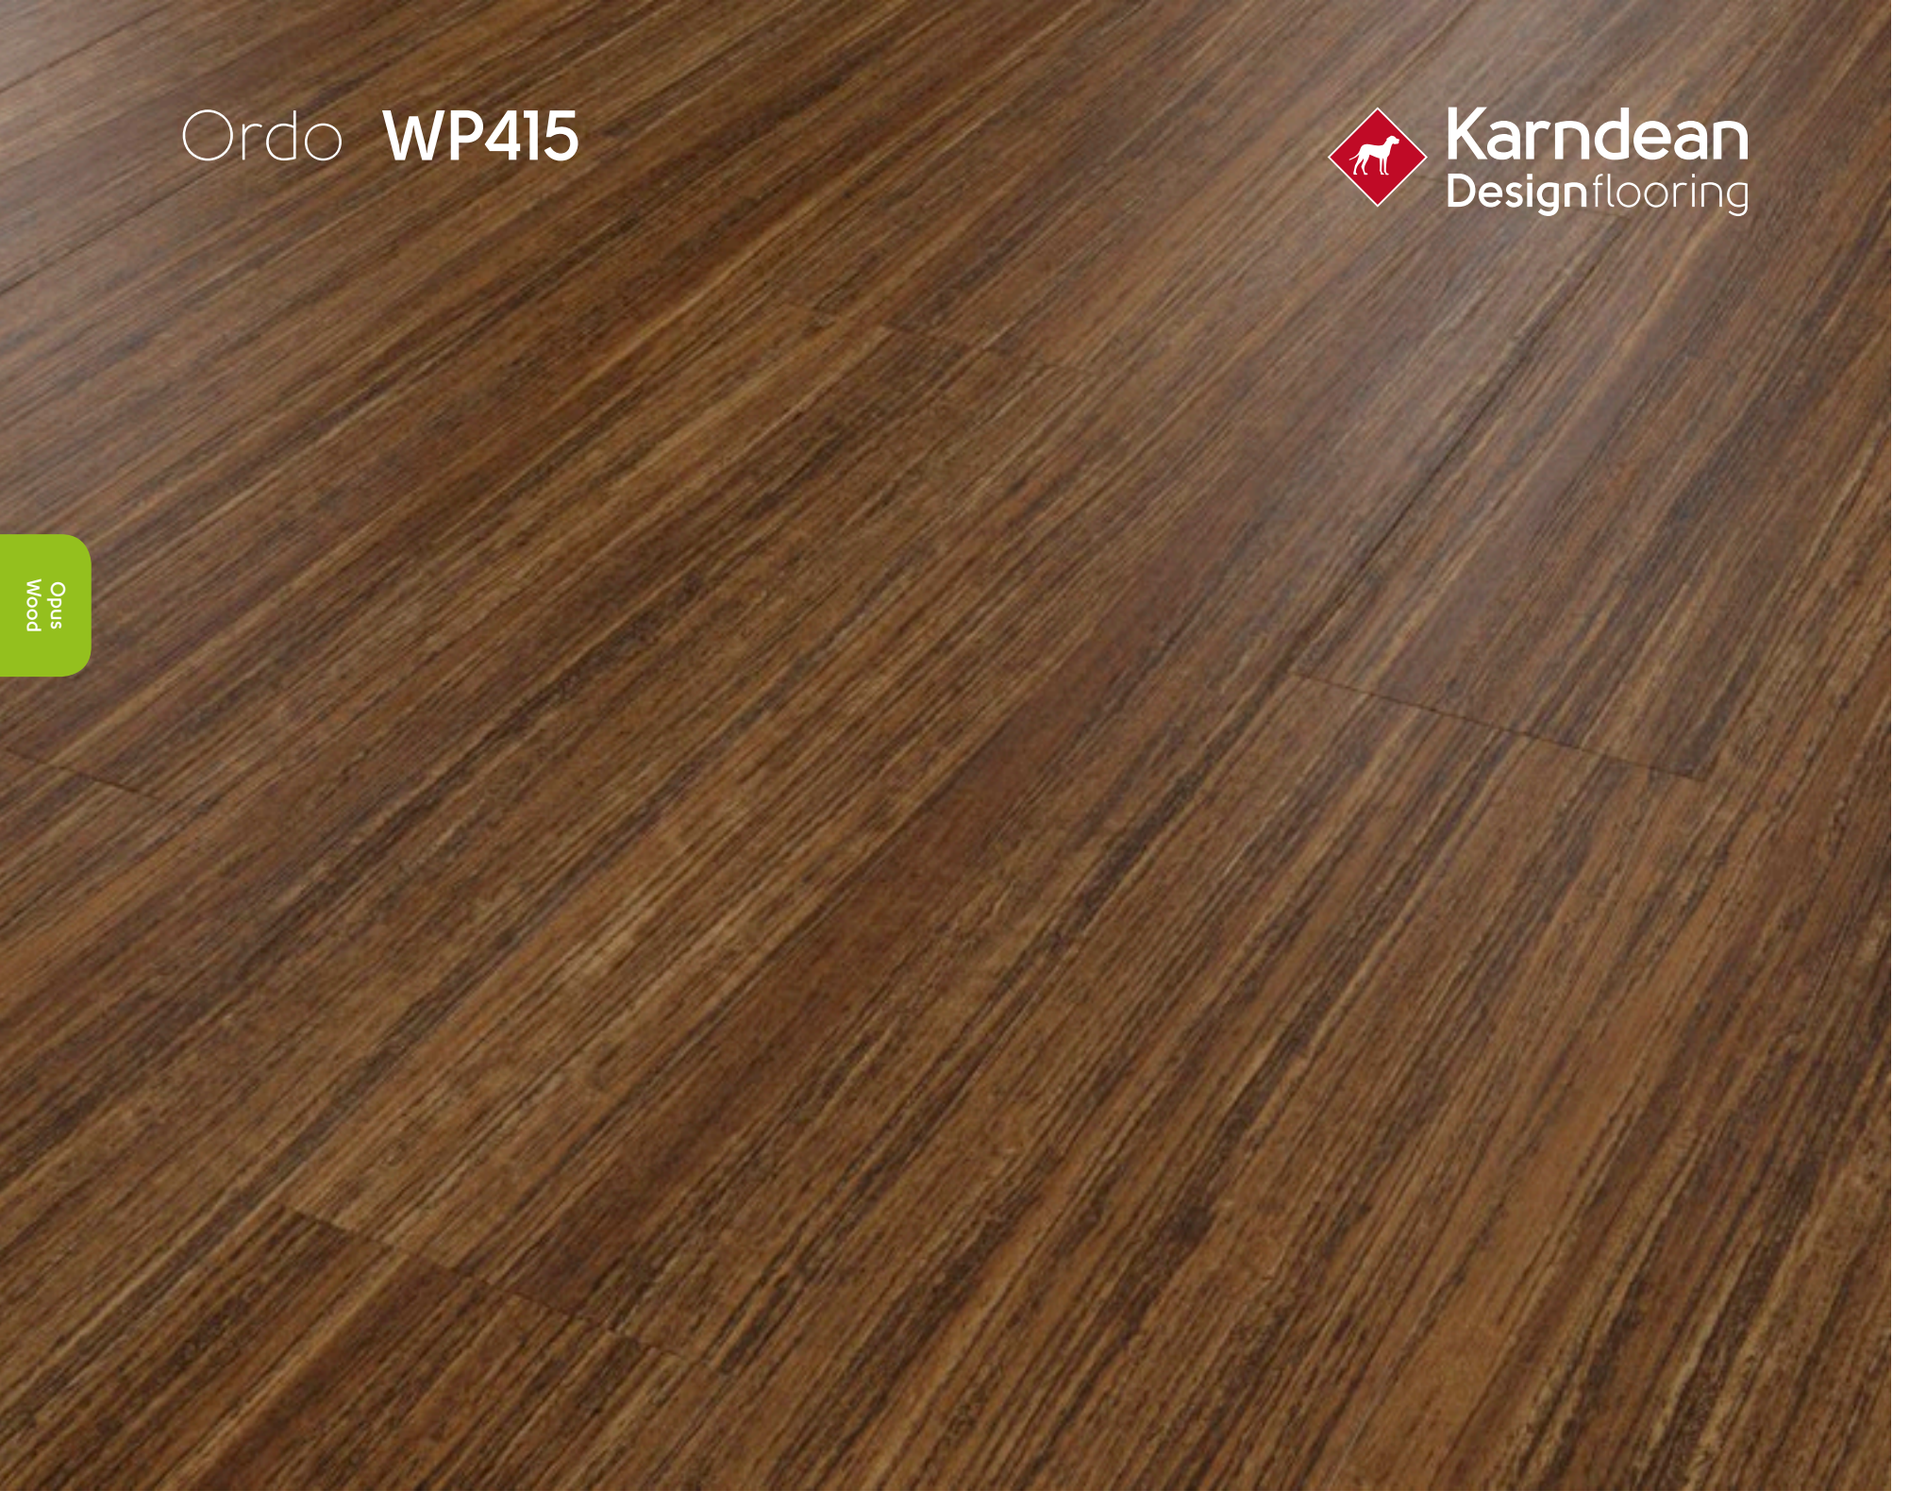

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP415
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Natural Walnut **WP326**

Karndean Designflooring

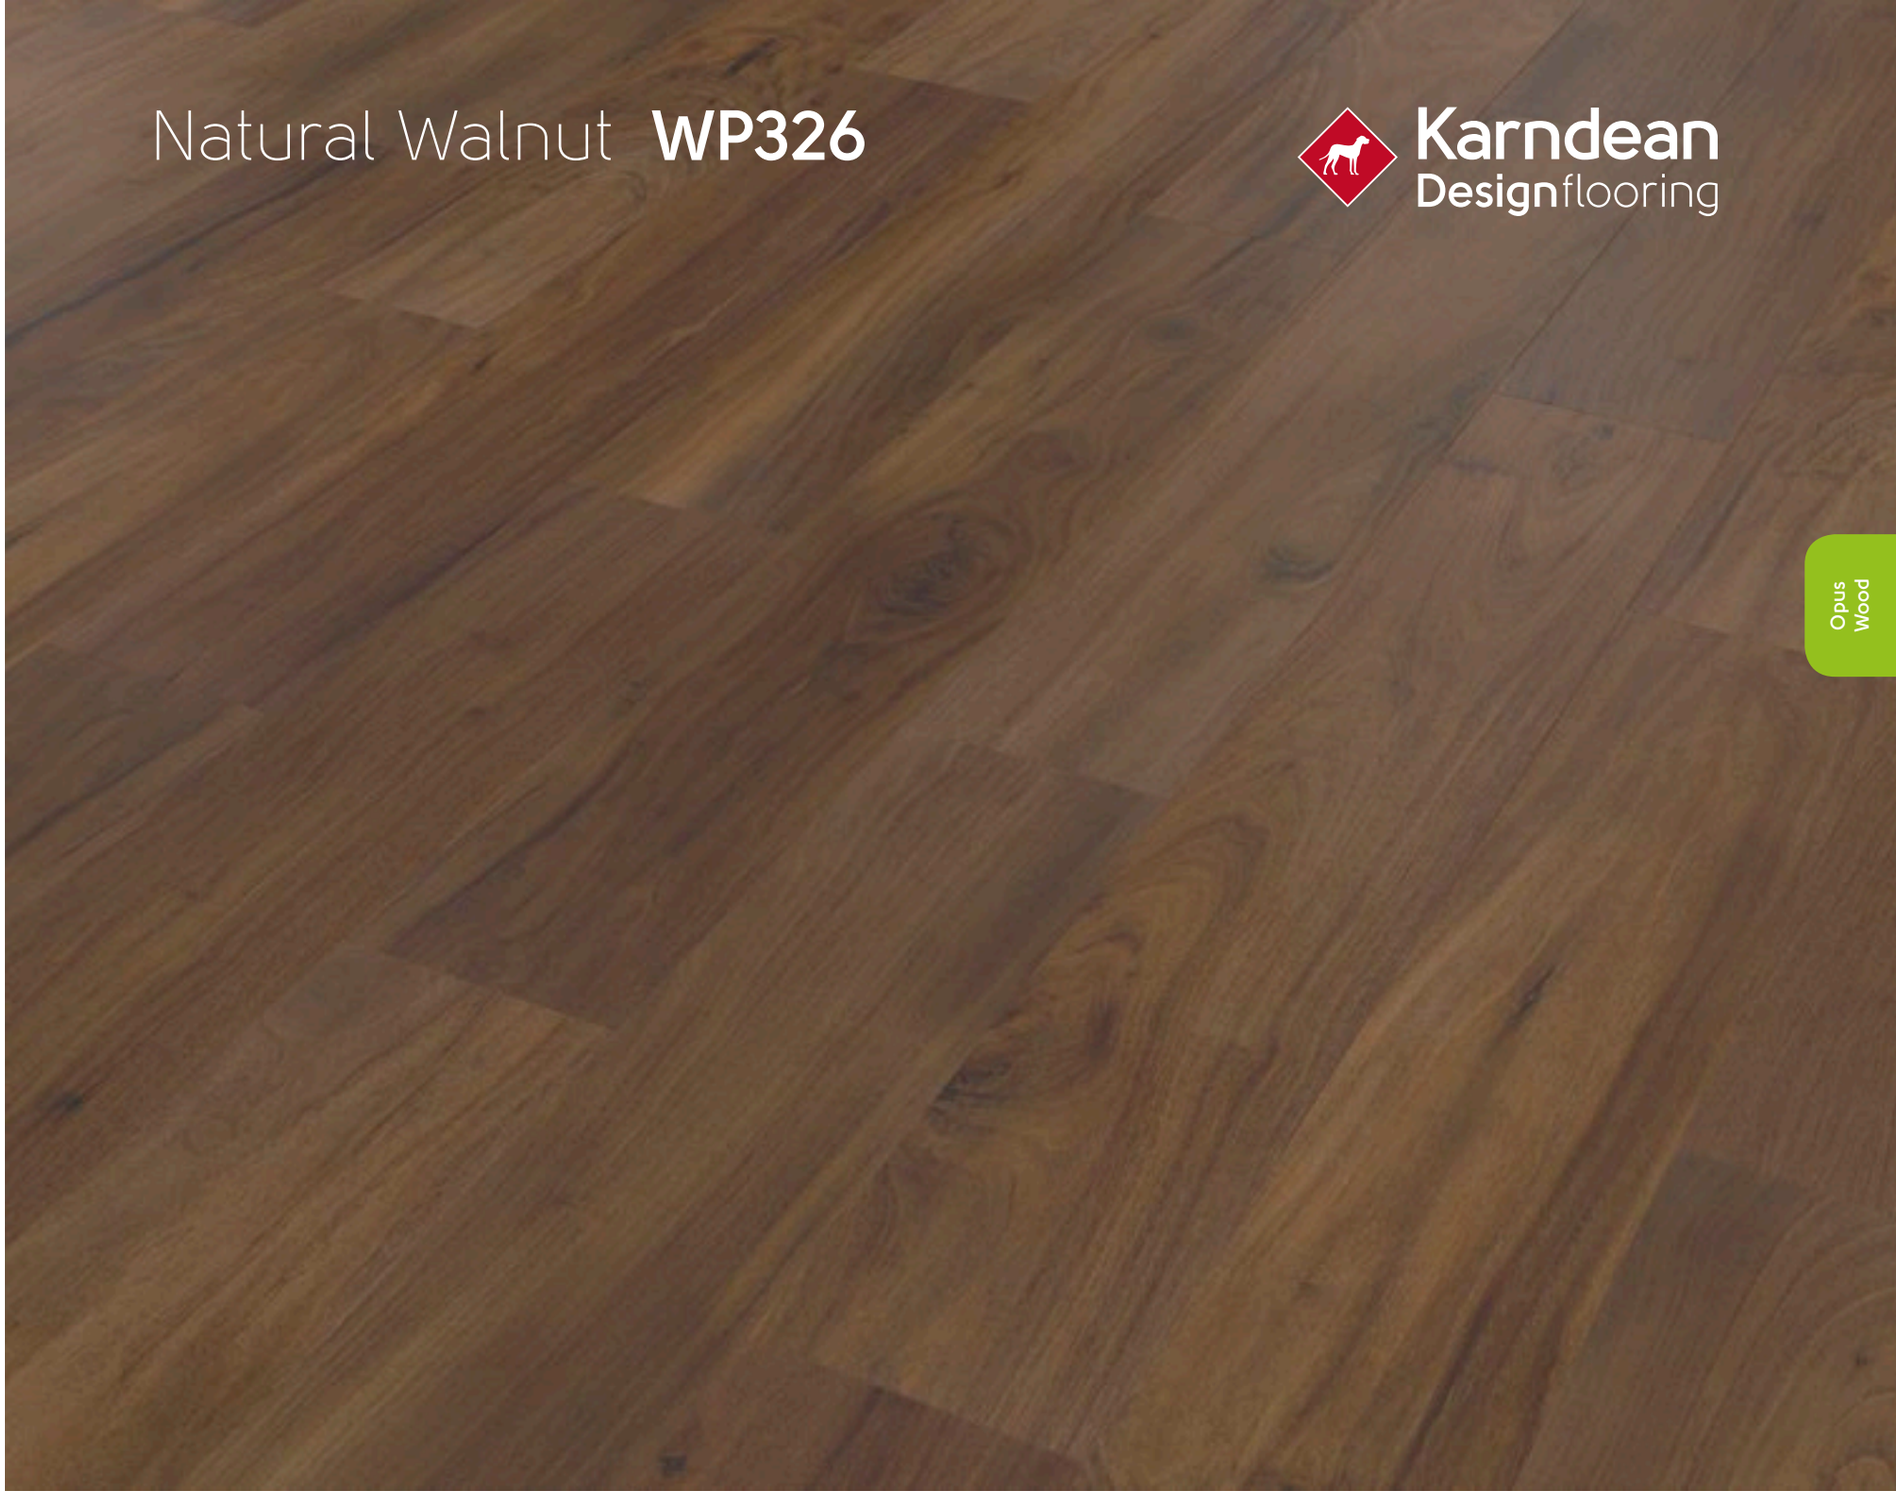

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP326
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Arrado **WP325**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP325
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Rubra **WP316**

Karndean Designflooring

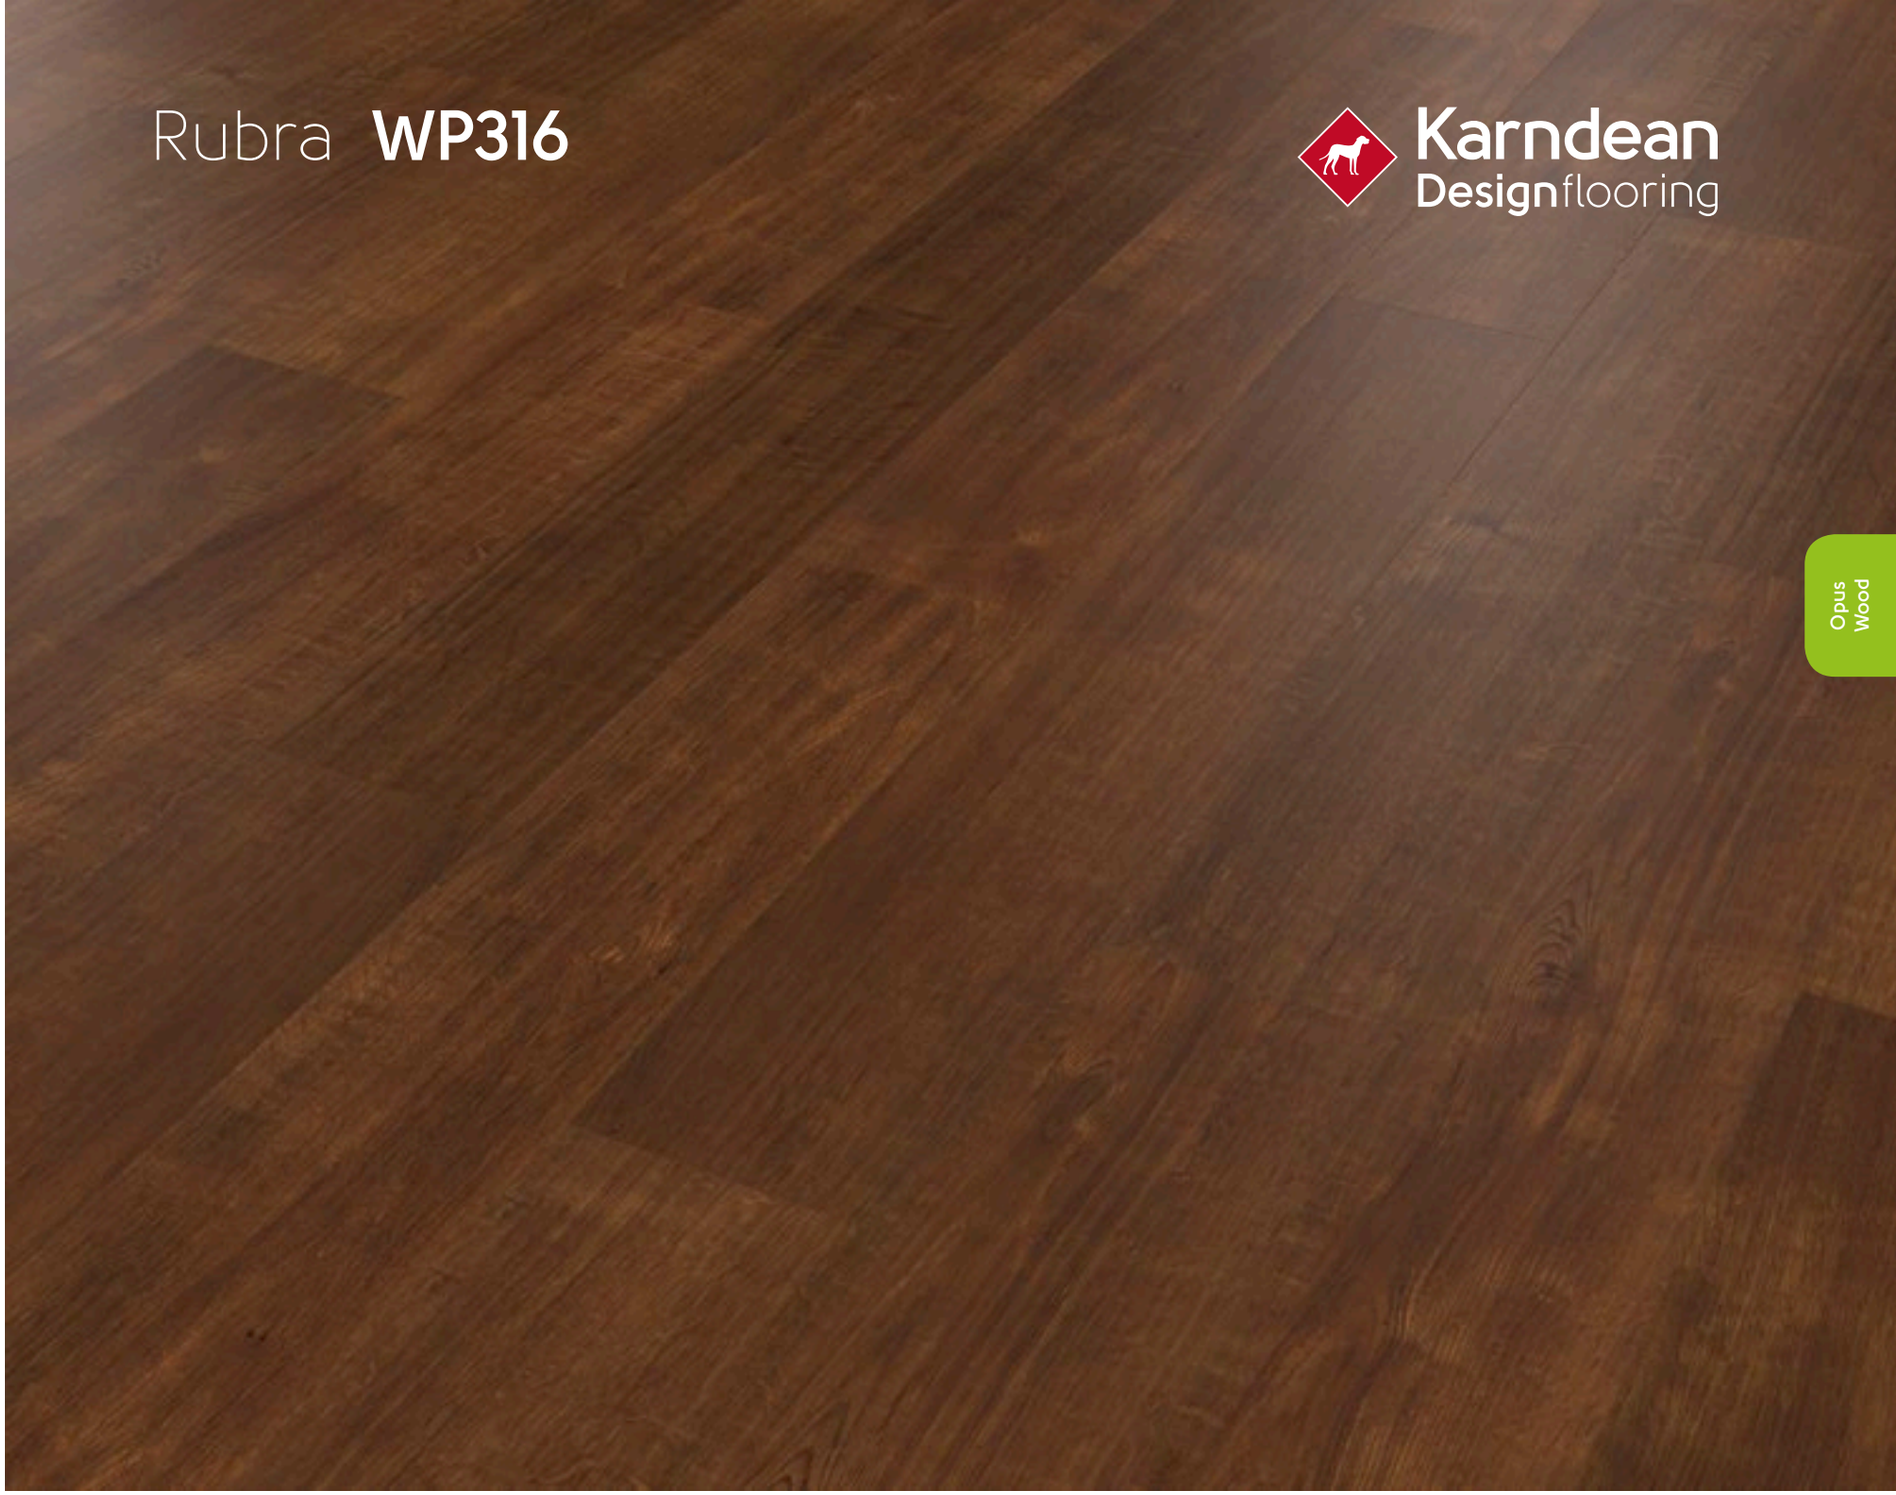

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP316
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Argen **WP414**

Karndean Designflooring

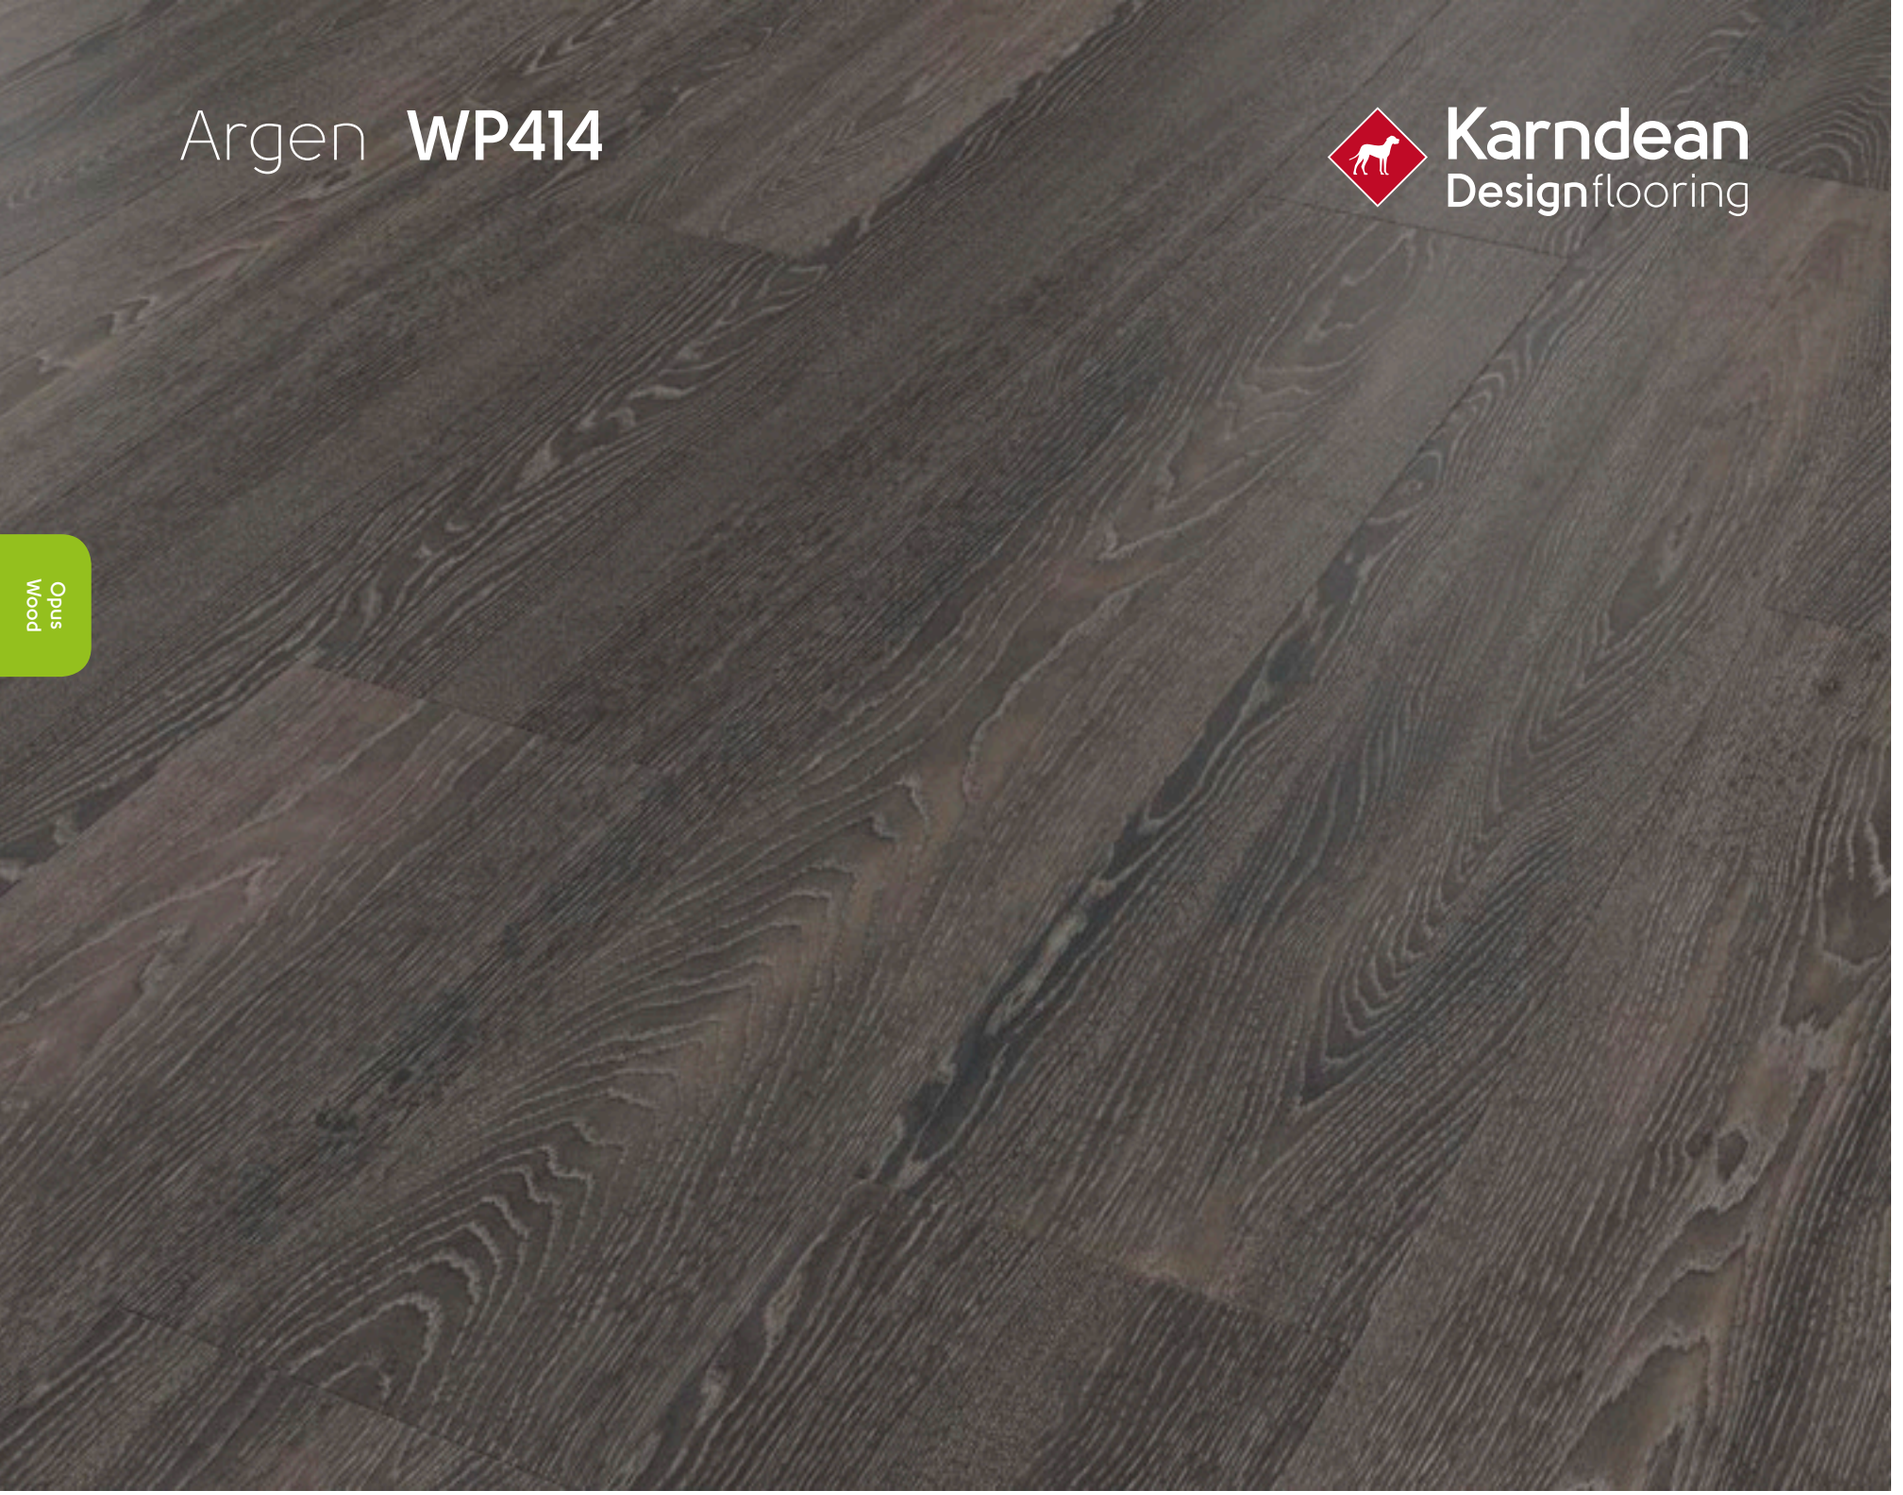

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP414
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Sylva **WP417**

Karndean Designflooring

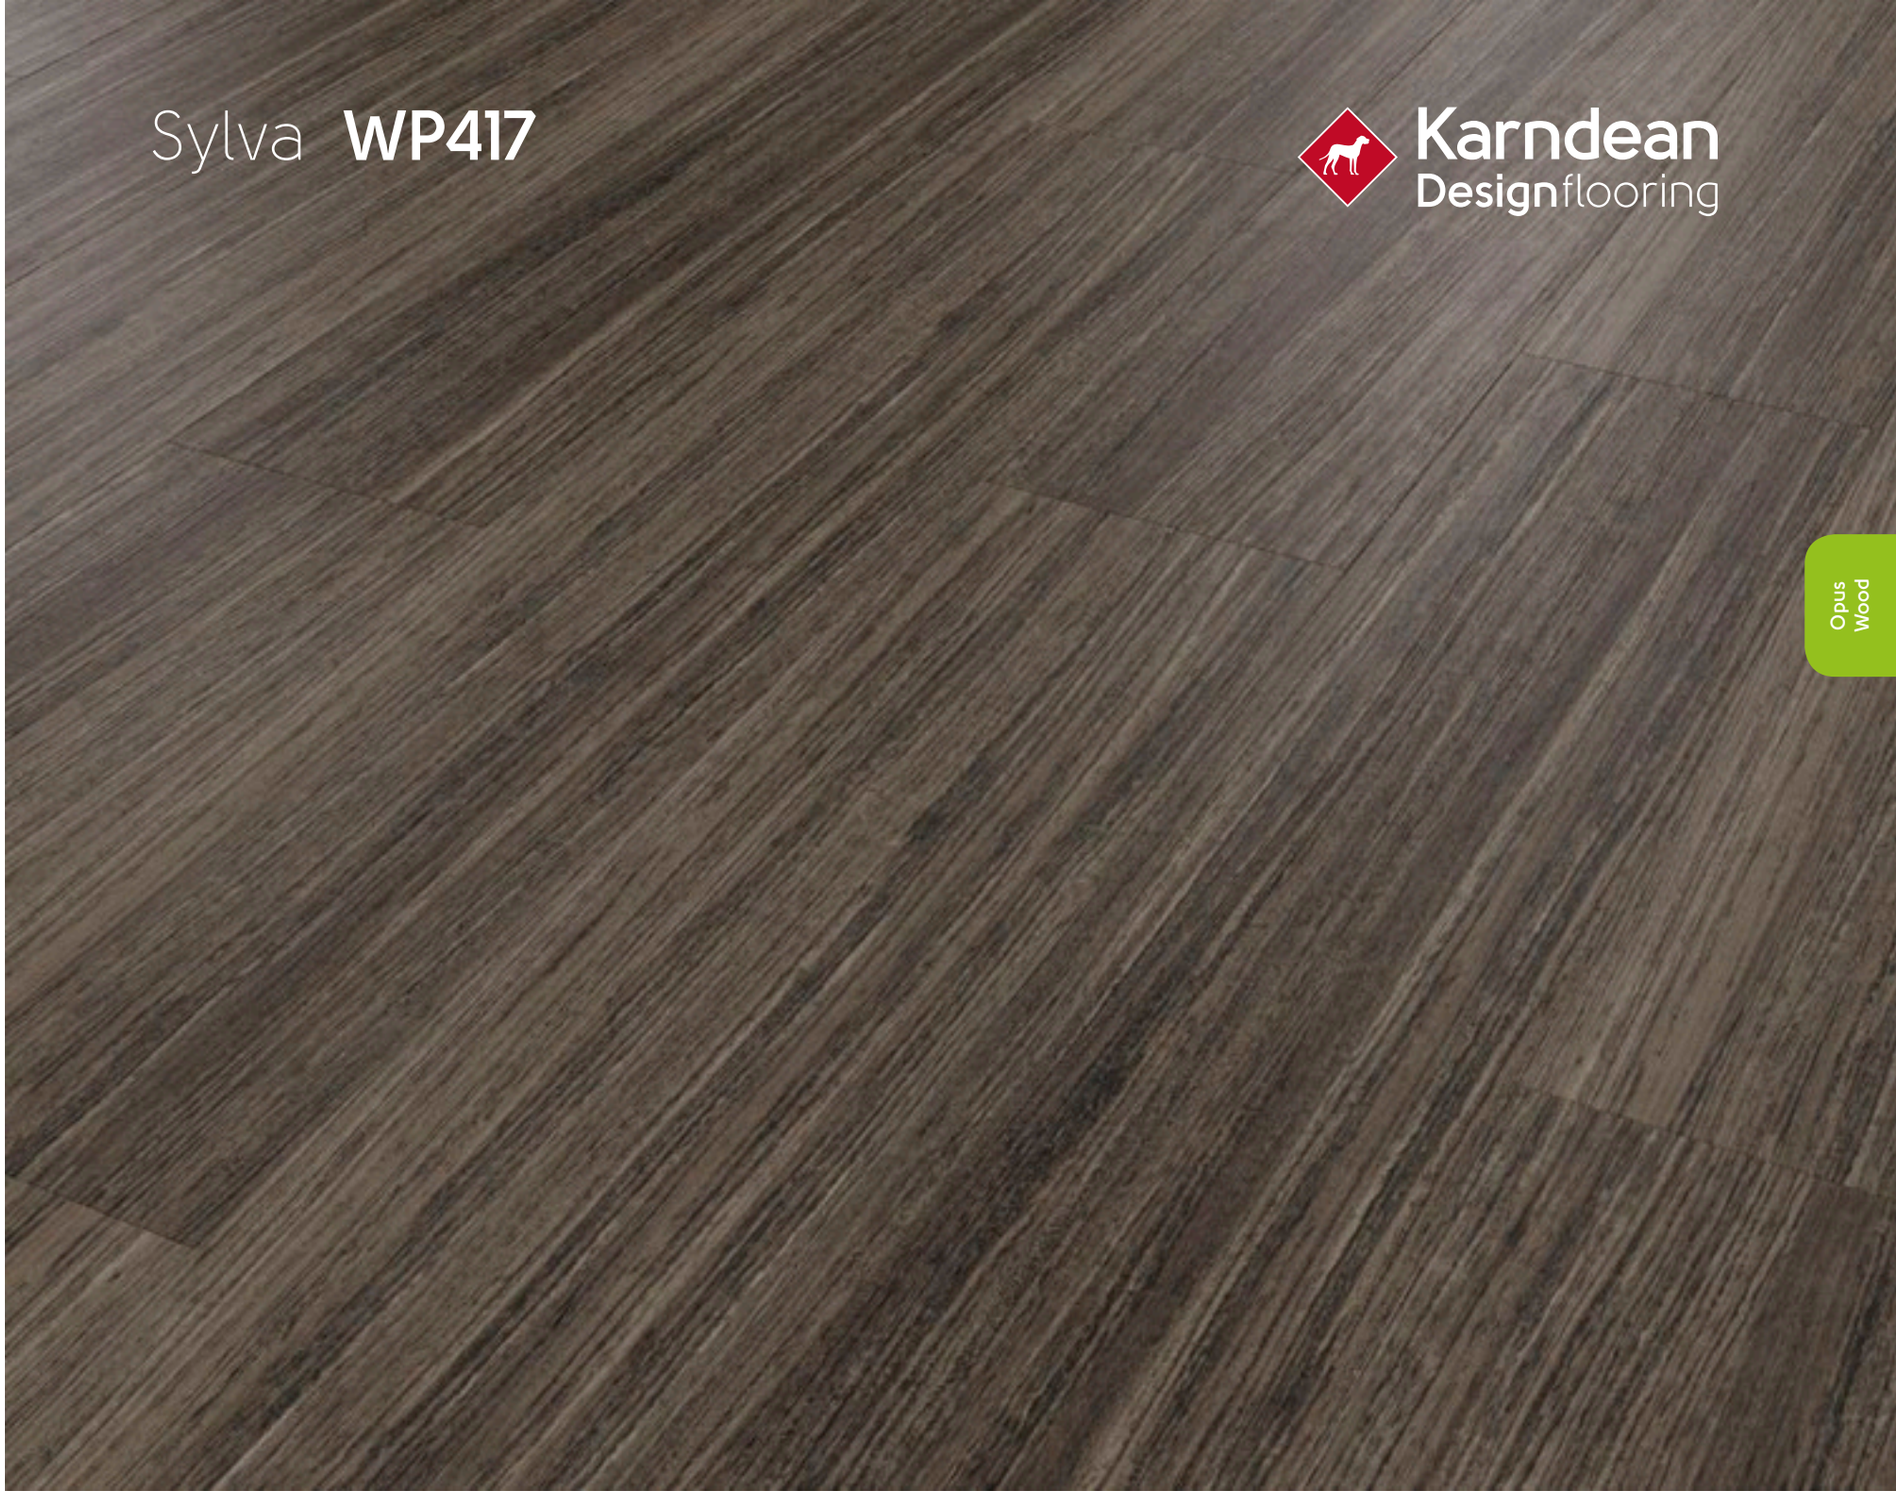

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP417
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Tenebra Walnut **WP330**

Karndean Designflooring

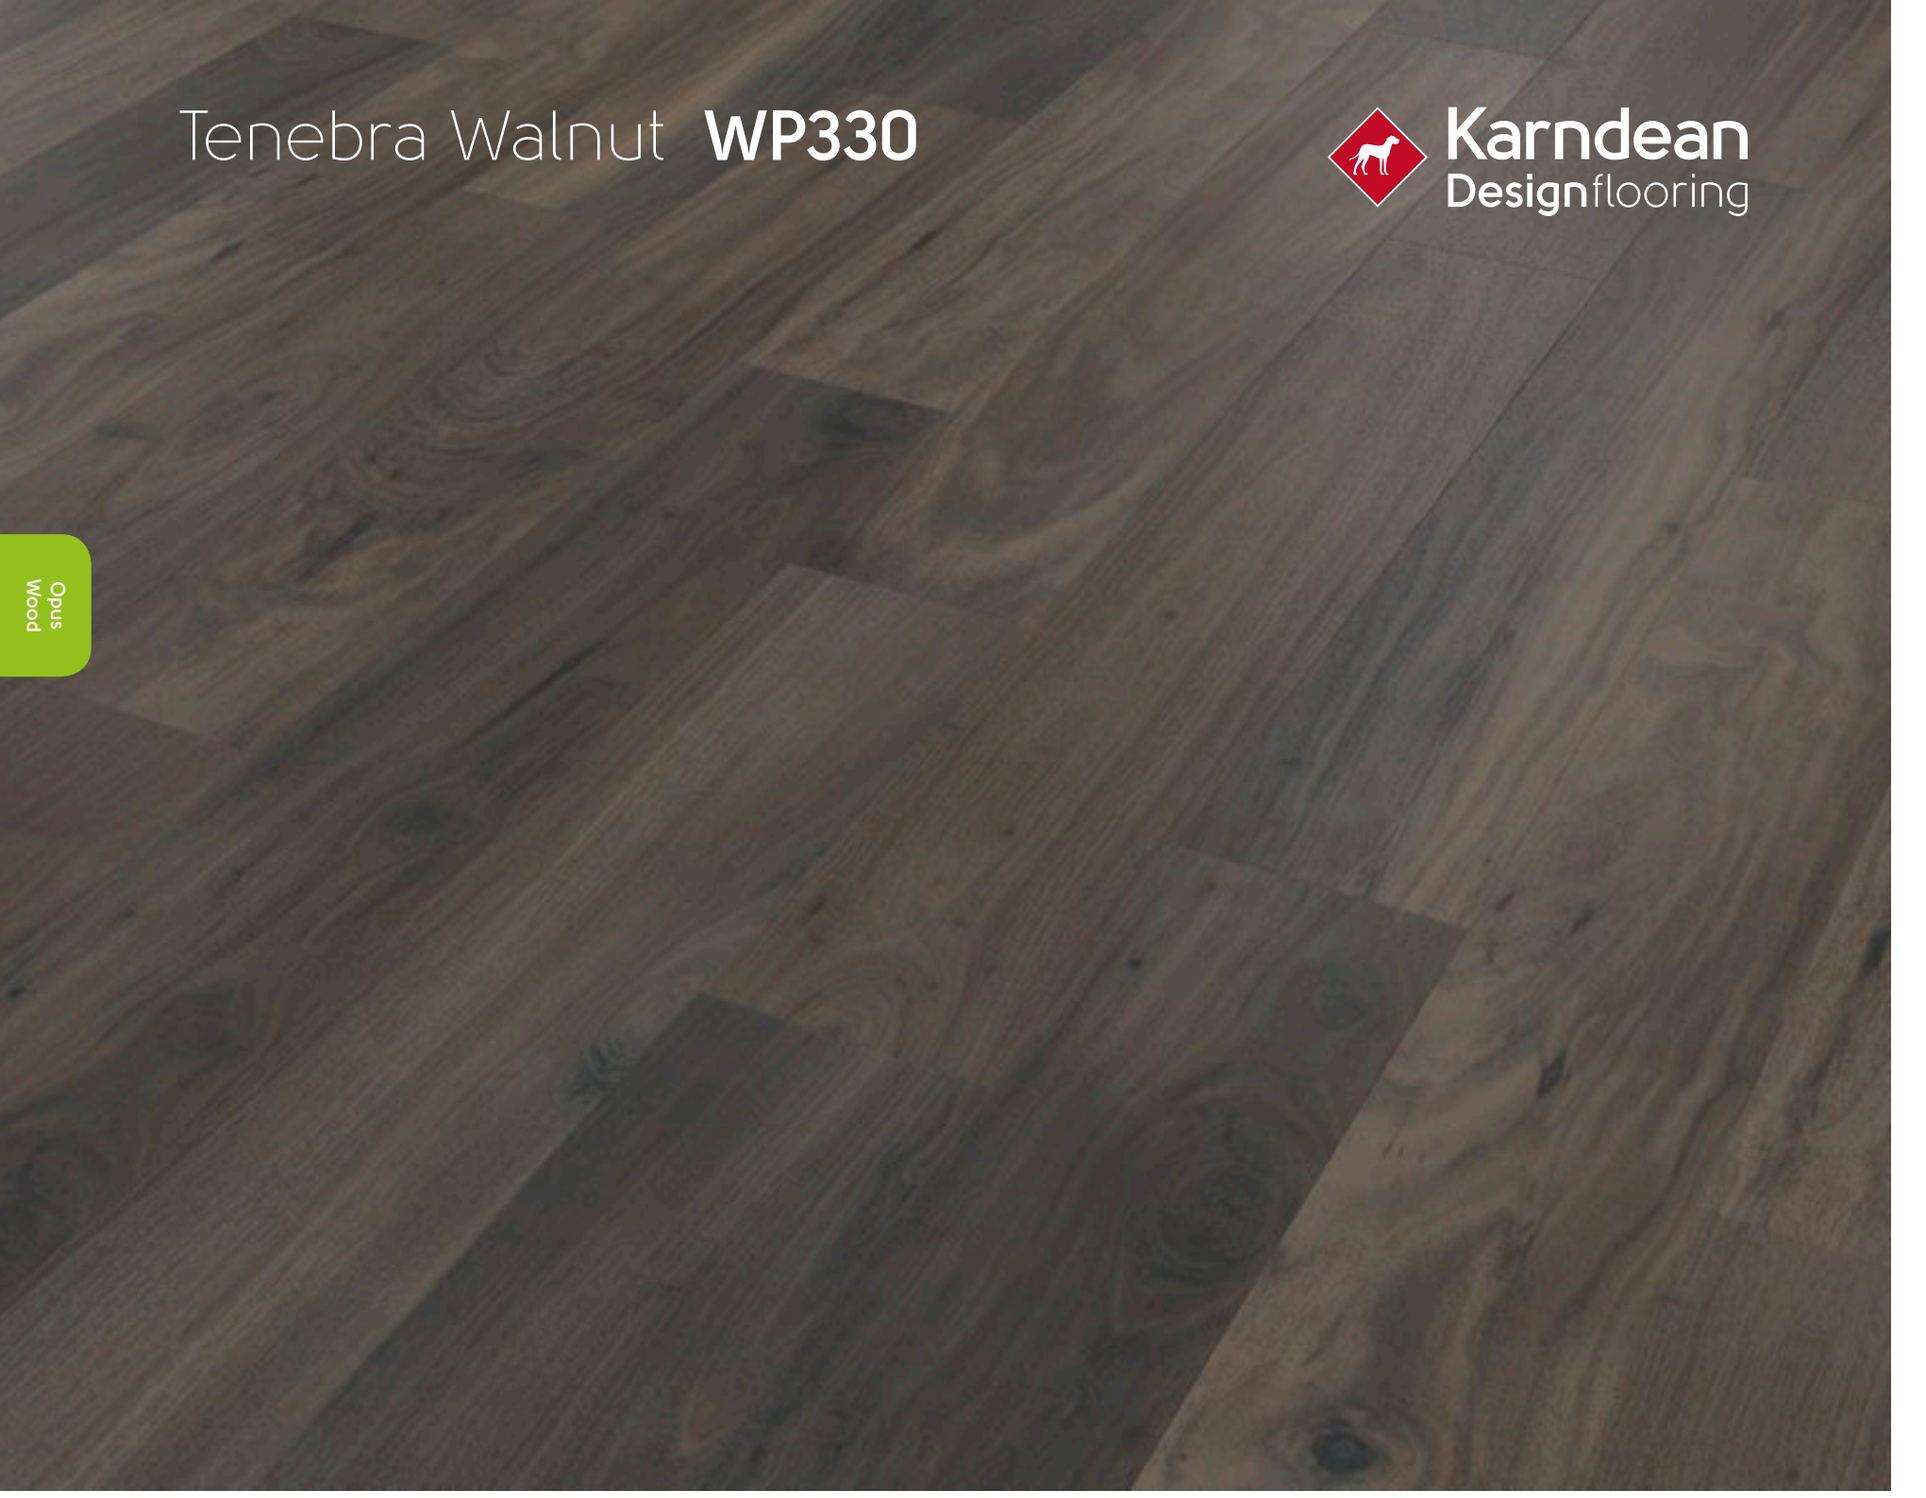

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP330
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Carbo **WP318**

Karndean Designflooring

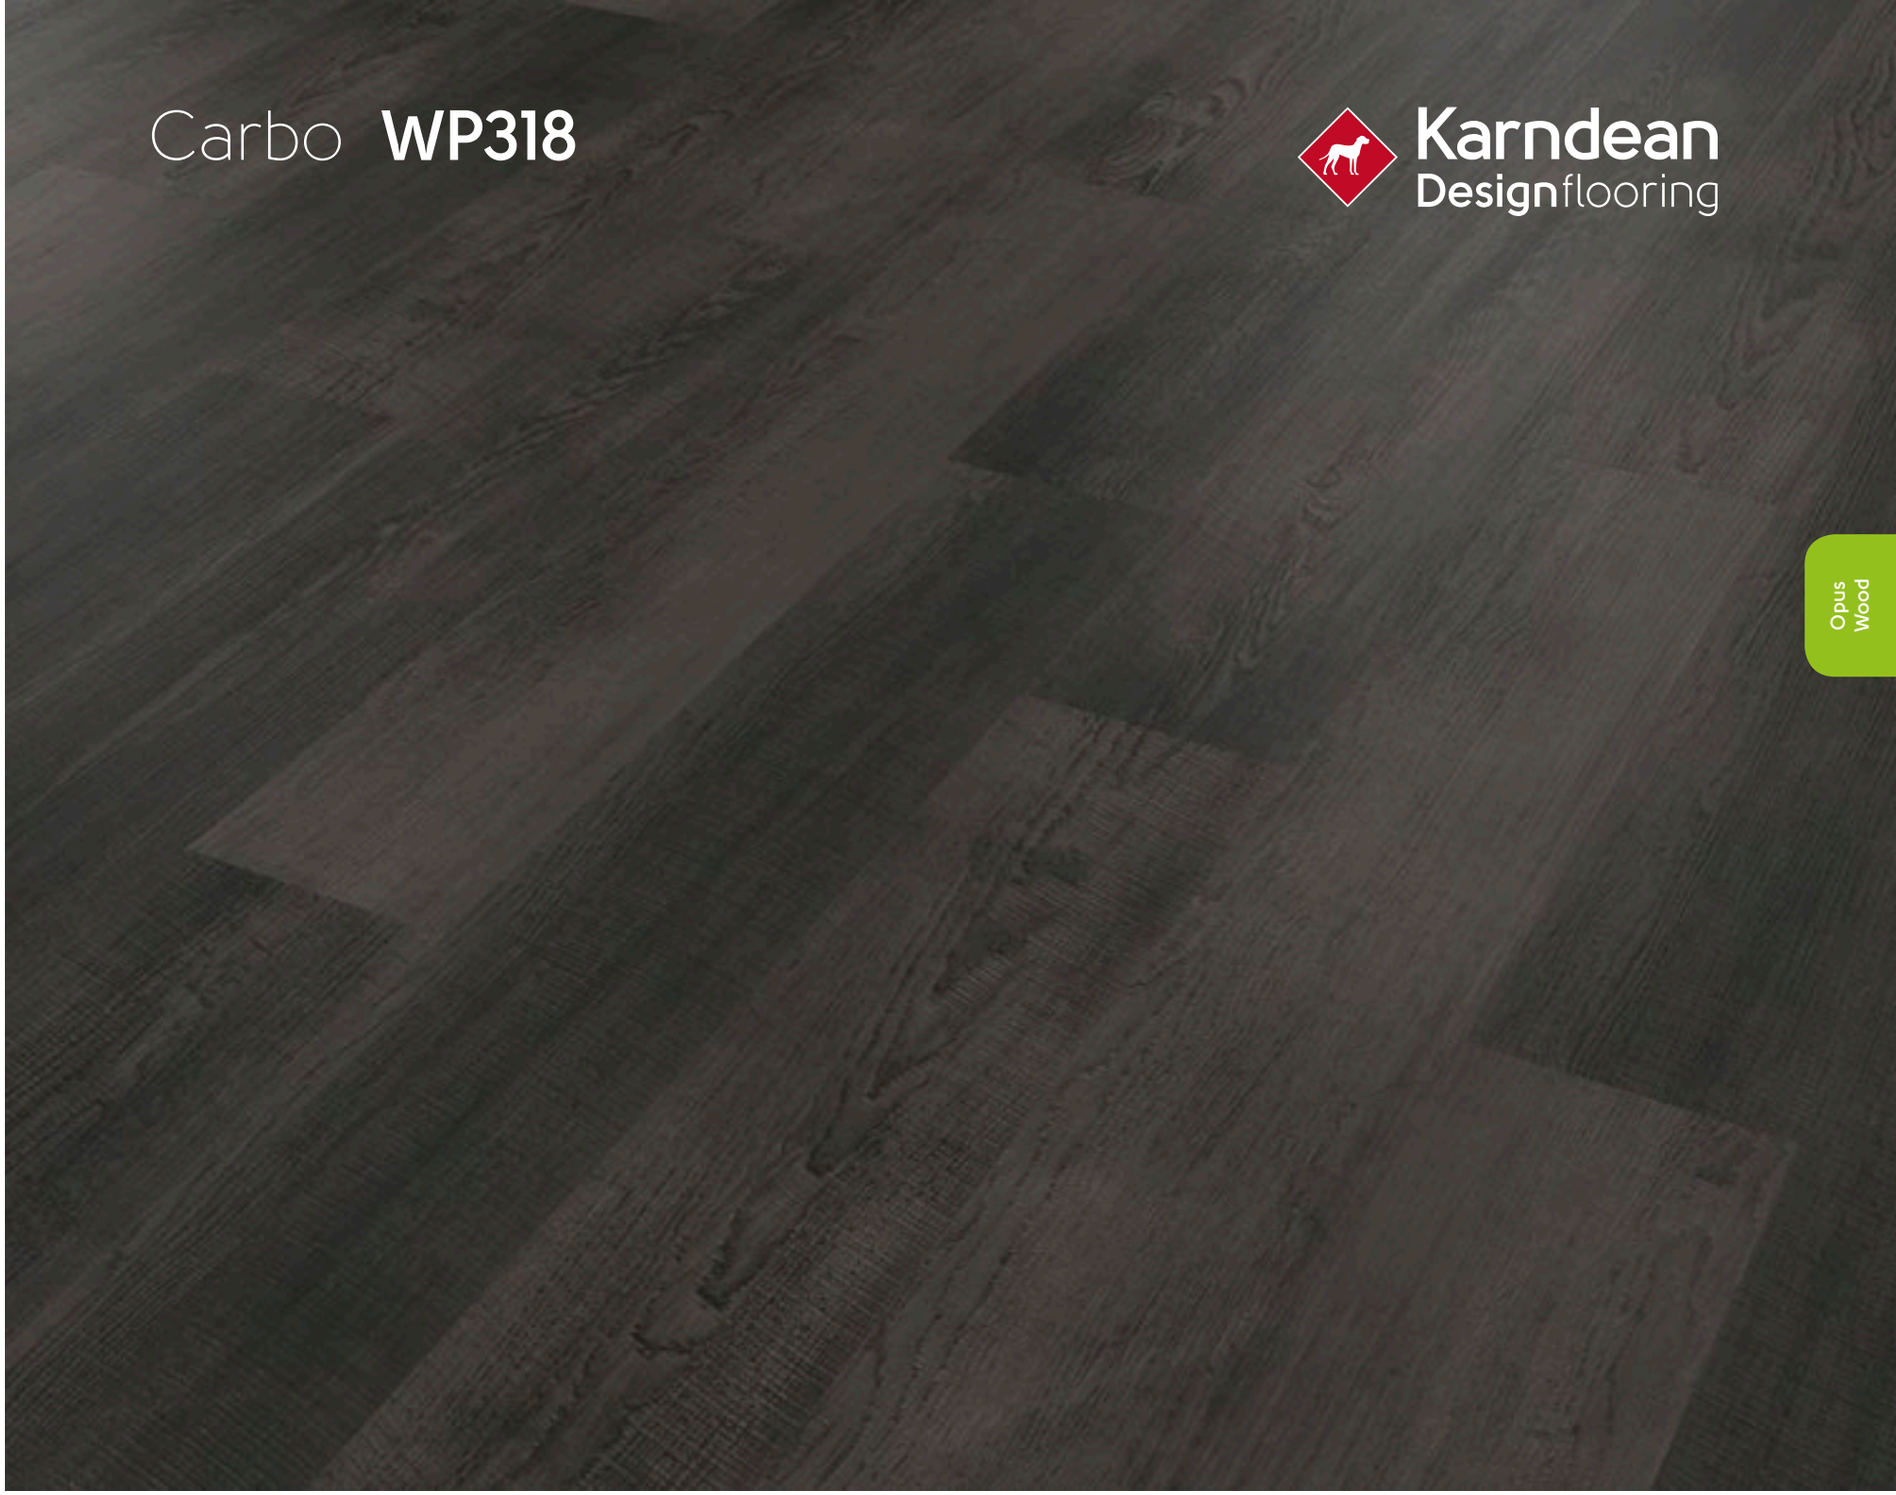

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)


Technical Specifications:

Page: 129

TEXT
WP318
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Tergo **WP324**

Karndean Designflooring

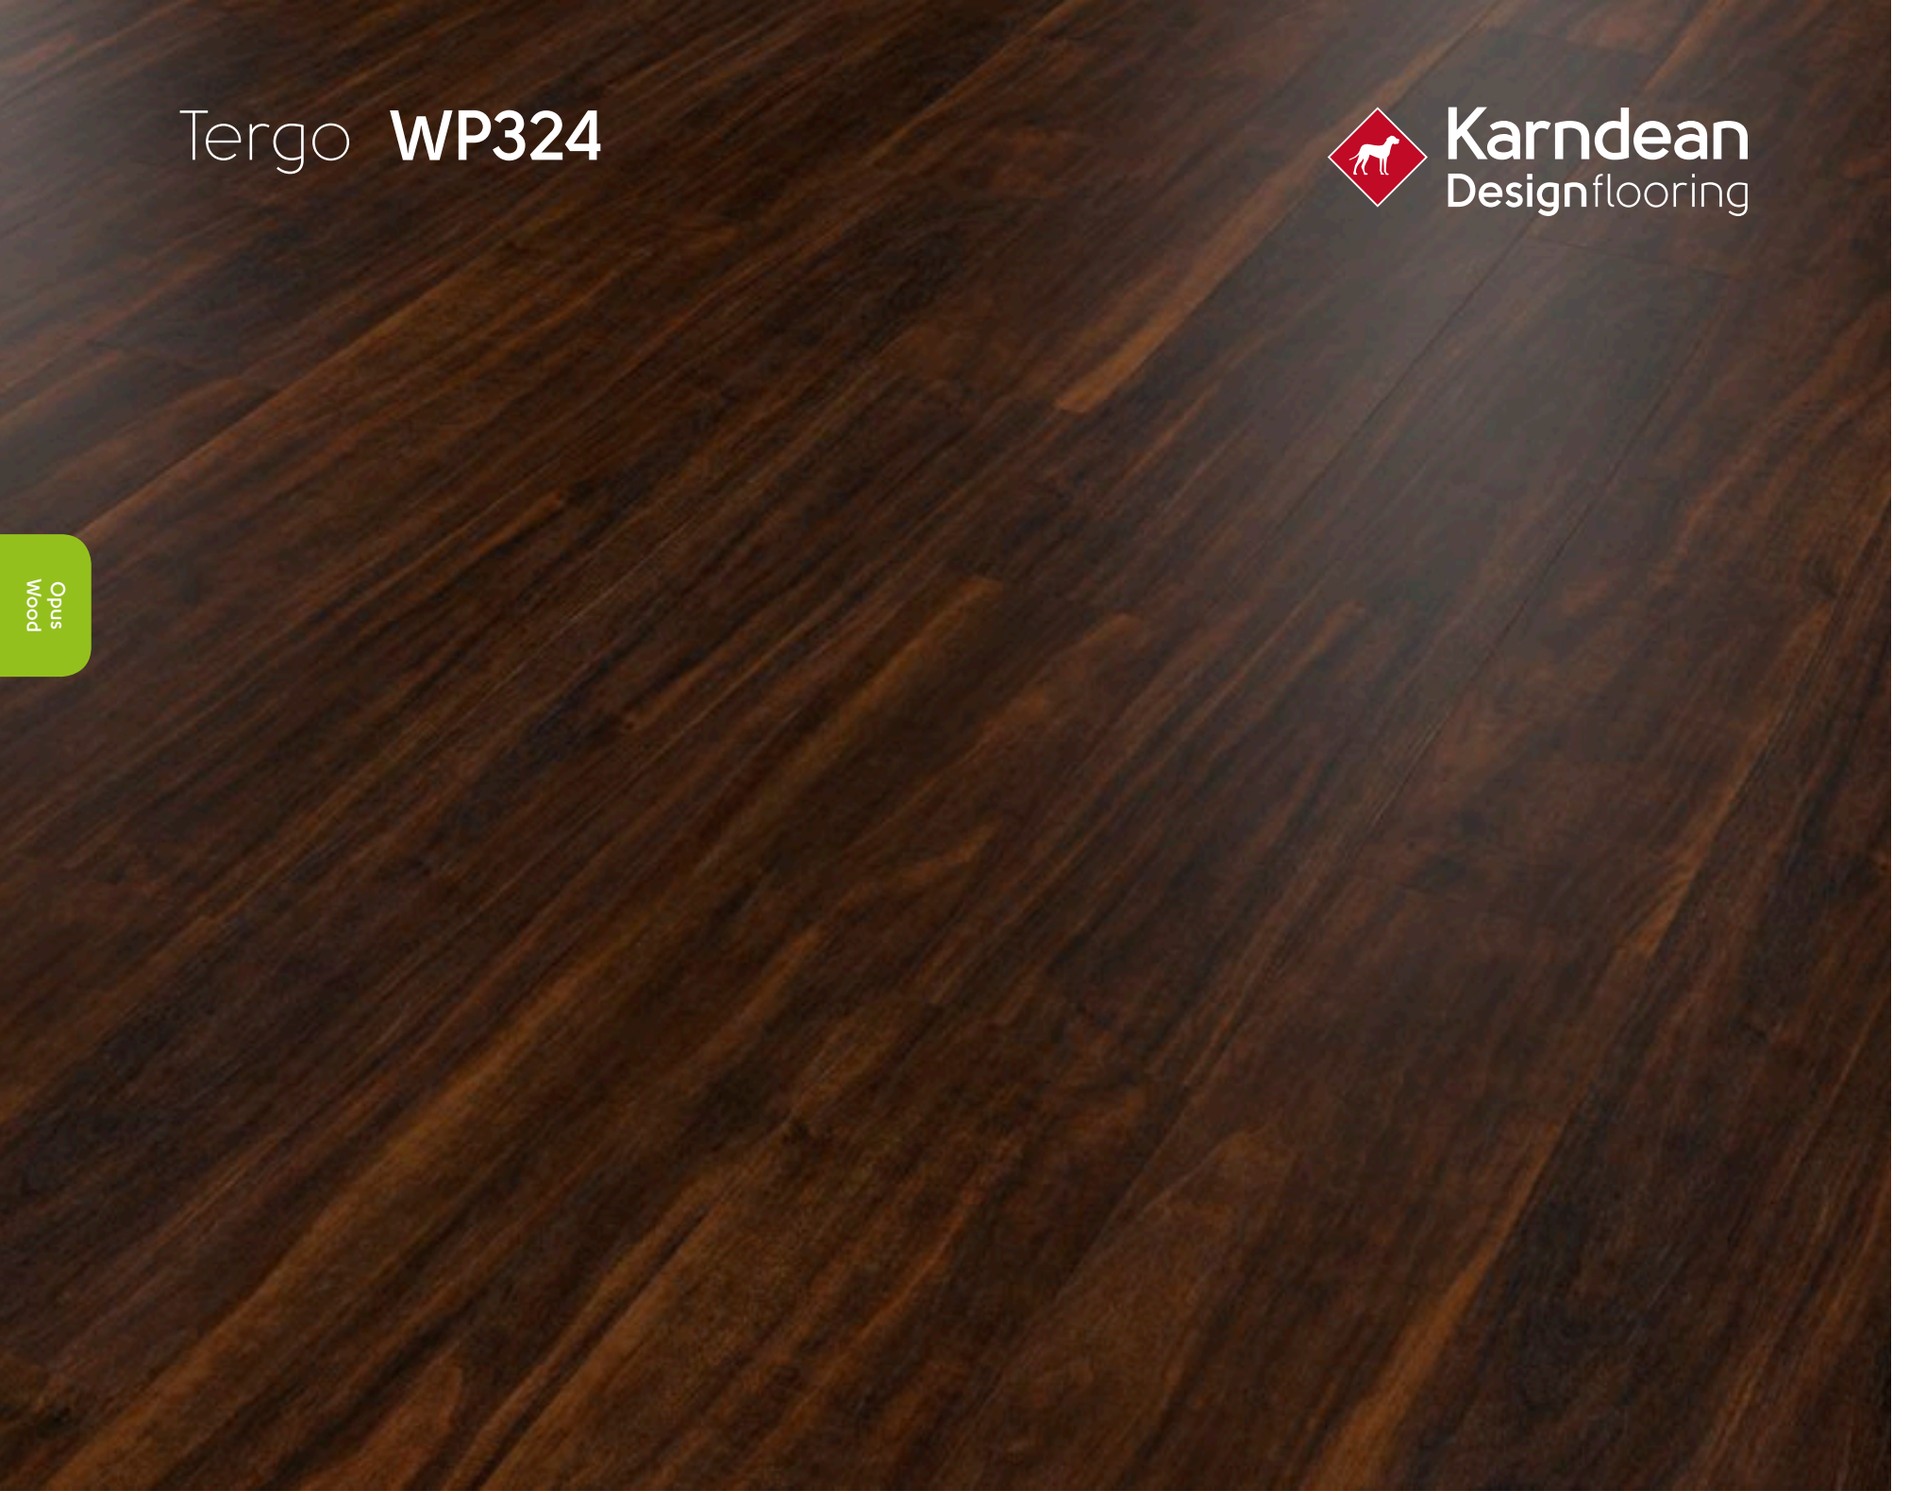

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP324
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Atra **WP317**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP317
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Knight Tile **Wood**

36" x 4" (915mm x 102mm)


Page: 159

Sycamore **KP32**


Page: 160

Cedar **KP35**


Page: 163

Walnut **KP36**


Page: 161

Elm **KP37**


Page: 162

Warm Oak **KP39**


Page: 171

Aran Oak **KP67***


Page: 173

Larne Oak **KP69***


Page: 175

Bray Oak **KP70***


Page: 158

Honey Maple **KP90**


Page: 174

Native Koa **KP93**


Page: 172

Sienna **KP107**

36" x 6" (915mm x 152mm)


Page: 164

Pale Limed Oak **KP94***


Page: 169

Mid Limed Oak **KP96***


Page: 170

Classic Limed Oak **KP97***


Page: 176

Aged Oak **KP98***


Page: 166

Lime Washed Oak **KP99***


Page: 156


White Painted Pine **KP105***


Page: 157


Grey Scandi Pine **KP131**


Page: 165

Grey Limed Oak **KP138**

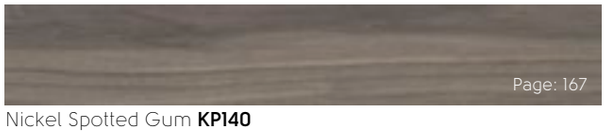
Page: 167

Nickel Spotted Gum **KP140**

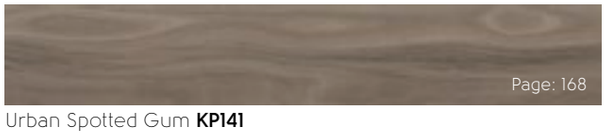
Page: 168

Urban Spotted Gum **KP141**

* Please note: as a feature of the design, these products incorporate a high color variation between individual planks.

Knight Tile **Wood**

Knight Tile | GLUEDOWN

Our Knight Tile wood collection includes a visual to fit any style, with a broad range of tones suitable for both residential and commercial applications. Developed from slate, limestone and marble, our designs are in neutral tones to suit a variety of projects, including multi-unit properties, retail spaces and restaurant facilities. What's more, it's easy to accentuate your layout using our design components, as this range has the widest selection of design strips and borders to choose from.



White Painted Pine **KP105**

	Standard	Result
Thickness		2.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		12 mil (0.3 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	10 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.88)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 1.3
Abrasion resistance	ASTM D3884	42000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0012"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 4 dB IIC = 43 dB (6" slab w/drop ceiling) IIC = 70 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

White Painted Pine **KP105**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP105
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Grey Scandi Pine **KP131**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP131
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Honey Maple **KP90**

Karndean Designflooring

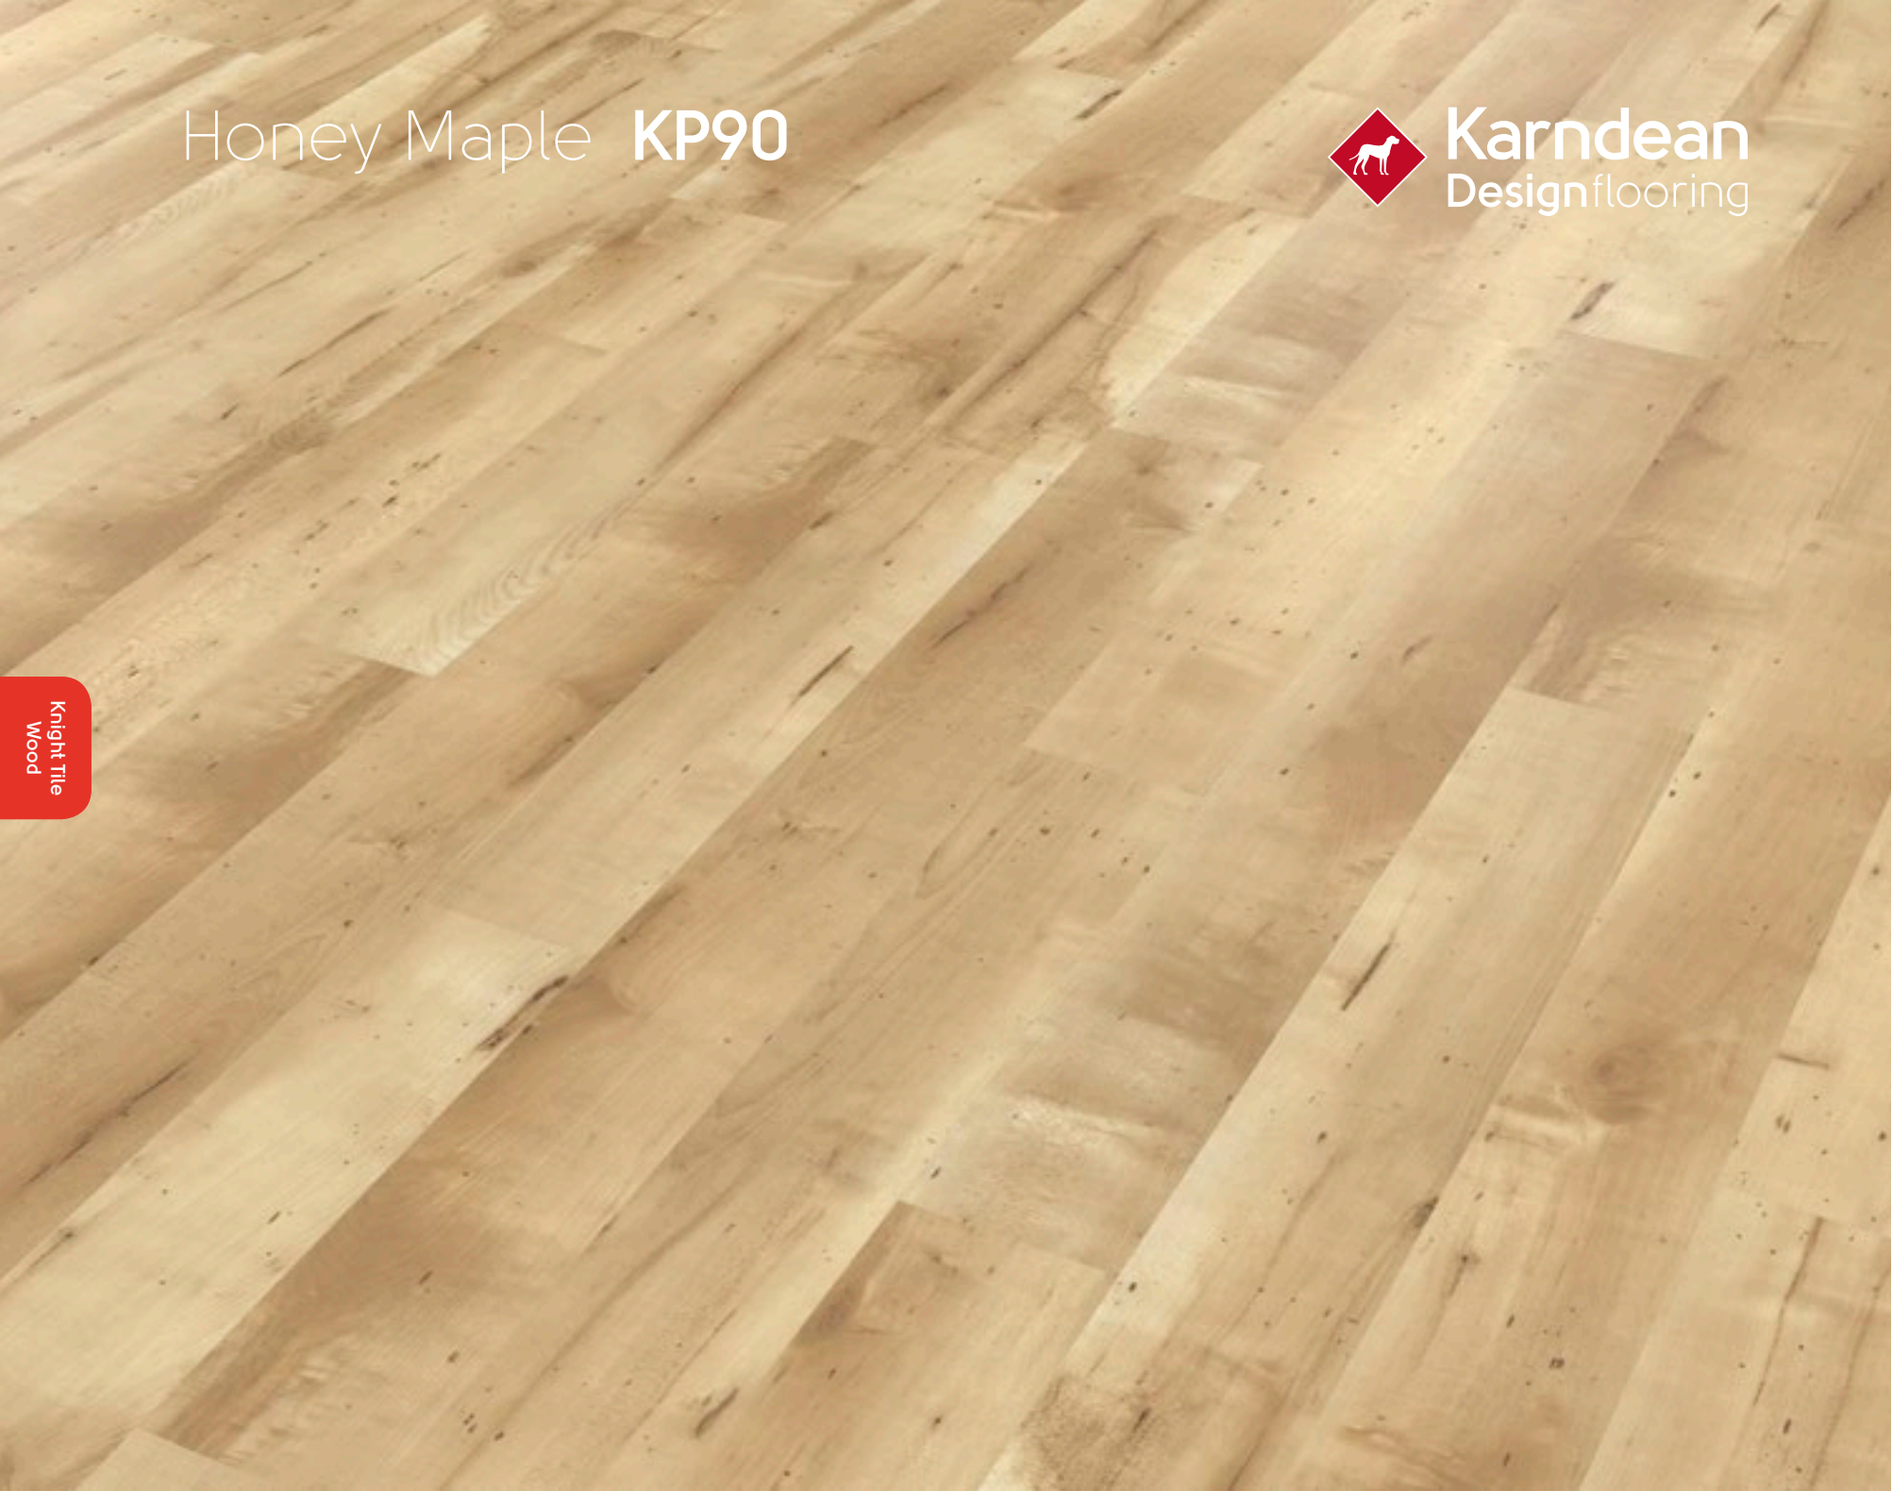

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP90
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Sycamore **KP32**

Karndean Designflooring

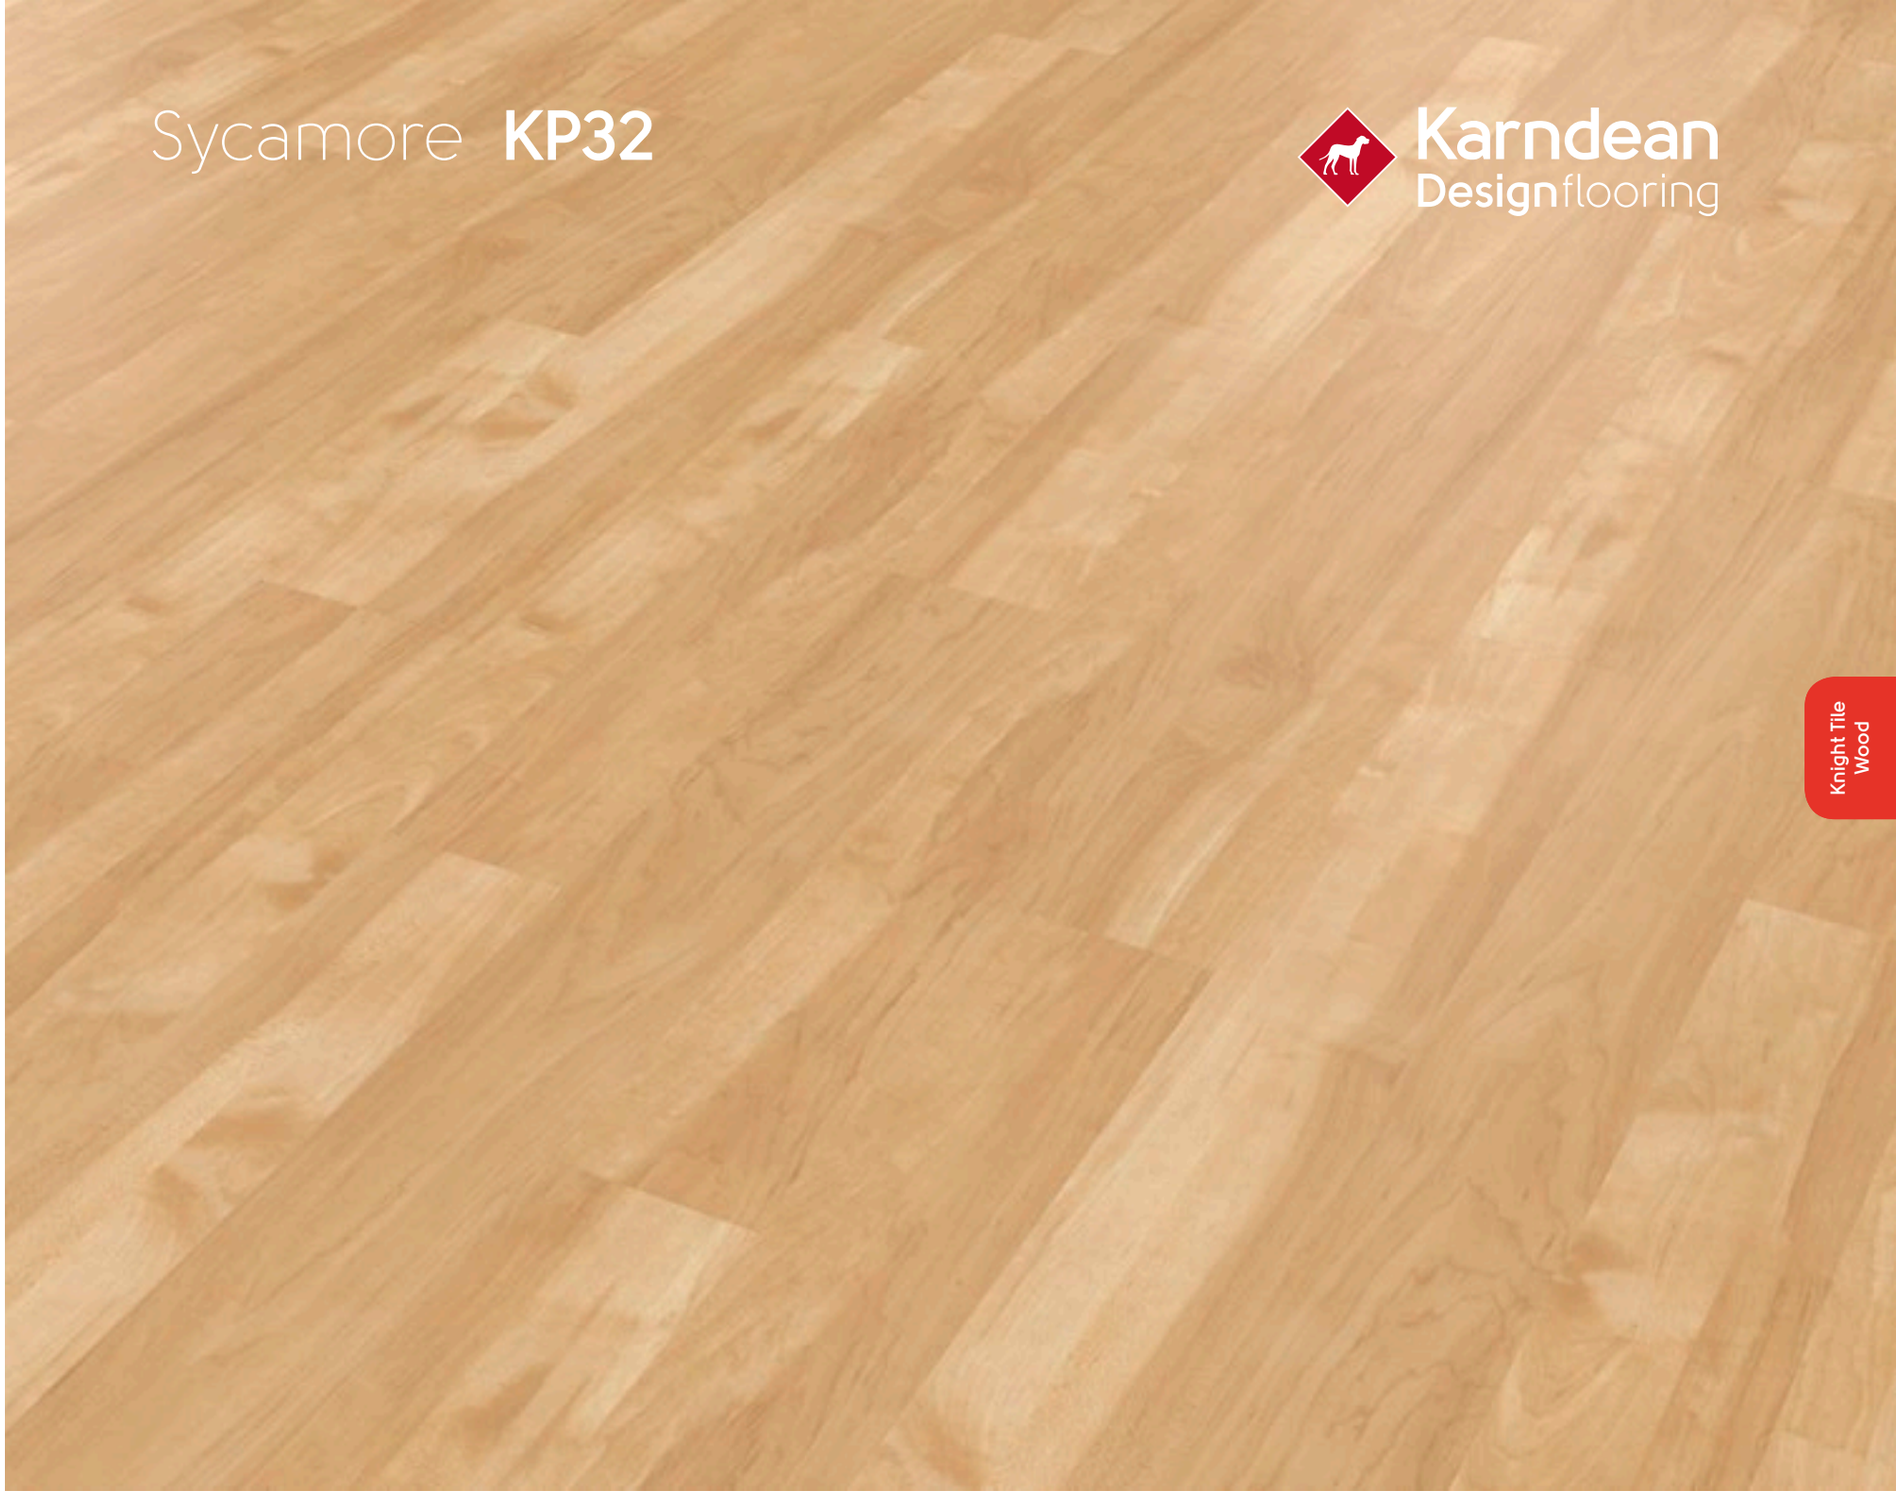

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP32
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Cedar **KP35**

Karndean Designflooring



Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP35
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Elm **KP37**

Karndean Designflooring



Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP37
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Warm Oak **KP39**

Karndean Designflooring

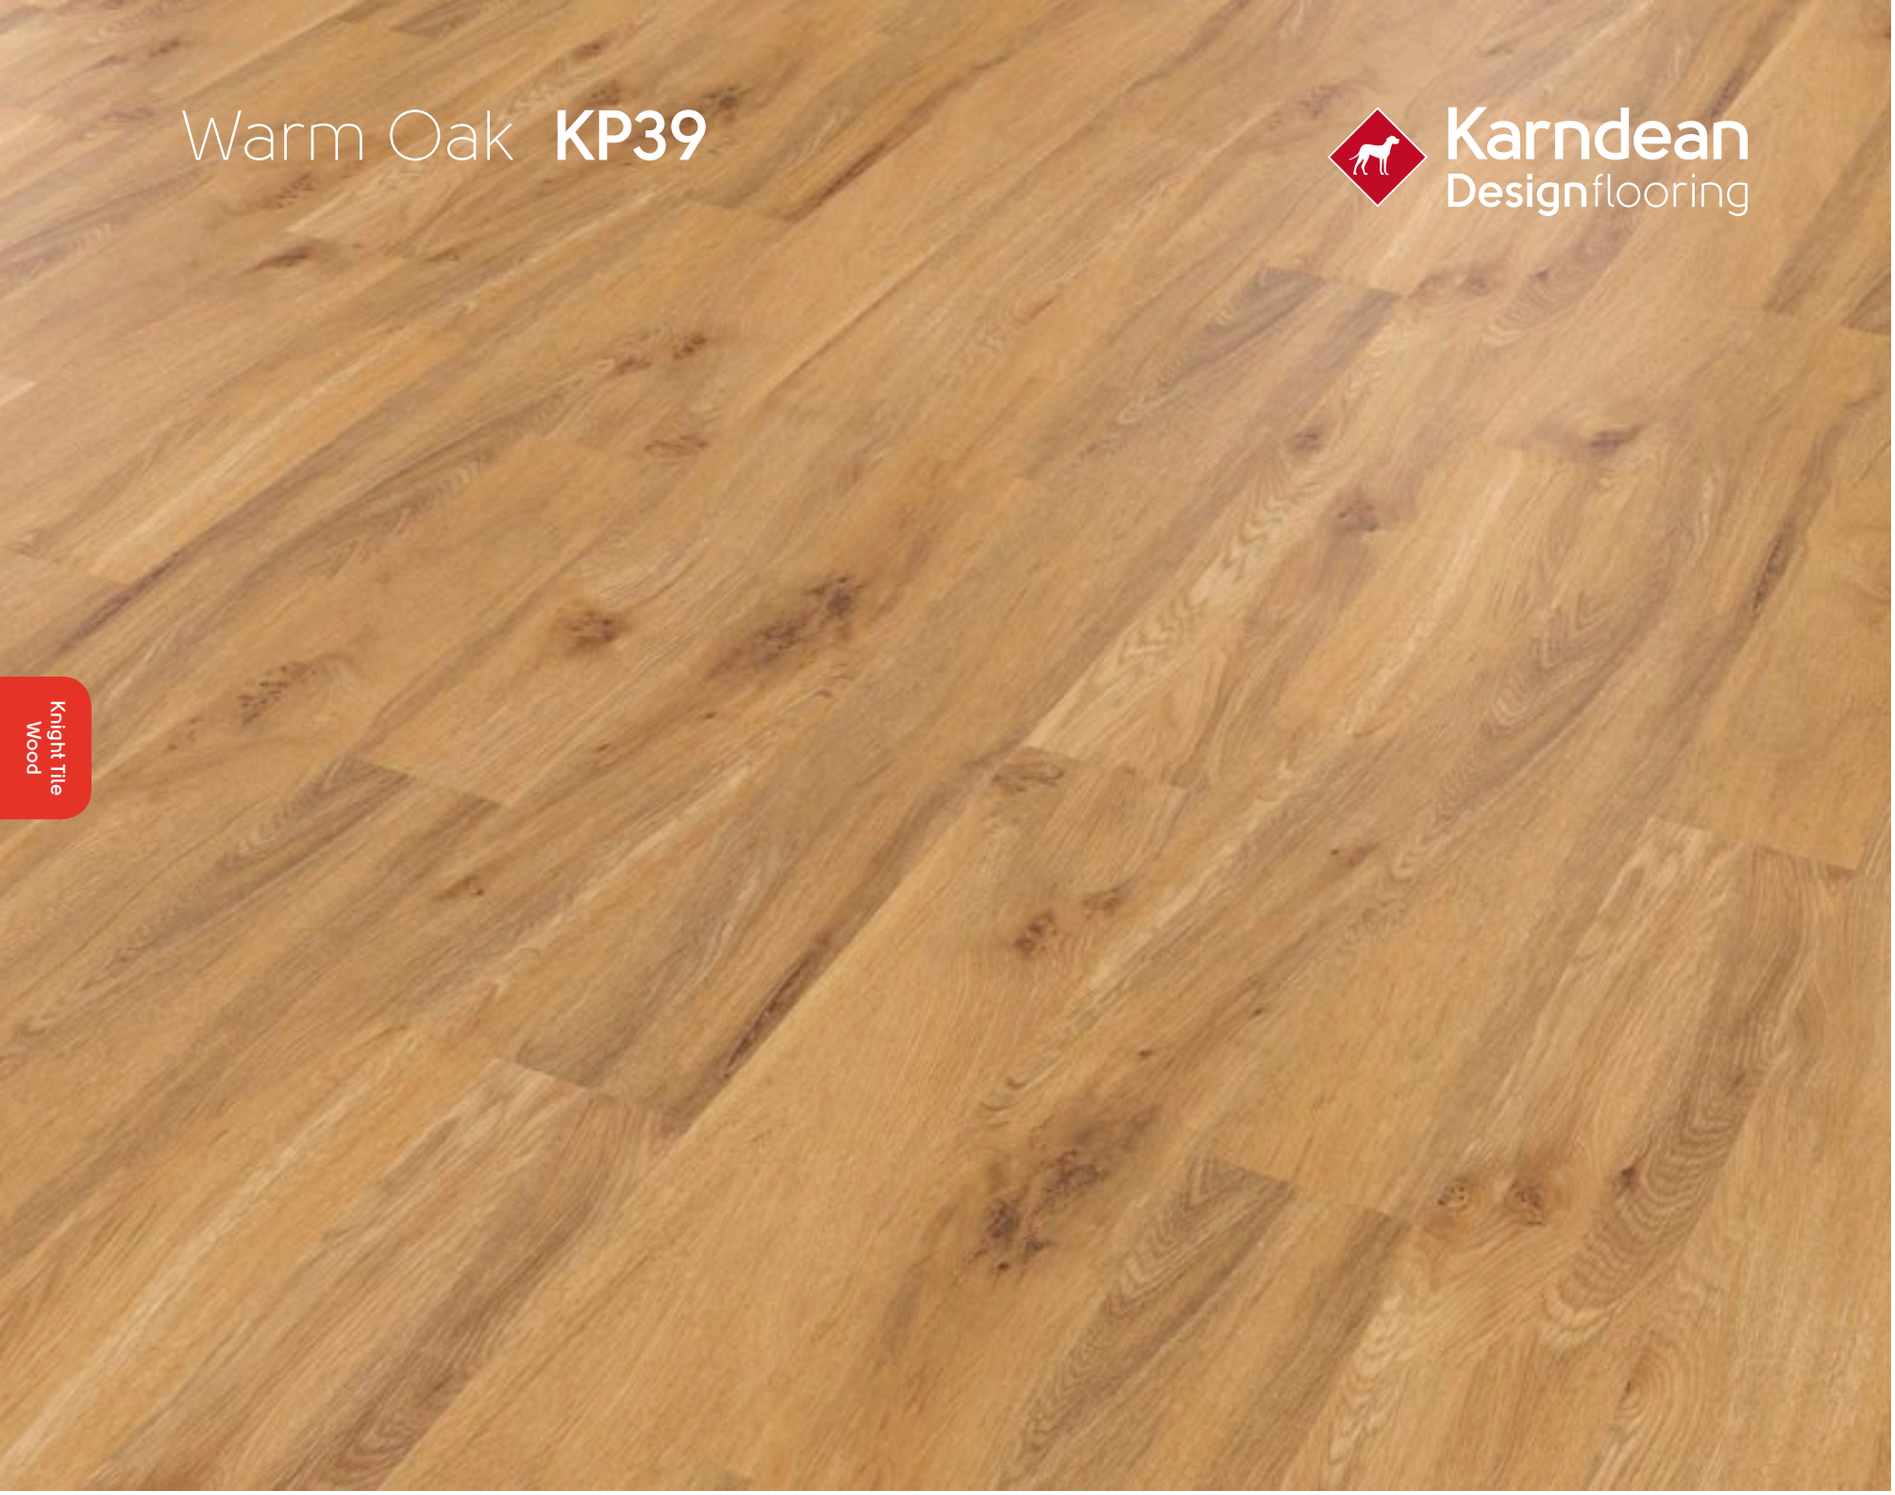

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP39
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Walnut **KP36**

Karndean Designflooring



Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP36
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Pale Limed Oak **KP94**

Karndean Designflooring

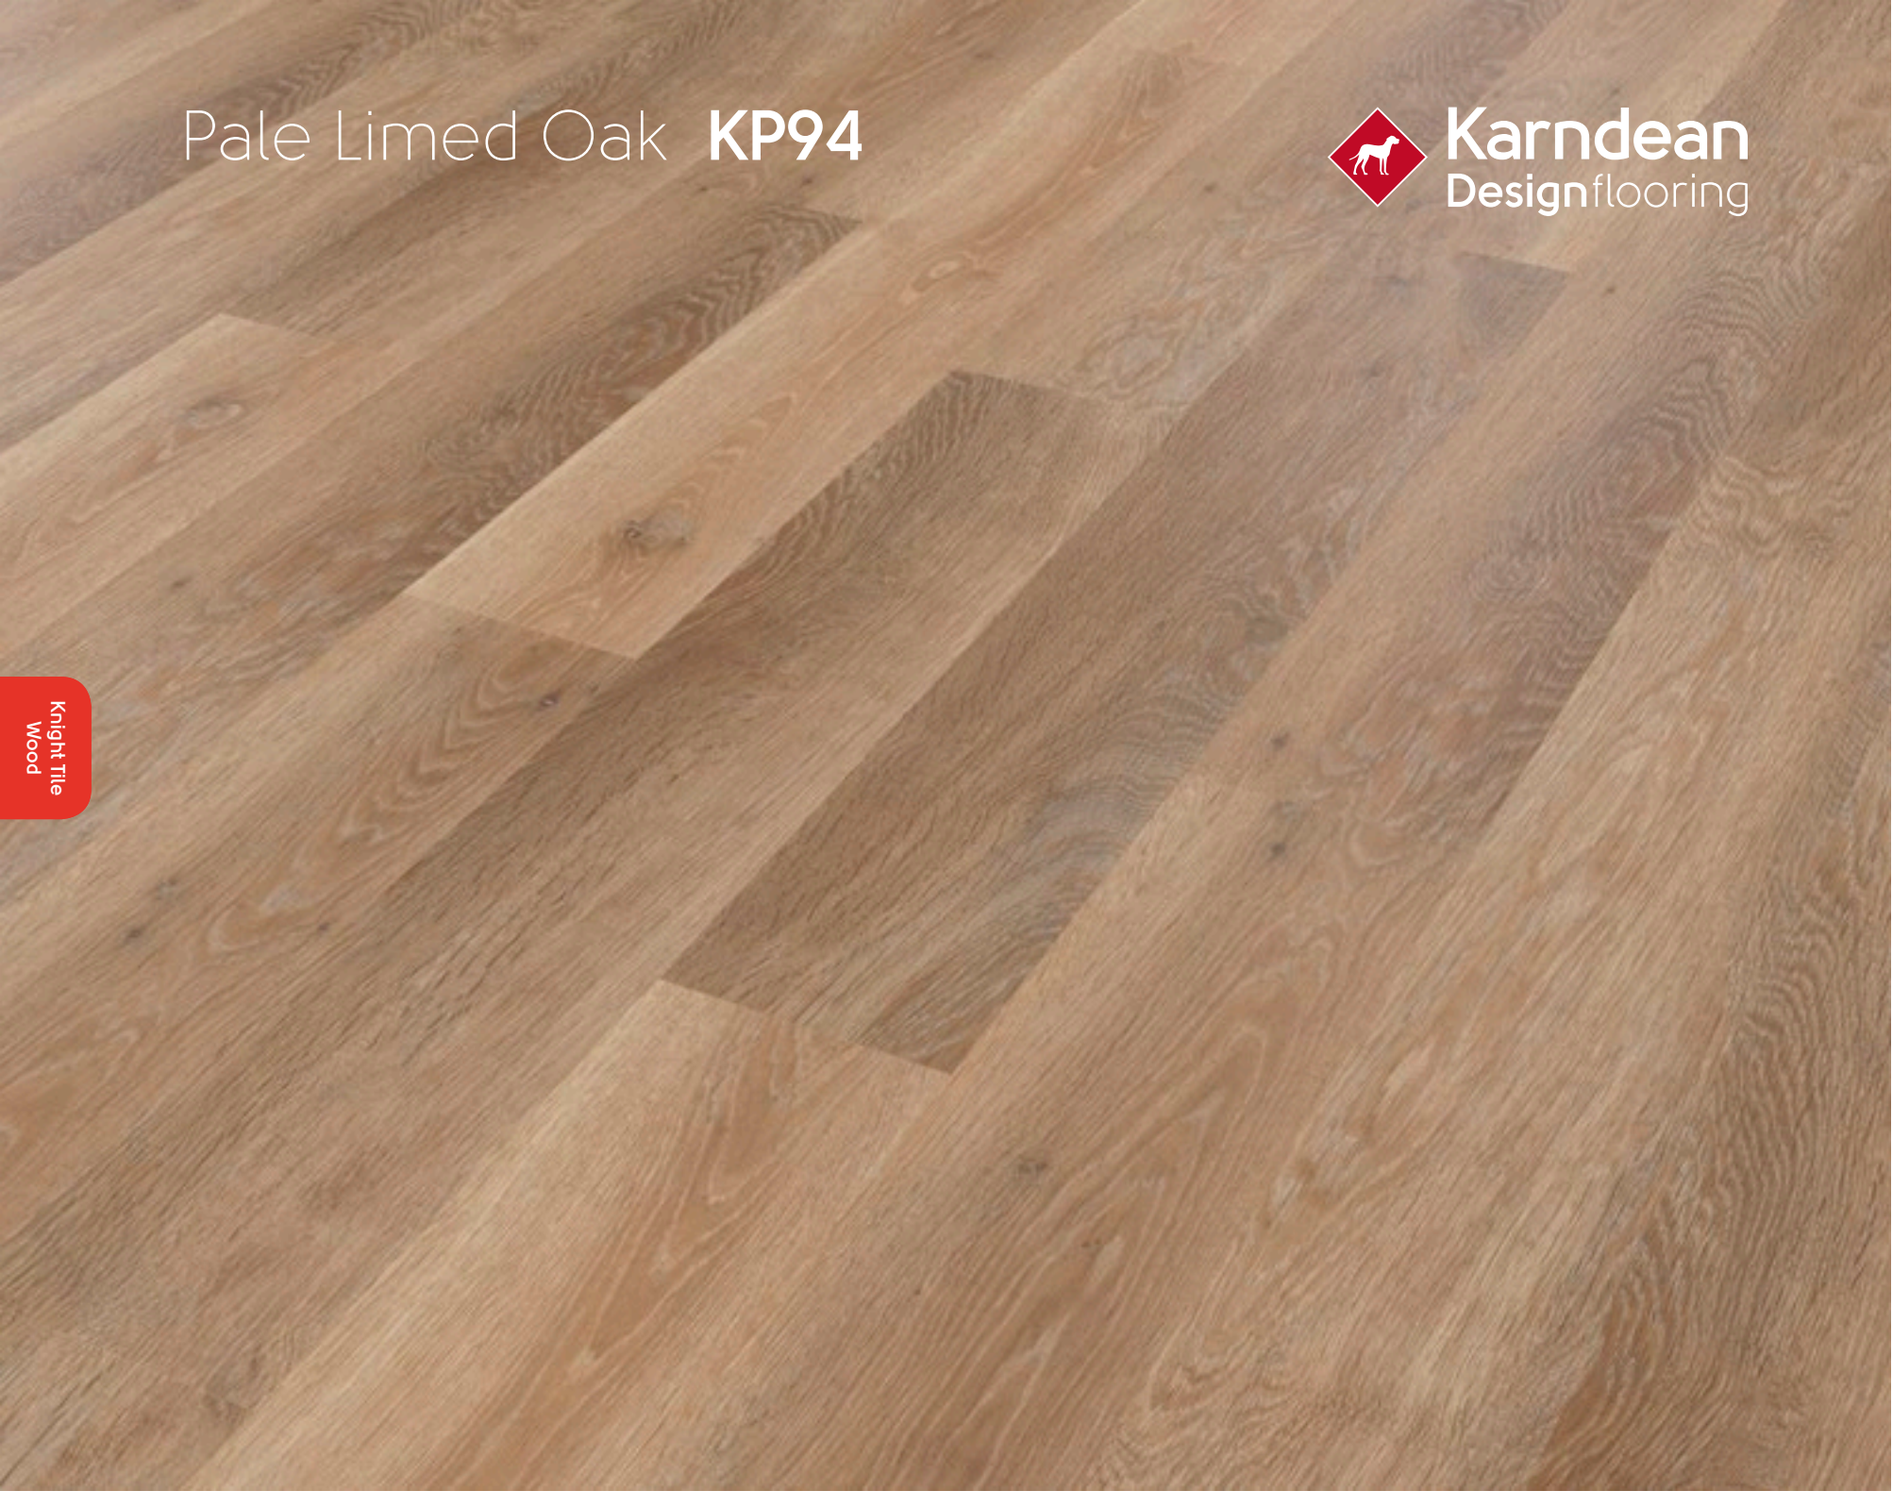

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP94
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Grey Limed Oak **KP138**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP138
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lime Washed Oak **KP99**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP99
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Nickel Spotted Gum **KP140**

Karndean Designflooring

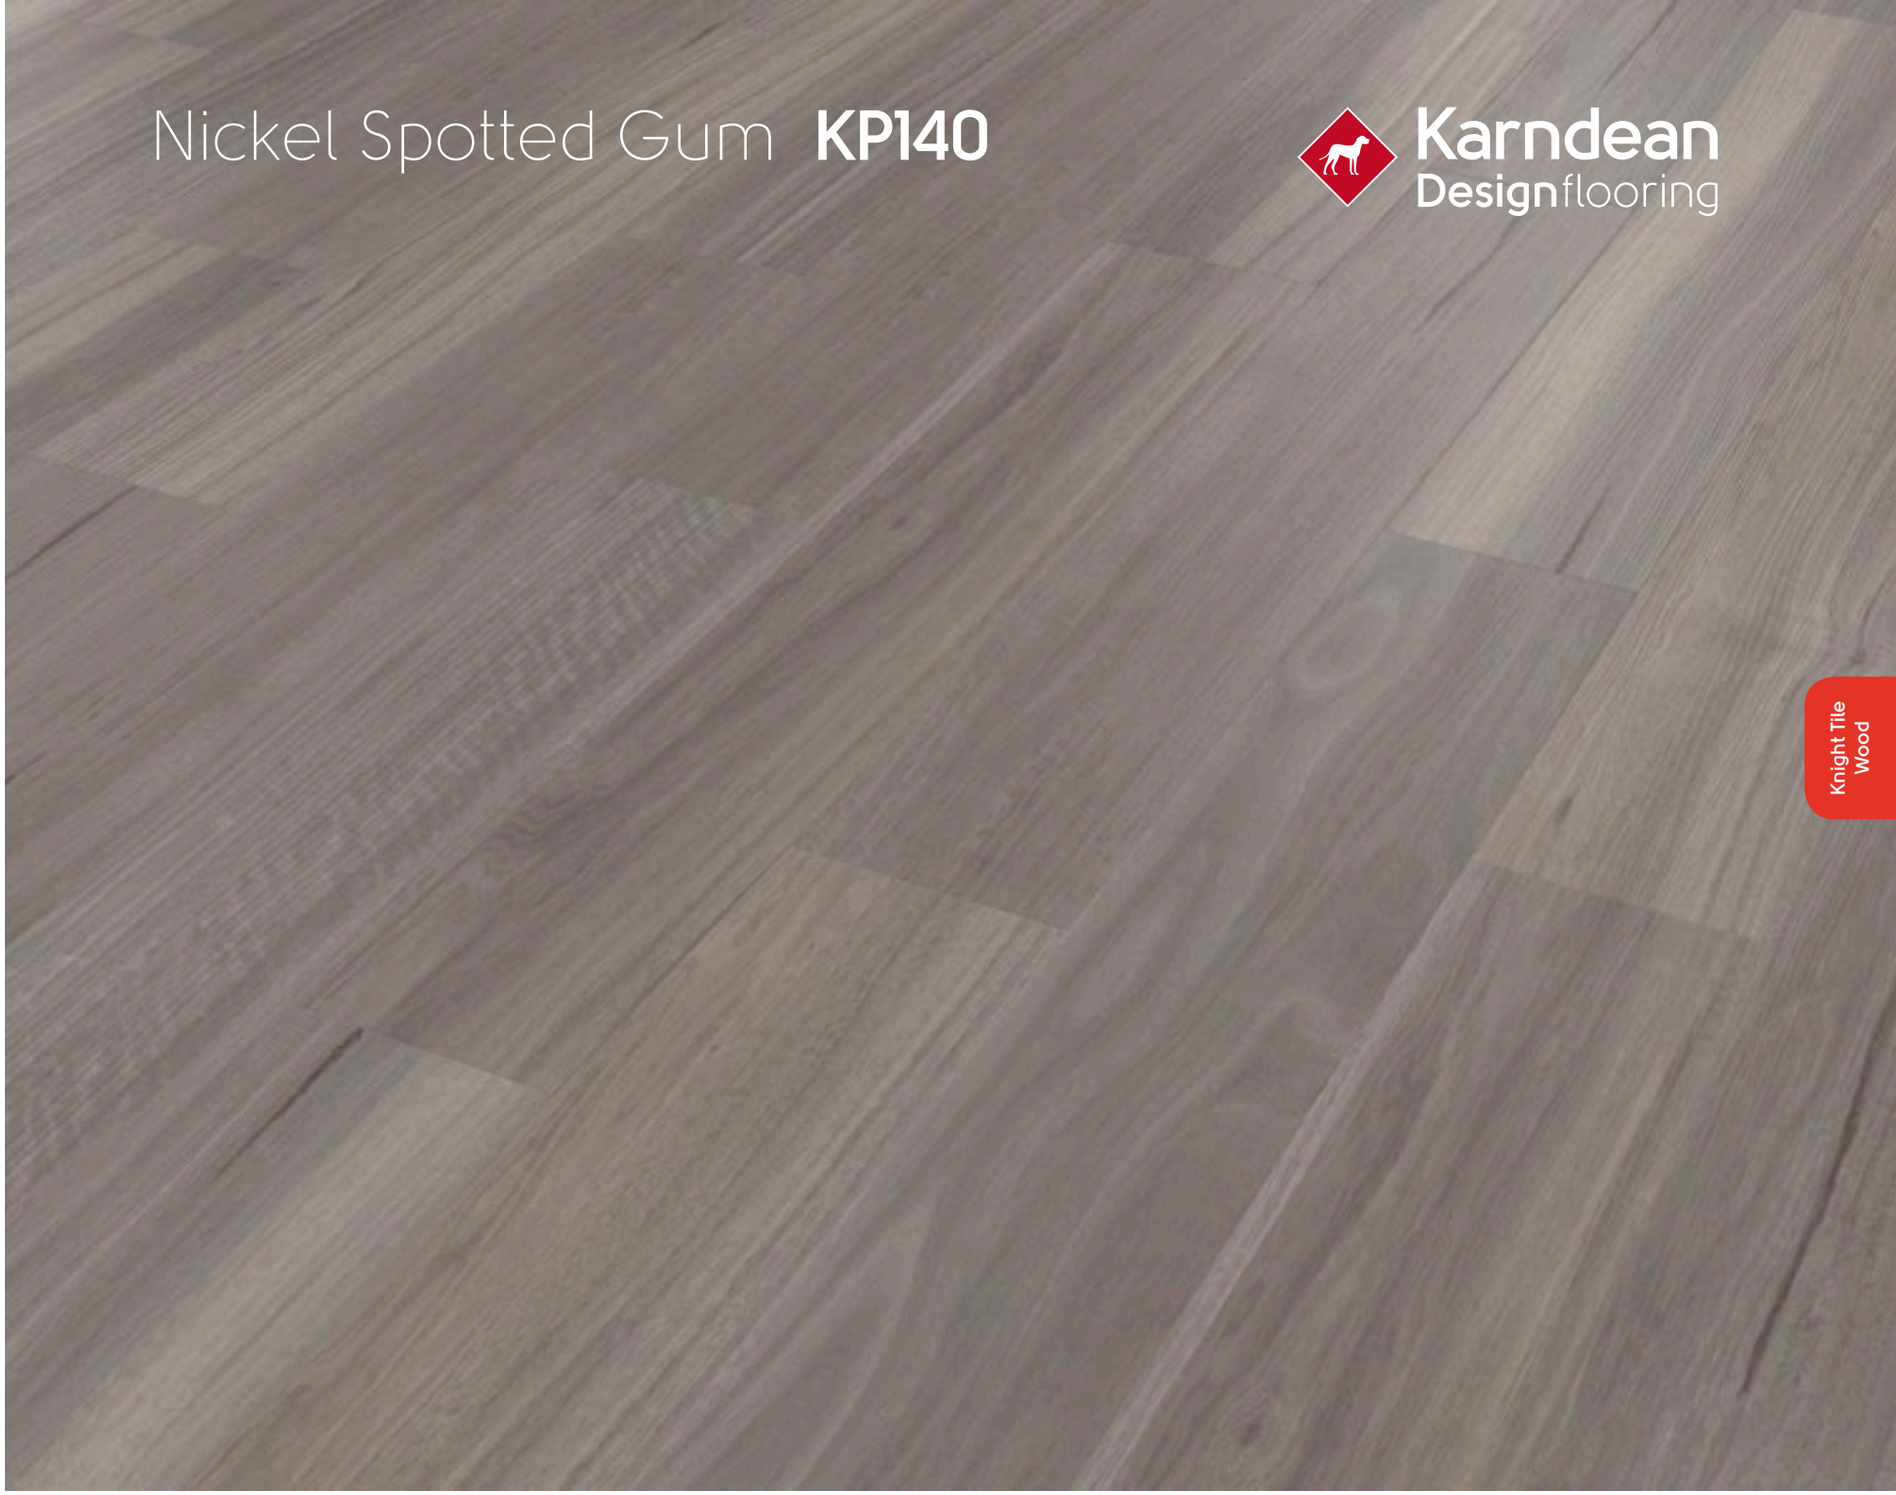

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP140
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Urban Spotted Gum **KP141**

Karndean Designflooring



Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP141
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Mid Limed Oak **KP96**

Karndean Designflooring

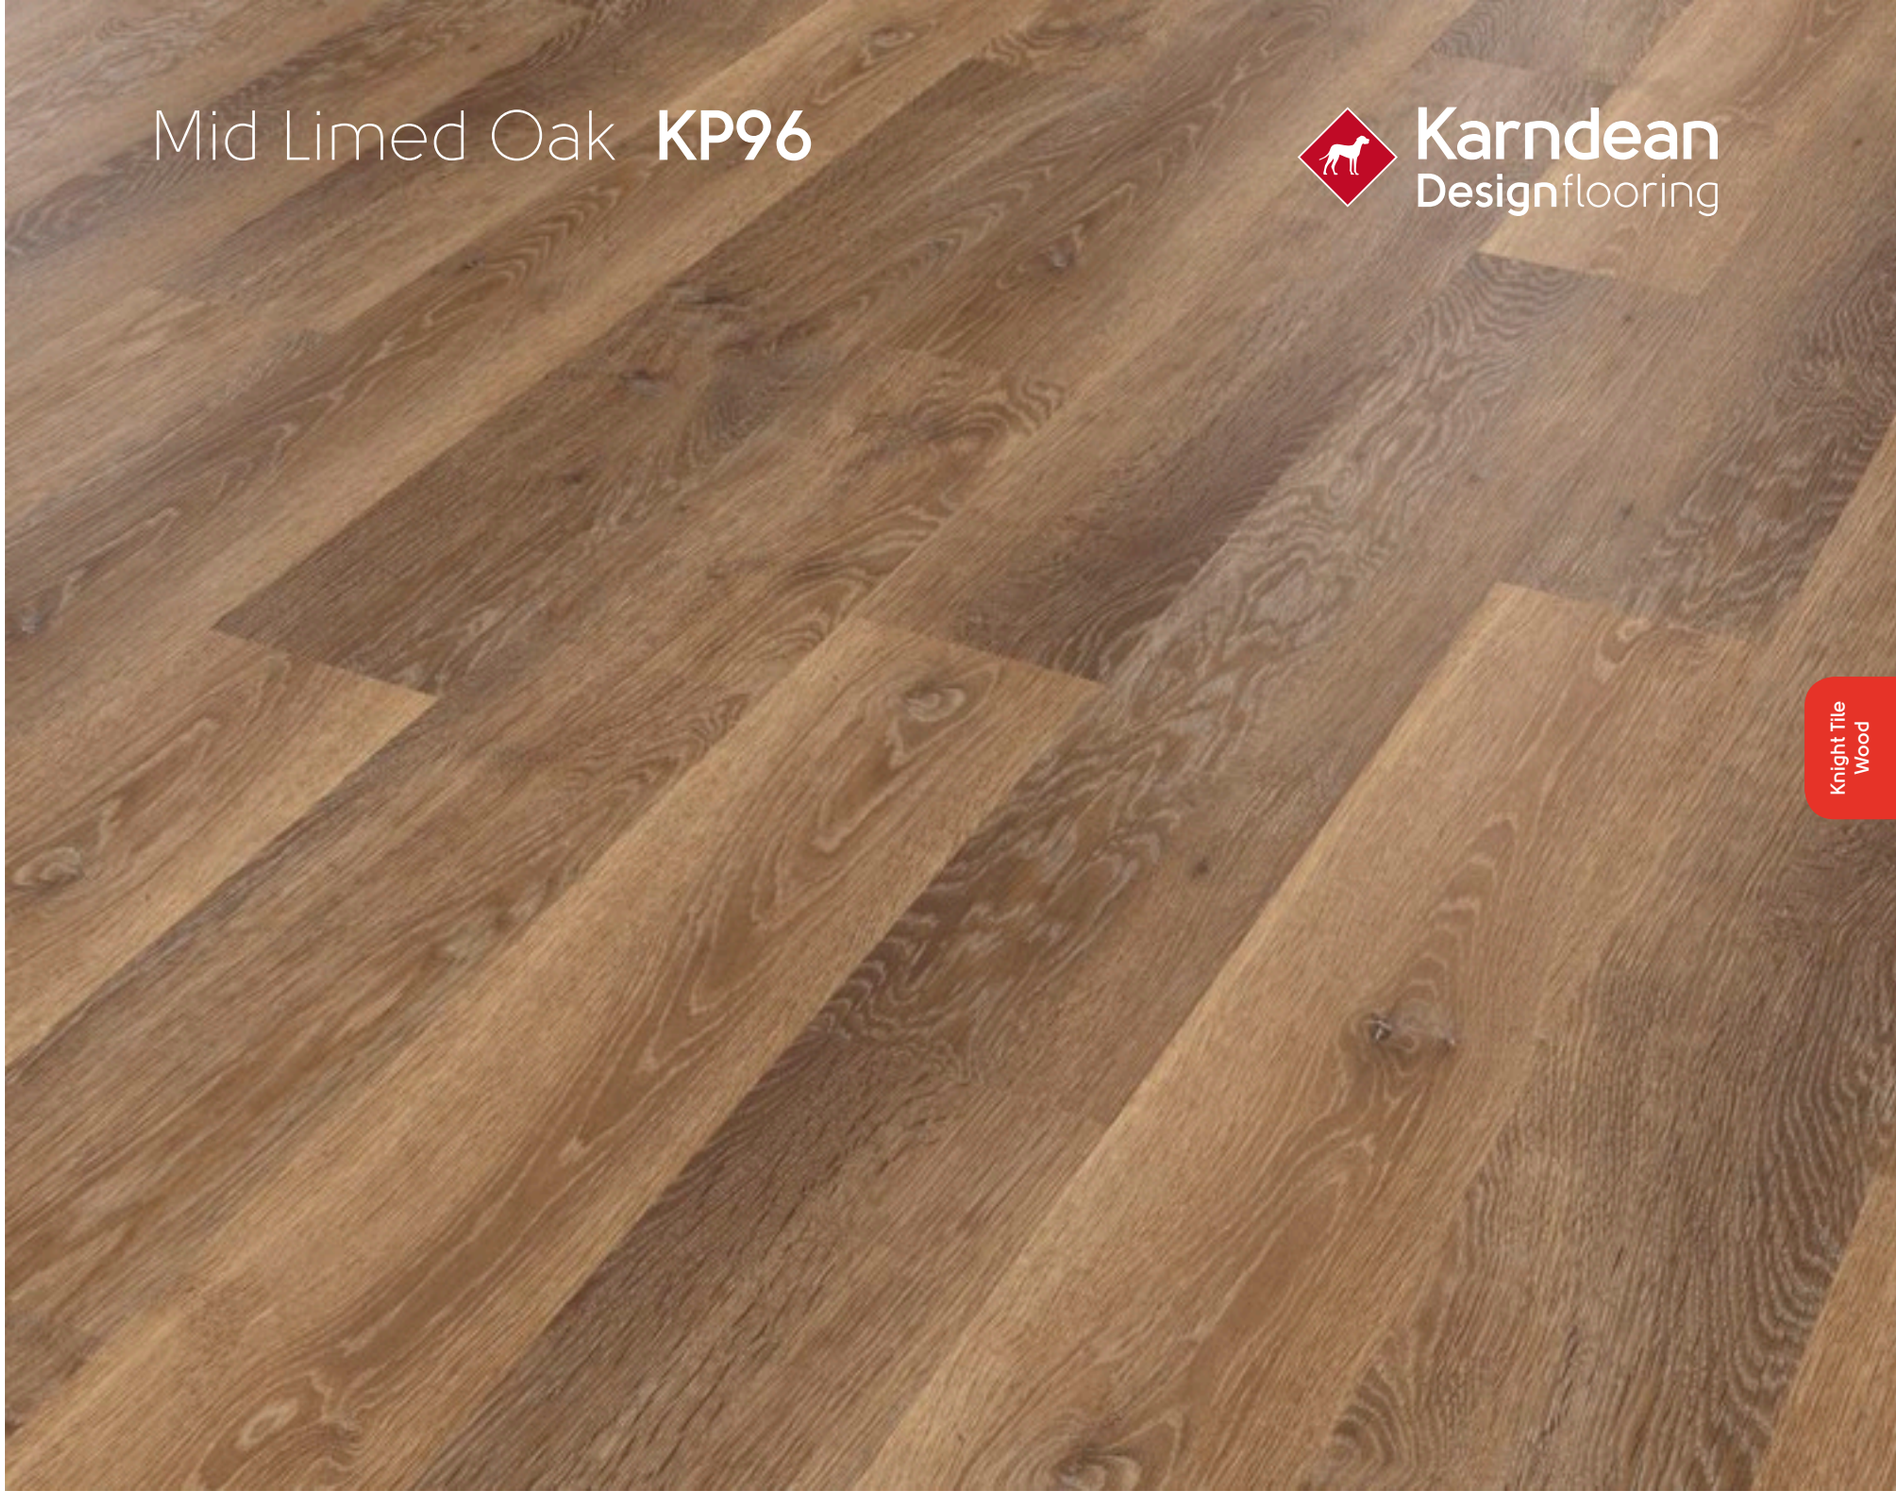

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP96
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Classic Limed Oak **KP97**

Karndean Designflooring

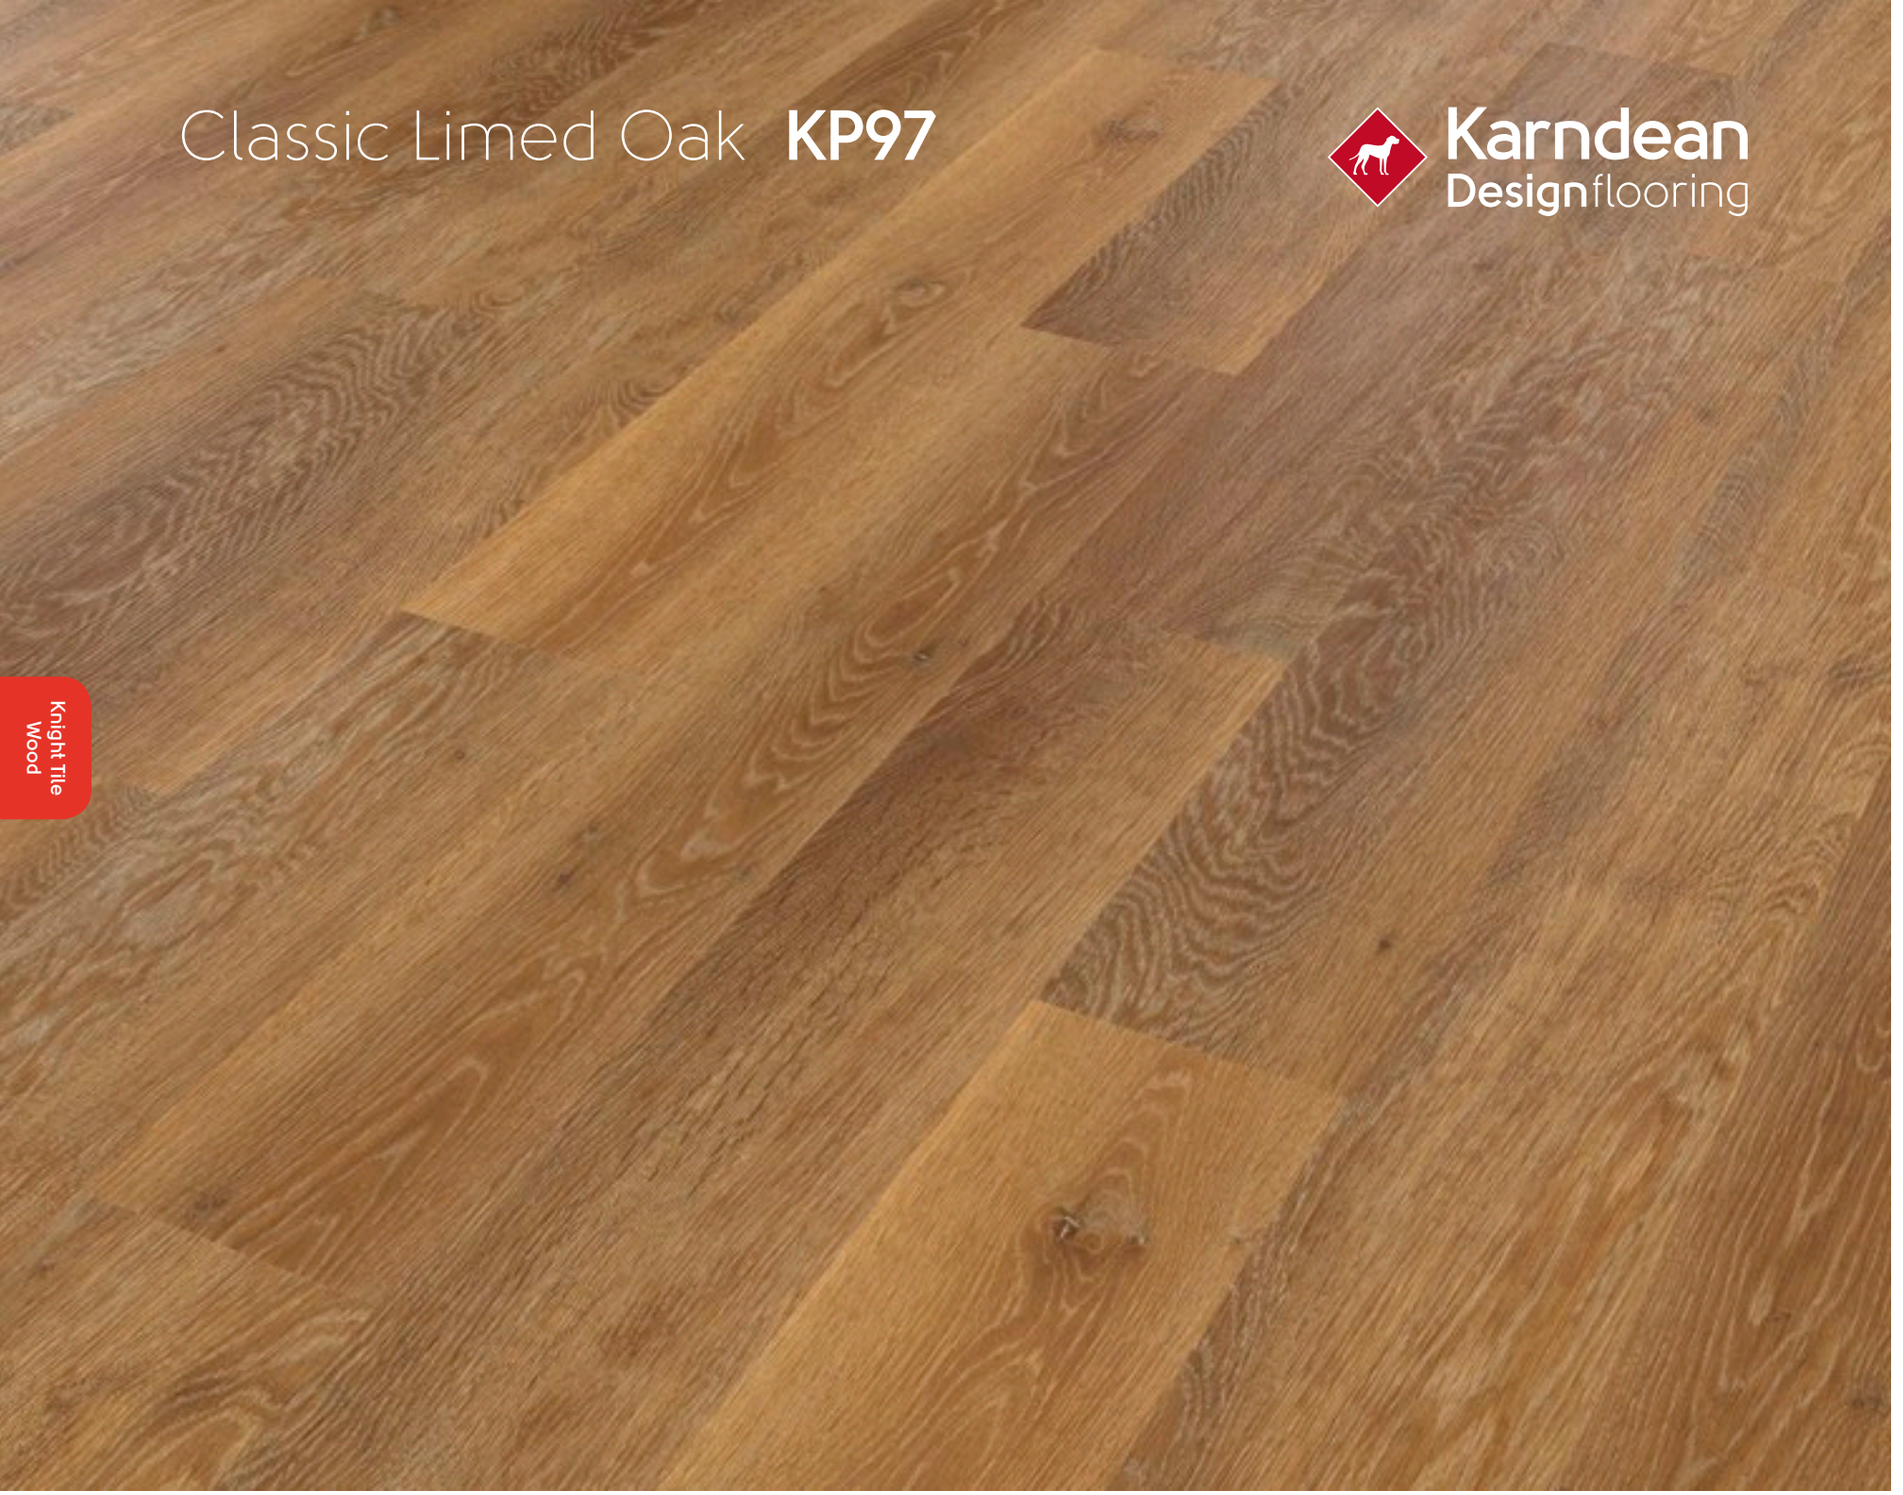

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP97
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aran Oak **KP67**



Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP67
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Sienna **KP107**

Karndean Designflooring



Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:


ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP107
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Larne Oak **KP69**

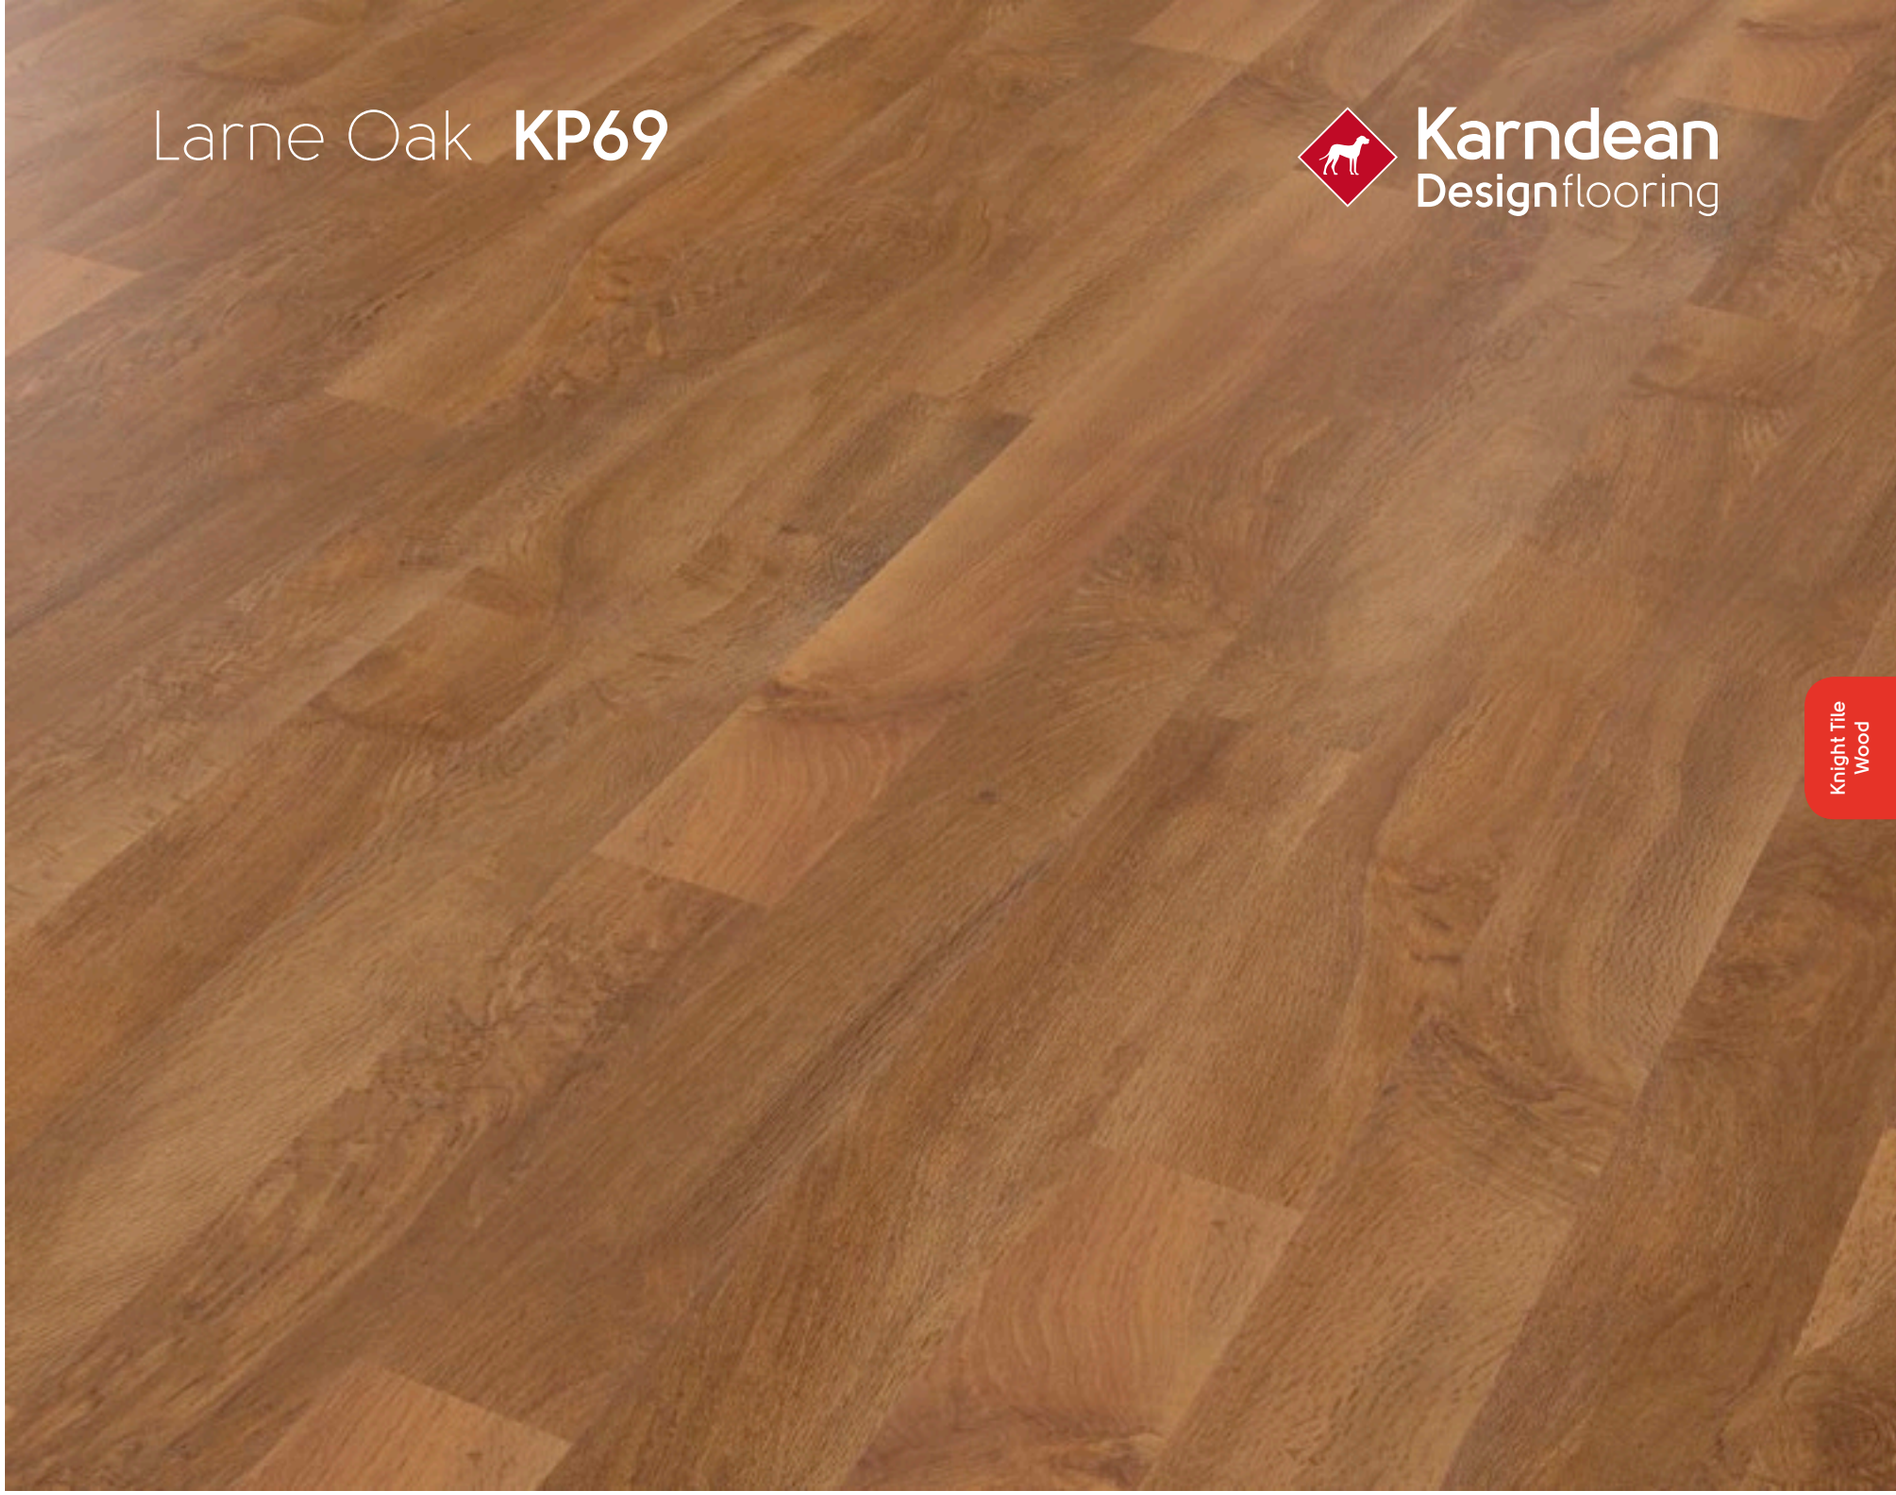

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP69
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Native Koa **KP93**

Karndean Designflooring

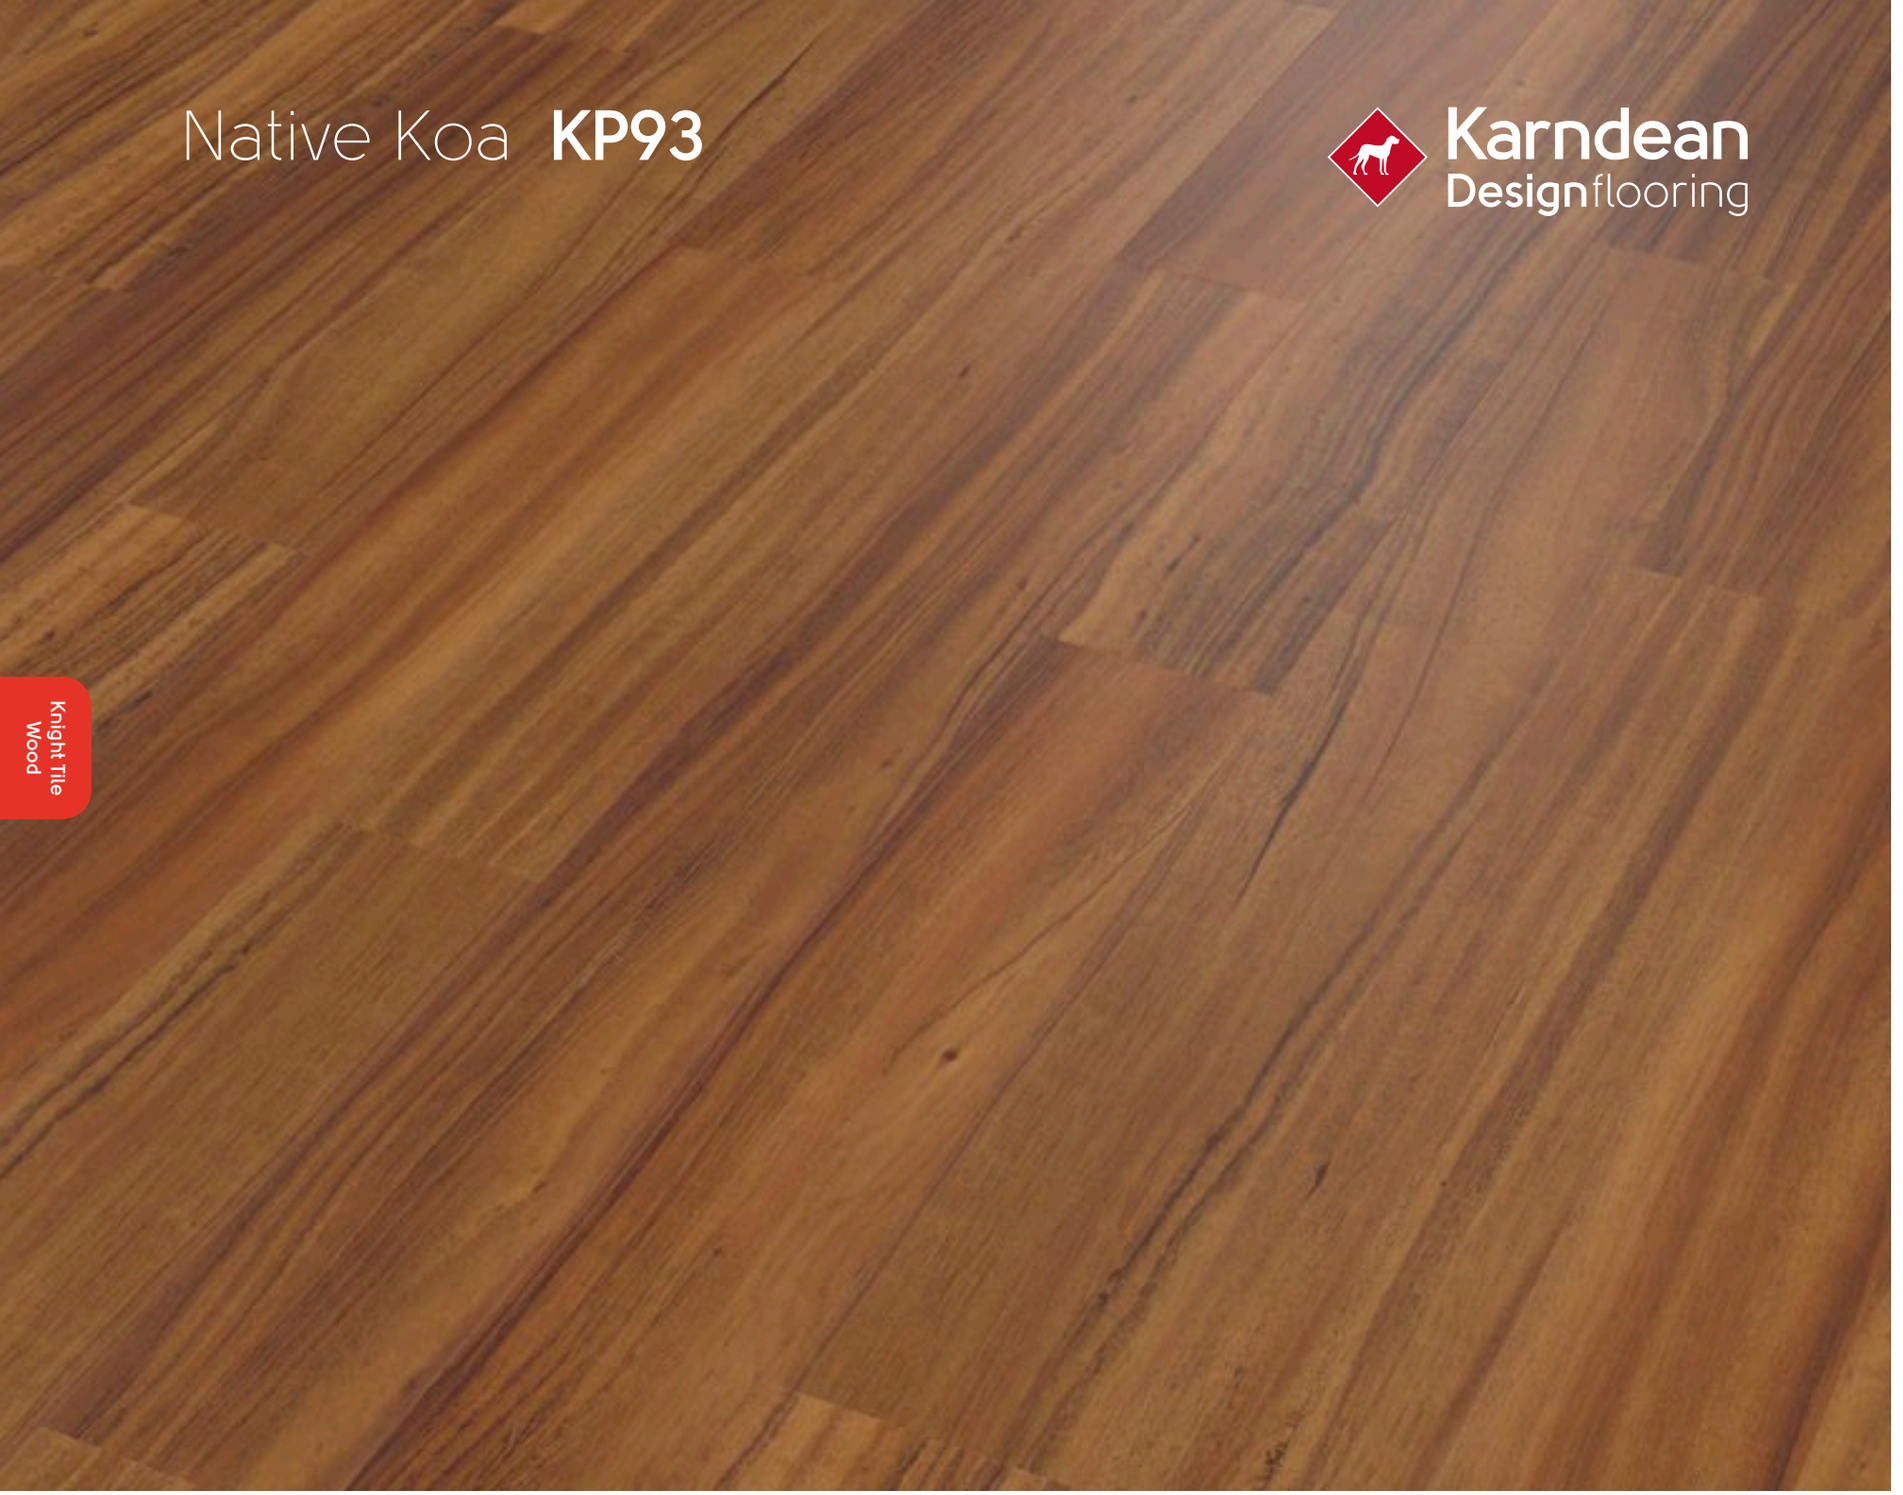

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP93
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Bray Oak **KP70**



Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)


Technical Specifications:

Page: 155

TEXT
KP70
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aged Oak **KP98**

Karndean Designflooring

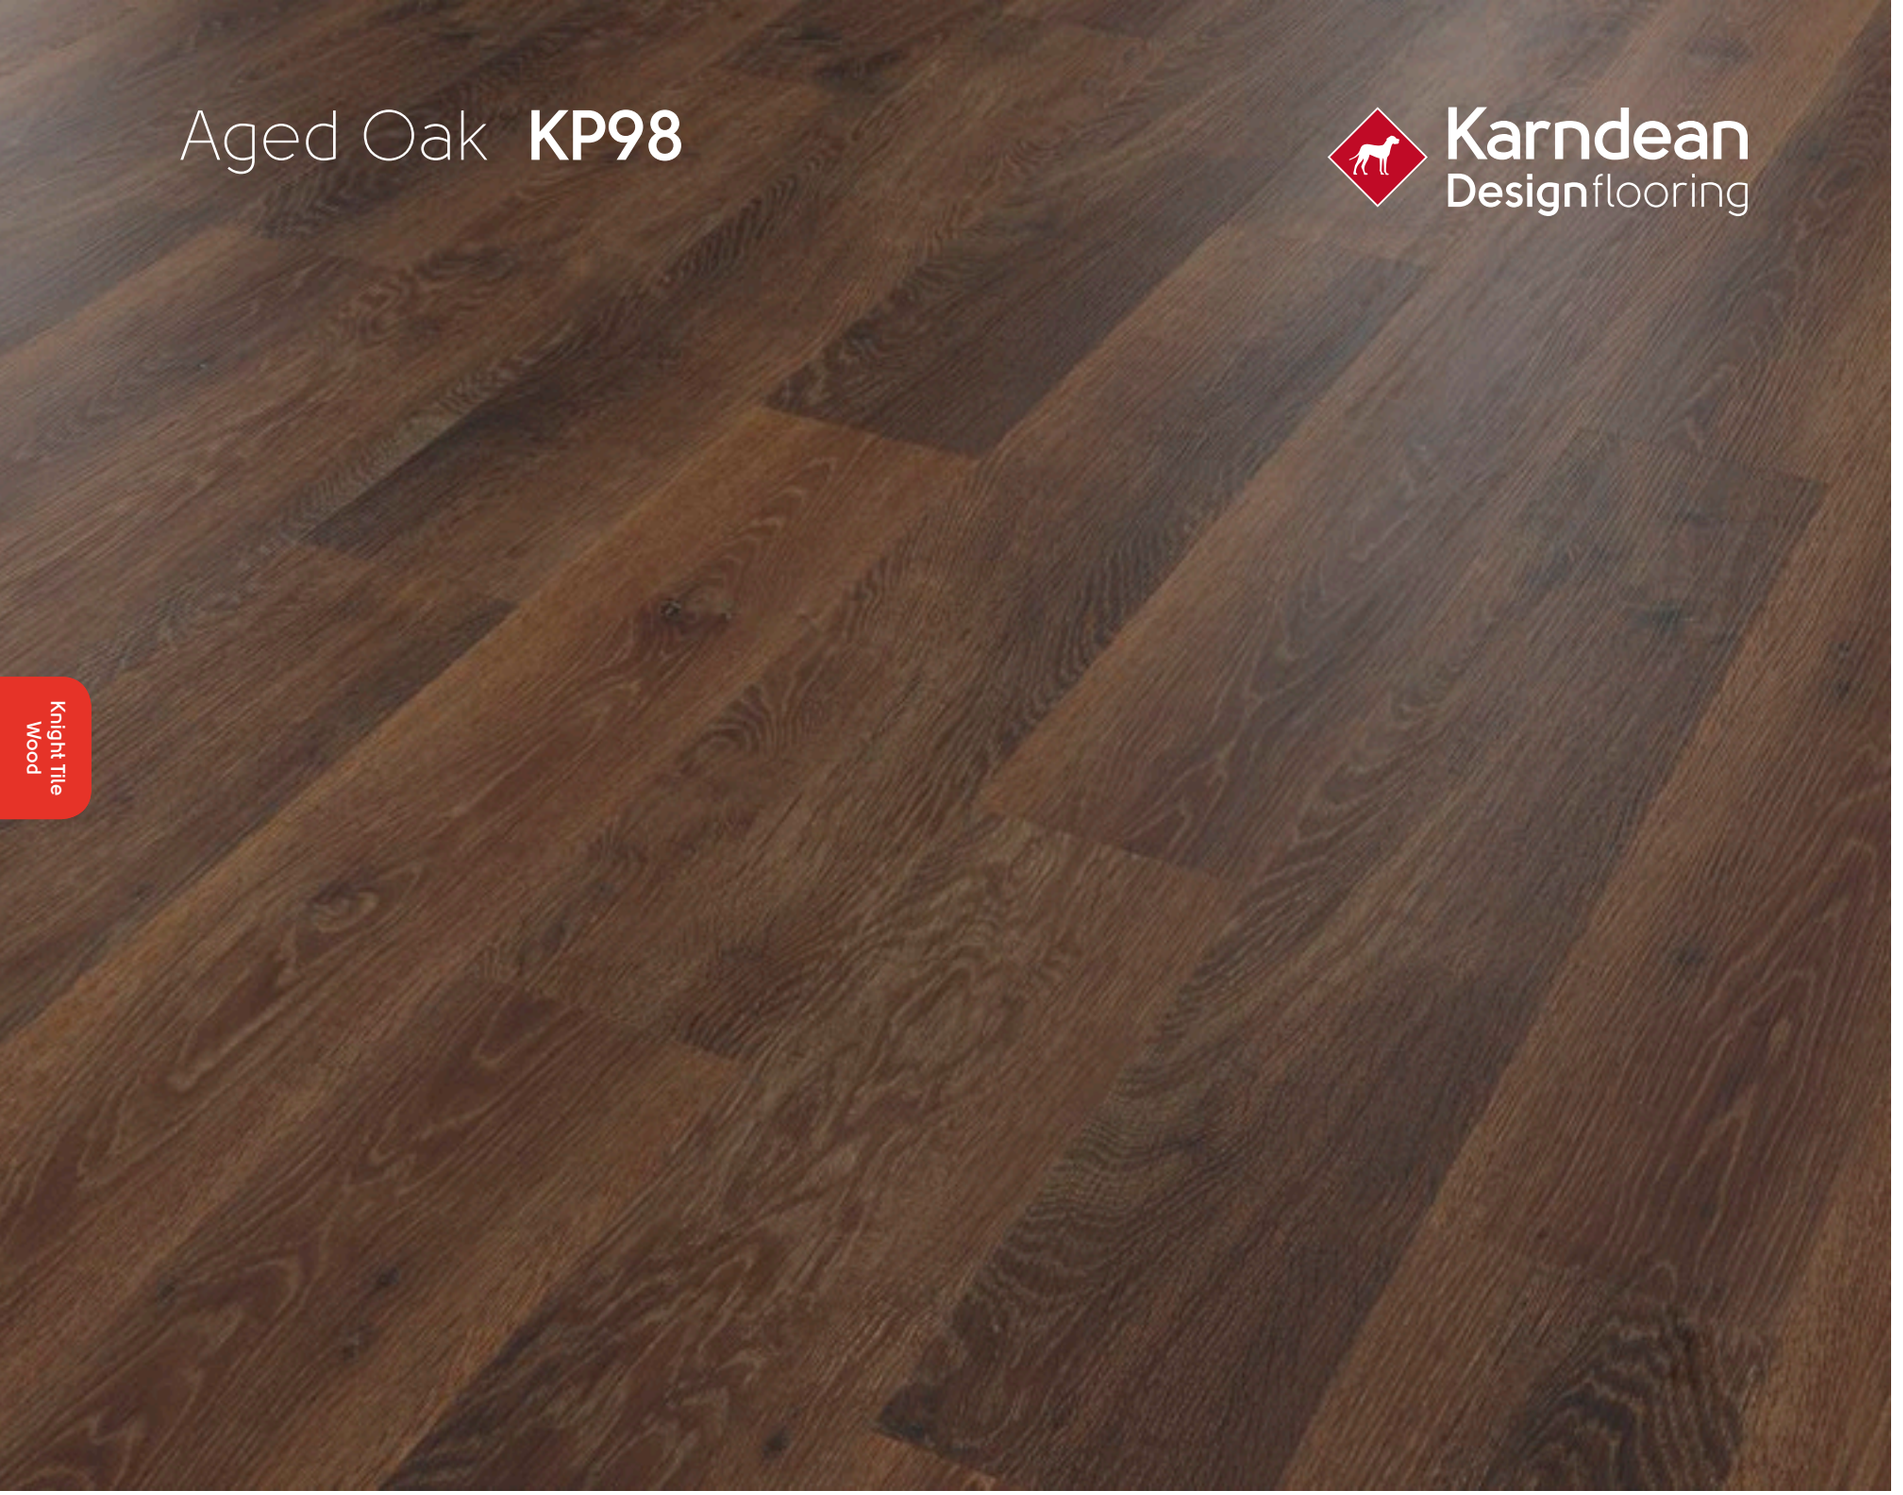

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155


TEXT
KP98
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.





Pale Limed Oak **KP94**


Art Select **Stone**

Slate 18" x 24" (457mm x 610mm)


Page: 187
Melbourne **LM05**


Page: 189
Canberra **LM06**


Page: 188
Oakeley **LM21**



Page: 186
Corris **LM22**

Limestone 36" x 36" (915mm x 915mm) Random Panel**



Page: 193
Jersey **LM01**


Page: 194
Guernsey **LM02**


Page: 192
Alderney **LM03**

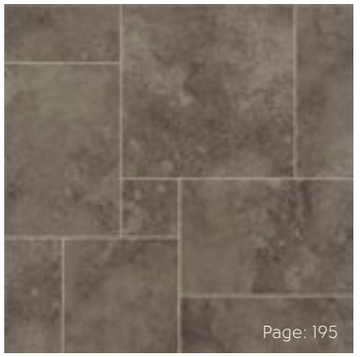

Page: 195
Herm **LM20**


Marble 16" x 16" (406mm x 406mm)



Page: 191
Otono **LM15**


Page: 190
Fiore **LM16**

Travertine 18" x 24" (457mm x 610mm)


Page: 180
Washburn **LM07***


Page: 184
Caldera **LM08***


Page: 182
Gallatin **LM09***

6" x 36" (152mm x 915mm)


Page: 181
Washburn **LM27***


Page: 185
Caldera **LM28***


Page: 183
Gallatin **LM29***


* Same color available in different formats, see product page for details.

** Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

Art Select **Stone**

Art Select | GLUEDOWN

Our Art Select stone collection is made up of four distinctive sub-ranges, providing an assortment of distinctive looks: Travertine, Slate, Marble and Limestone. Our Travertines offer three mid-toned designs in either 18" x 24" tiles or 6" x 36" plank-shaped tiles. Lay each size on its own or with its complementary full-sized tiles, creating a stylish room-to-room layout. Developed from Australian and Welsh slates, the Slate sub-range reflects the true rugged texture and charm of the natural stone in 18" x 24" tiles. For a project that requires classic elegance, opt for our two 16" x 16" Marble designs. Or choose from our four random panel Limestones, which capture the character and dappled texture of natural limestone.

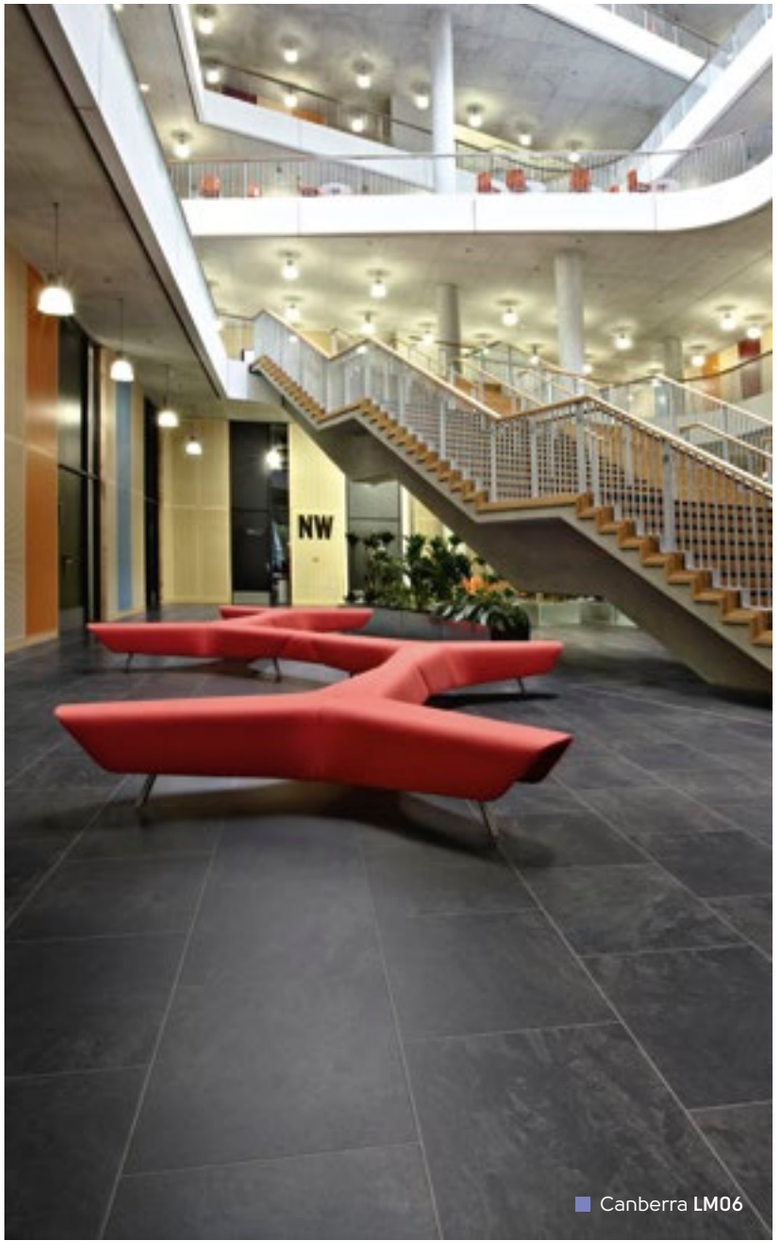

Canberra **LM06**

	Standard	Result
Thickness		3.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+ PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 3.3
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.
** Subject to terms, see page: 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Washburn **LM07**

Karndean Designflooring



Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

This color is also available in a 6" x 36" format, see page opposite.

TEXT
LM07
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Washburn **LM27**

Karndean Designflooring



Size	6" x 36" (152mm x 915mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

This color is also available in a 18" x 24" format, see page opposite.

TEXT
LM27
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Gallatin **LM09**

Karndean Designflooring



Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS15 (3mm)

This color is also available in a 6" x 36" format, see page opposite.

TEXT
LM09
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Gallatin **LM29**

Karndean Designflooring



Size	6" x 36" (152mm x 915mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

This color is also available in a 18" x 24" format, see page opposite.

TEXT
LM29
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Caldera **LM08**

Karndean Designflooring



Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:


DS10 (3mm)

This color is also available in a 6" x 36" format, see page opposite.

TEXT
LM08
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Caldera **LM28**

Karndean Designflooring

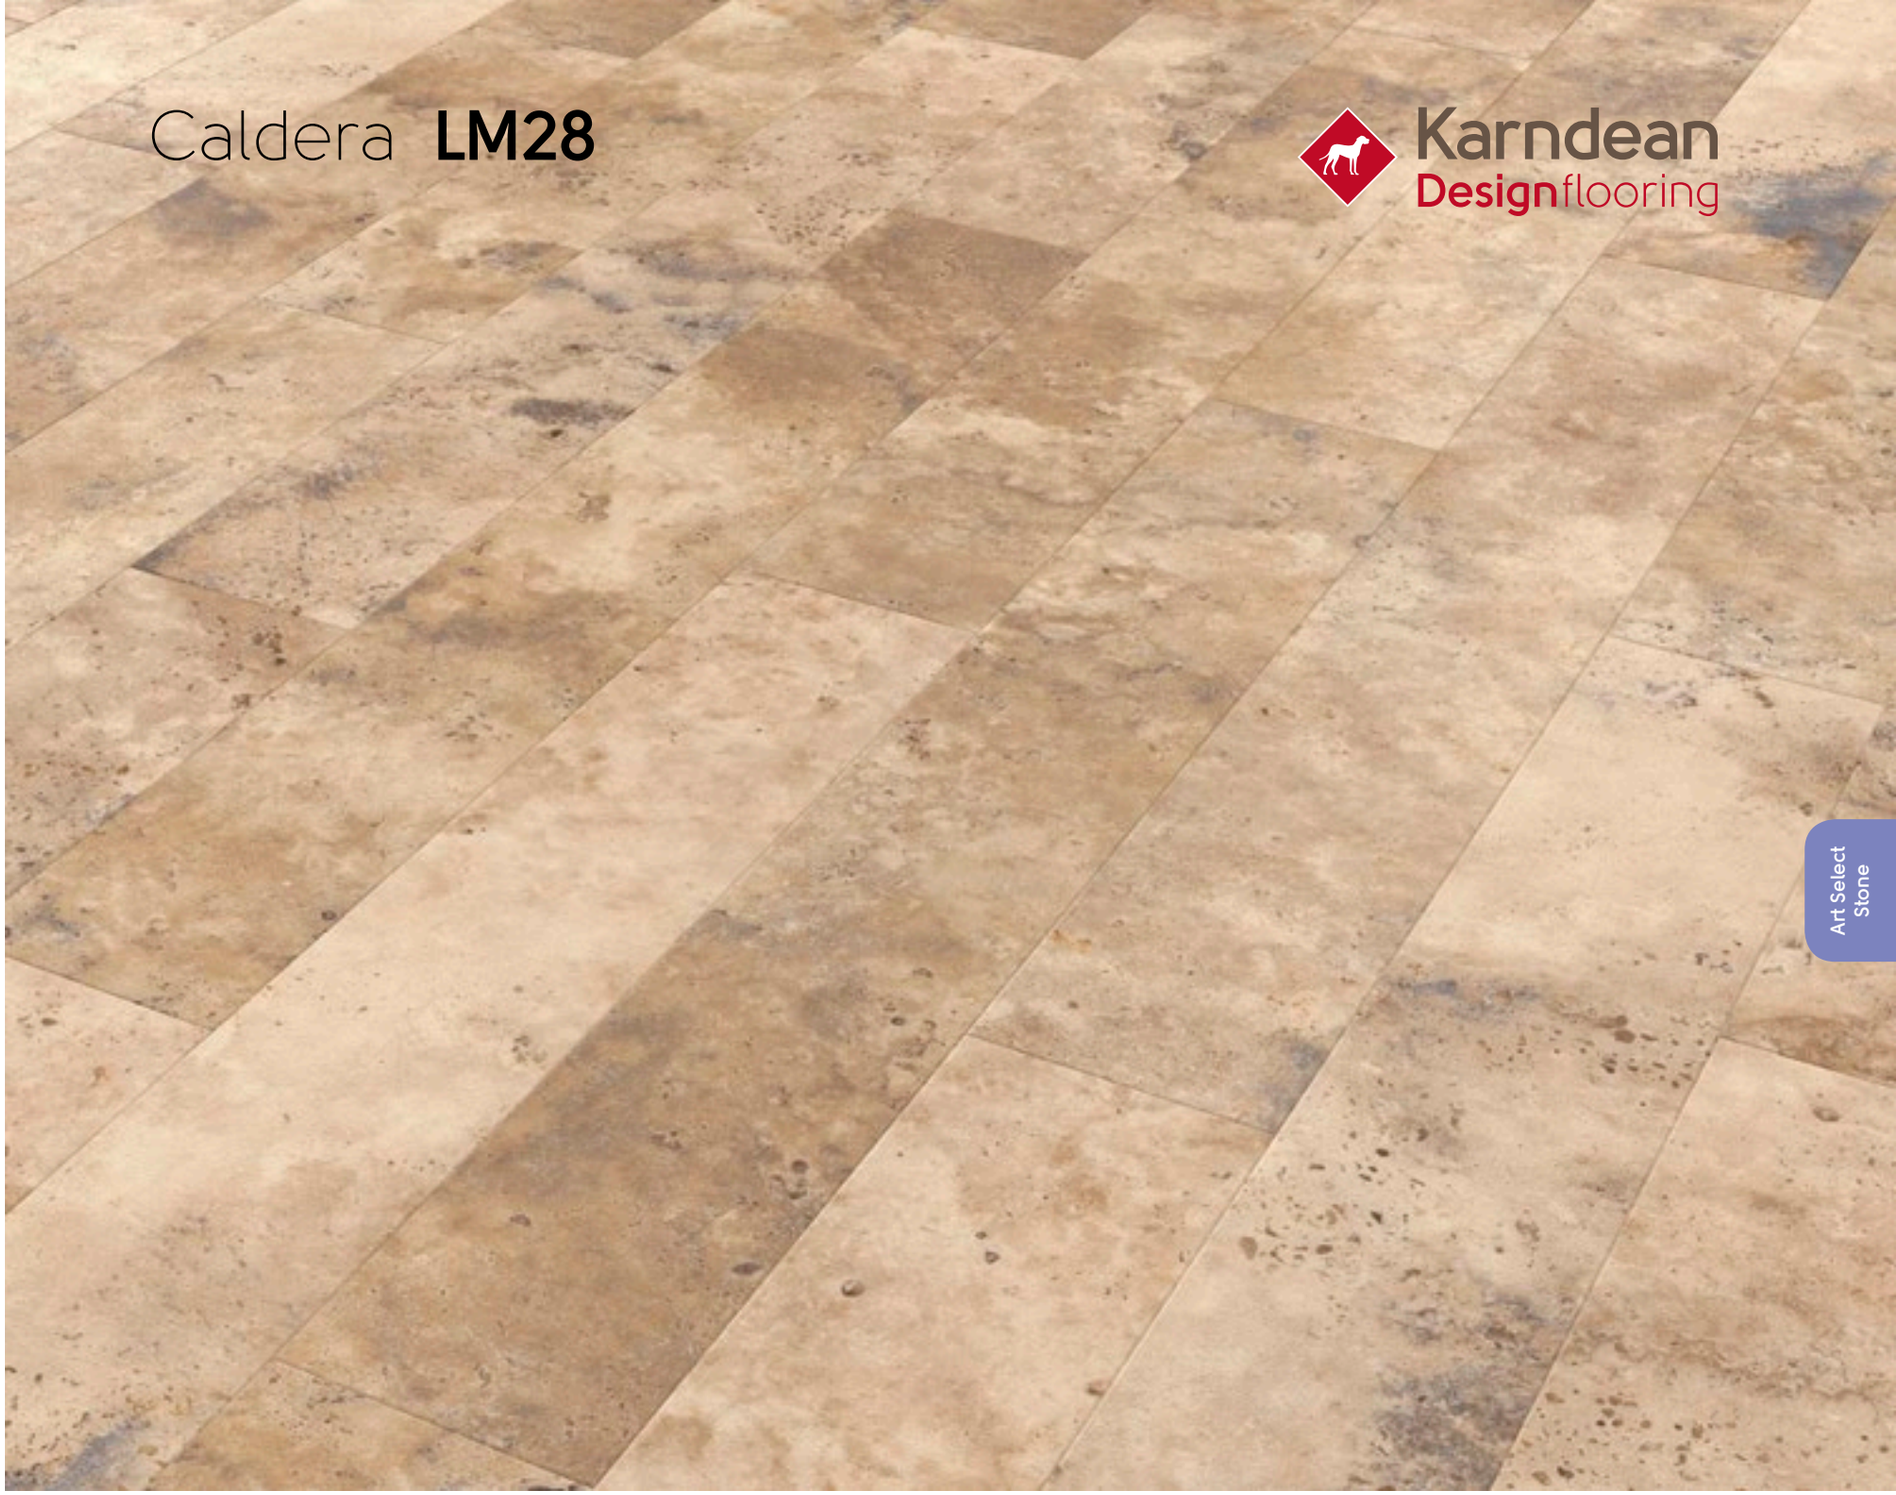

Size	6" x 36" (152mm x 915mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

This color is also available in a 18" x 24" format, see page opposite.

TEXT
LM28
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Corris **LM22**

Karndean Designflooring



Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179


Decorative Strip Shown:

DS10 (3mm)

TEXT
LM22
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Melbourne **LM05**

Karndean Designflooring

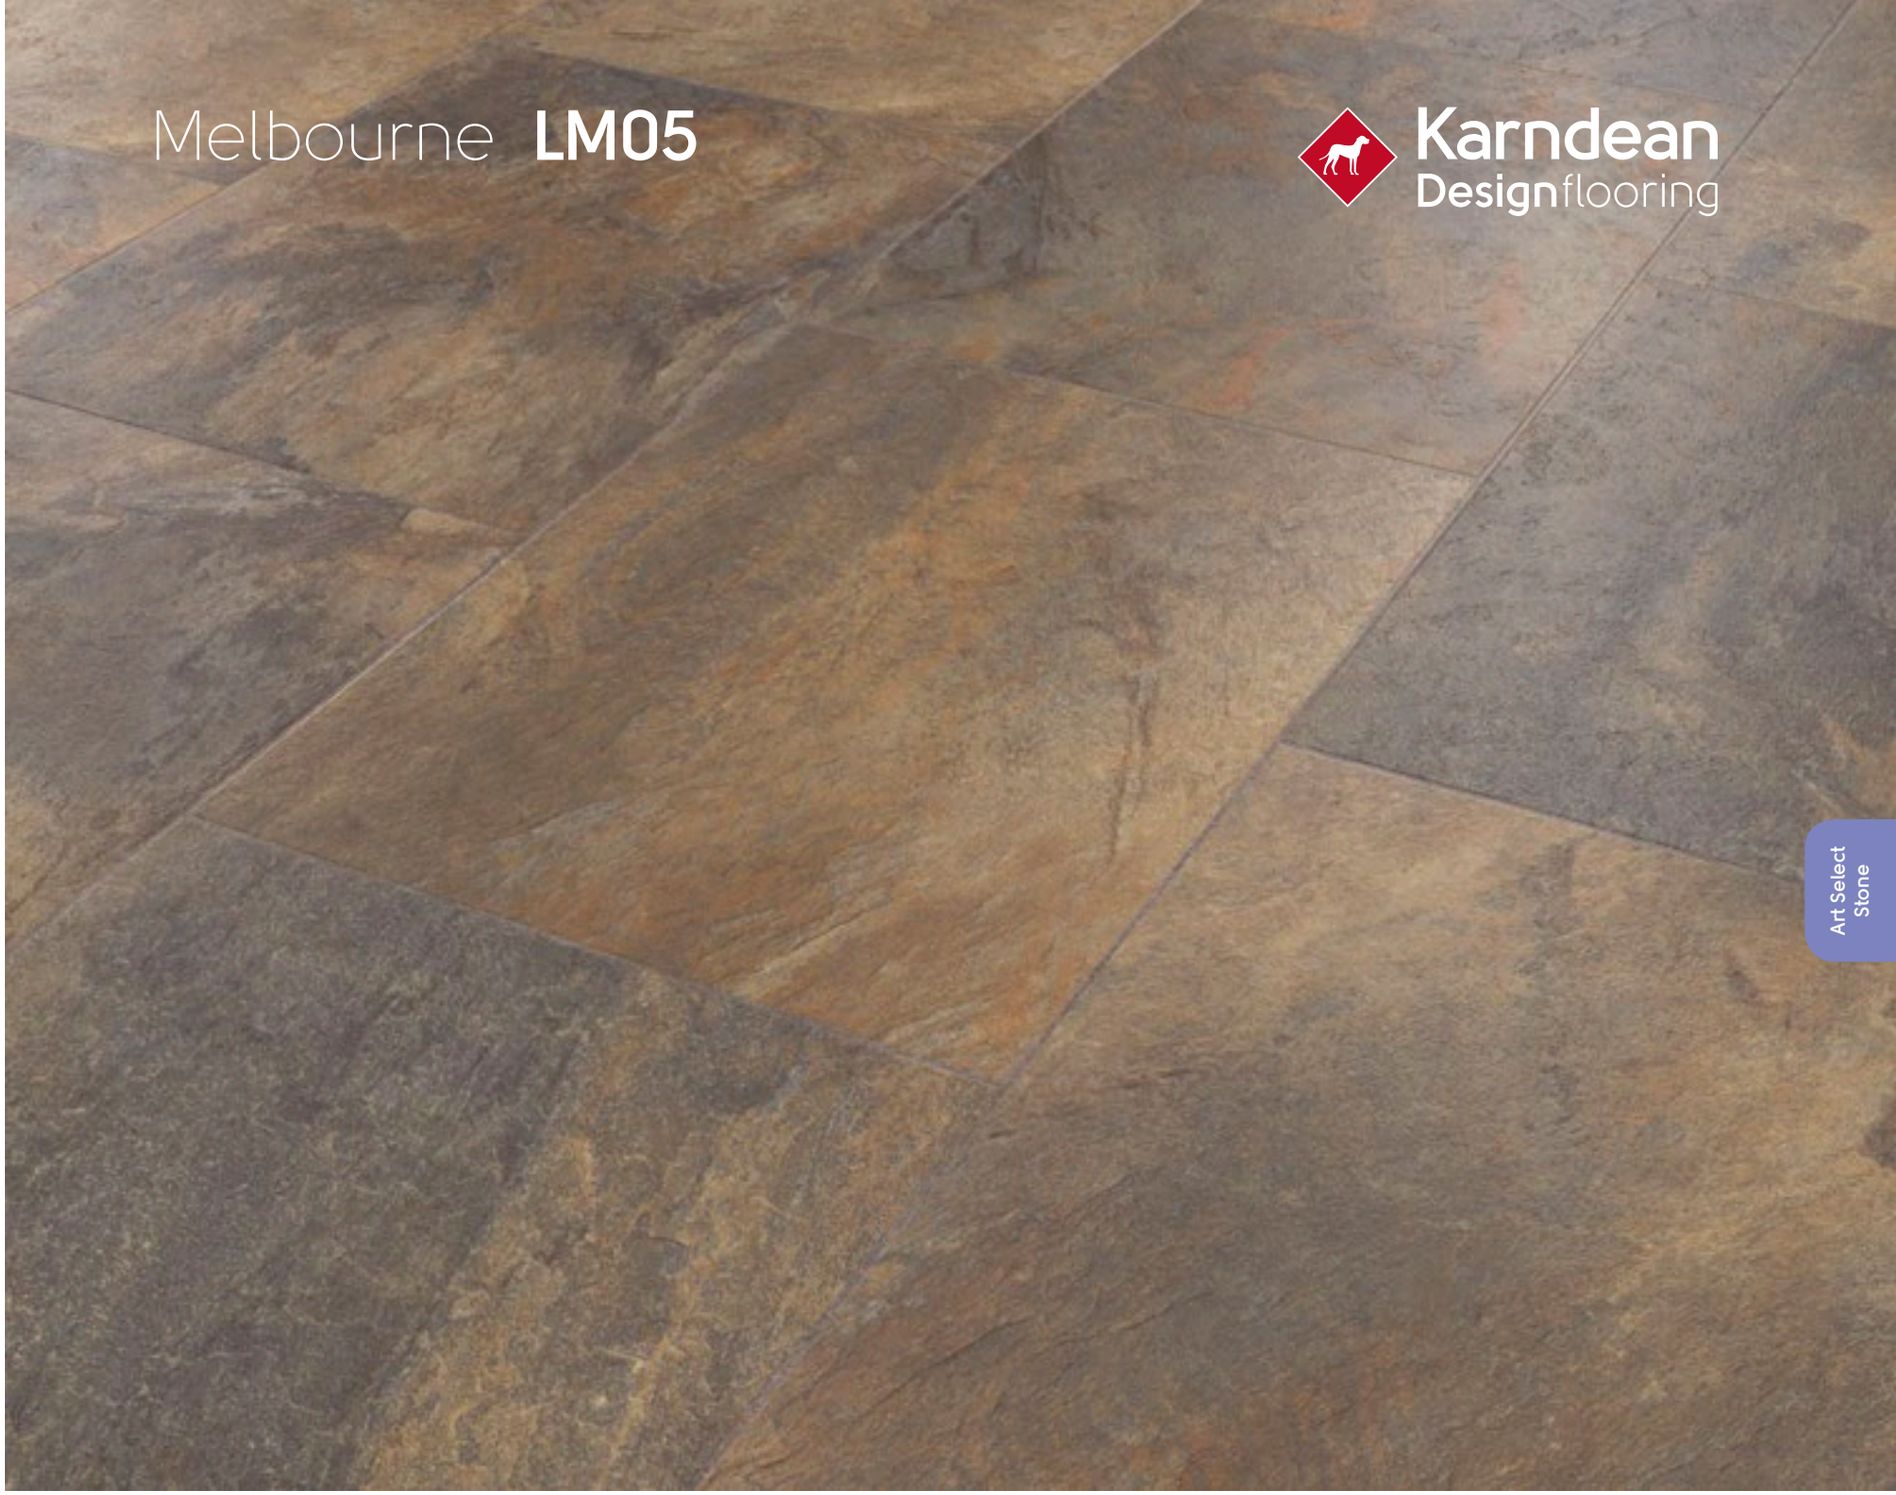

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS16 (3mm)

TEXT
LM05
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Oakeley **LM21**

Karndean Designflooring



Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

TEXT
LM21
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Canberra **LM06**

Karndean Designflooring



Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

TEXT
LM06
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Fiore **LM16**

Karndean Designflooring

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

TEXT
LM16
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Otono **LM15**

Karndean Designflooring



Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

TEXT
LM15
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Alderney **LM03**

Karndean Designflooring



Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

TEXT
LM03
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Jersey **LM01**

Karndean Designflooring



Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

TEXT
LM01
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Guernsey **LM02**

Karndean Designflooring



Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

TEXT
LM02
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Herm **LM20**

Karndean Designflooring



Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:


Page: 179


*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.


TEXT
LM20
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.


Da Vinci **Stone**

12" x 18" (305mm x 457mm)

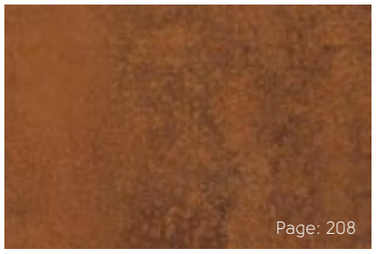
Page: 208
Molten **CER11***

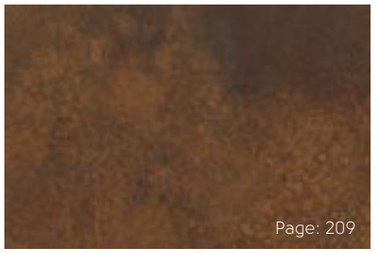
Page: 209
Iron Ore **CER12***

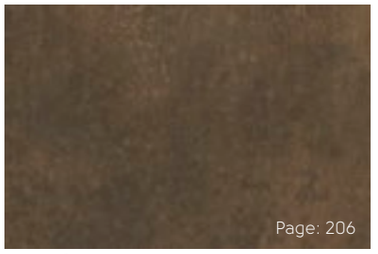

Page: 206
Eisen **CER13***

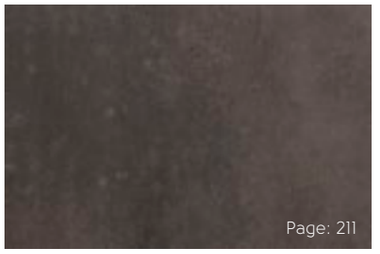
Page: 211
Carbon **CER14***


Page: 200
Dune **CER15**


Page: 203
Sable **CER16**


Page: 205
Drift **CER17**

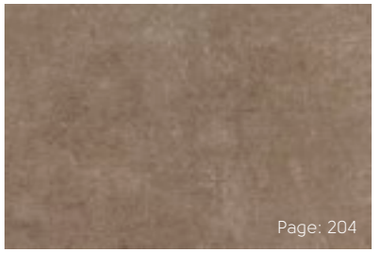
Page: 204
Burnet **CER19**


Page: 201
Cambric **CER20**


Page: 210
Sindon **CER21**

16" x 16" (406mm x 406mm)


Page: 207
Oxide **CC08**


Page: 198
Piazza Limestone **LST03**


Page: 199
Spirito Limestone **LST04**



Page: 202
Santi Limestone **LST05**

*Please note: as a feature of the design, these products incorporate a high color variation between individual tiles.

Da Vinci **Stone**

Da Vinci | GLUEDOWN

Our Da Vinci collection offers the rich textures of natural stone, slate and metal, with a comforting warmth unique to Karndean Designflooring. The beveled edges add definition to each tile and a range of design strips enables you to choose a finishing touch to complete your look (for full details on strips and borders, please see pages: 240-242). Choose from 12" x 18" or 16" x 16" tiles available in a wide range of colors and effects.

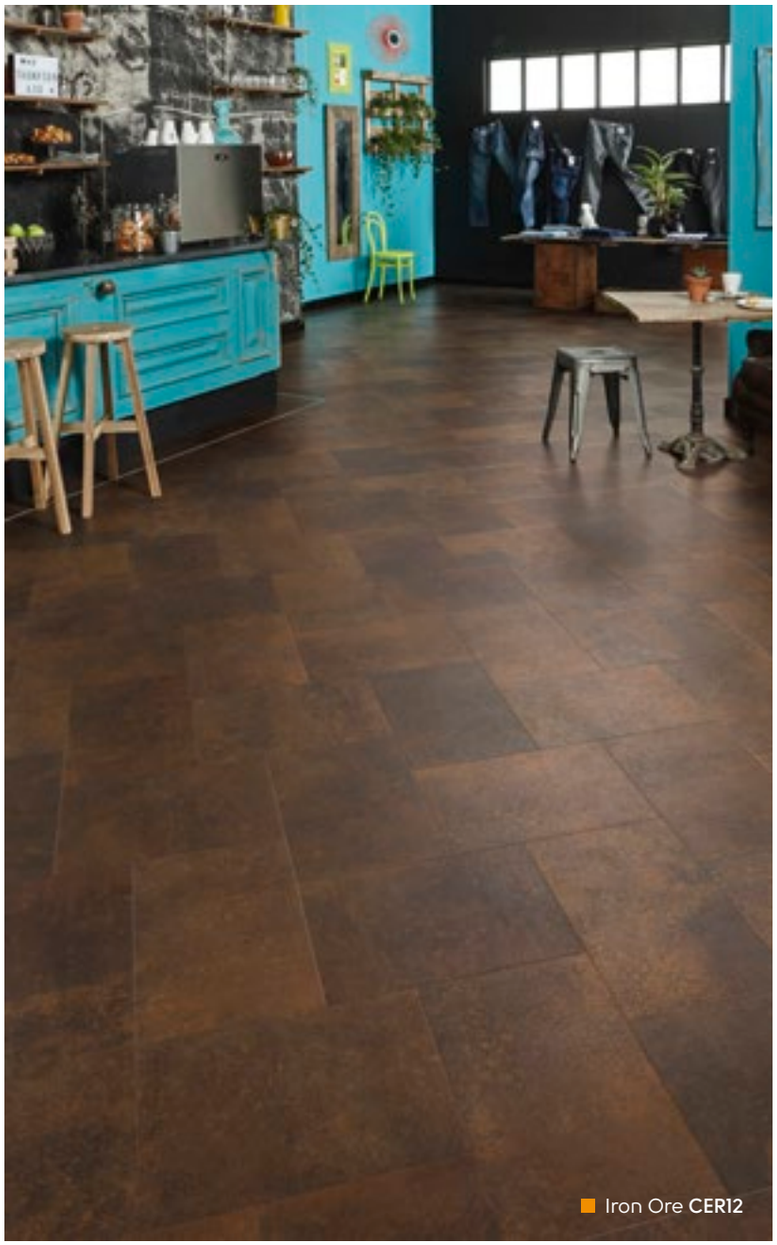


Iron Ore **CER12**

	Standard	Result
Thickness		3.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+ PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 3.3
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.
** Subject to terms, see page: 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Piazza Limestone **LST03**

Karndean Designflooring

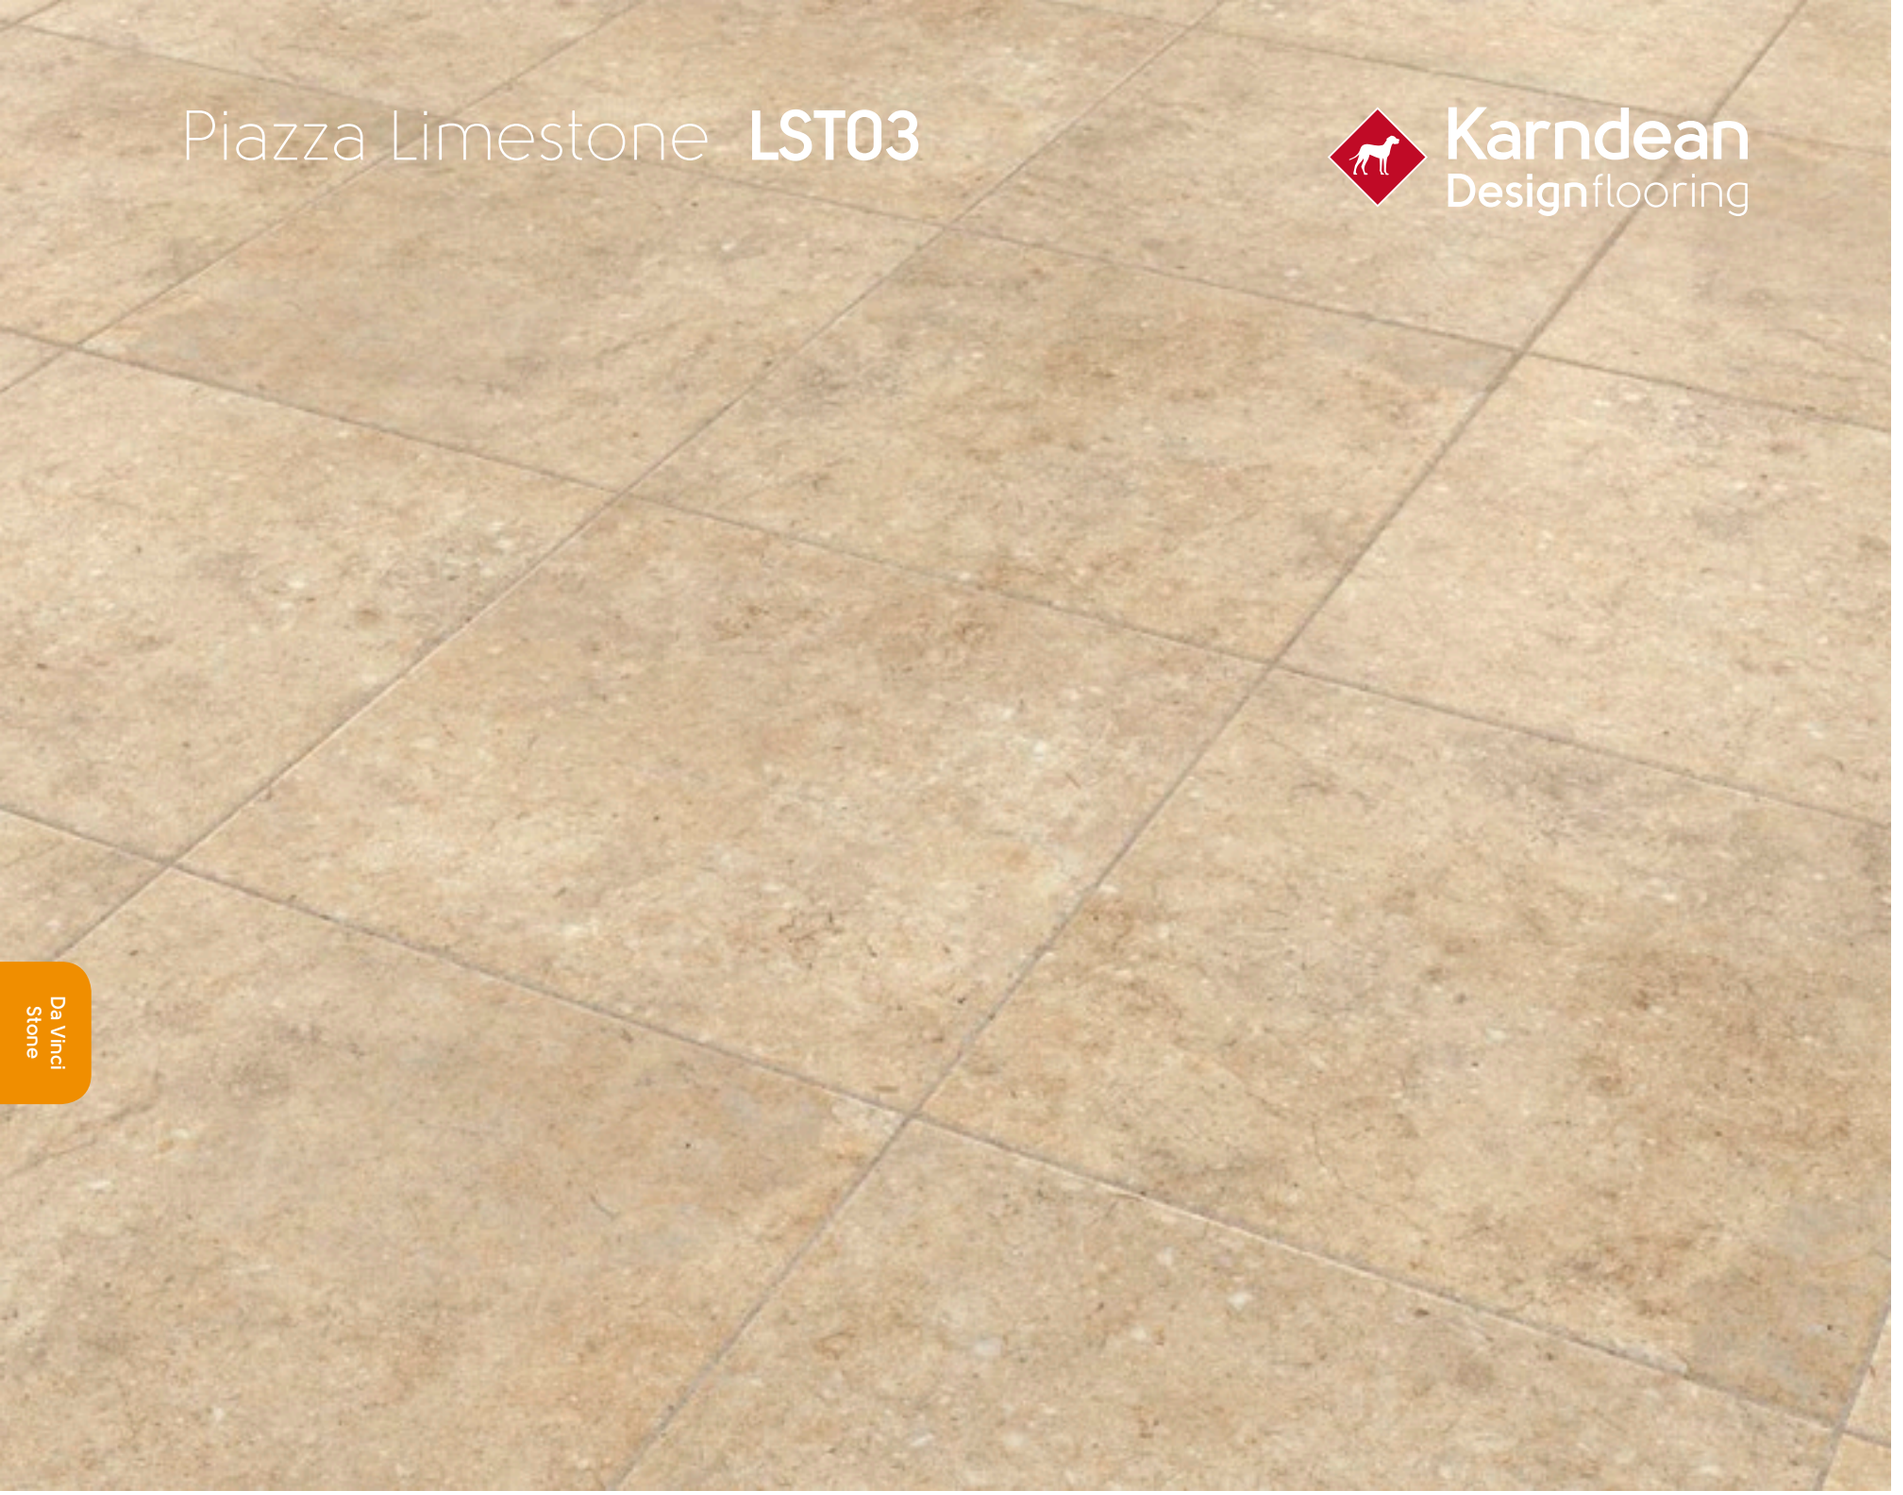

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197


Decorative Strip Shown:

DS15 (3mm)

TEXT
LST03
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Spirito Limestone **LST04**

Karndean Designflooring

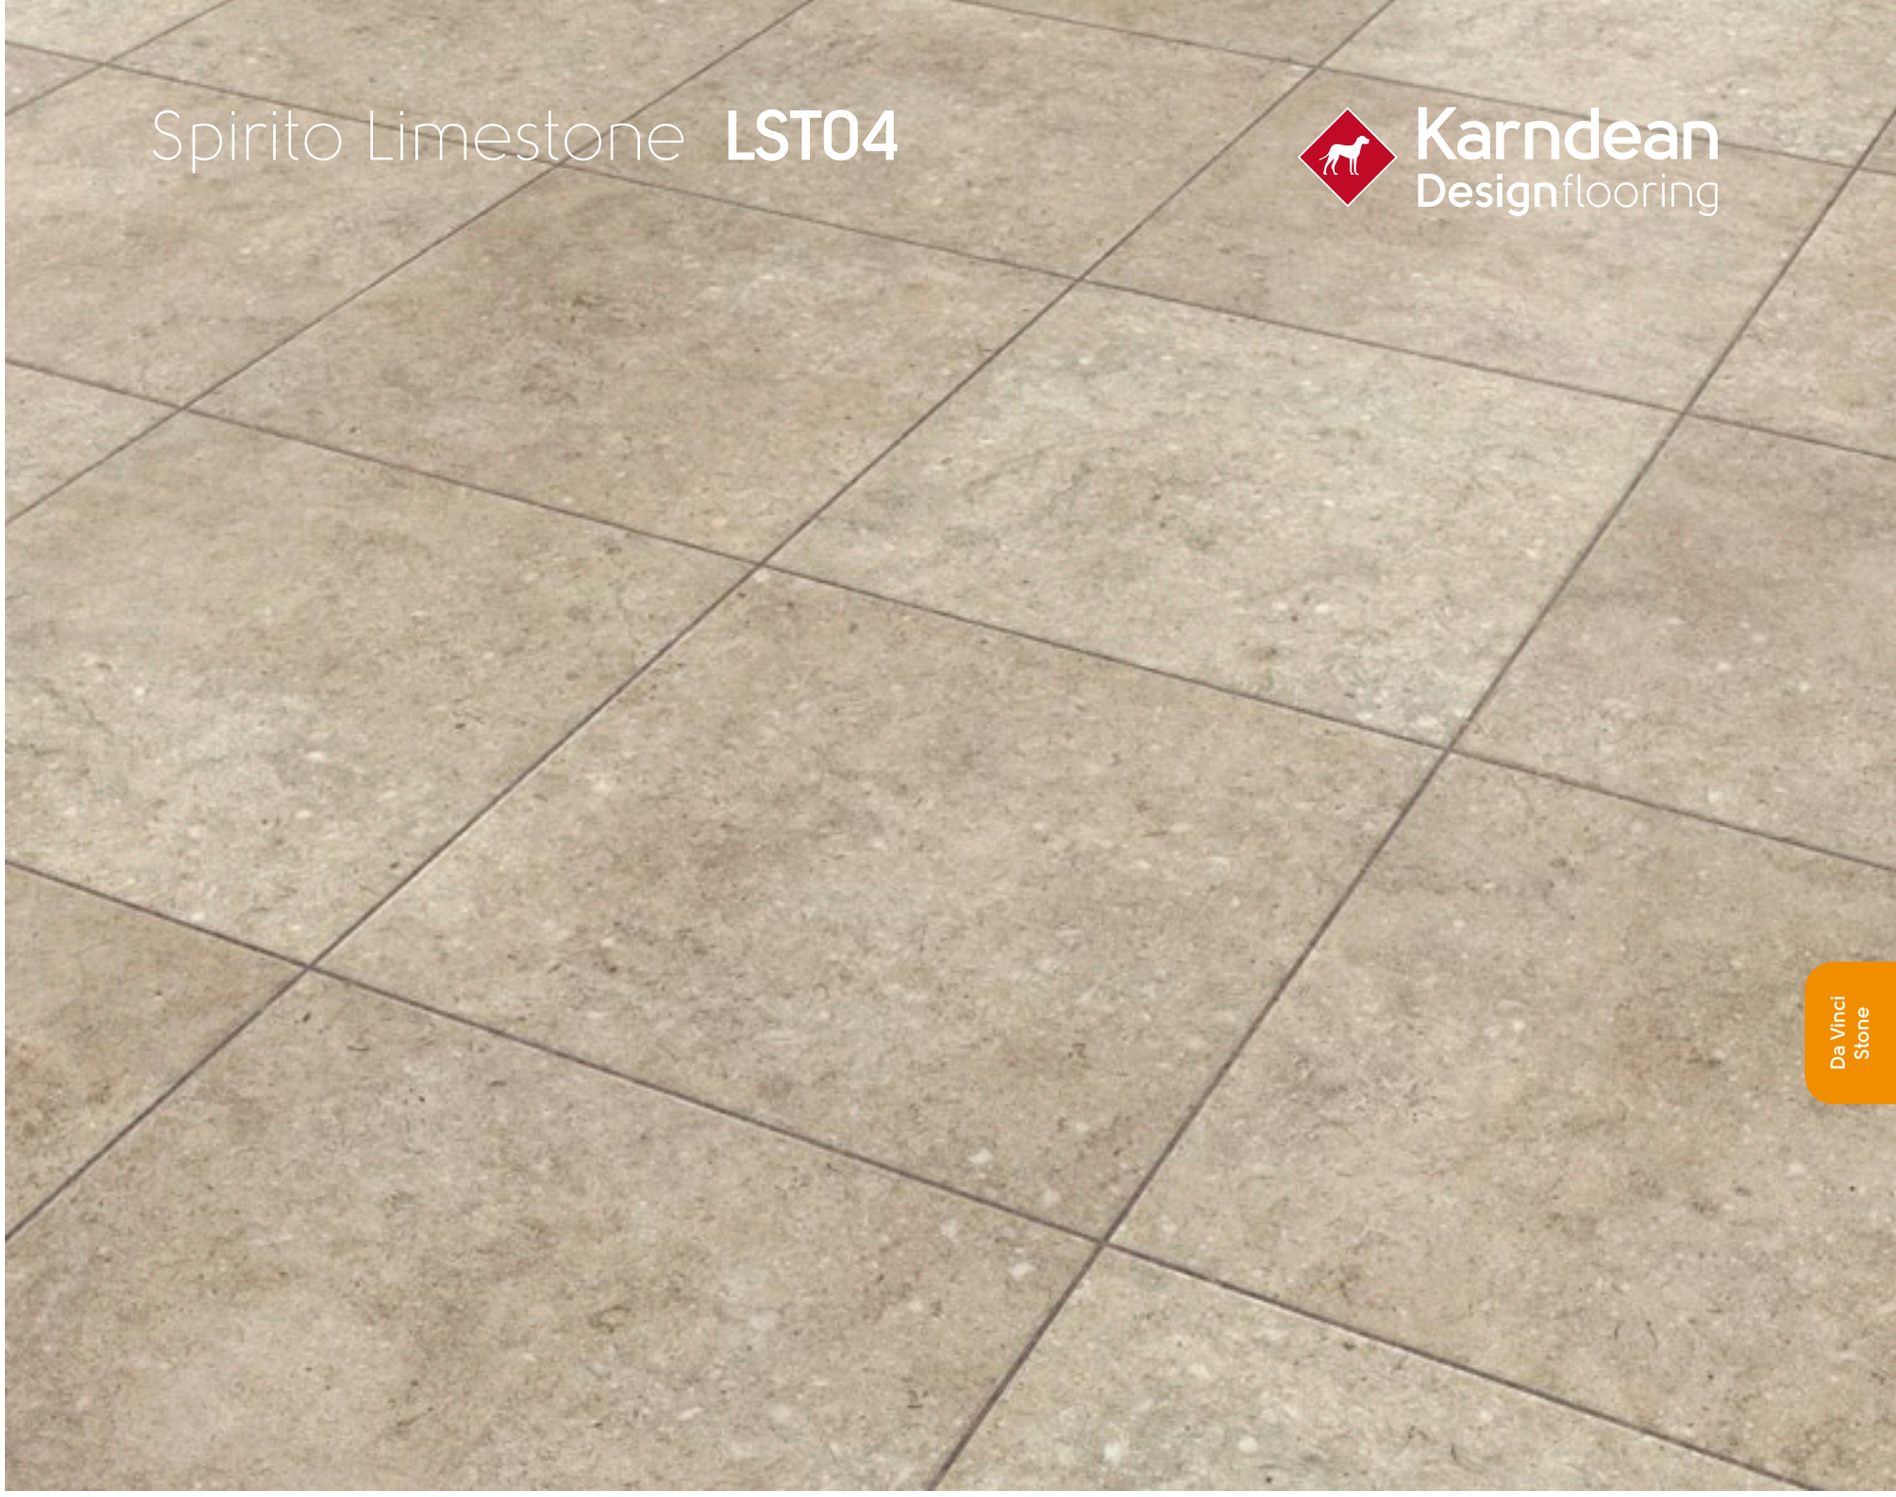

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS16 (3mm)

TEXT
LST04
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Dune **CER15**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS10 (3mm)

TEXT
CER15
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Cambric **CER20**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS20 (3mm)

TEXT
CER20
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Santi Limestone **LST05**

Karndean Designflooring



Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS10 (3mm)

TEXT
LST05
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Sable **CER16**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
CER16
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burnet **CER19**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS12 (3mm)

TEXT
CER19
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Drift **CER17**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
CER17
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Eisen **CER13**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
CER13
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Oxide **CC08**

Karndean Designflooring



Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS20 (3mm)

TEXT
CC08
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Molten **CER11**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

TEXT
CER11
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Iron Ore **CER12**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

AF07 (3mm)

TEXT
CER12
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Sindon **CER21**

Karndean Designflooring



Da Vinci Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS12 (3mm)

TEXT
CER21
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Carbon **CER14**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS12 (3mm)

TEXT
CER14
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Opus Stone

Opus Enhance

Our most popular Opus products are available with enhanced slip resistance.
Ask your Karndean Commercial Business Manager for more information.

18" x 24" (457mm x 610mm)


Page GD: 216


Terra **SP212**


Page GD: 220

Urbus **SP213**


Page GD: 218

Fumo **SP216**

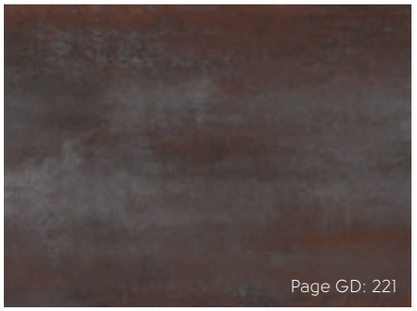
Page GD: 221

Ferra **SP215**

6" x 36" (152mm x 915mm)


Page GD: 224

Russus **SP717***


Page GD: 222

Texo **SP718***

18" x 36" (457mm x 915mm)


Page GD: 219

Lapis **SP711**


Page GD: 217

Clarus **SP714**


Page GD: 225

Robigo **SP715***


Page GD: 223

Aurego **SP716***

* Same color available in different formats, see product page for details.

Opus **Stone**

Opus | GLUEDOWN

Our Opus stones offer fresh, contemporary visuals in some of our largest tile sizes, perfect for commercial applications. Visuals in this collection feature the looks of brushed, stained and polished concrete, travertine limestone. Two of our designs are available in compatible 6" x 36" planks and 18" x 36" sizes, which allow for additional design flexibility. Use these two size formats together or alone, or incorporate design strips to create a grouted look (see page GD: 242).



Clarus **SP714**

	Standard	Result
Thickness		2.5 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.89)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 5.0
Abrasion resistance	ASTM D3884	124000 Cycles
Dimensional stability	ASTM F2199	Pass -0.004"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 4 dB IIC = 44 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page GD: 261.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Terra **SP212**

Karndean Designflooring



Opus Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215


Decorative Strip Shown:

DS10 (3mm)

TEXT
SP212
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Clarus **SP714**

Karndean Designflooring

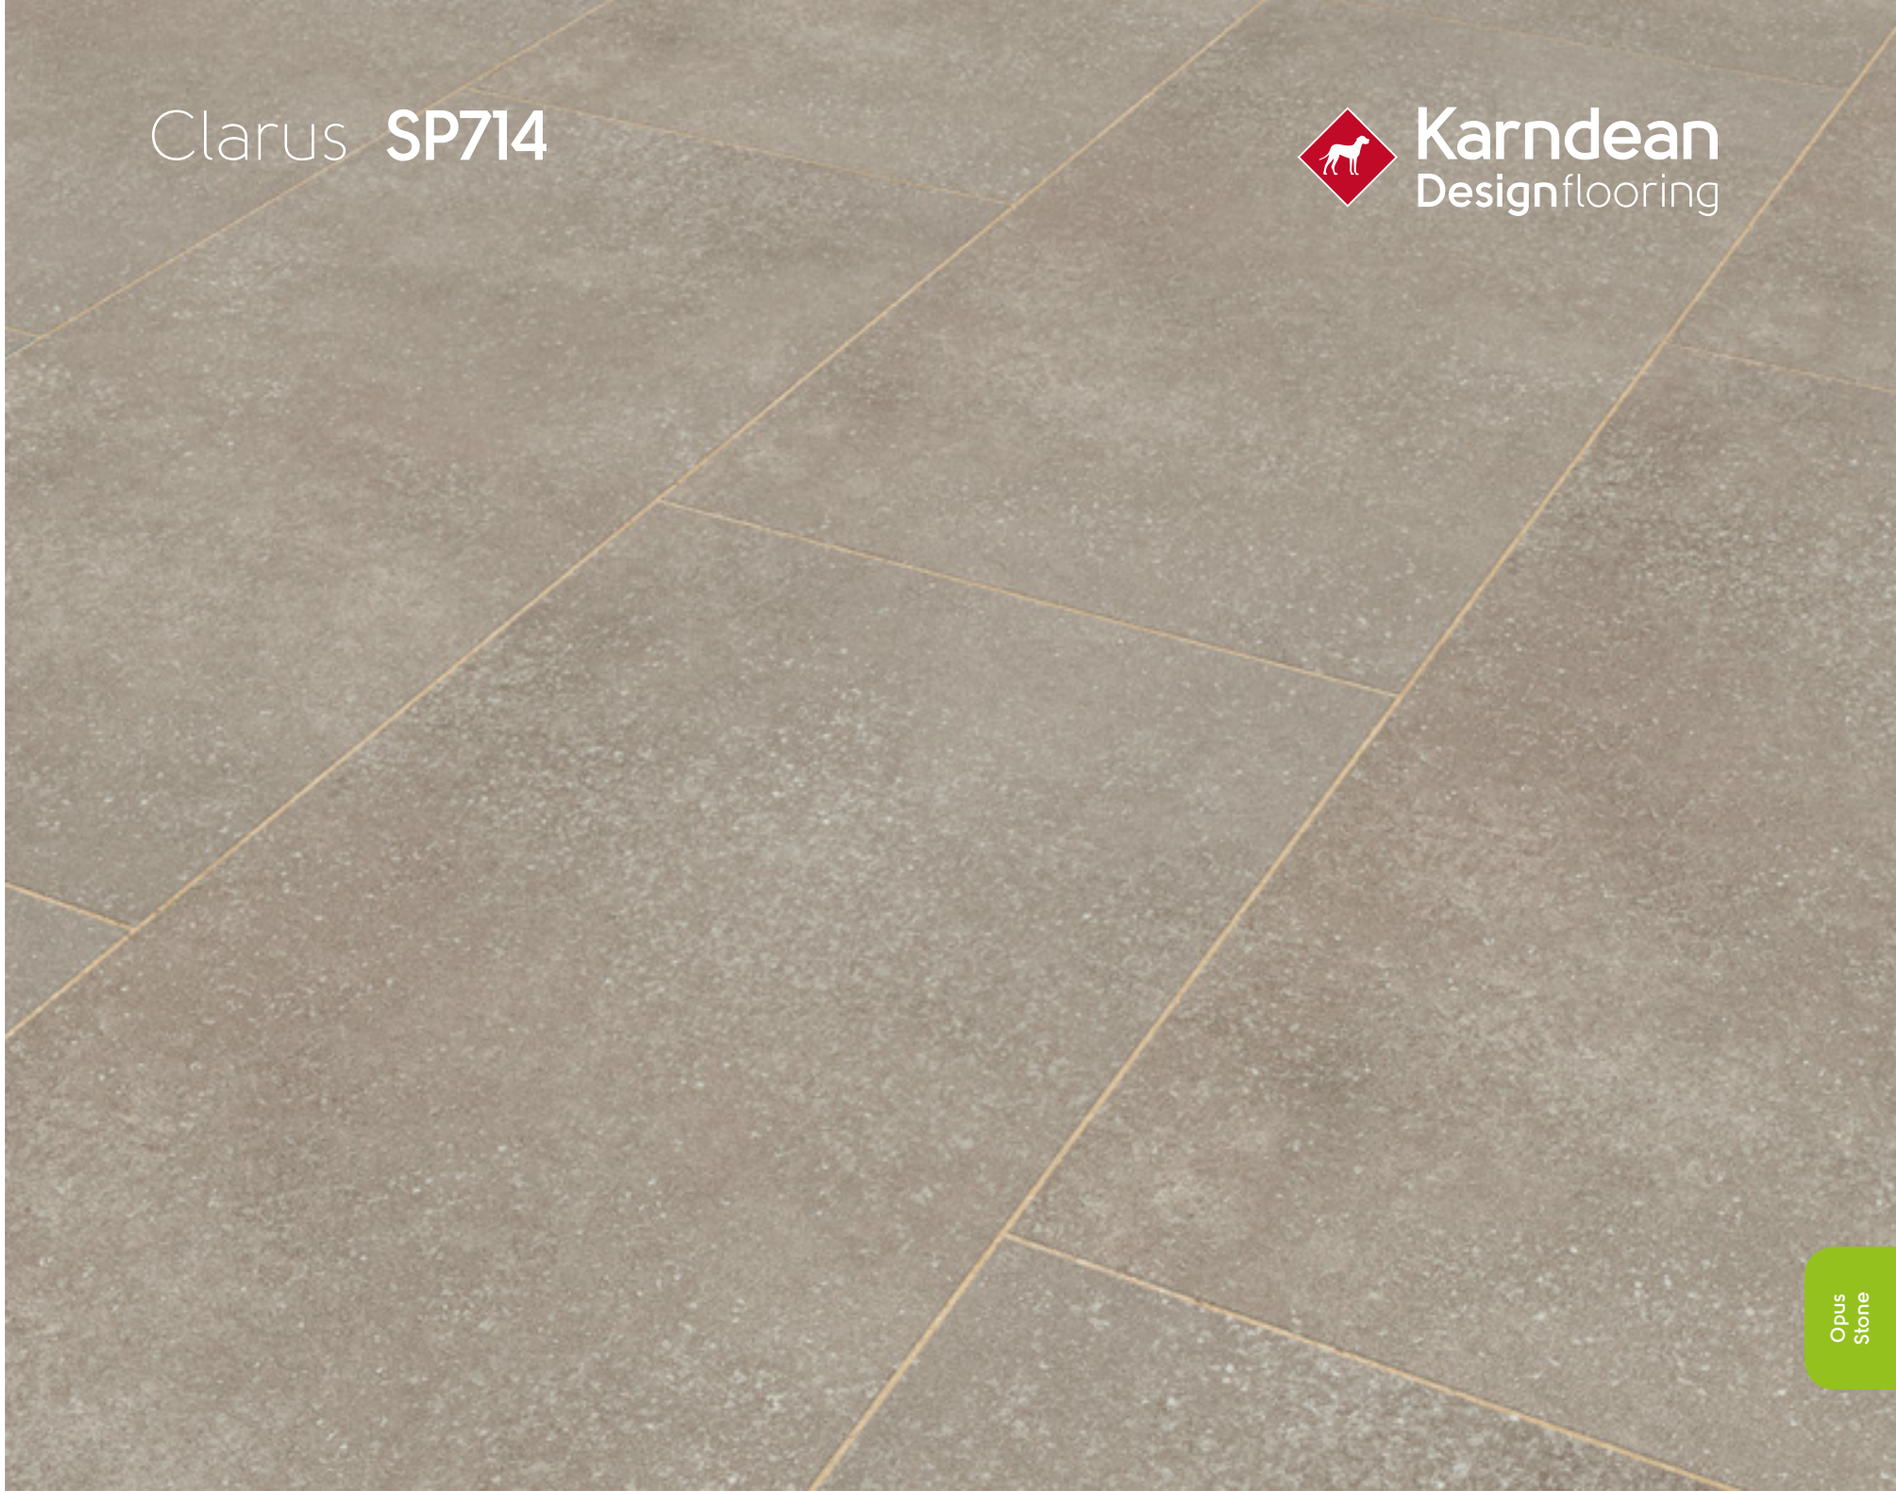

Size	18" x 36" (457mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	8 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

Decorative Strip Shown:

DS20 (3mm)

TEXT
SP714
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Fumo **SP216**

Karndean Designflooring



Opus Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

Decorative Strip Shown:

DS10 (3mm)

TEXT
SP216
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lapis **SP711**

Karndean Designflooring



Opus Stone

Size	18" x 36" (457mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	8 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

Decorative Strip Shown:

DS20 (3mm)

TEXT
SP711
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Urbus **SP213**

Karndean Designflooring



Opus Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

Decorative Strip Shown:

DS10 (3mm)

TEXT
SP213
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Ferra **SP215**

Karndean Designflooring



Opus Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215


Decorative Strip Shown:

DS17 (3mm)

TEXT
SP215
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Texo **SP718**

Karndean Designflooring

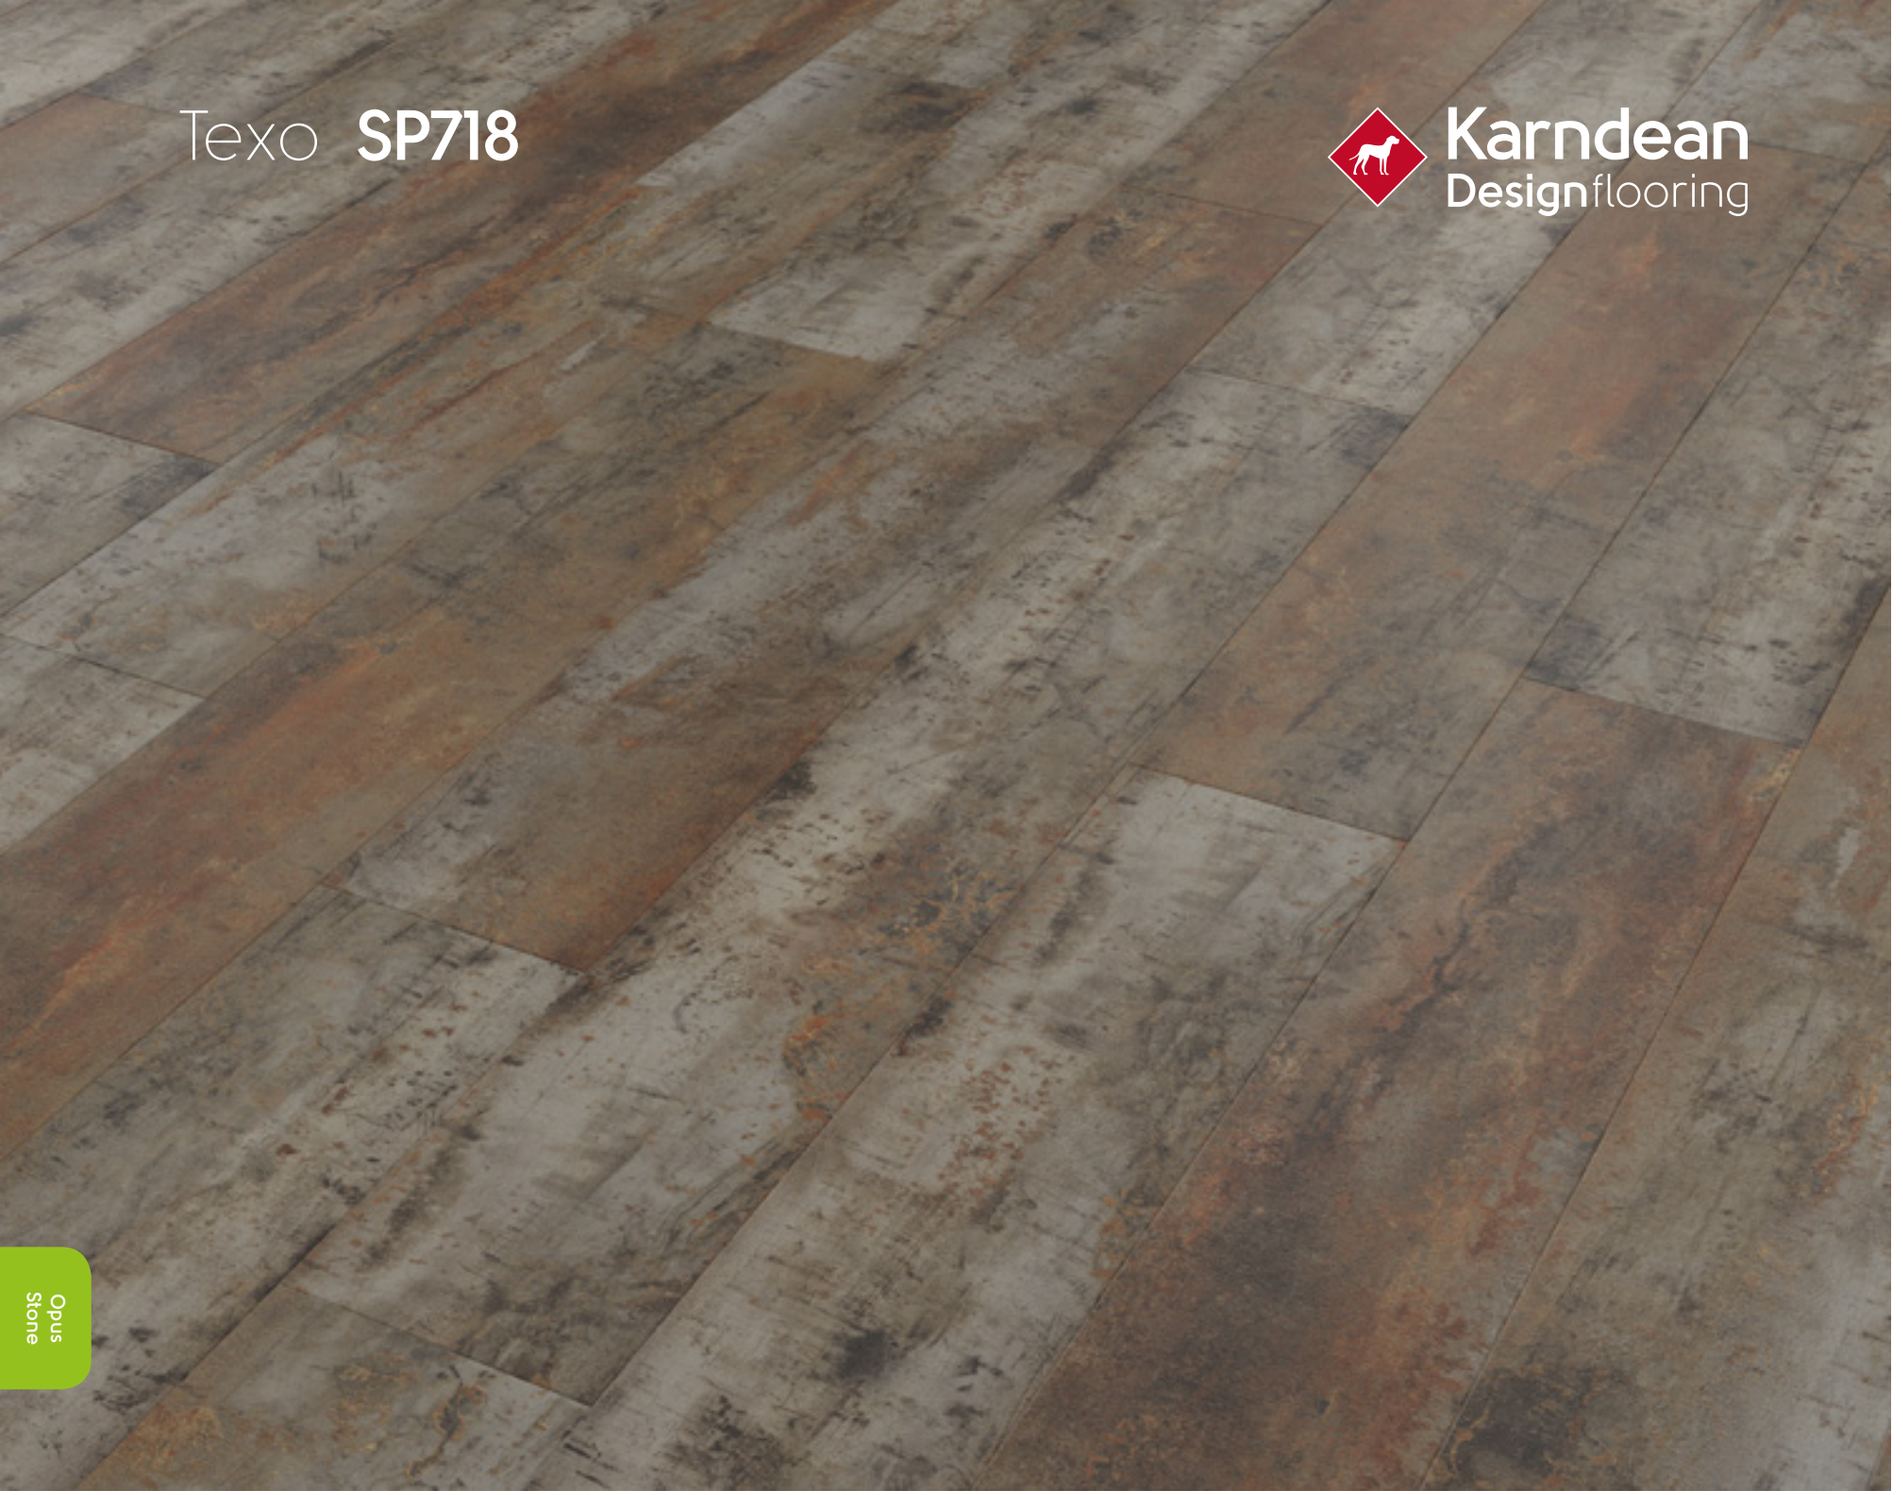

Opus Stone

Size	6" x 36" (152mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:


Page GD: 215

This color is also available in a 18" x 36" format, see page opposite.

TEXT
SP718
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aurego **SP716**

Karndean Designflooring

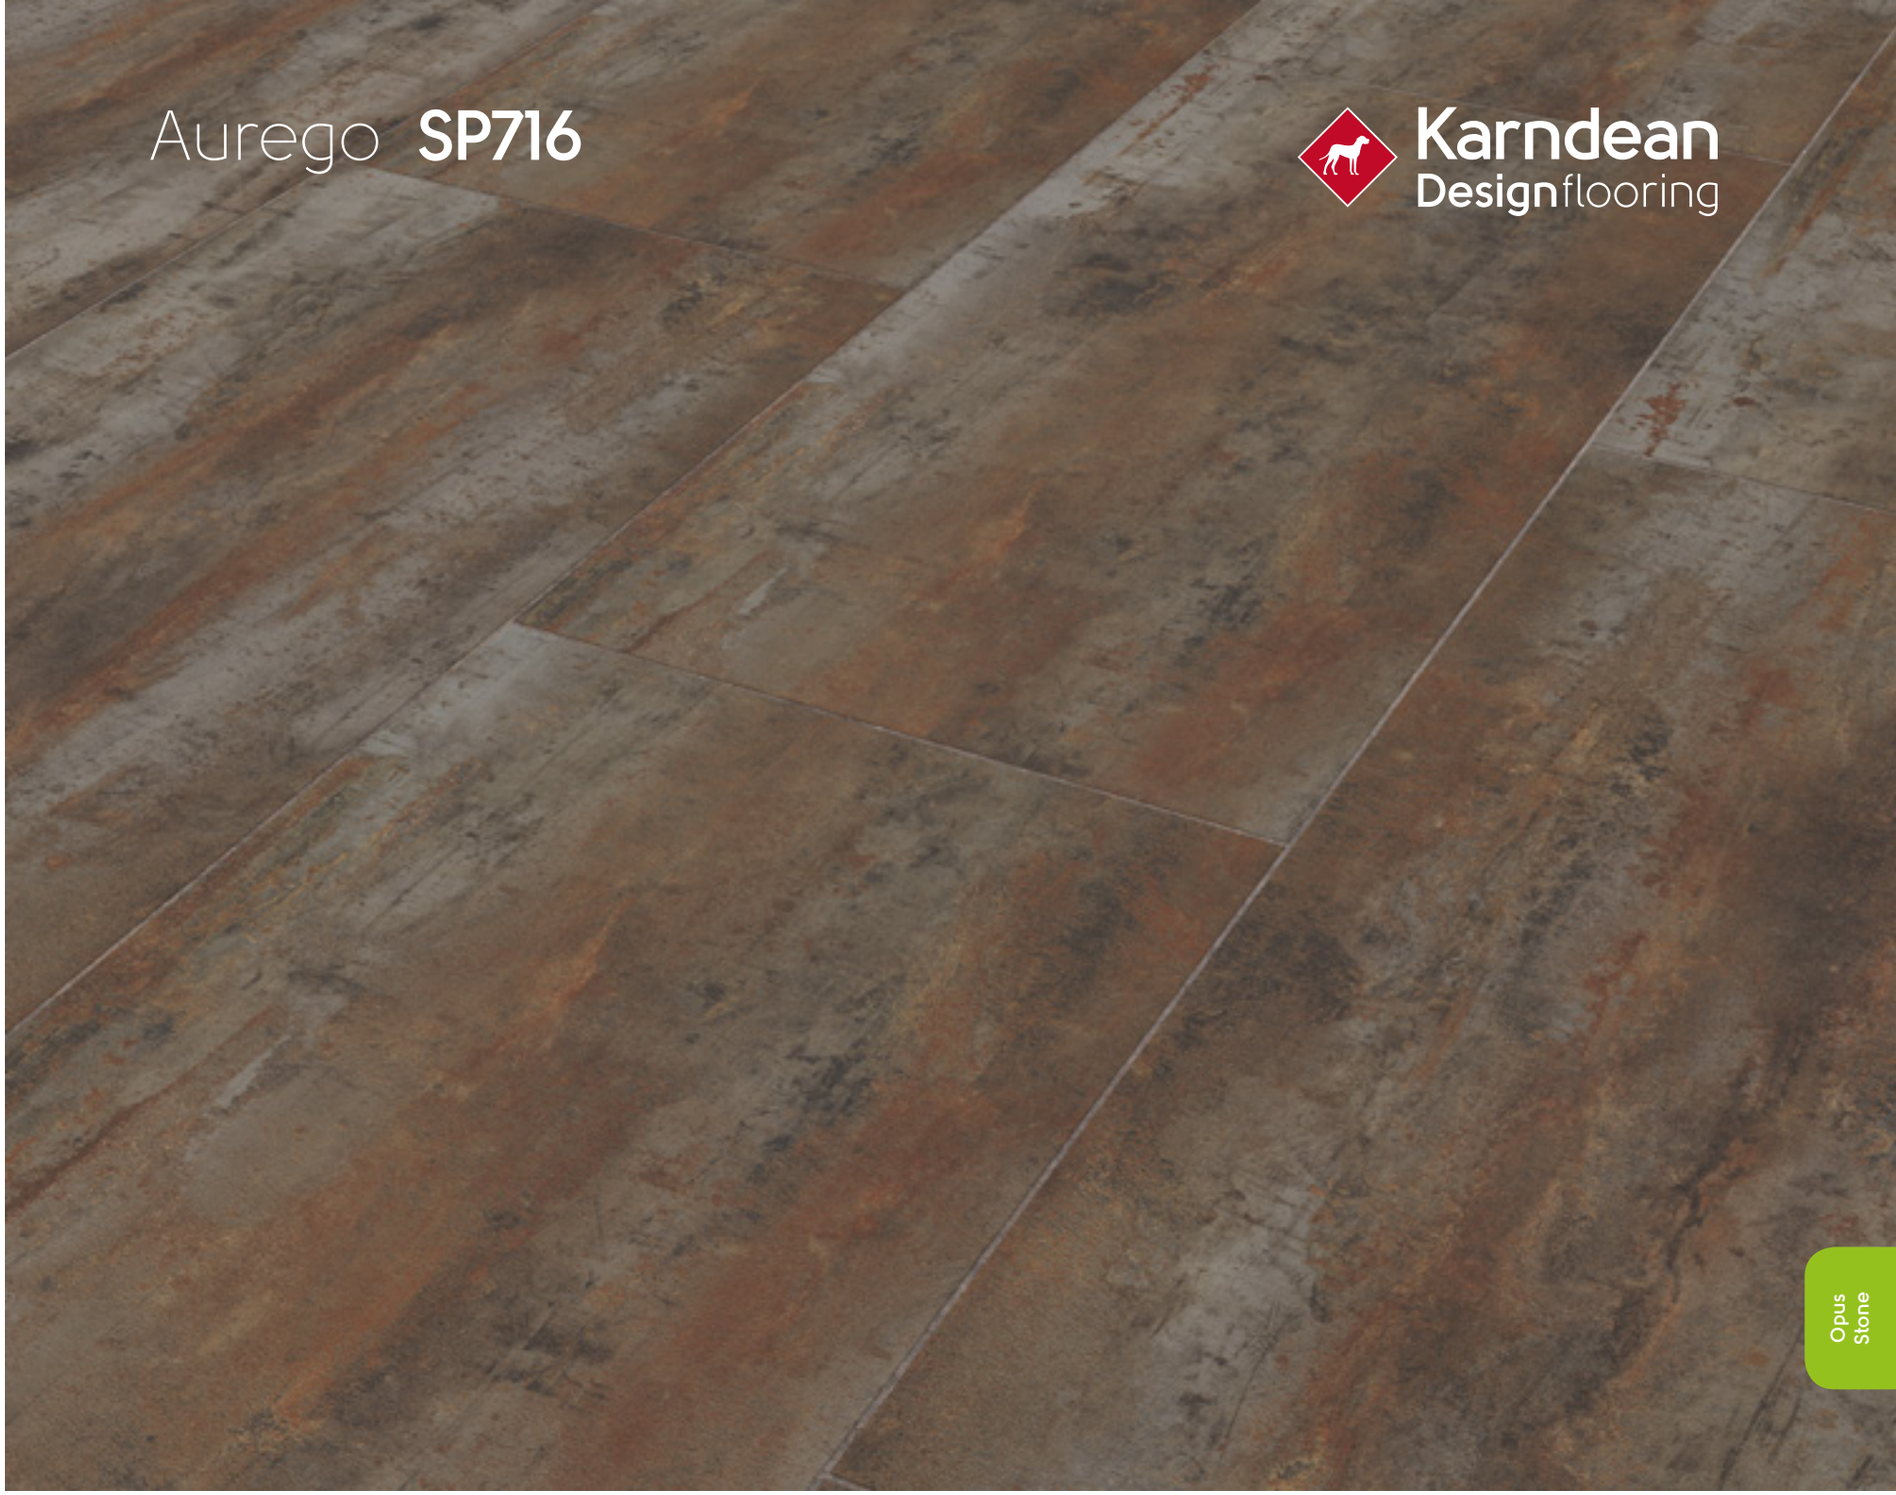

Opus Stone

Size	18" x 36" (457mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	8 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

Decorative Strip Shown:

DS16 (3mm)

This color is also available in a 6" x 36" format, see page opposite.

TEXT
SP716
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Russus **SP717**

Karndean Designflooring



Opus
Stone

Size	6" x 36" (152mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

This color is also available in a 18" x 36" format, see page opposite.

TEXT
SP717
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Robigo **SP715**

Karndean Designflooring



Opus Stone

Size	18" x 36" (457mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	8 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page GD: 215

Decorative Strip Shown:


DS07 (3mm)

This color is also available in a 6" x 36" format, see page opposite.


TEXT
SP715
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Knight Tile **Stone**


12" x 12" (305mm x 305mm)




Soapstone **ST5**




Midnight Black **T74**




Copper **T84**



Andecite **T89**



Carrara **T90**



Rona **T99**


12" x 18" (305mm x 457mm)



Bath Stone **ST12**



Portland Stone **ST13**

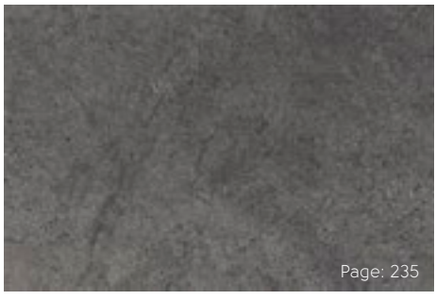

Cumbrian Stone **ST14**



Grey Riven Slate **ST16**



Honed Oyster Slate **ST17**

Knight Tile **Stone**

Knight Tile | GLUEDOWN

Our Knight Tile stone range offers an array of styles inspired by slate, limestone and marble, and offers a versatile selection of design components to complement any chosen floor. Compared to natural stone, Knight Tile is warmer, quieter underfoot and easier to maintain, making it the ideal solution for multi-unit properties, retail spaces and restaurant facilities.



Grey Riven Slate **ST16**

	Standard	Result
Thickness		2.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		12 mil (0.3 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	10 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.88)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 1.3
Abrasion resistance	ASTM D3884	42000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0012"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 4 dB IIC = 43 dB (6" slab w/drop ceiling) IIC = 70 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray K-Spray 98 Karndean Epoxy K-95HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Carrara **T90**

Karndean Designflooring



Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

TEXT
T90
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Honed Oyster Slate **ST17**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS12 (3mm)

TEXT
ST17
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Soapstone **ST5**

Karndean Designflooring



Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS15 (3mm)

TEXT
ST5
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Bath Stone **ST12**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS10 (3mm)

TEXT
ST12
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Rona T99

Karndean Designflooring



Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS16 (3mm)

TEXT
T99
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Portland Stone **ST13**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS10 (3mm)

TEXT
ST13
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Grey Riven Slate **ST16**



Karndean Designflooring

Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225


Decorative Strip Shown:

DS12 (3mm)

TEXT
ST16
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Andecite **T89**

Karndean Designflooring

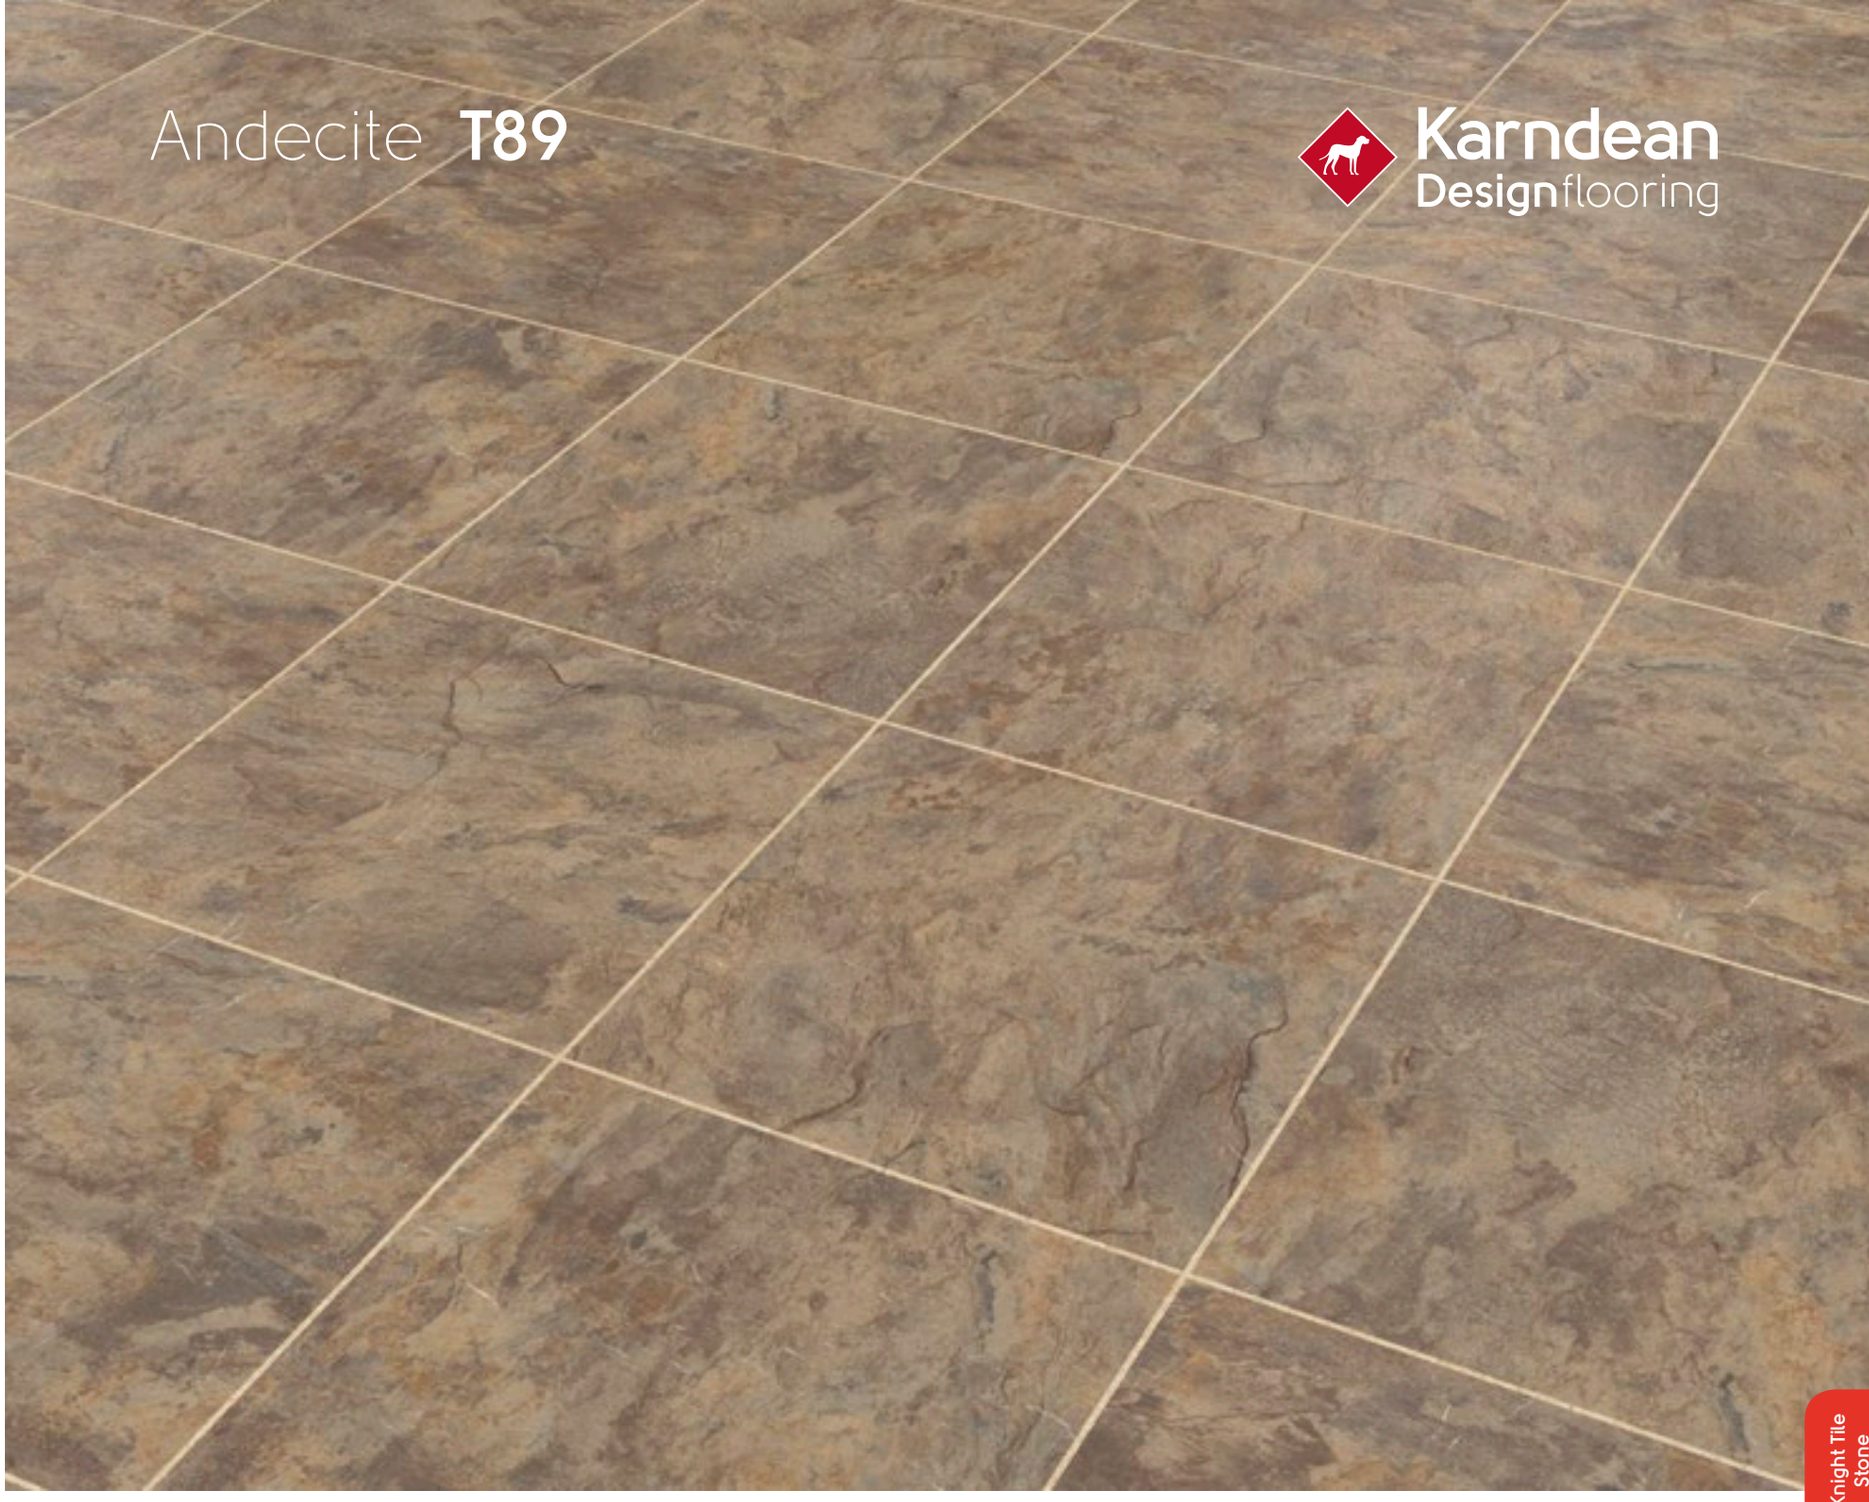

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225


Decorative Strip Shown:

DS20 (3mm)

TEXT
T89
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Copper **T84**

Karndean Designflooring

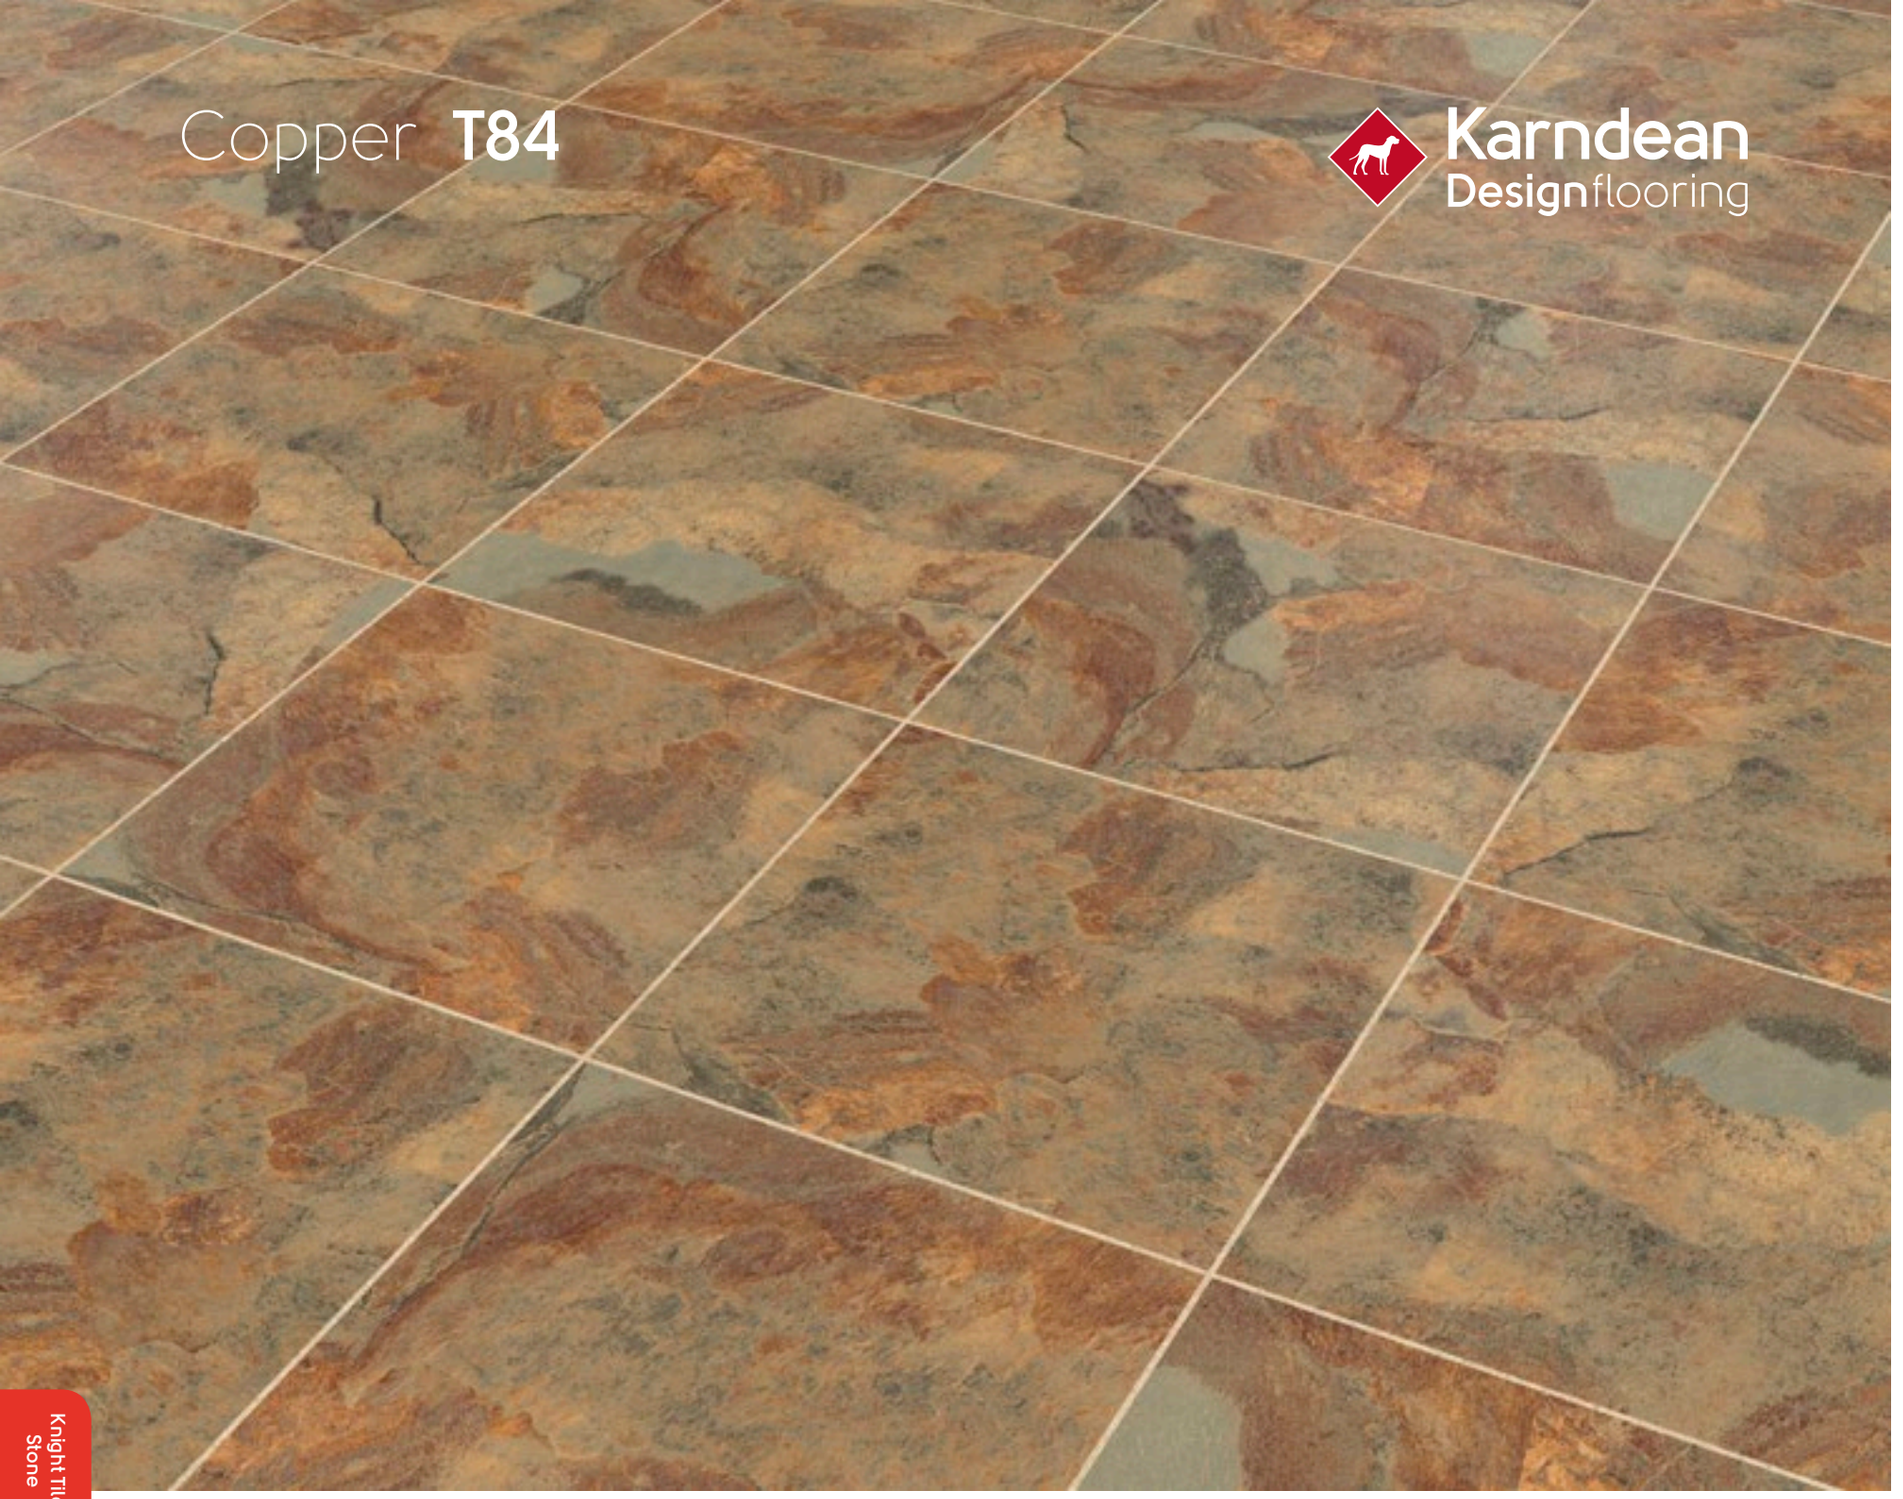

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS20 (3mm)

TEXT
T84
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Cumbrian Stone **ST14**

Karndean Designflooring



Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS10 (3mm)

TEXT
ST14
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Midnight Black **T74**

Karndean Designflooring



Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 225

Decorative Strip Shown:

DS17 (3mm)

TEXT
T74
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.



Cumbrian Stone **ST14** with DS10 3mm design strip





Design components

Design strips


Design strips are narrow pieces of luxury vinyl tile which can be put between our planks and tiles. They allow you to finish off the design of your floor with some realistic touches, such as adding a strip to create a grout effect between tiles (example on page: 35) or between planks for a ship lap effect (example on page: 34). Design strips are available in a variety of colors and widths. The wider the strip, or bolder the color, the more impact it will have, and the beauty of our strips versus real grout is that they won't stain or fade, and they don't have to be sealed.

The choice of color is completely up to you. You may want to choose a design strip in a color that matches the walls, for example, to help tie in elements that are already in your room to your new floor. Alternatively, you could choose a color which helps the overall look of your floor feel either more contemporary or more traditional, enhancing the design of the product you've chosen.

Design strip		compatible with	widths
Vanilla **DS01**		 Available for use with all our floors.	3mm and 10mm
Honey **DS03**			
Coffee **DS04**			
Russet **DS05**			
Chocolate **DS06**			
Ebony **DS07**			
Carbon Cross Grain **DS09**			
Chalk **DS10**			
Concrete **DS12**			
Clay **DS15**			
Charcoal **DS16**			
Silver **DS17**			
Sand **DS20**			

Grout strip		compatible with	widths
Beige **AF06**		Available for use with Art Select*, Da Vinci*, Opus and Knight Tile floors.	3mm
Ivory **AF05**			
Taupe **AF04**			
Brown **AF02**			
Chestnut **AF07**			
Black **AF01**			

Feature strip		compatible with	widths
Beige		Available for use with Art Select*, Da Vinci*, Opus and Knight Tile** floors.	5mm
Gray			
Brown			
Gold			
Light Brown			
Black			

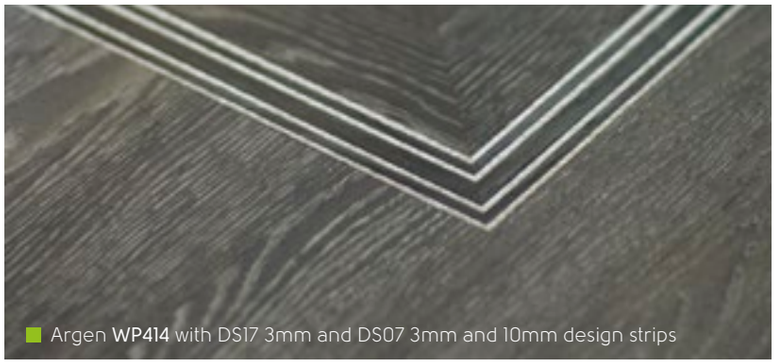

Argen **WP414** with DS17 3mm and DS07 3mm and 10mm design strips



Bath Stone **ST12** with DS10 3mm and DS14 10mm design strips

* Due to Art Select and Da Vinci's beveled edge, these strips can only be used between planks or tiles and not along a cut edge.

** Knight Tile feature strip is supplied FREE on request with Knight Tile products only (82 linear ft per tube). One tube of feature strip provides enough material for one box of Knight Tile product. Supplied free, only if delivered with Knight Tile, as one consignment.

Decorative borders


Define the perimeter of your space with decorative style. We offer a variety of decorative borders to complement our gluedown ranges. Choose a sleek, single tone option, such as Accent or a strong, distinctive pattern like Zigzag.

Border		use with		made up of	width	length
Accent			**CER14**	CER14	1.5″	36″
Block			**RP41**	RP41/DS01	3″	36″
Canterbury			**T101**	T101/DS15	2″	34.25″
Dark Mackintosh			**ST14**	ST14/ST13/DS10	2″	37″
Dark Mosaic			**ST12**	ST12/ST13/ST14/DS10	1″	35.5″
			ST13			
			ST14			
Davyne			**CER15**	CER15/AF06	3″	35″
Davyne			**CER16**	CER16/CER15/AF06	3″	35″
Diamond			**T90**	T90/T74	3″	36″
Diamond			**LM16**	LM15/LM16	2.5″	36″
Geometric			**T86**	T86/T88	4″	36″

Border		use with		made up of	width	length
Kousa			**CER20**	CER20/CER21	1.8"	35.5"
Kousa Framed			**CER19**	CER19/DS12	3"	34"
Leaf			**KP107**	KP107/KP40	4"	36"
Leaf			**WP513**	WP513/P707	4"	37"
Light Mackintosh			**ST13**	ST13/ST14/DS10	2"	37"
			ST14			
Light Mosaic			**ST11**	ST11/ST12/ST13/DS10	1"	35.5"
			ST12			
			ST13			
Mackintosh			**LST04**	LST04/LST05/DS10	2"	37"
			LST05			
Mosaic			**LST03**	LST03/LST04/ LST05/DS10	1"	35.5"
			LST04			
			LST05			
Quadrant			**CER13**	CER13	2"	36"
Regent			**KP70**	KP40/KP70	2"	36"
Weave			**RP61**	RP02/RP11/RP61	3"	36"
Windsor			**KP36**	KP36/KP38	2"	36"
Windsor			**ST16**	ST16/DS12	2"	36"
Zigzag			**LM22**	CC06/LM22//LM16	2.5"	36"
			CC06			

Custom cutting

With Karndean Designflooring, you really can design the floor you want. We offer an in-house custom cutting service which allows you to incorporate a company logo, a motif or simply an additional design element into your floor, all cut from your favorite Karndean products.

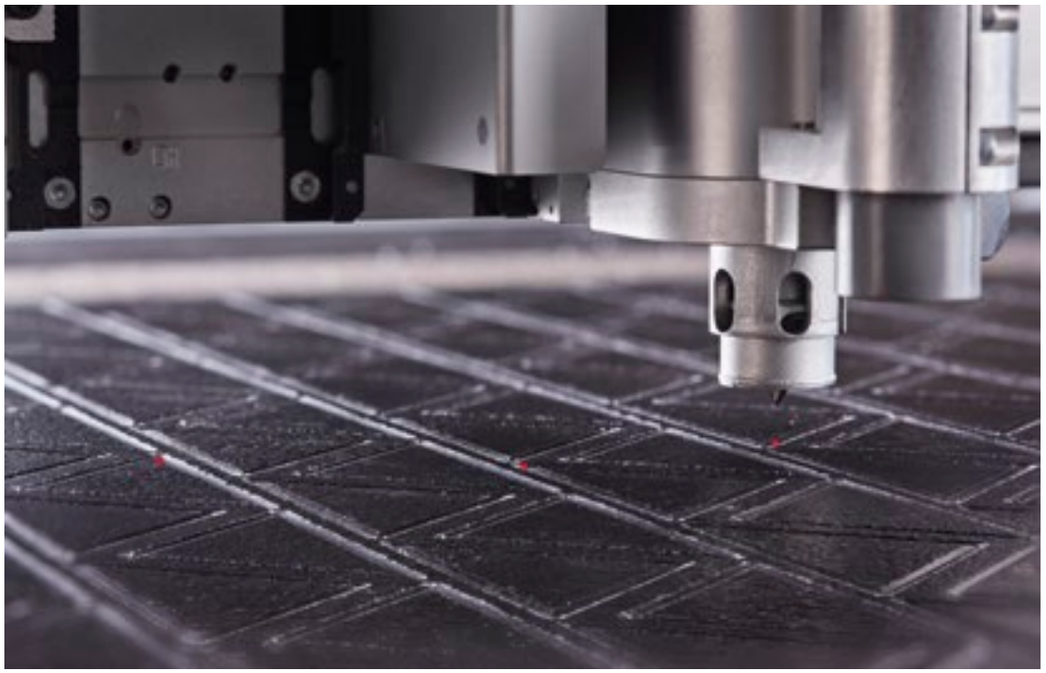






Our designers recreate your preferred image using top-of-the-line software to enable flawless reproduction.



If preferred, we also offer a number of pre-defined motifs where you can simply select the colors you want and we'll do the rest. For example, our Nexus and Star motifs are classic, eye-catching designs that look phenomenal in entryways and hallways.

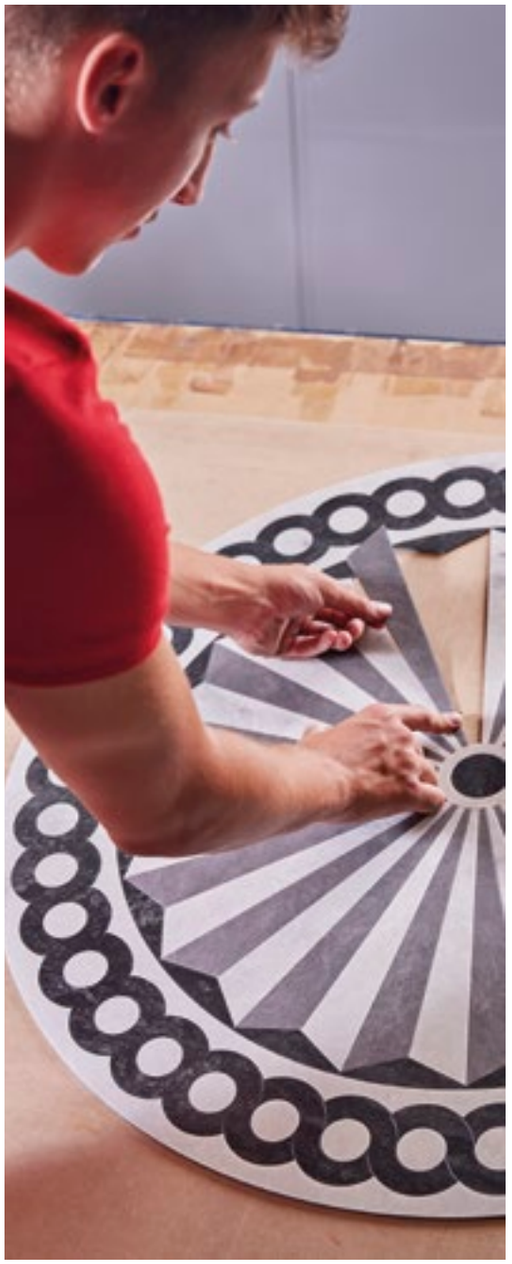



Star feature




Canberra **LM06** with Nexus feature


KaleidSCOPE

Kaleidoscope is an innovative collection of six modular designs custom cut in compatible geometric formats. Utilizing our most popular colors from our standard product ranges, including woods, stones and new solids, Kaleidoscope shapes have complementary scale and angles*, designed to fit together, and offering you unparalleled flexibility.


Use one shape or combine shapes to create compelling spaces that push the boundaries of Designflooring.


Apex



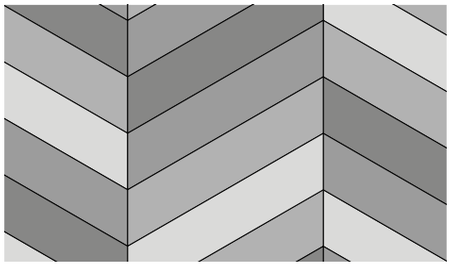



Cubix



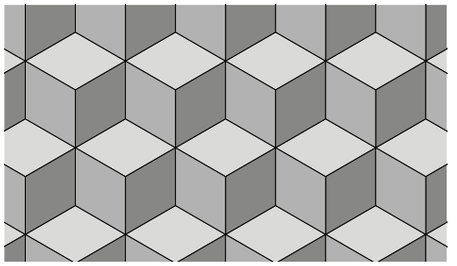



Hexa



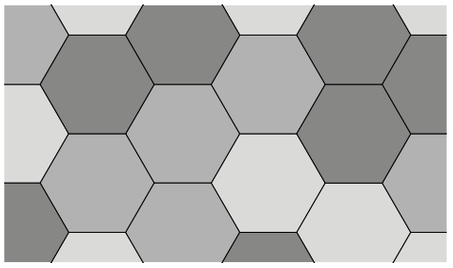



Pennon



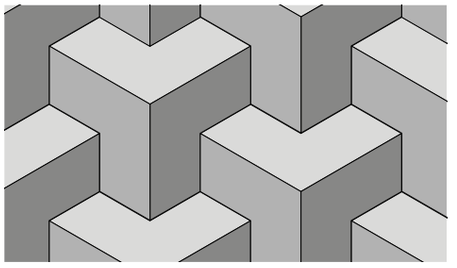



Half Pennon**



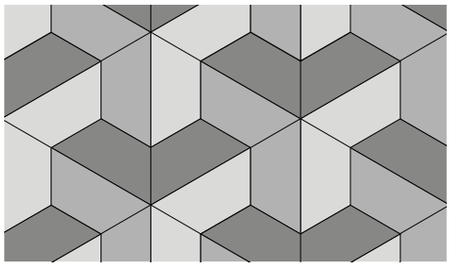



Pyramid



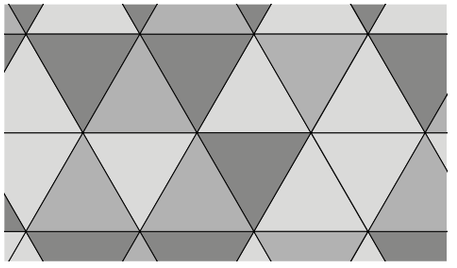

Tripoint



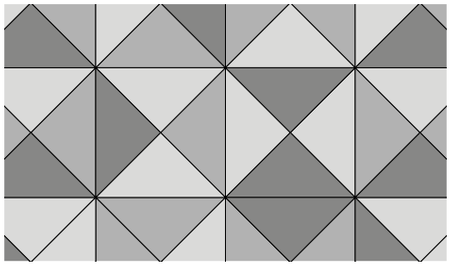

Note: pricing and lead times for these products varies. Contact your Commercial Business Manager for details.


* Excludes Tripoint.
**Available for wood designs.

hospitality design awards


ADEX



Cubix with ■ **SP111** (custom), **SP213** and **SP114** (custom)

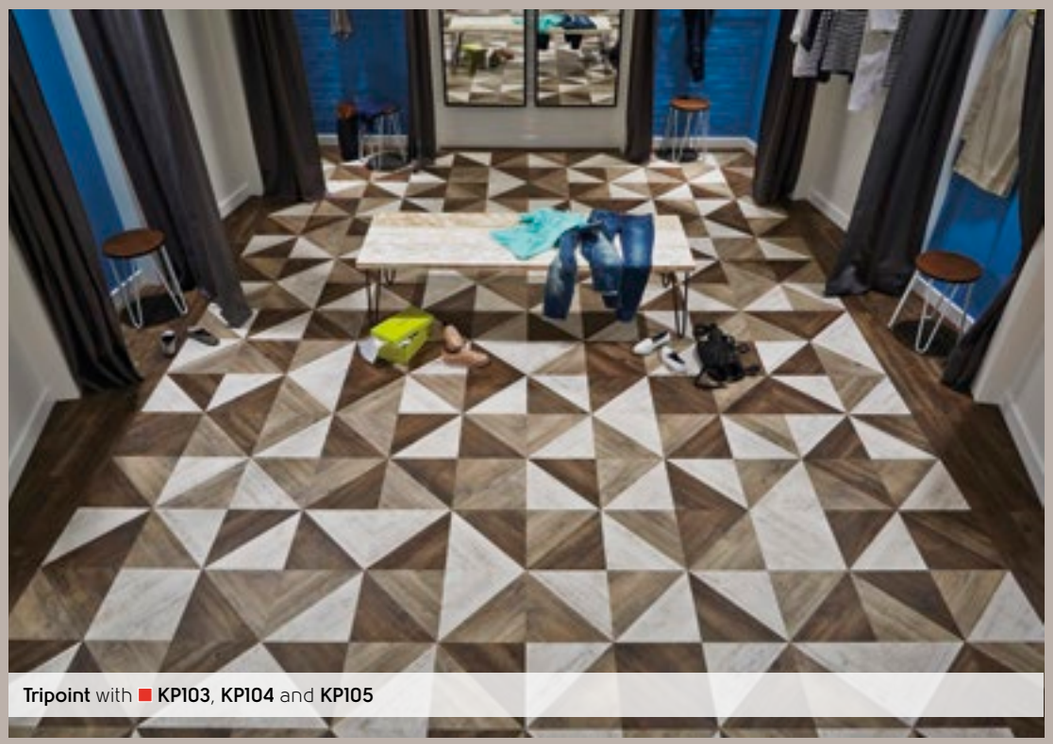

Tripoint with ■ **KP103**, **KP104** and **KP105**

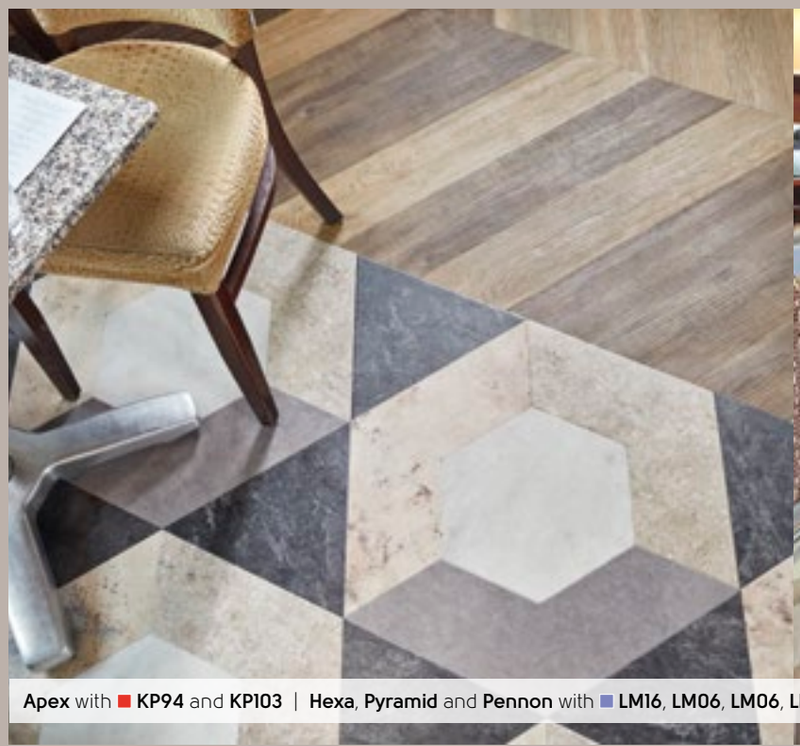



Apex with ■ **KP94** and **KP103** | **Hexa**, **Pyramid** and **Pennon** with ■ **LM16**, **LM06**, **LM06**, **LM22** and ■ **LST04**

Solid colors

Inject bold color into your designs with our new solid colors. Use solid color to add balance to your geometric designs or to incorporate zoning and wayfinding.

Yellow **V1**
Thickness 3.0mm | **Wear Layer** 30 mil

Red **V6**
Thickness 3.0mm | **Wear Layer** 30 mil

Green **V5**
Thickness 3.0mm | **Wear Layer** 30 mil

Blue **V7**
Thickness 3.0mm | **Wear Layer** 30 mil

Black **V9**
Thickness 3.0mm | **Wear Layer** 30 mil

White **V10**
Thickness 3.0mm | **Wear Layer** 30 mil

Baby Blue **V11**
Thickness 2.5mm | **Wear Layer** 20 mil

Azure **V12**
Thickness 2.5mm | **Wear Layer** 20 mil

Laurel **V13**
Thickness 2.5mm | **Wear Layer** 20 mil

Blush **V14**
Thickness 2.5mm | **Wear Layer** 20 mil

Gold **V15**
Thickness 2.5mm | **Wear Layer** 20 mil

Crimson **V16**
Thickness 2.5mm | **Wear Layer** 20 mil

Taupe **V17**
Thickness 2.5mm | **Wear Layer** 20 mil

Terracotta **V18**
Thickness 2.5mm | **Wear Layer** 20 mil

Dove Grey **V19**
Thickness 2.5mm | **Wear Layer** 20 mil

Lace **V20**
Thickness 2.5mm | **Wear Layer** 20 mil

KaleidSCOPE

Note: These products are only suitable for use with our Kaleidoscope range (see page: 246) and our custom cuts offering (see page: 244). As such, pricing and lead times for these products varies. Contact your Commercial Business Manager for details.



American Oak **RP11**, Fresco Light Oak **RP90**, Natural Oak **RP102** and custom White **V10** planks


SATURDAY
SUNDAY


Loose lay



☐ Raven Oak **LLP302**




☐ Pearl Oak **LLP306**



Weathered Heart Pine **LLP304**



□ Colorado **LLT201** | Montana **LLT203**

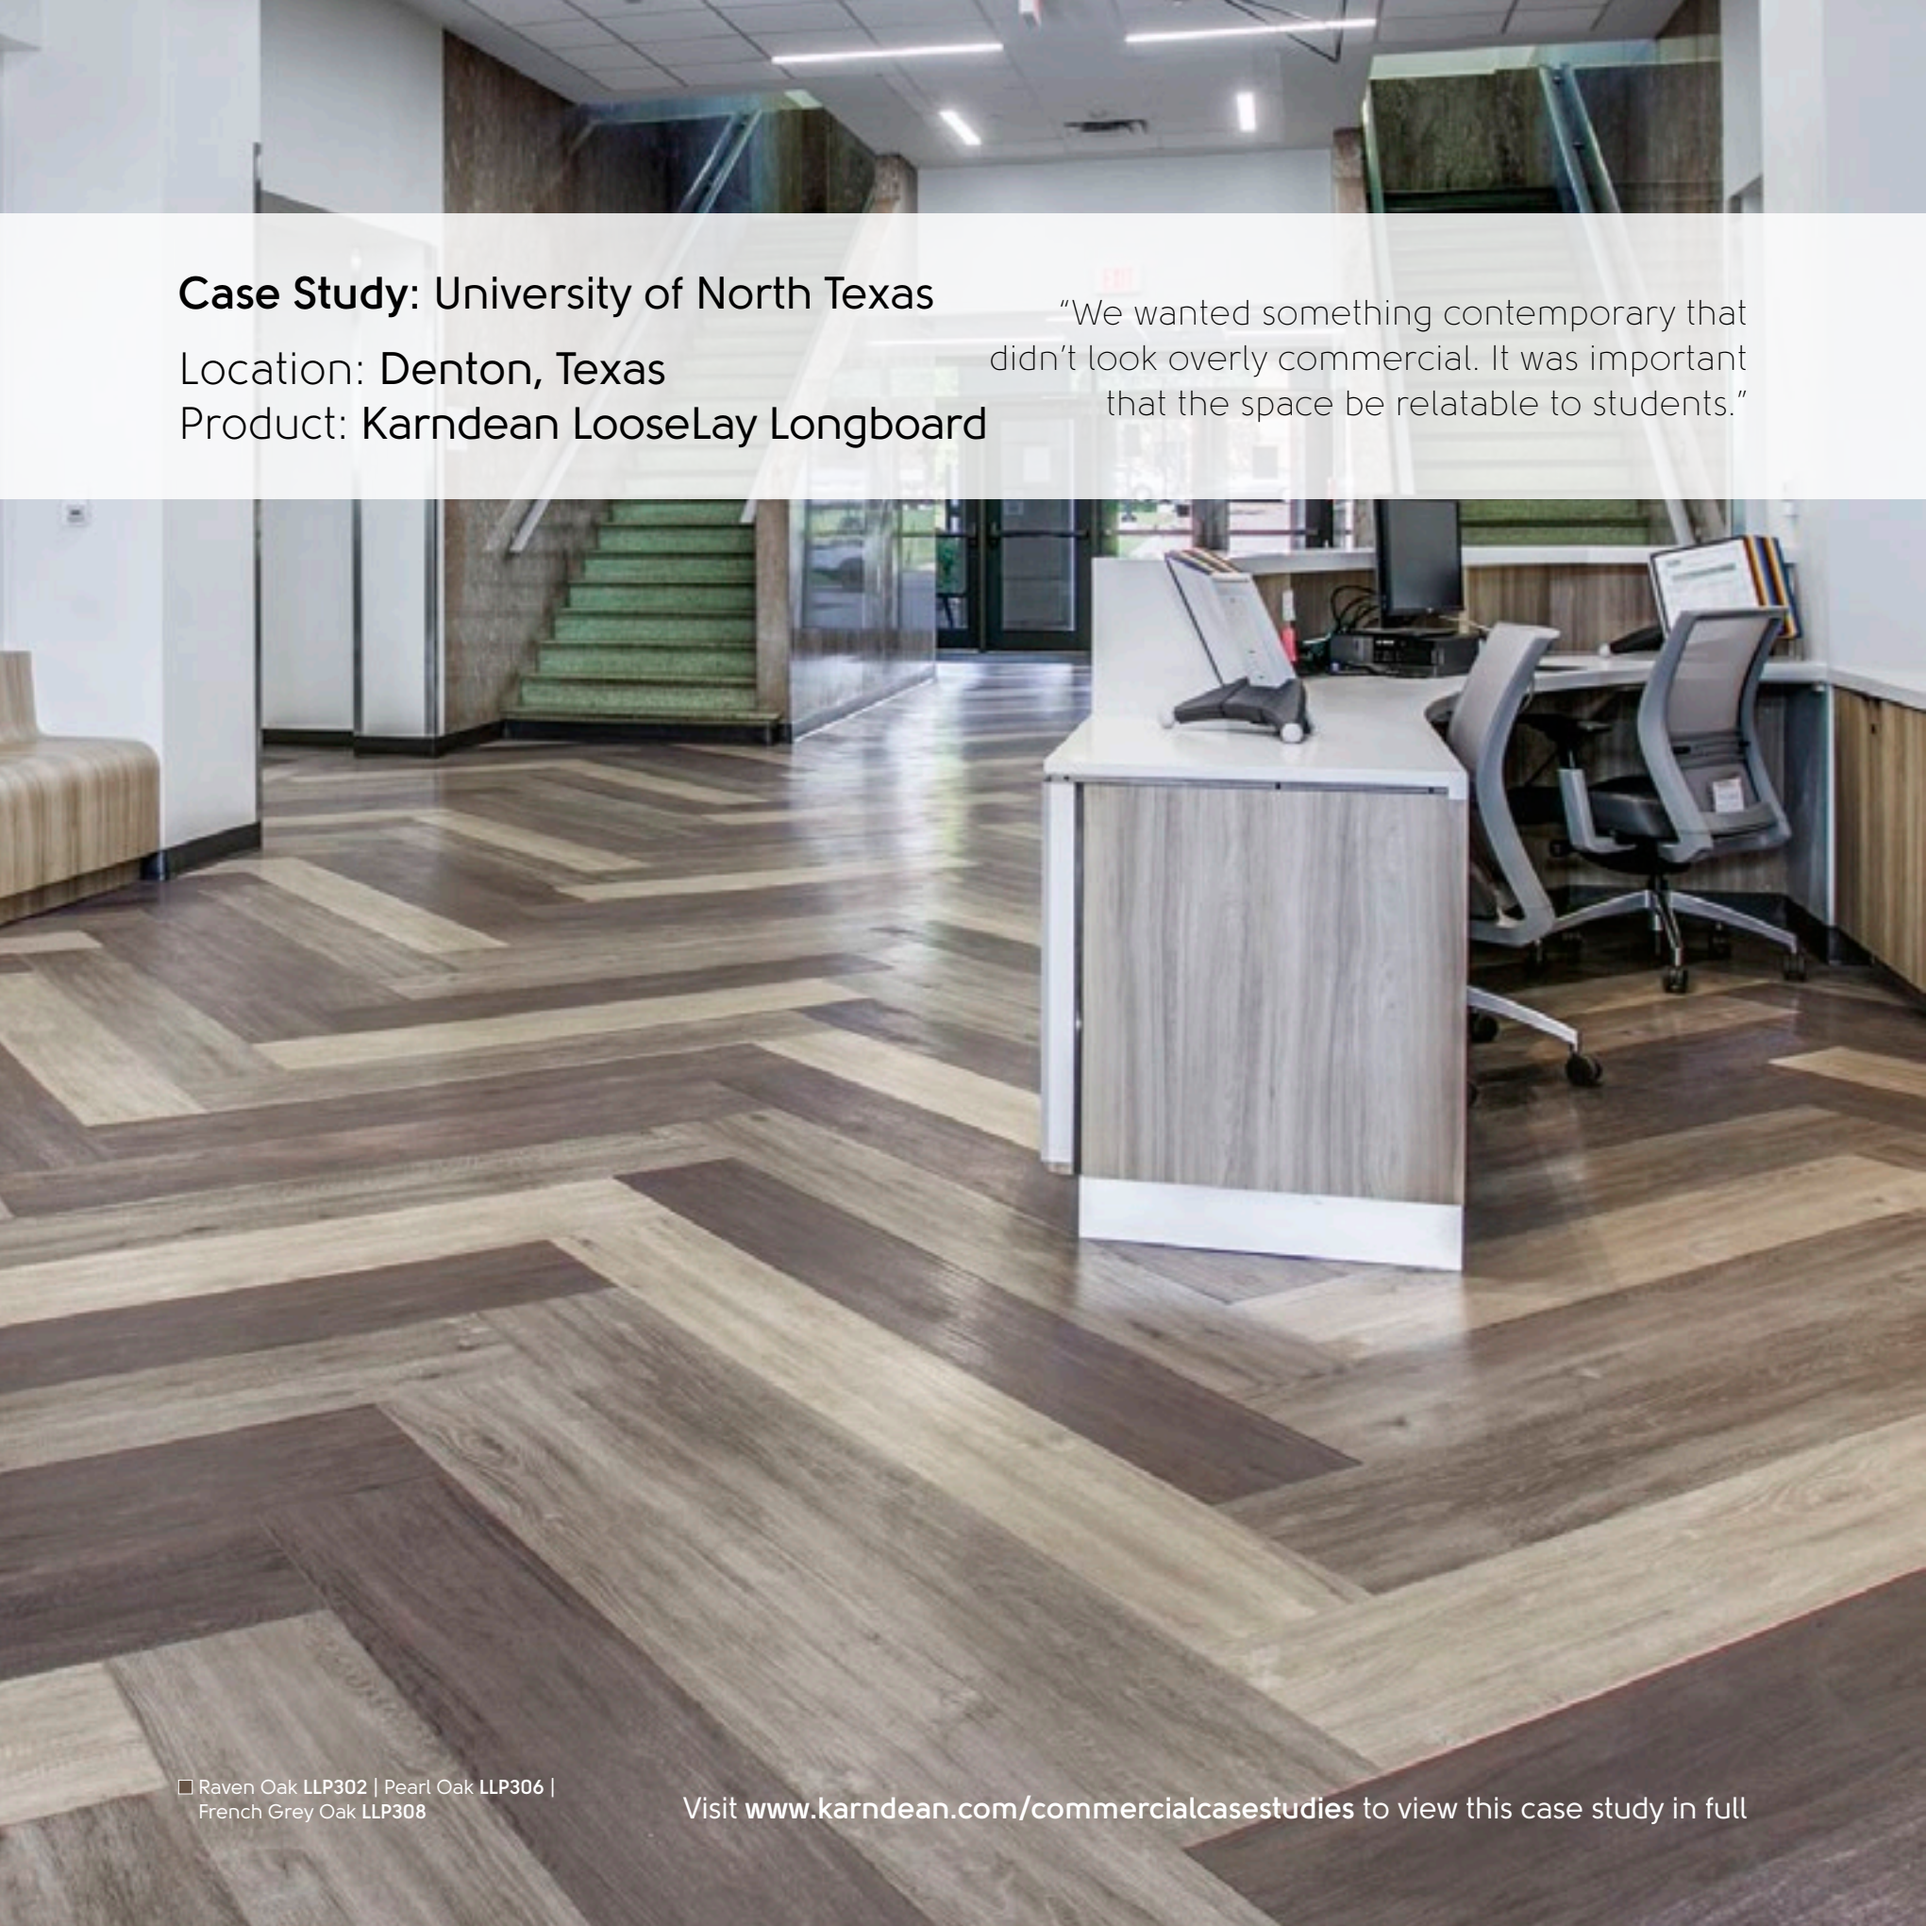


Case Study: University of North Texas

Location: **Denton, Texas**
Product: **Karndean LooseLay Longboard**

"We wanted something contemporary that didn't look overly commercial. It was important that the space be relatable to students."

❑ Raven Oak **LLP302** | Pearl Oak **LLP306** | French Grey Oak **LLP308**

Visit **www.karndean.com/commercialcasestudies** to view this case study in full

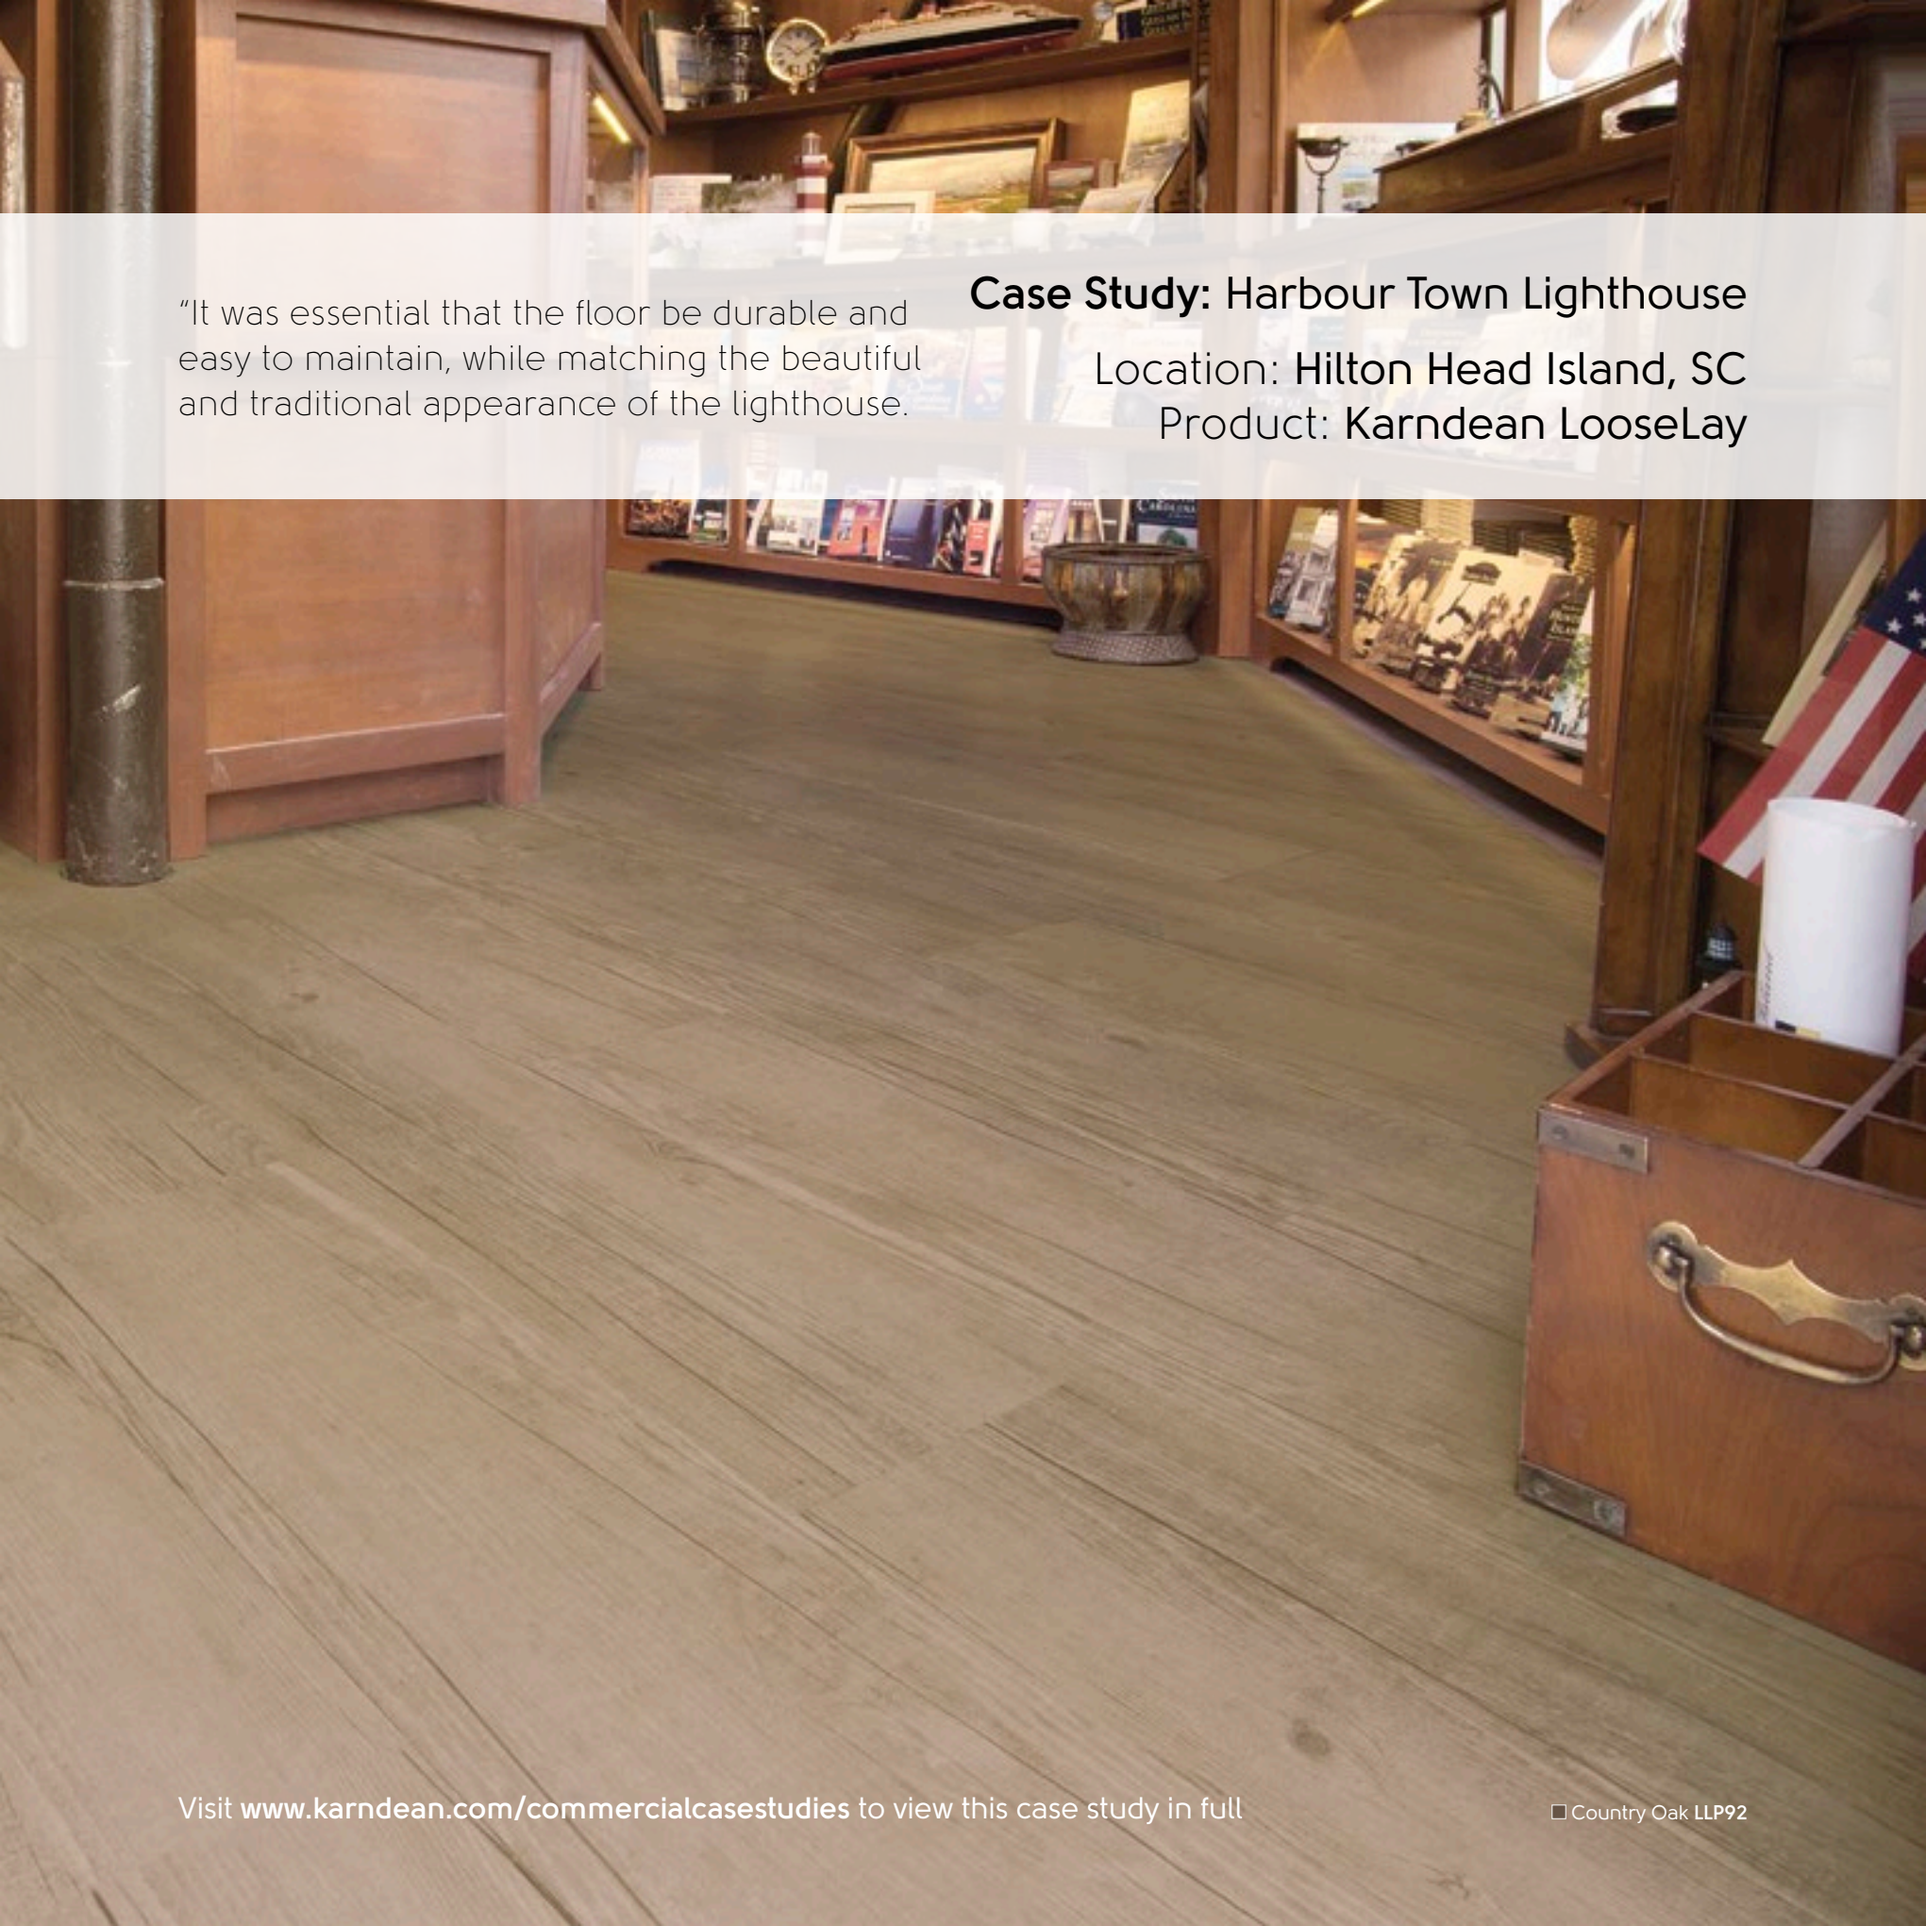

"It was essential that the floor be durable and easy to maintain, while matching the beautiful and traditional appearance of the lighthouse.

Case Study: Harbour Town Lighthouse

Location: **Hilton Head Island, SC**


Product: **Karndean LooseLay**

Visit **www.karndean.com/commercialcasestudies** to view this case study in full

☐ Country Oak **LLP92**

Pattern guide

Create an eye-catching design with loose lay, which can incorporate multiple colors into one design. Karndean LooseLay's multi-directional planks and tiles allow for added pattern flexibility.

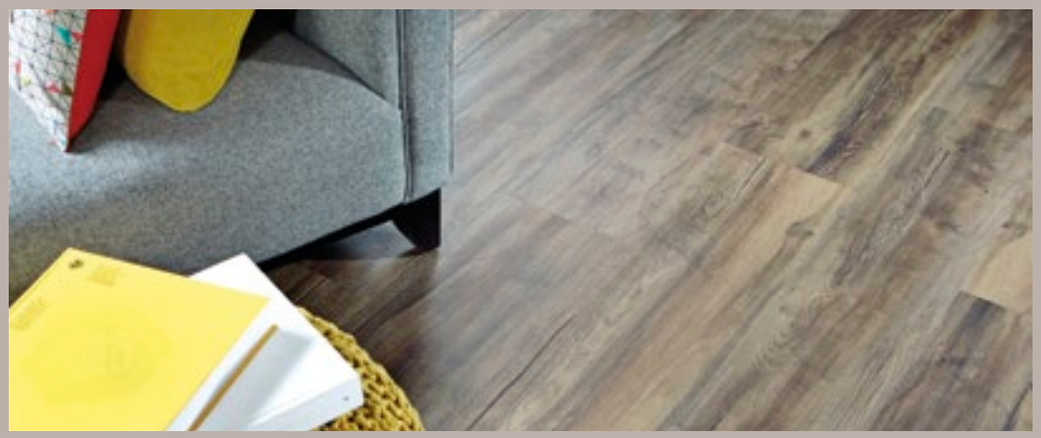

Wood layouts



Herringbone



Chevron



Broken Herringbone



Staggered



Diagonal with border



Striped



Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these designs into a future project.

Stone layouts



Brick Lay



Diagonal



Herringbone



Striped



Mixed wood & stone layouts

Striped





Note: Do not cut Karndean LooseLay planks or tiles into pieces that are smaller than the width of the product, as this will affect the quality of the installation.




Wood at a glance (loose lay only)


Loose lay: ■ Karndean LooseLay | ■ Karndean LooseLay Longboard







































































































Stone at a glance (loose lay only)


Loose lay: ■ Karndean LooseLay


■ **LLT201** pg: 281


□ **LLT206** pg: 276


□ **LLT207** pg: 272


□ **LLT205** pg: 277


■ **LLT202** pg: 279


□ **LLT200** pg: 267


□ **LLT204** pg: 269


□ **LLT203** pg: 283


□ Shadow Fabric Oak **LLP331**


□ Pennsylvania **LLT204**

Technical overview (loose lay only)

	Standard	Karndean LooseLay Longboard (see page: 264)	Karndean LooseLay (see page: 284)
Thickness		4.5 mm	4.5 mm
Size		59.05" x 9.84" (1500 mm x 250 mm)	Various, see individual product pages
Box quantity		8 Planks/32.28 sq.ft.	Various, see individual product pages
Wear layer		20 mil (0.5 mm)	20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating	K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime	15 Years Lifetime
Beveled edge		No	No
Classification	ASTM F1700	Class III Type B	Class III Type B
Reaction to fire	ASTM E648-06	Class 1	Class 1
Smoke density	ASTM E662-06	Pass (<450)	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass	Pass
Light fastness	ASTM F1515	Pass △E = 1.7	Pass △E = 1.7
Abrasion resistance	ASTM D3884	113000 Cycles	113000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 16 dB IIC = 56 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	△IIC = 16 dB IIC = 56 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi	1000 psi
Flexibility	ASTM F137	Pass	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass	Pass
Indentation – residual	ASTM F1914	<0.003"	<0.003"
Adhesive		Please refer to our installation instructions.	Please refer to our installation instructions.
Recycling		Suitable	Suitable
Phthalate free		Yes	Yes

* Subject to terms, see page: 395.
** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.



☐ Twilight Oak **LLP301**

Karndean LooseLay **Longboard**


59" x 10" (1500mm x 250mm)*



Twilight Oak **LLP301**




Raven Oak **LLP302**

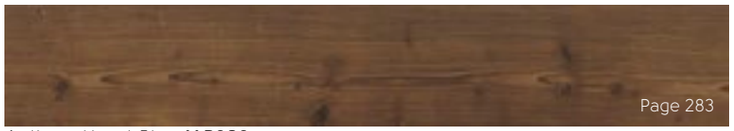

Antique Heart Pine **LLP303**



Weathered Heart Pine **LLP304**

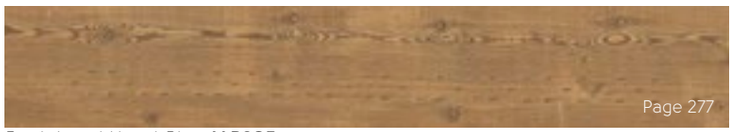

Reclaimed Heart Pine **LLP305**



Pearl Oak **LLP306**



Neutral Oak **LLP307**



French Grey Oak **LLP308**



Taupe Oak **LLP309**



Champagne Oak **LLP310**



Character Walnut **LLP315**



Lemon Spotted Gum **LLP317**



Worn Fabric Oak **LLP330**




Shadow Fabric Oak **LLP331**



Urban Fabric Oak **LLP332**



Vanilla Oak **LLP333**

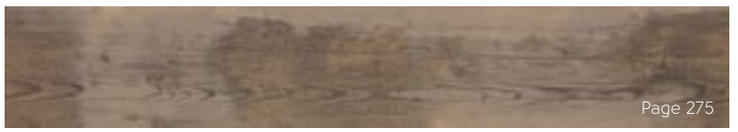

Weathered American Pine **LLP335**



Distressed American Pine **LLP336**

* Actual product size: 59.05" x 9.84"

Karndean LooseLay **Longboard**

Karndean LooseLay Longboard
LOOSE LAY

A preferred alternative to carpet tiles and other floating floors, Karndean Designflooring's innovative LooseLay products give you the intricate design and durability you expect from a Karndean floor, but in a unique format that can be installed quickly and easily in nearly any space. Featuring enhanced acoustic properties, an IIC rating of 56 and excellent environmental credentials, LooseLay Longboard is the perfect choice for a variety of installations. Its 59" length facilitates even faster installation times than standard Karndean LooseLay. LooseLay Longboard can be laid over most existing hard floors and does not require a full-spread adhesive in most applications. What's more, it can be installed on subfloors with an RH of up to 95%.




☐ Character Walnut **LLP315**

	Standard	Result
Thickness		4.5 mm
Size		59.05" x 9.84" (1500 mm x 250 mm)
Box quantity		8 Planks/32.28 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 1.7
Abrasion resistance	ASTM D3884	113000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 16 dB IIC = 56 (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass
Indentation – residual	ASTM F1914	<0.003"
Adhesive	Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.
** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Vanilla Oak **LLP333**

Karndean Designflooring

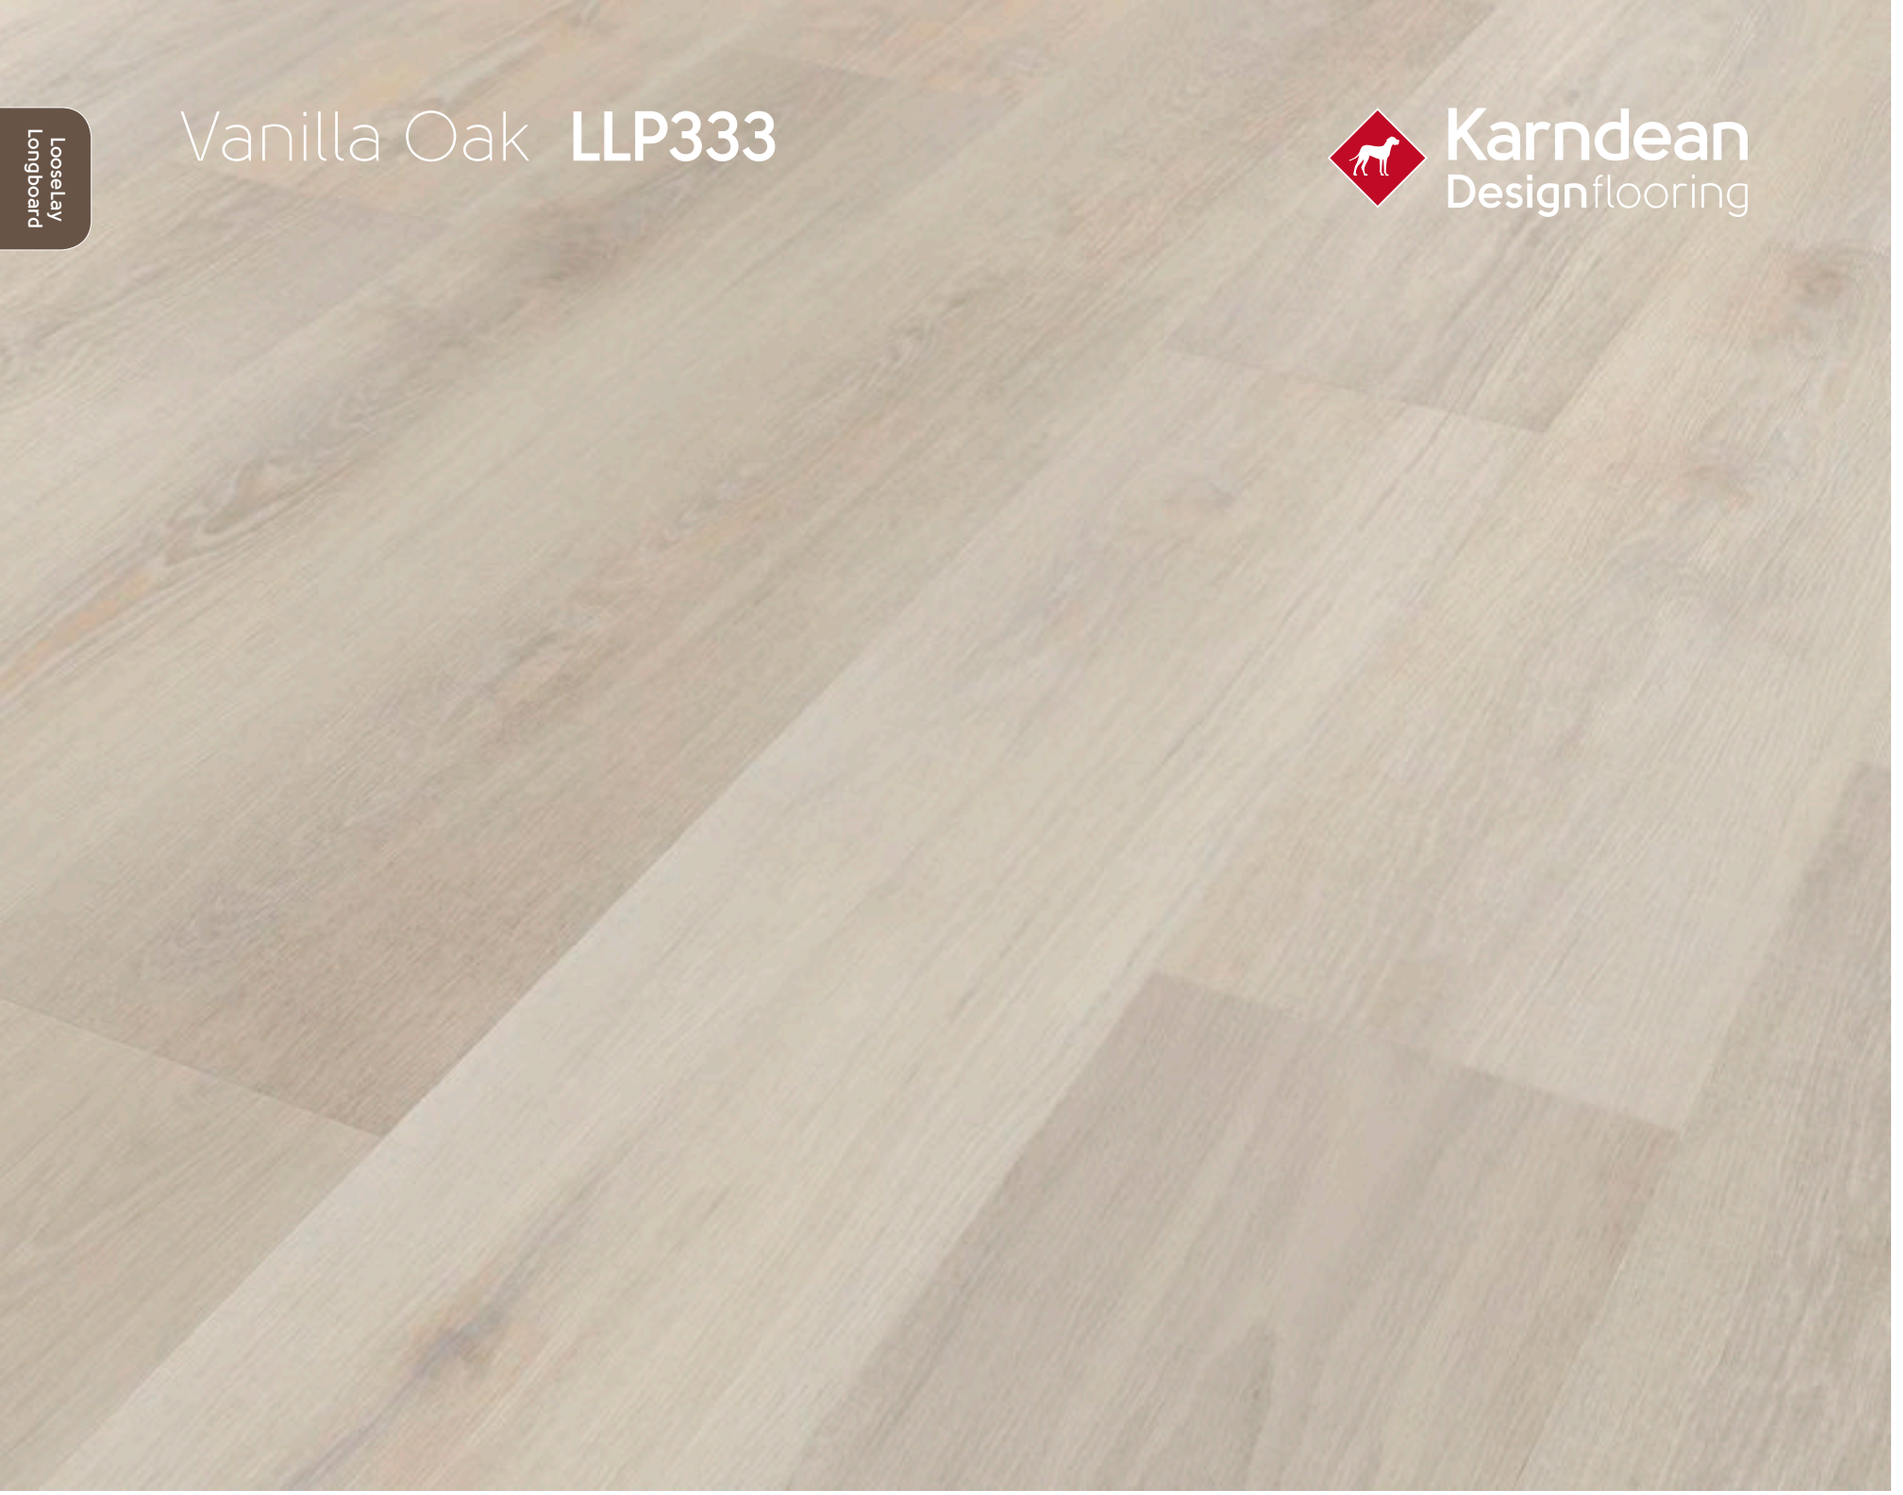

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP333
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Pearl Oak **LLP306**

Karndean Designflooring

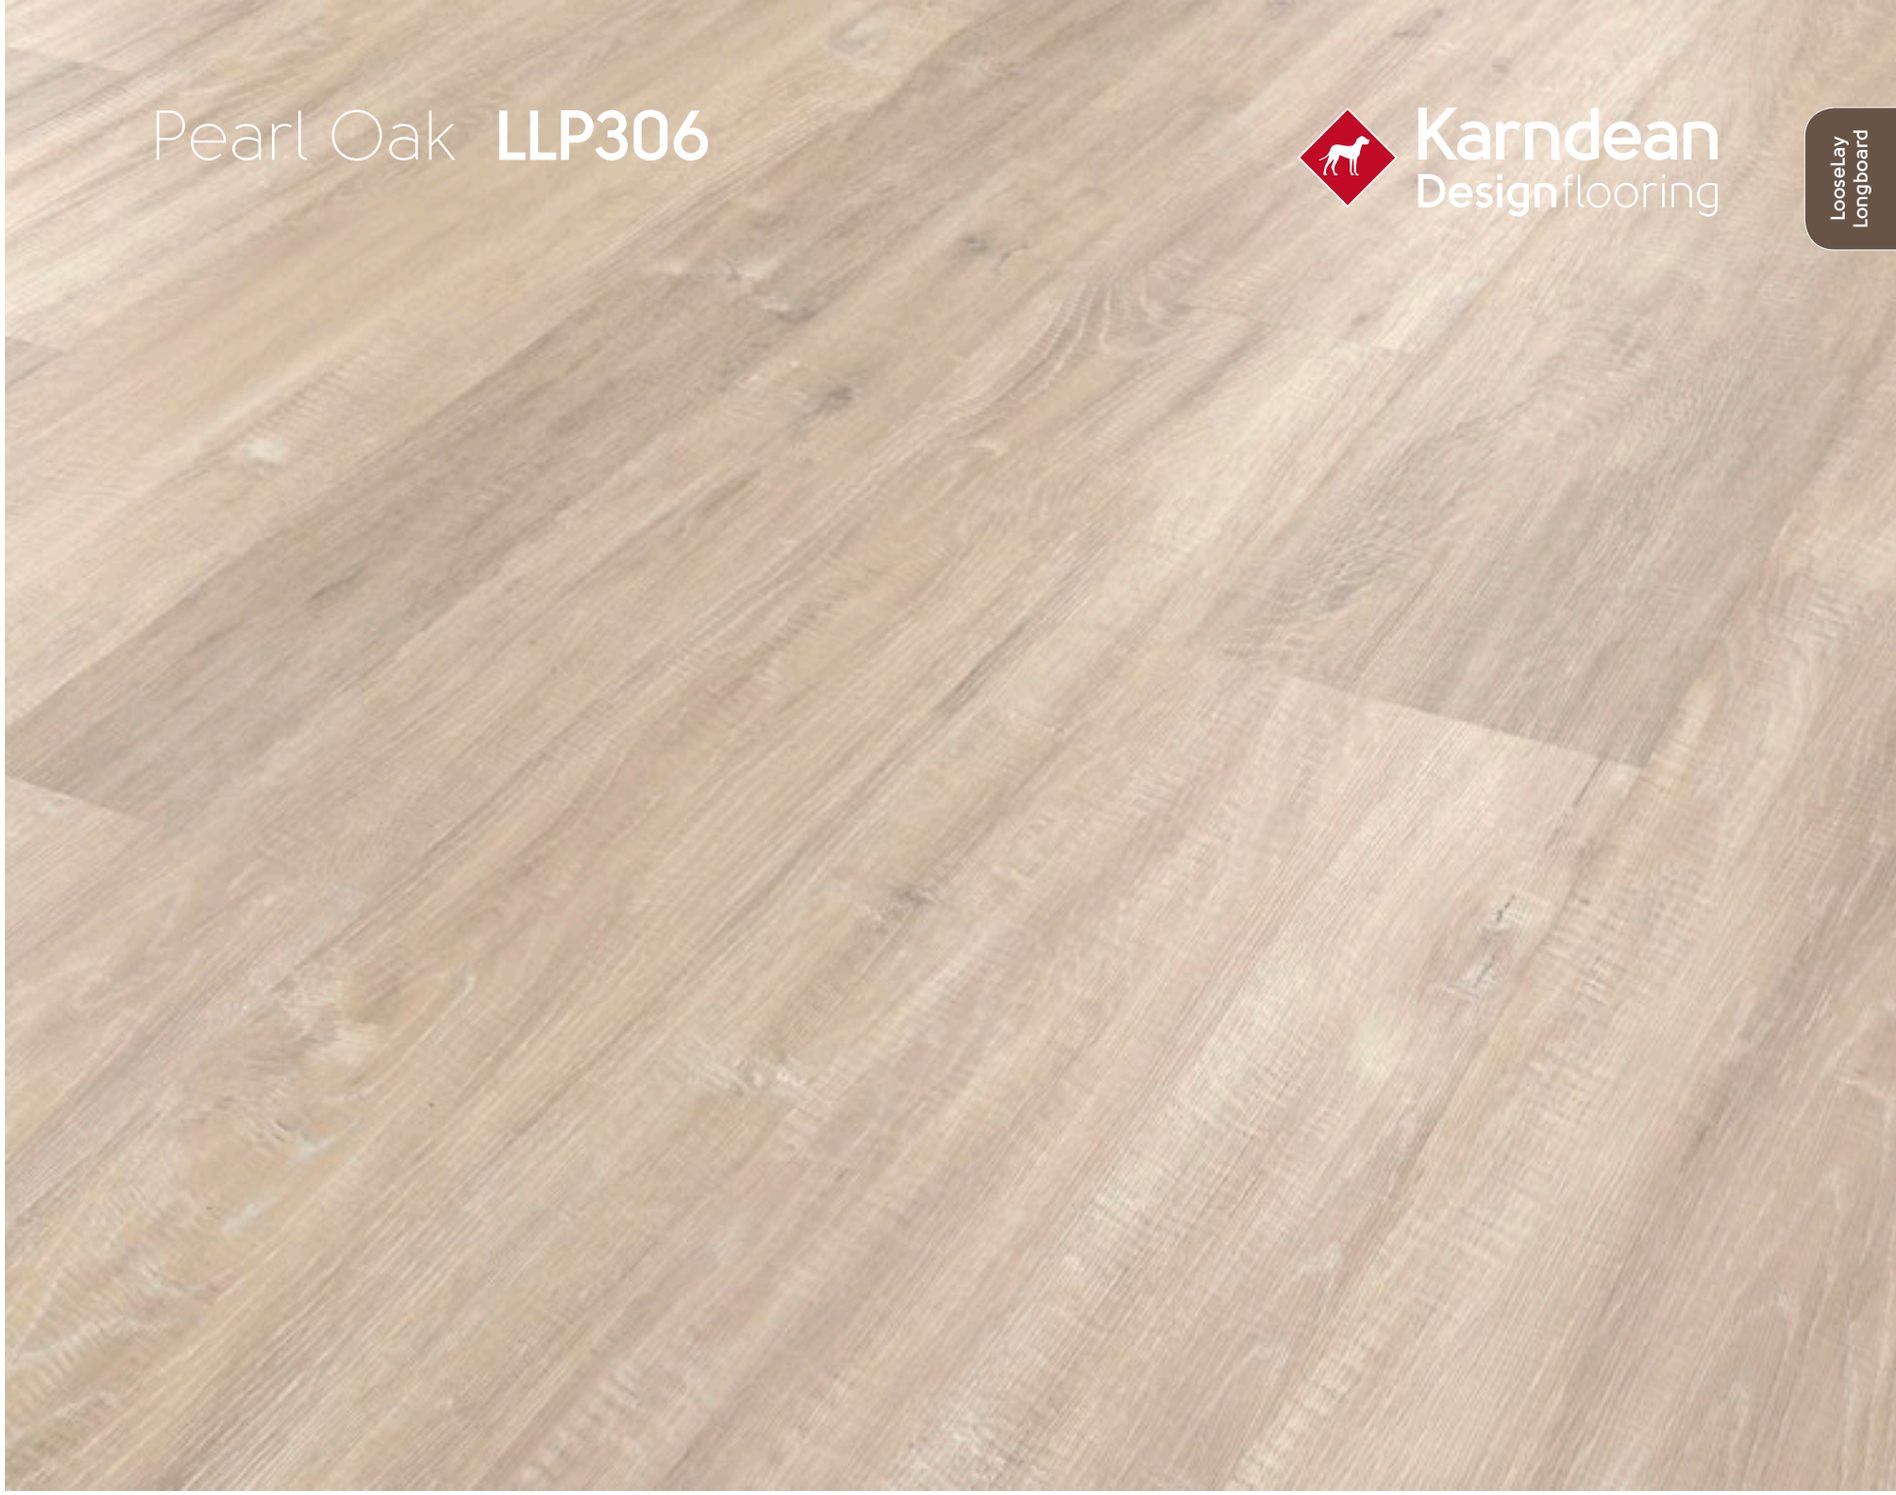

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP306
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Champagne Oak **LLP310**

Karndean Designflooring

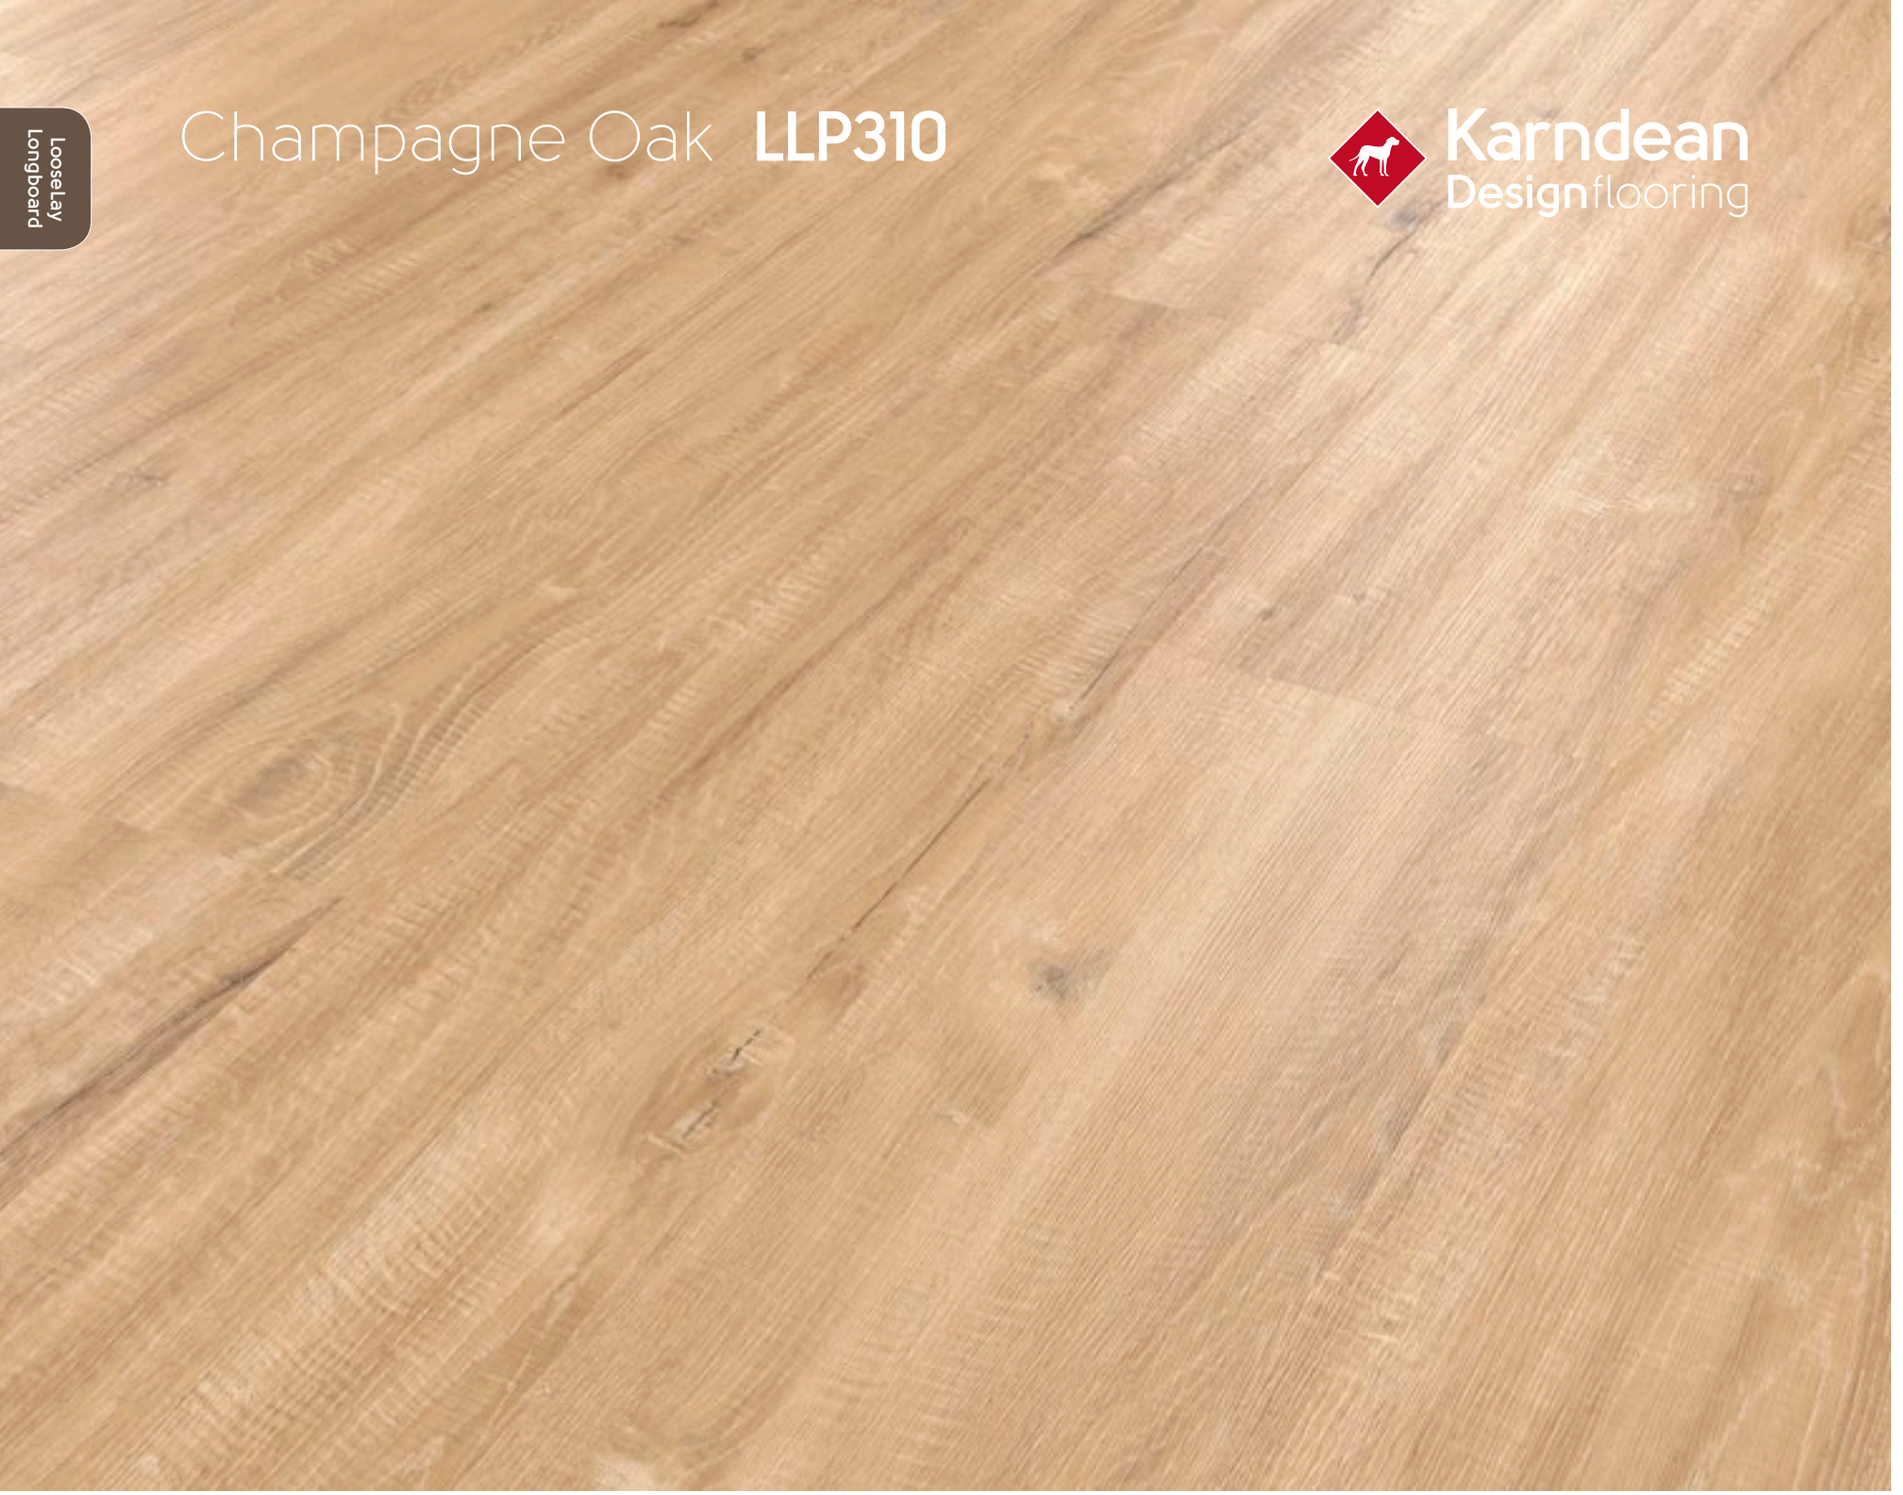

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP310
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Heart Pine **LLP304**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP304
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lemon Spotted Gum **LLP317**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP317
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Shadow Fabric Oak **LLP331**

Karndean Designflooring

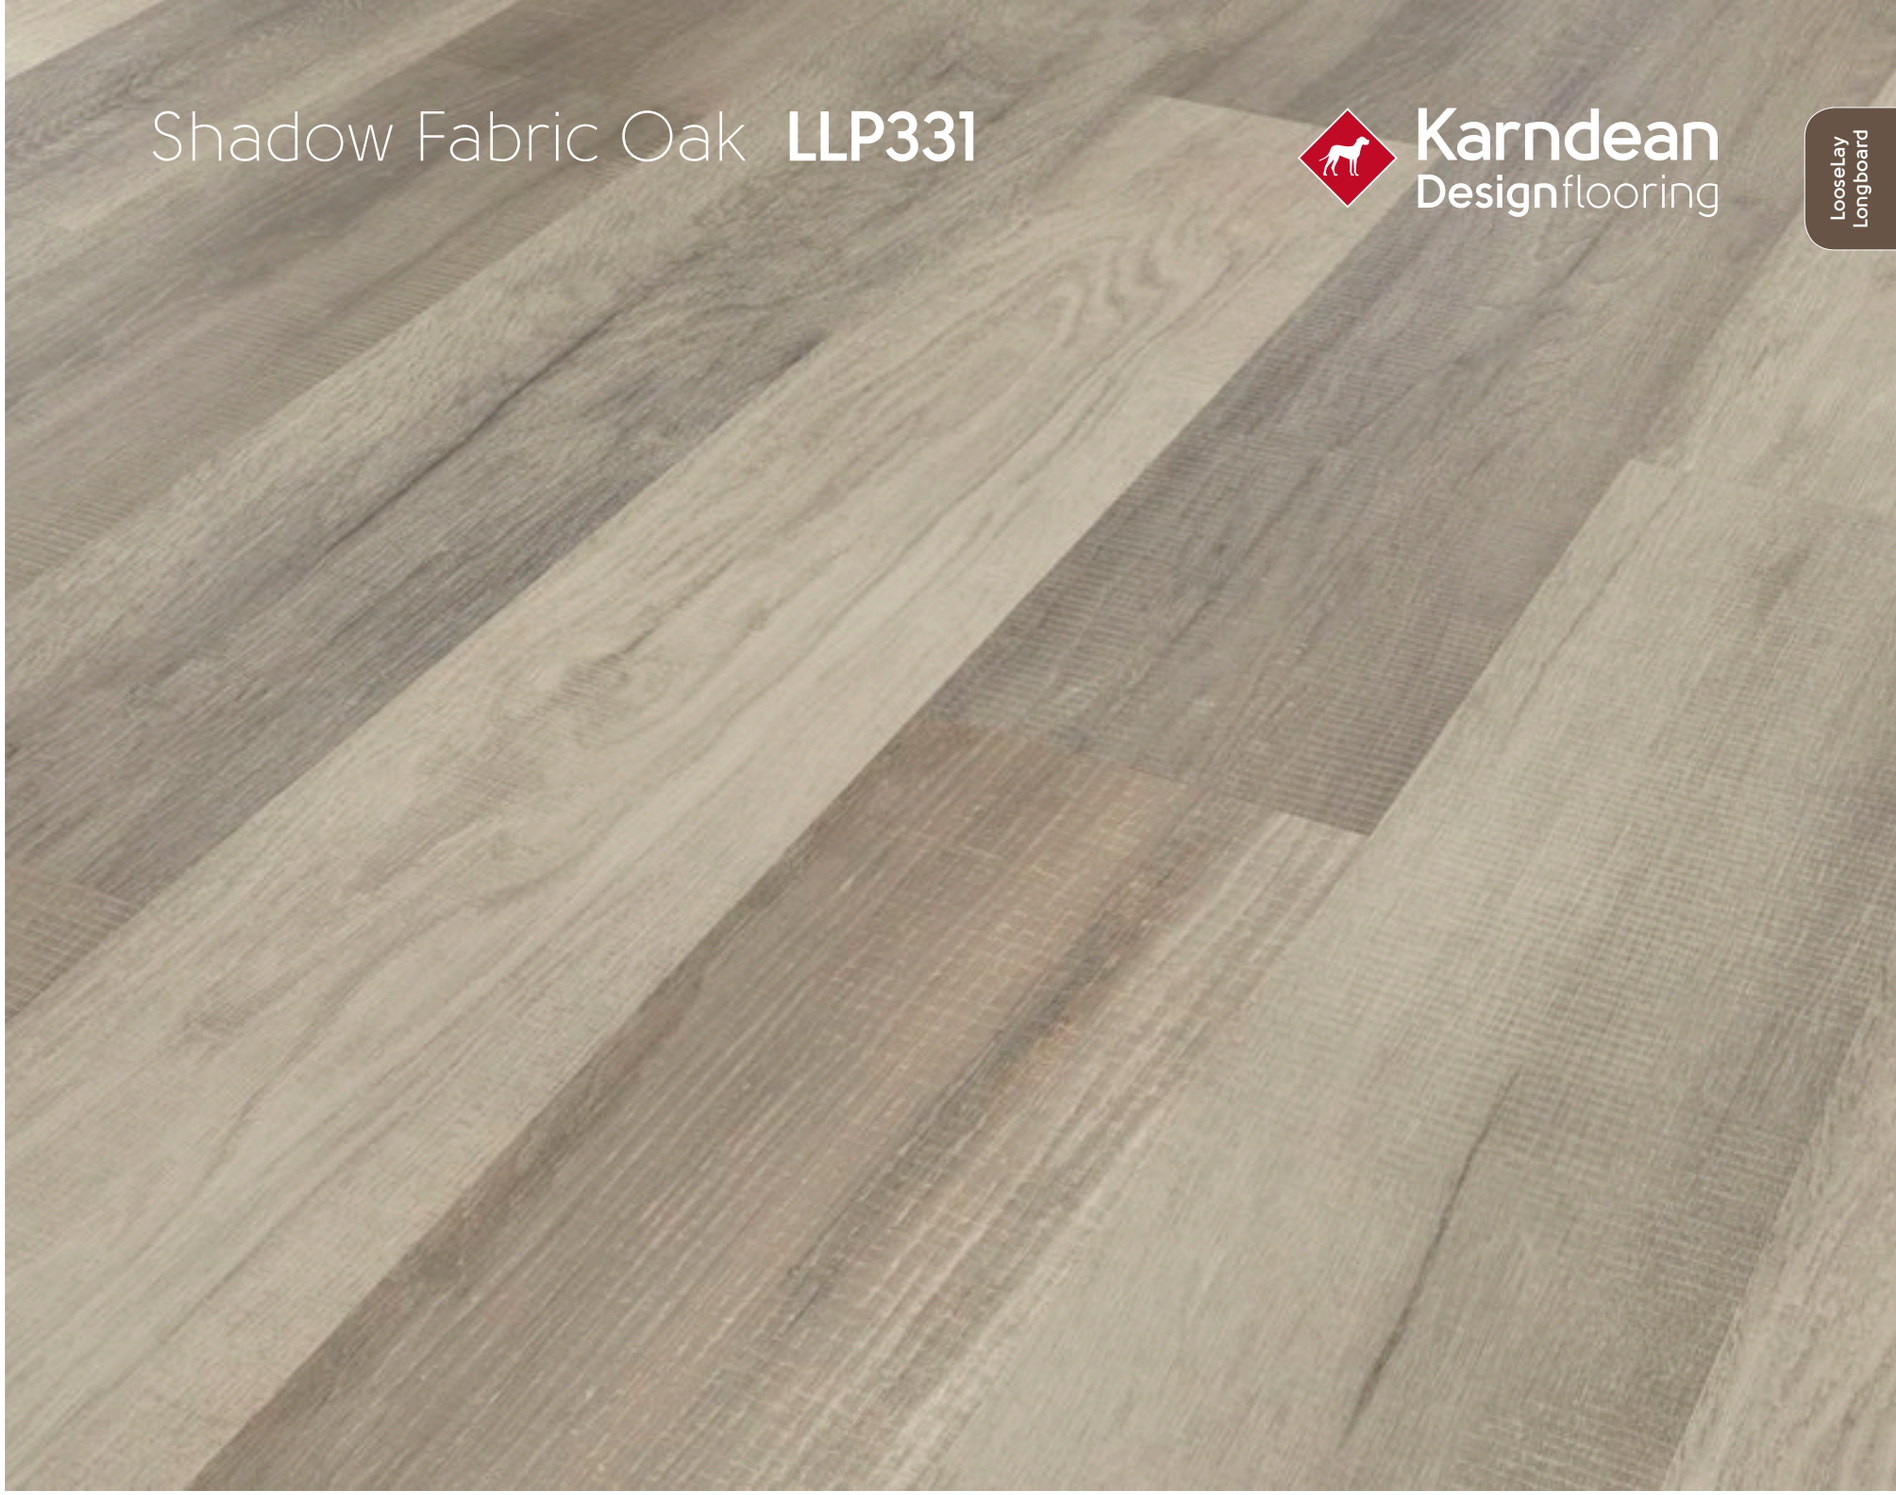

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP331
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

French Grey Oak **LLP308**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP308
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Worn Fabric Oak **LLP330**

Karndean Designflooring

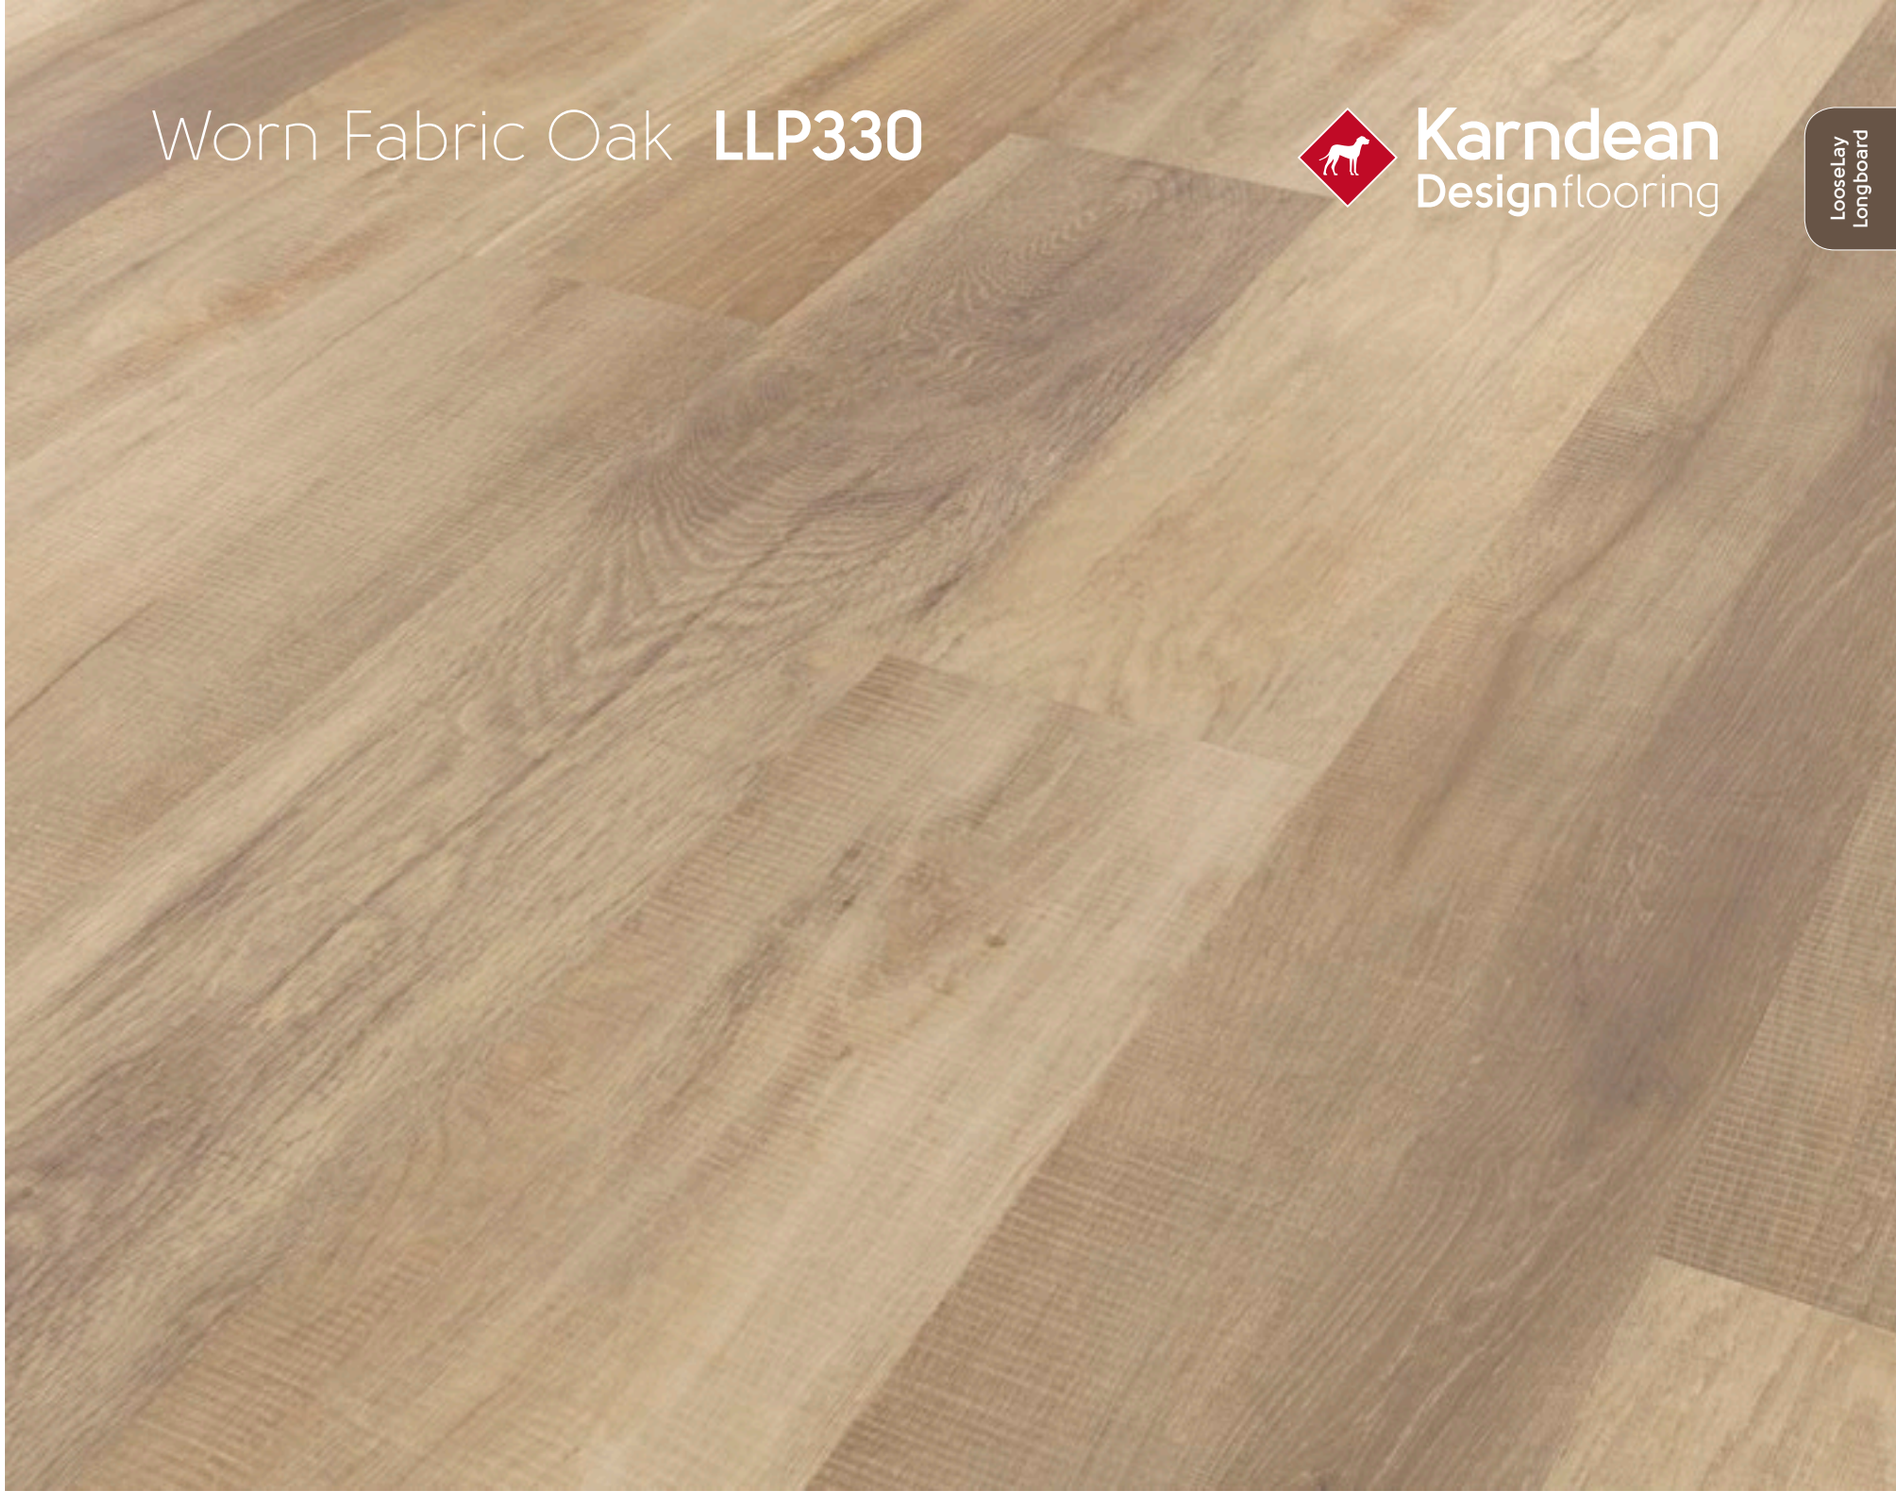

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP330
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Taupe Oak **LLP309**

Karndean Designflooring

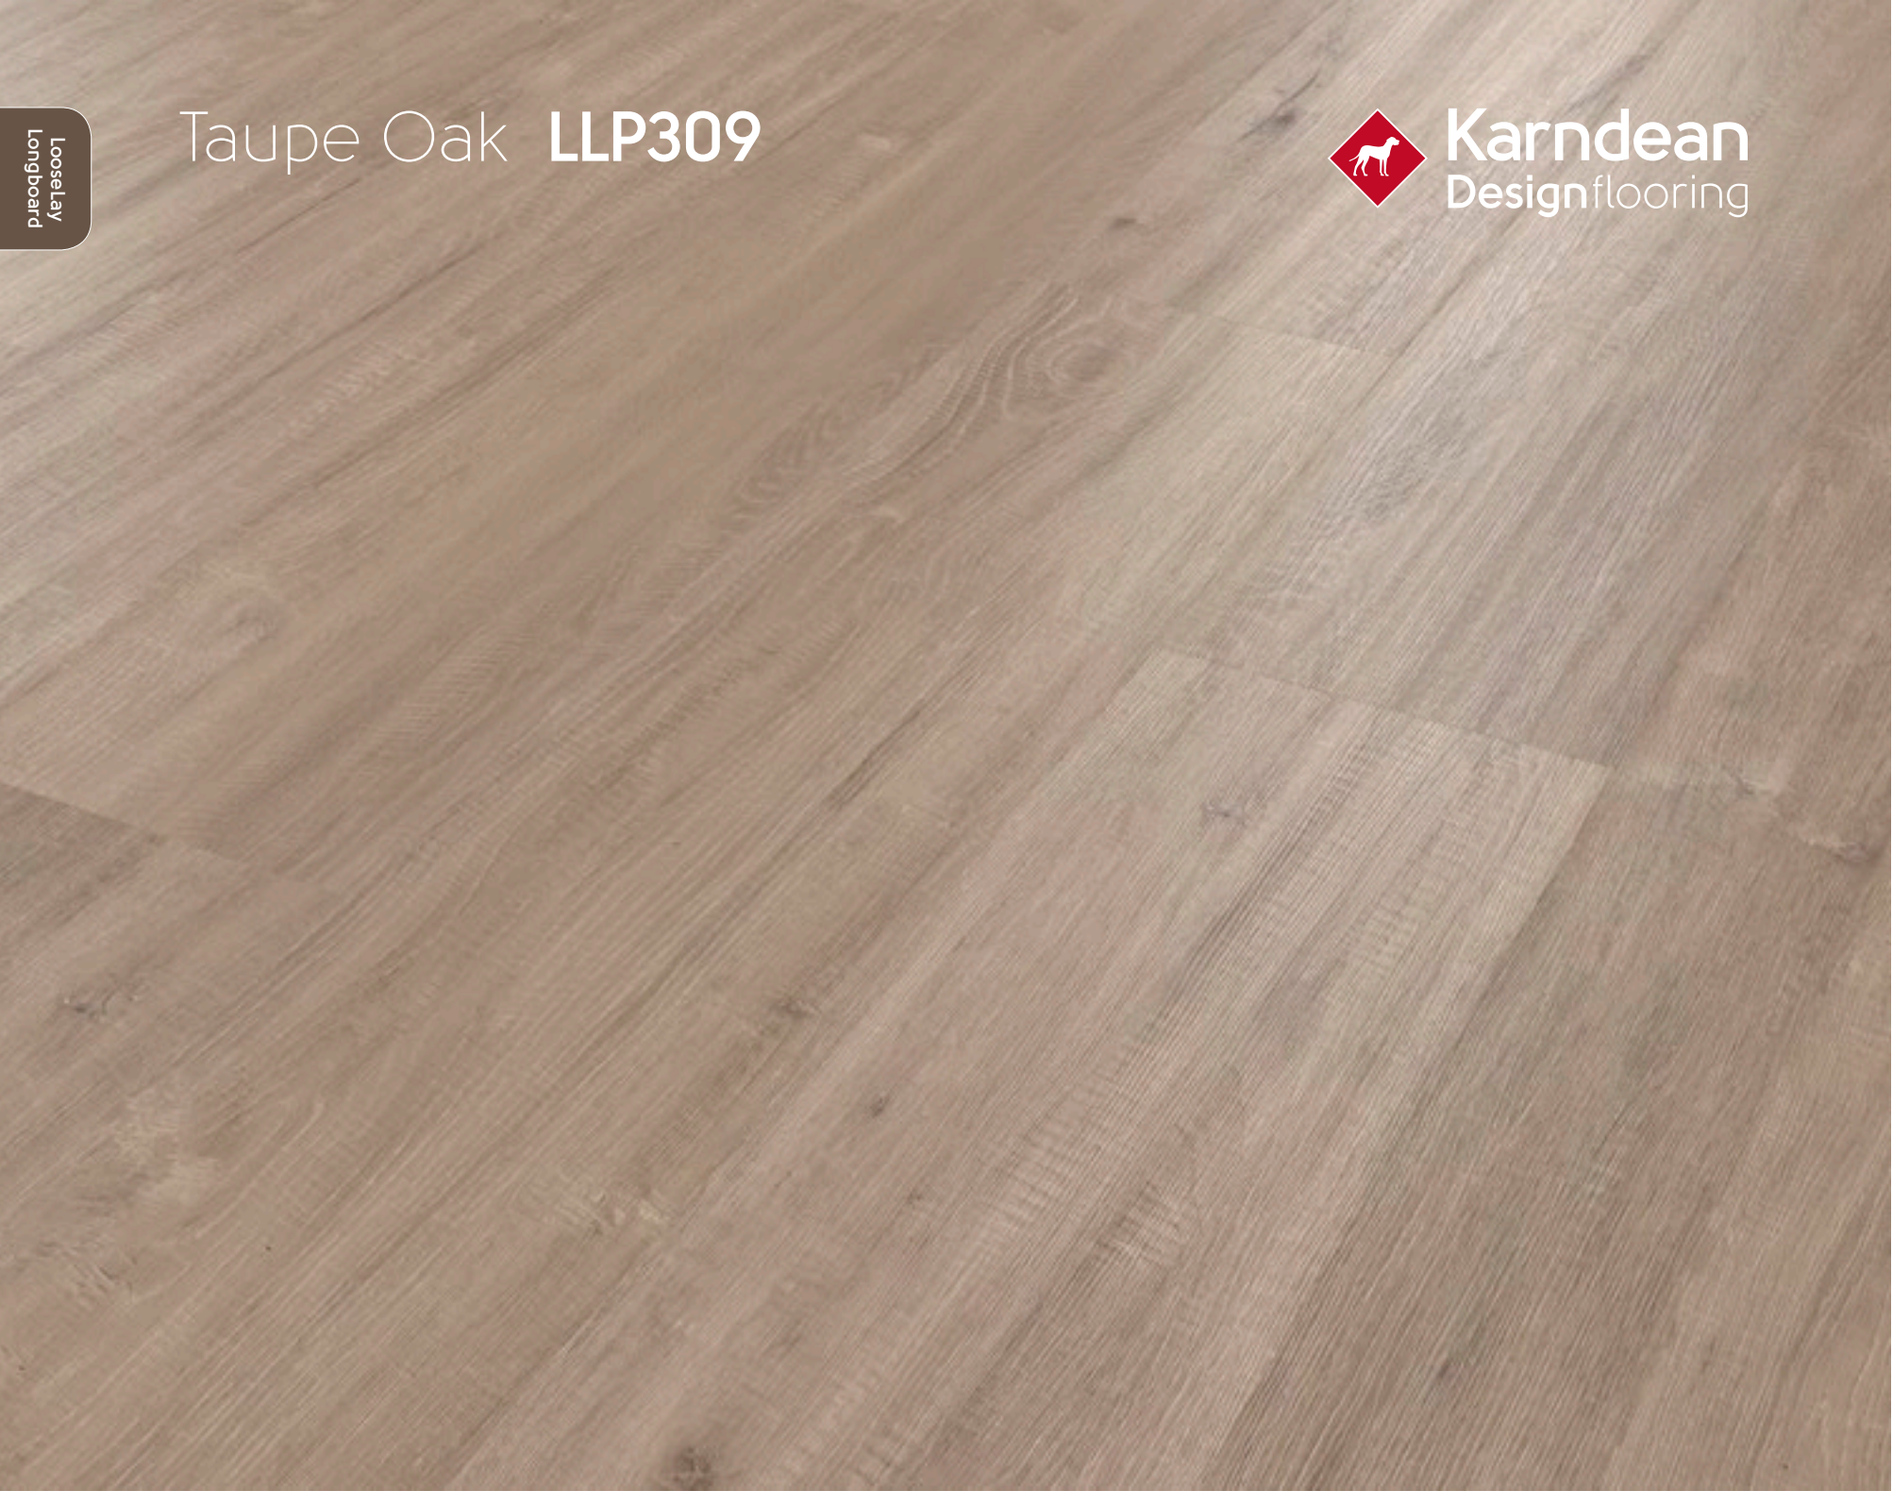

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP309
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered American Pine **LLP335**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP335
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Neutral Oak **LLP307**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP307
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed Heart Pine **LLP305**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP305
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Urban Fabric Oak **LLP332**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP332
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Twilight Oak **LLP301**

Karndean Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP301
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Distressed American Pine **LLP336**

Karndean Designflooring

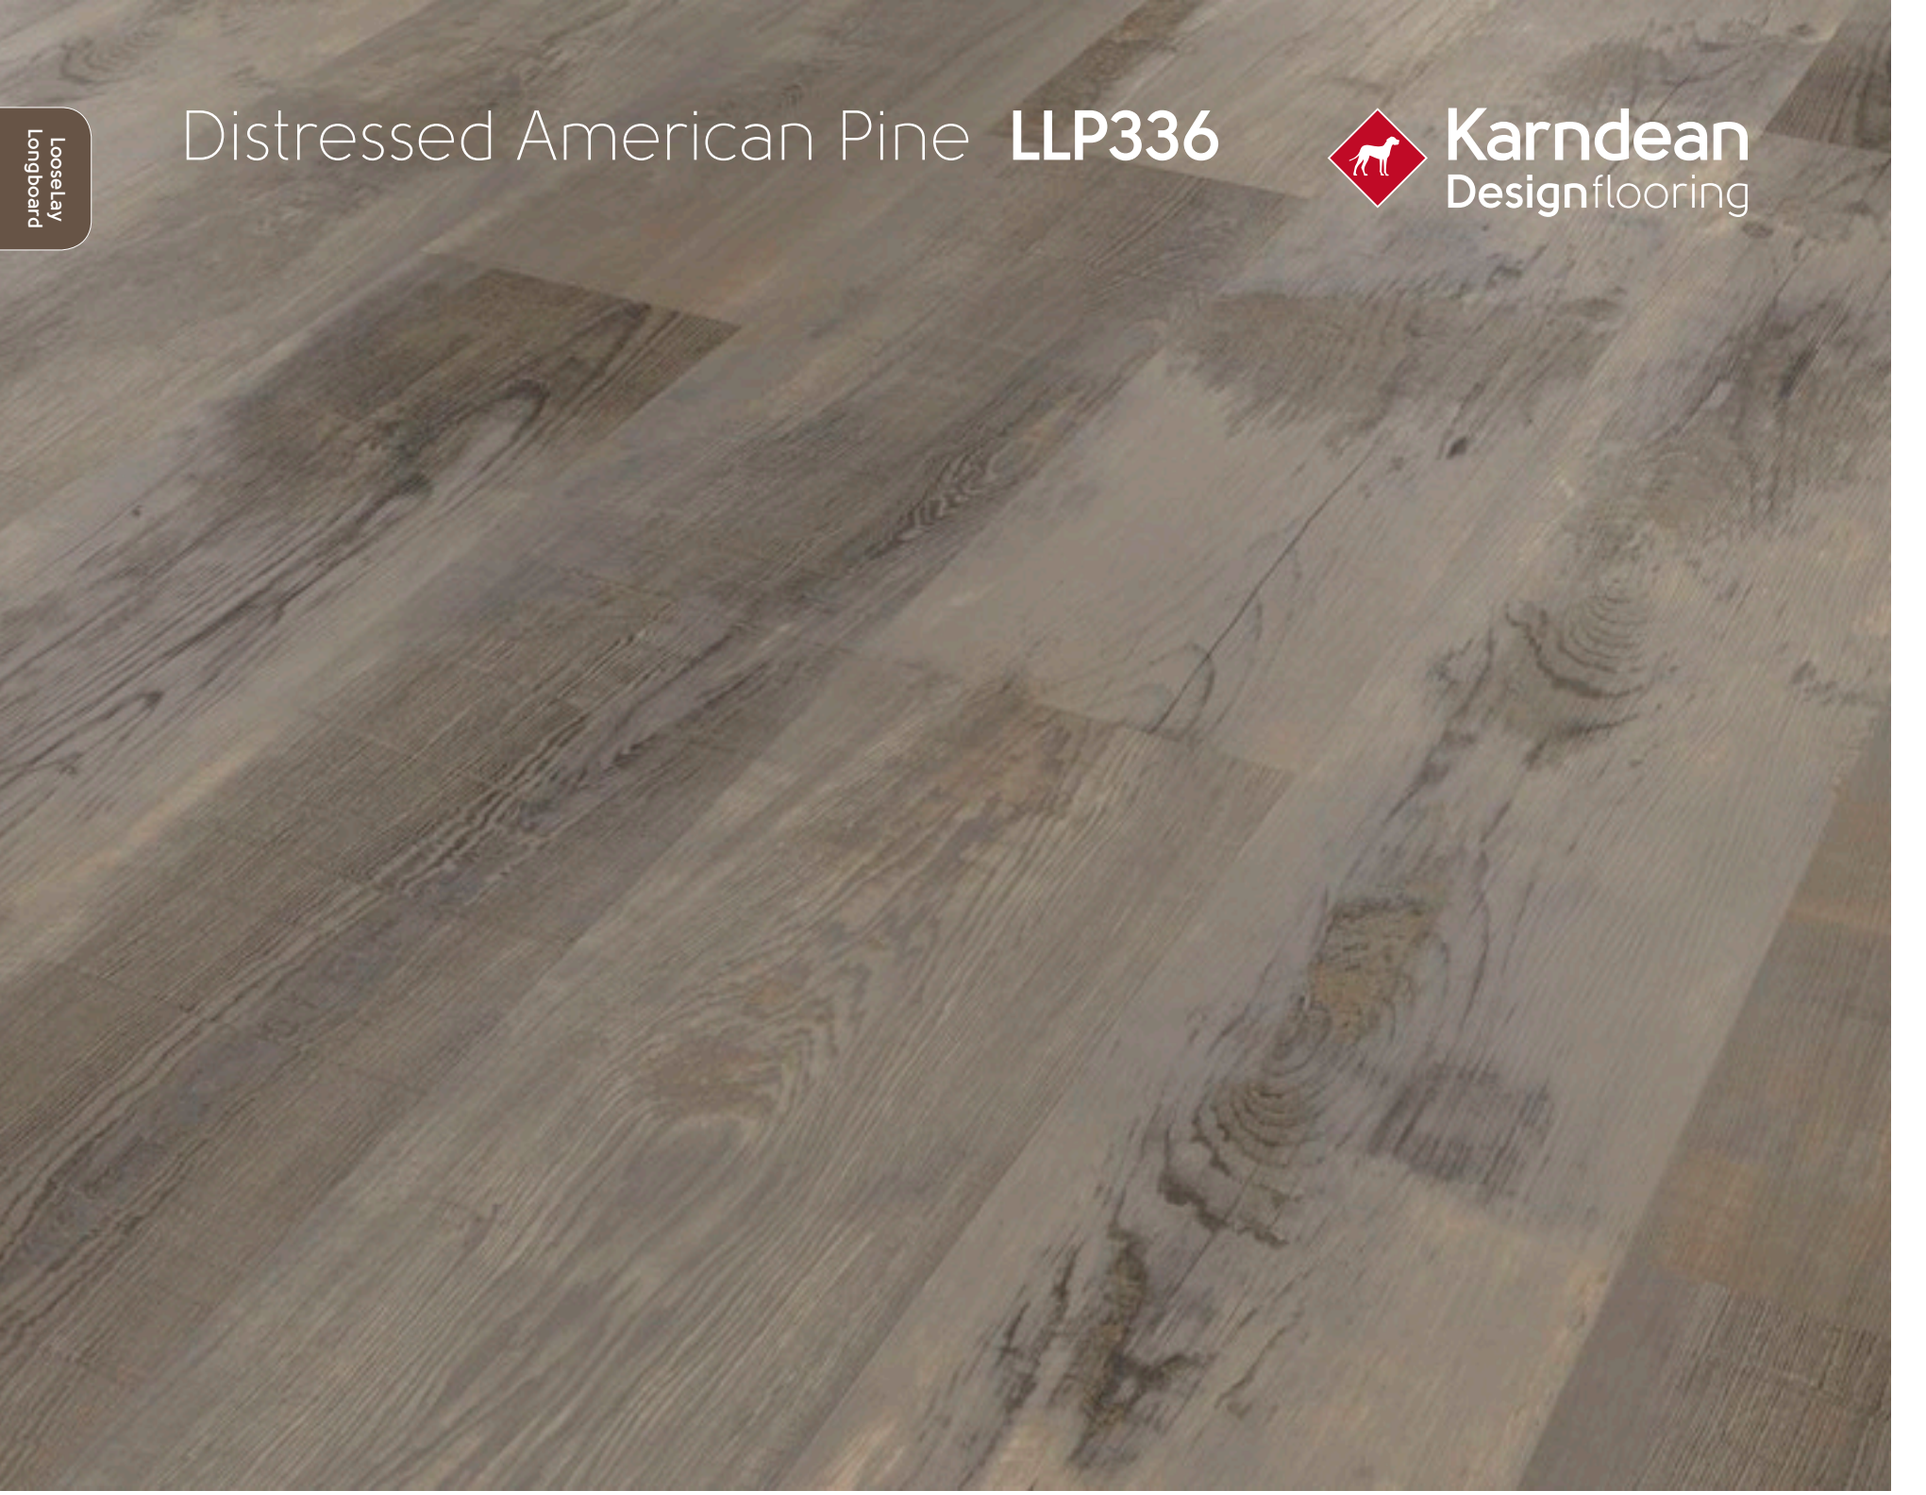

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP336
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Raven Oak **LLP302**

Karndean Designflooring

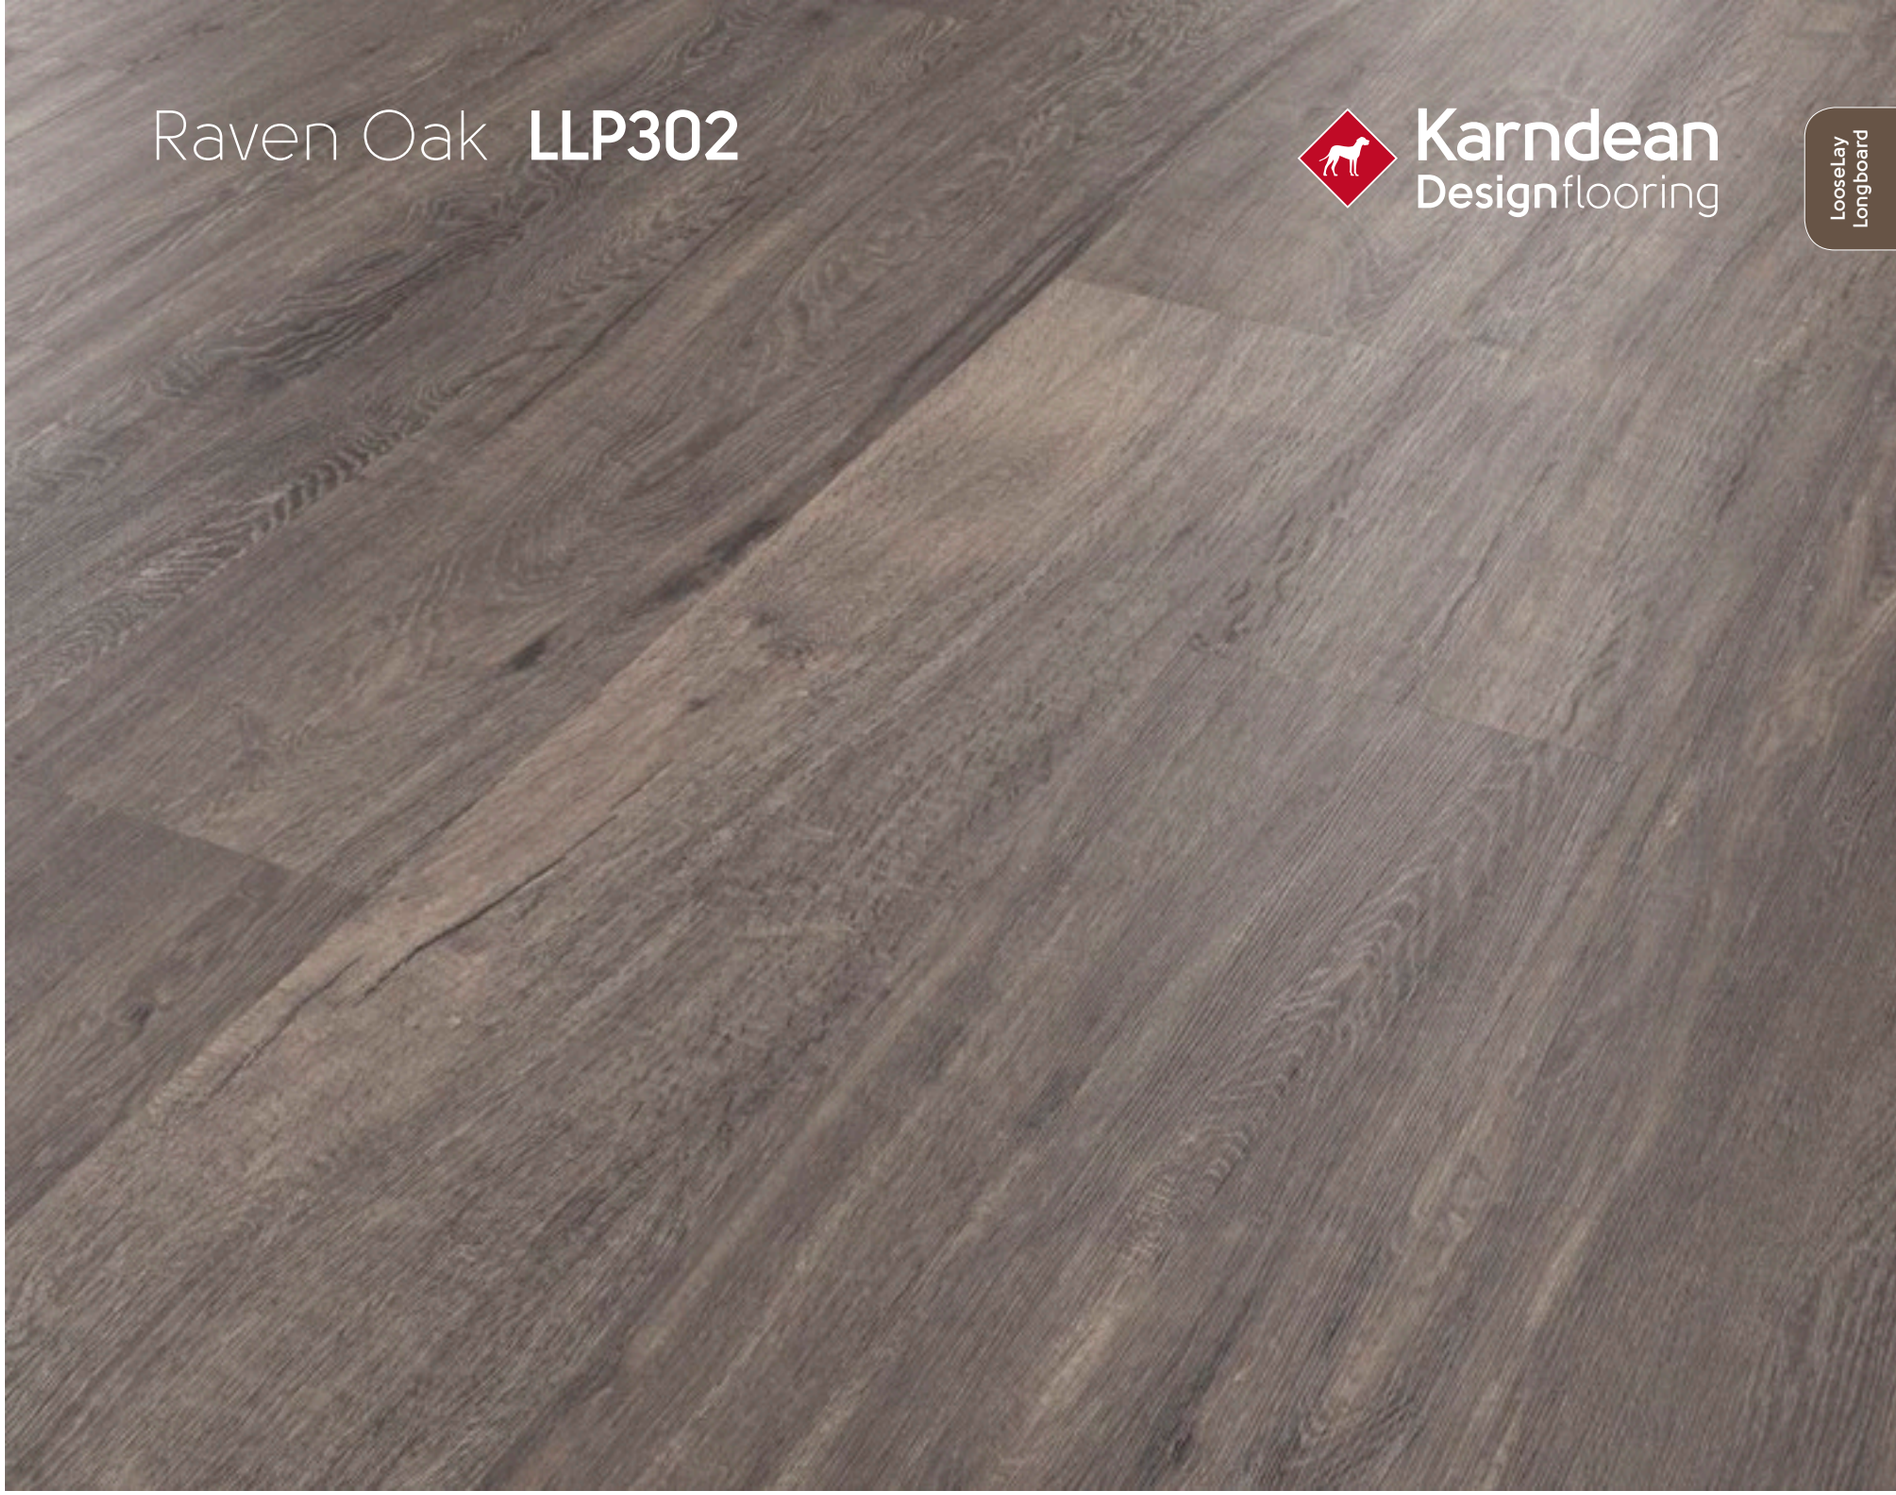

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP302
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Character Walnut **LLP315**

Karndean Designflooring

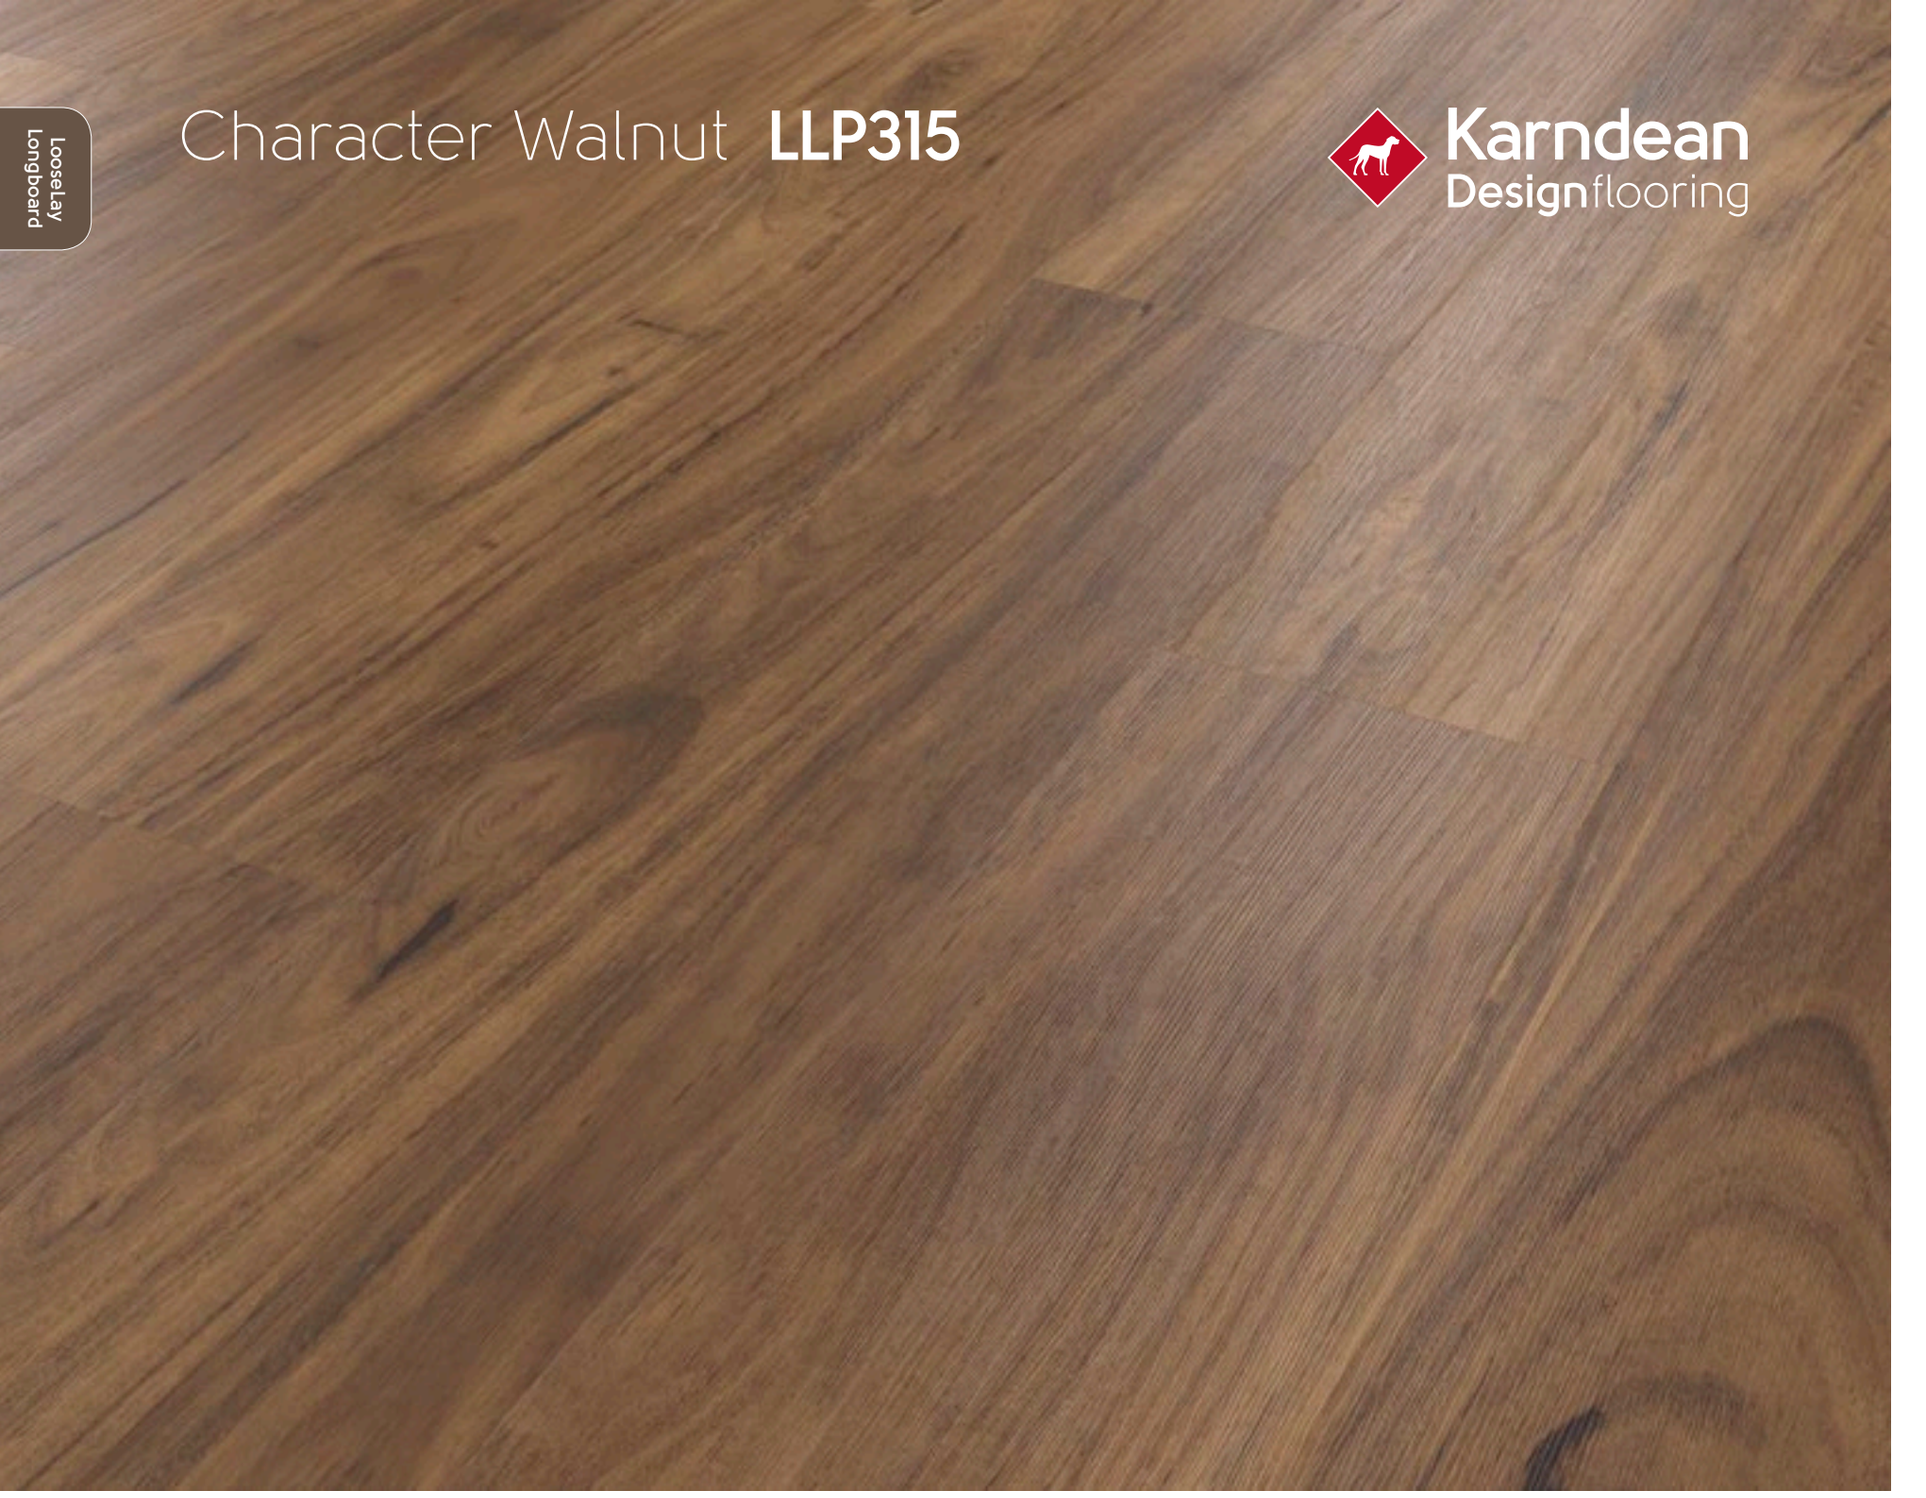

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 265

TEXT
LLP315
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Antique Heart Pine **LLP303**

Karndean Designflooring

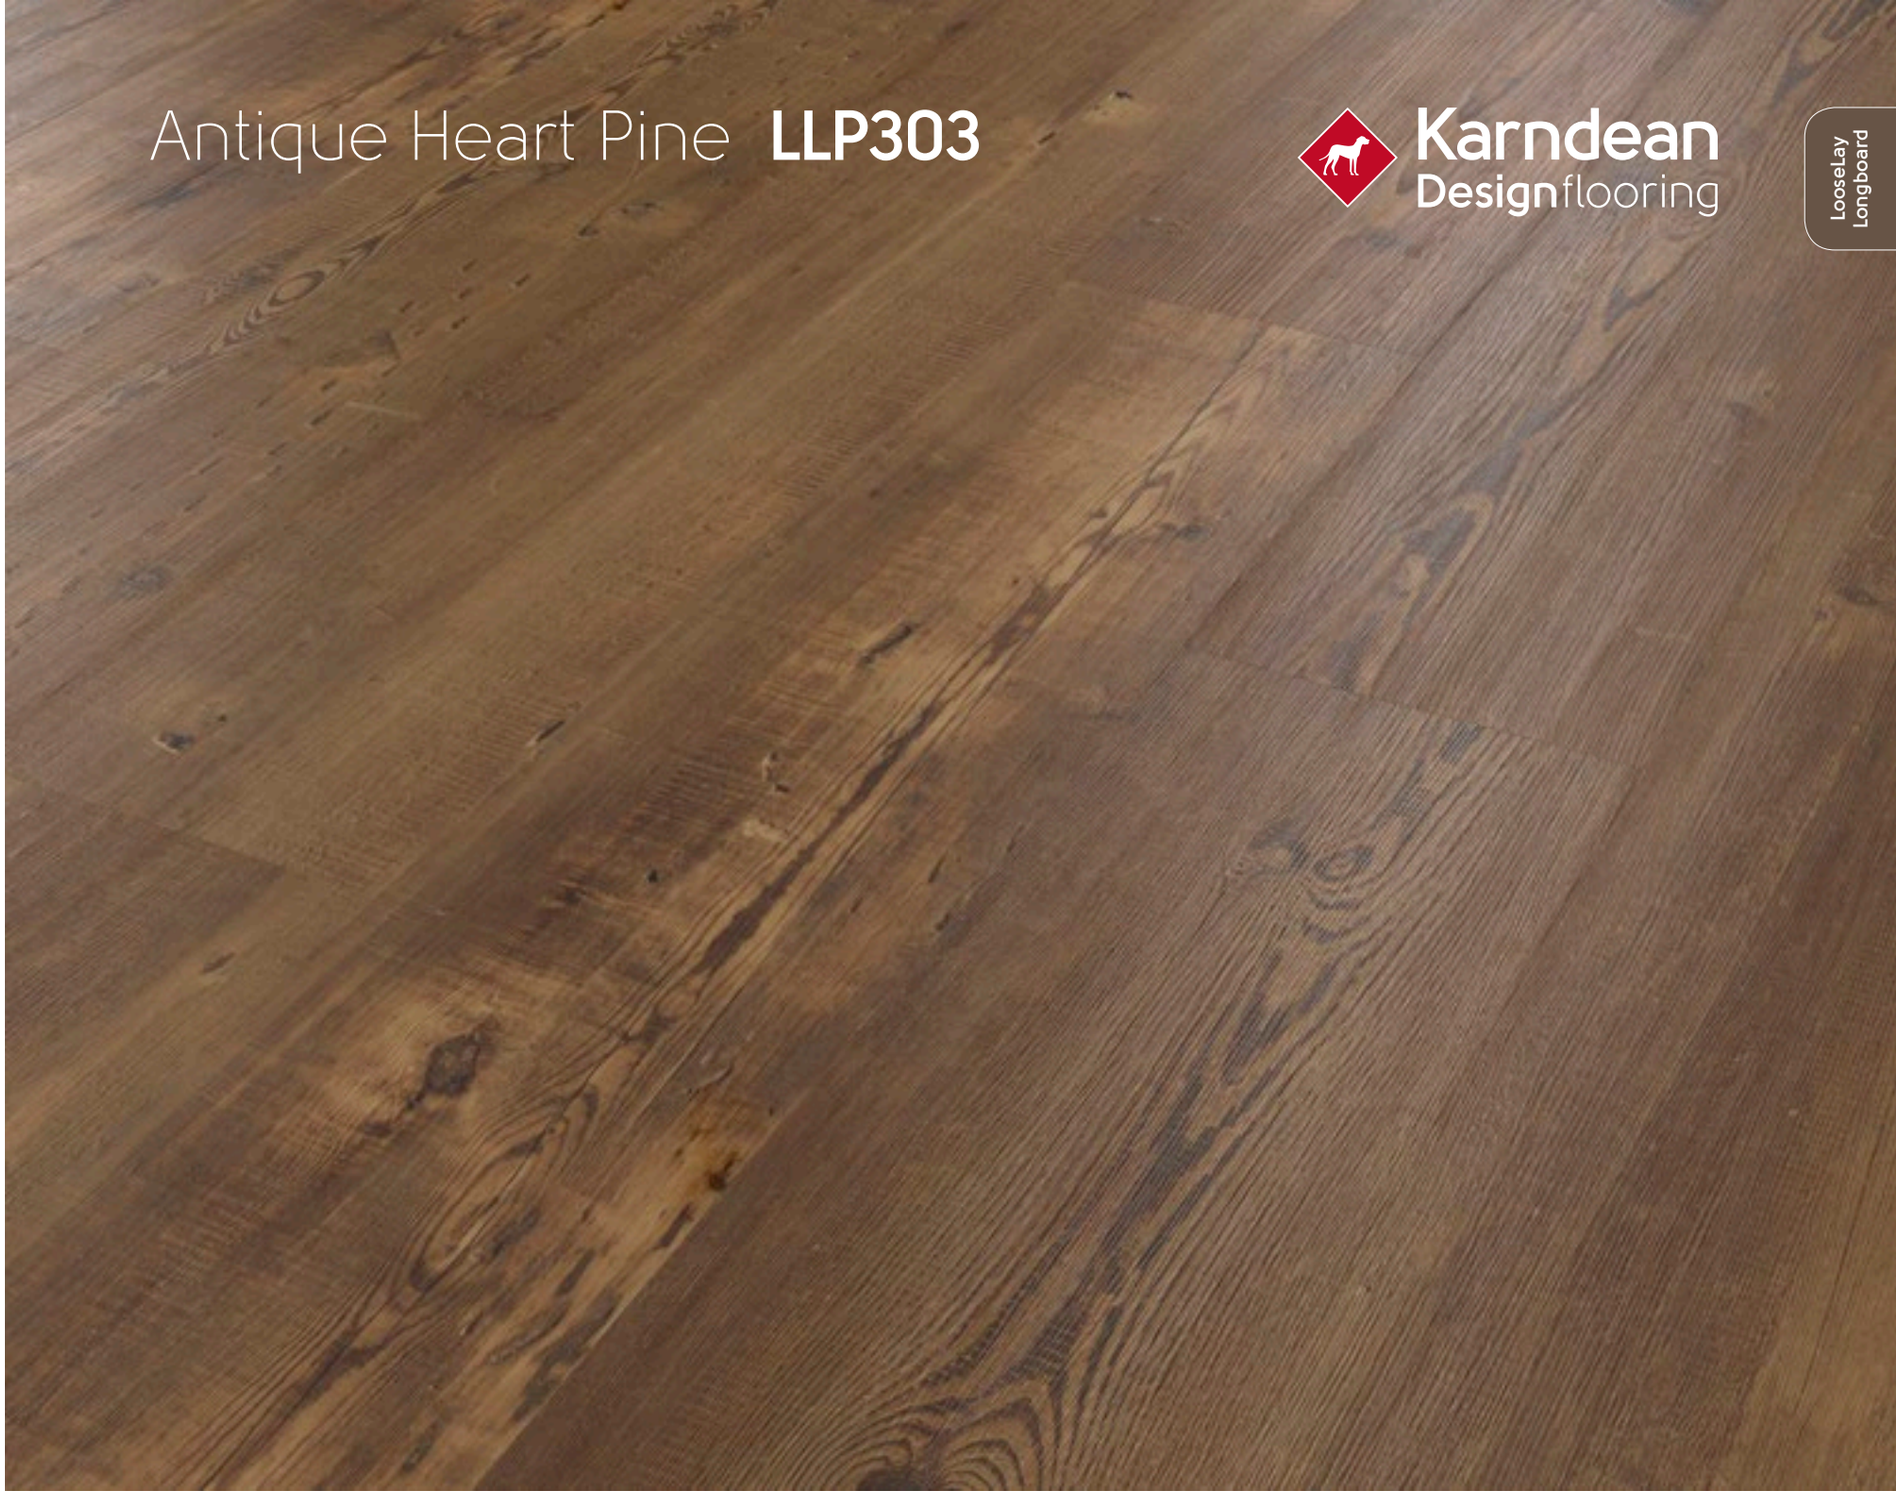

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 265

TEXT
LLP303
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Karndean LooseLay **Wood**

41" x 10" (1050mm x 250mm)*


Page: 295
Burnt Ginger **LLP5-7**


Page: 303
Dover **LLP93**


Page: 288
Providence **LLP108**


Page: 296
Copper Gum **LLP33**


Page: 290
Newport **LLP94**


Page: 294
Stamford **LLP109**


Page: 291
Tasmanian Wattle **LLP38**


Page: 286
Ashland **LLP95**


Page: 298
Burlington **LLP110**


Page: 292
Antique Karri **LLP39**


Page: 299
Salem **LLP96**


Page: 302
Boston **LLP111**


Page: 300
Merbau **LLP91**


Page: 297
Winchester **LLP97**


Page: 301
Hartford **LLP112**


Page: 289
Country Oak **LLP92**


Page: 293
Hudson **LLP99**


Page: 287
Cambridge **LLP113**

* Actual product size: 41.33" x 9.84"

Karndean LooseLay **Wood**

Karndean LooseLay is an innovative format of luxury vinyl flooring featuring a friction grip backing that holds the product in place without the need for clicking or locking. It's easy to install, boasts enhanced acoustic properties and is 100% recyclable. In some spaces we do recommend the use of a tackifier. Please see our website for details. The collection includes 18 wood look planks available in a wide range of designs and tones. From the light rustic tones of Country Oak through to the rich brown tones of Dover, our LooseLay Wood collection offers something to suit any space.



☐ Stamford **LLP109**


	Standard	Result
Thickness		4.5 mm
Size		41.33" x 9.84" (1050 mm x 250 mm)
Box quantity		12 Planks/33.89 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 1.7
Abrasion resistance	ASTM D3884	113000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 16 dB IIC = 56 (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass
Indentation – residual	ASTM F1914	<0.003"
Adhesive	Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Ashland **LLP95**

Karndean Designflooring

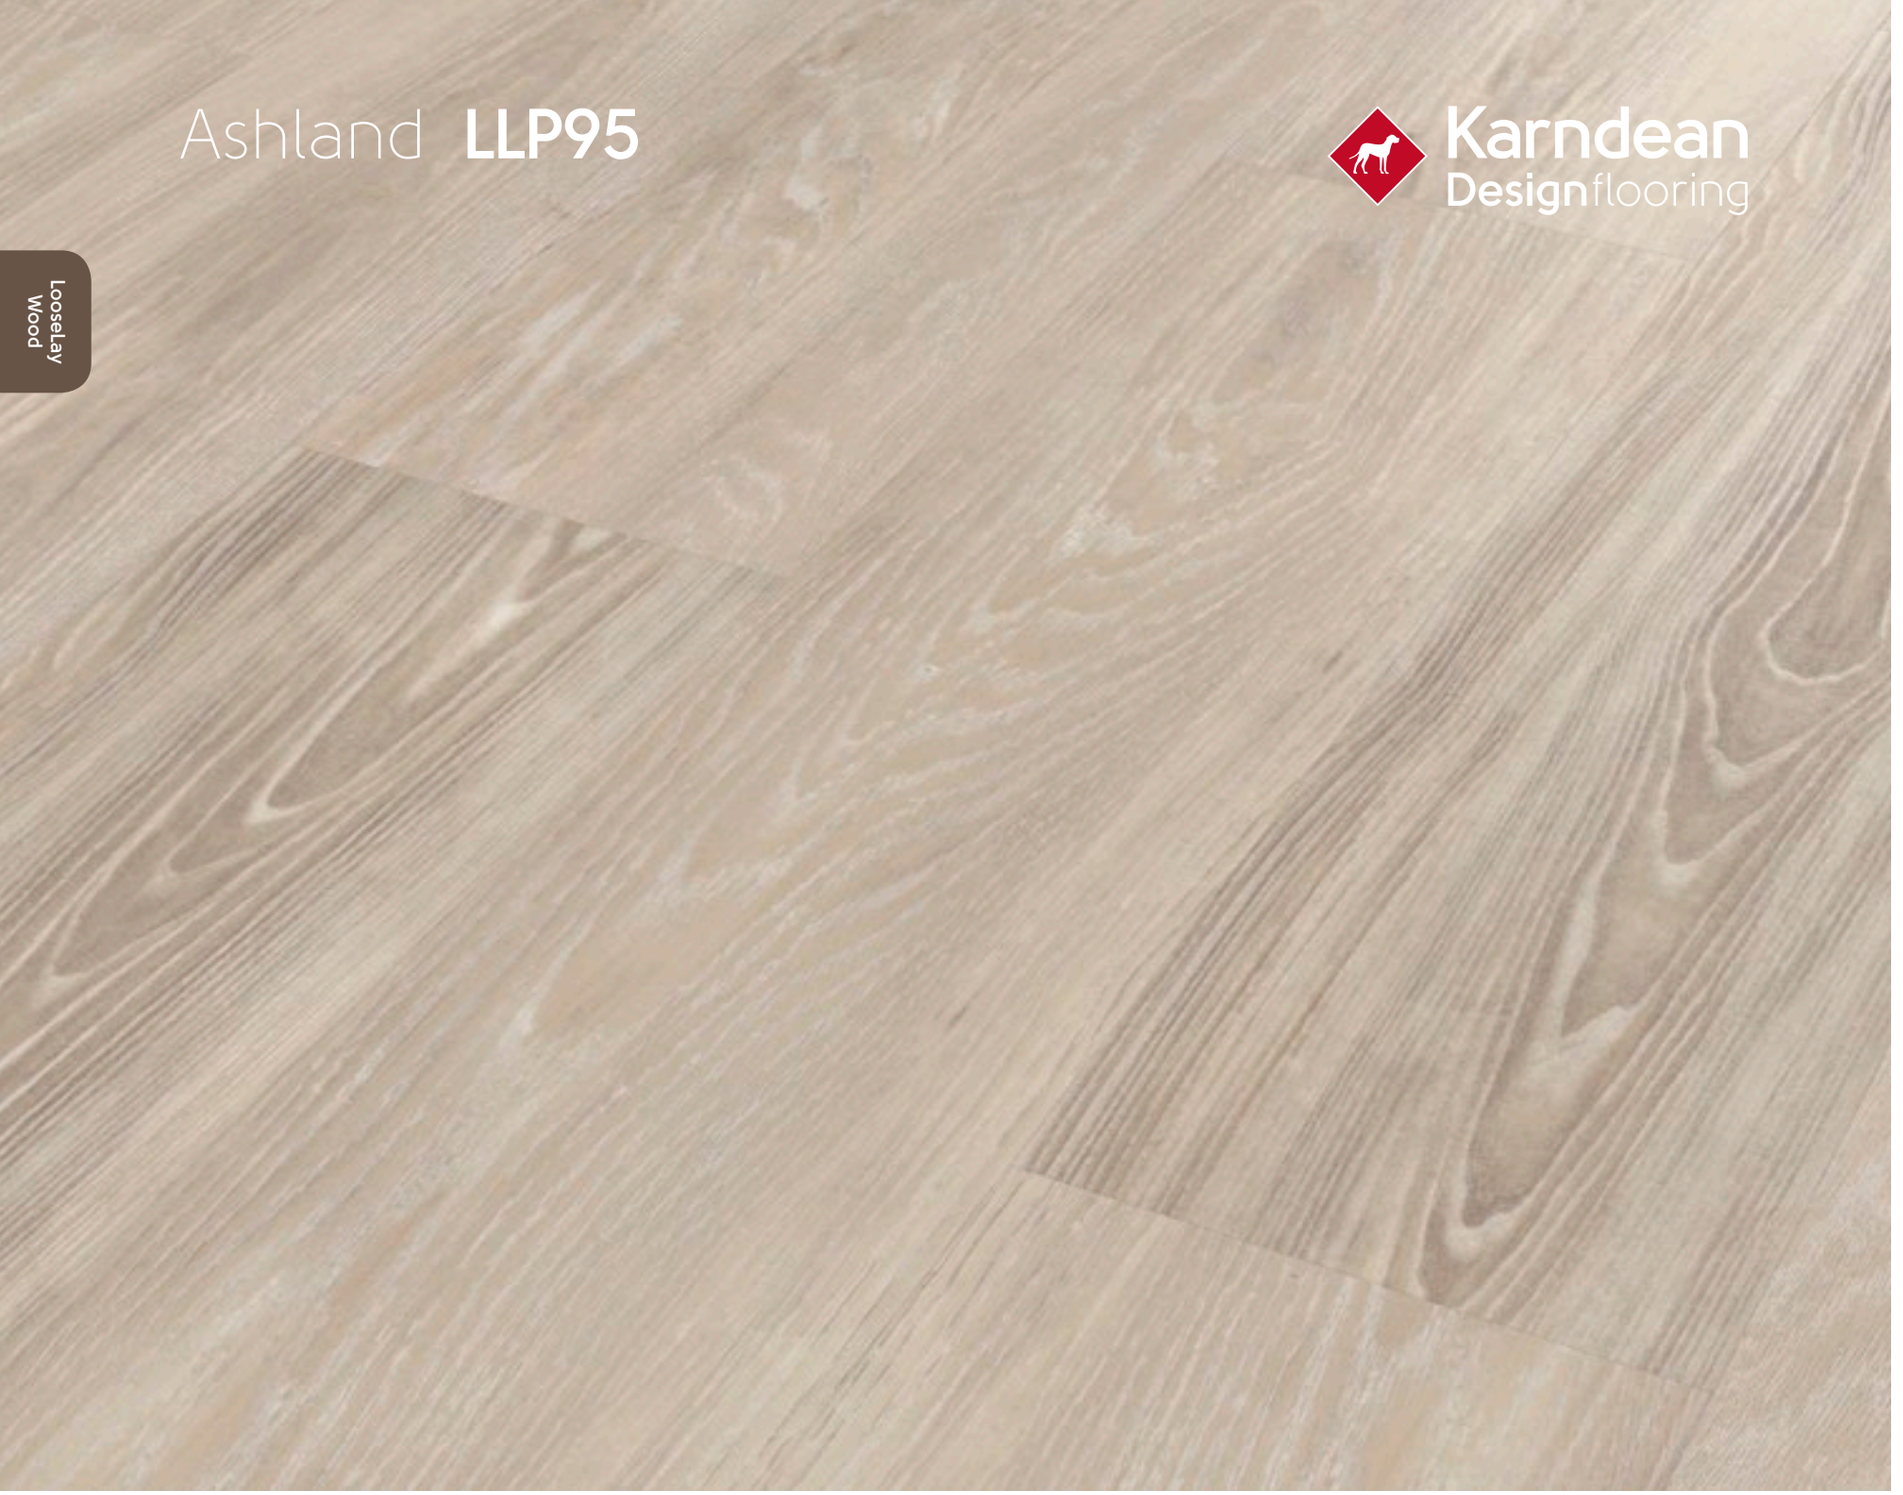

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP95
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Cambridge **LLP113**

Karndean Designflooring

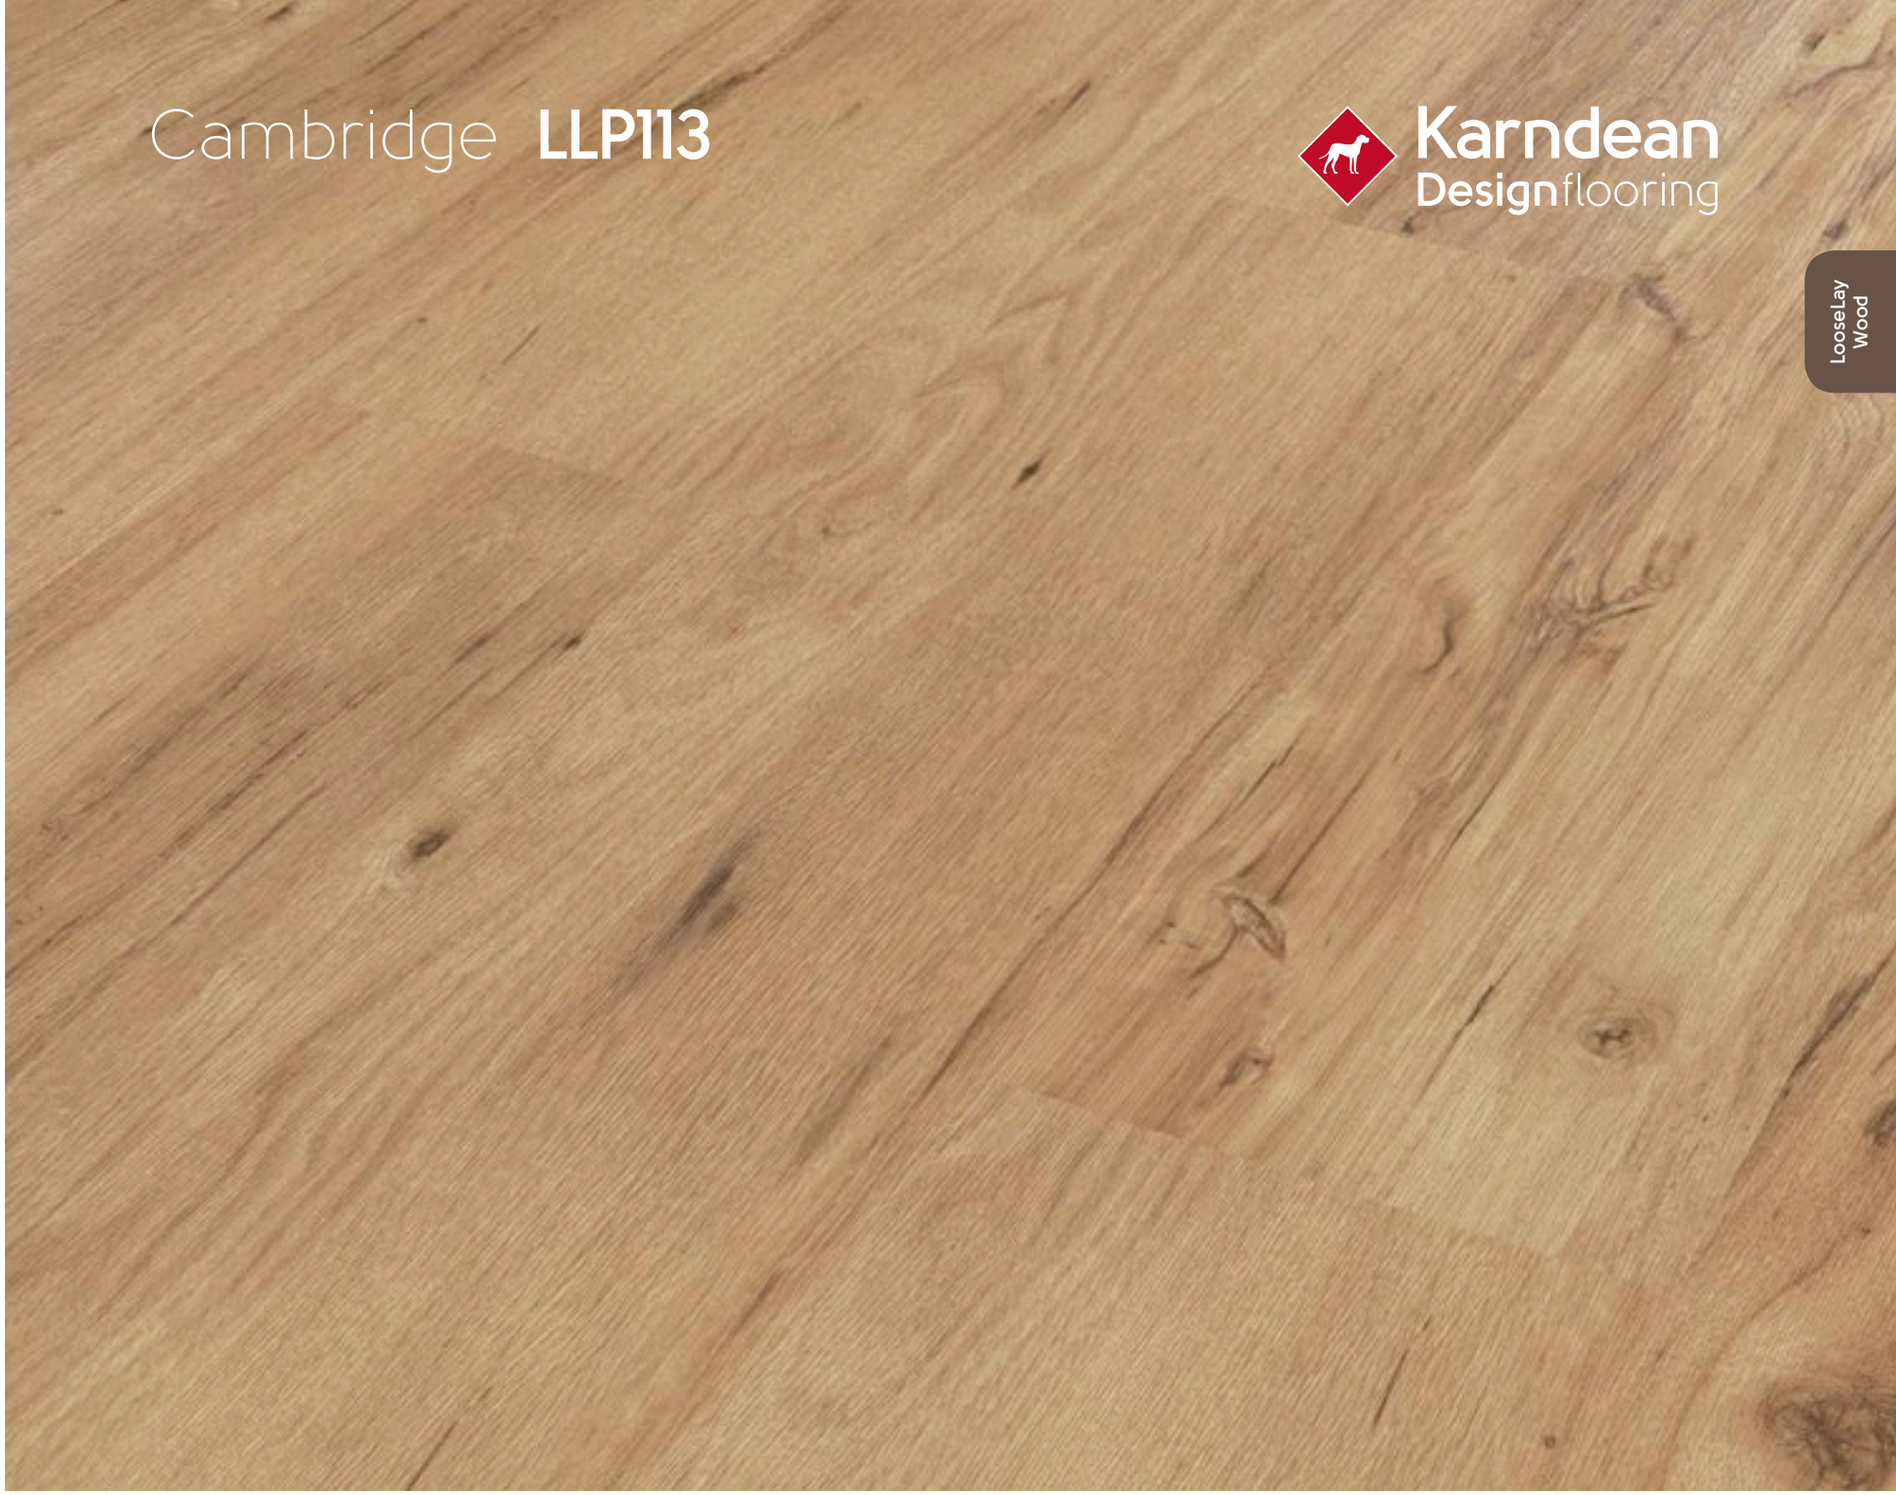

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP113
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Providence **LLP108**

Karndean Designflooring

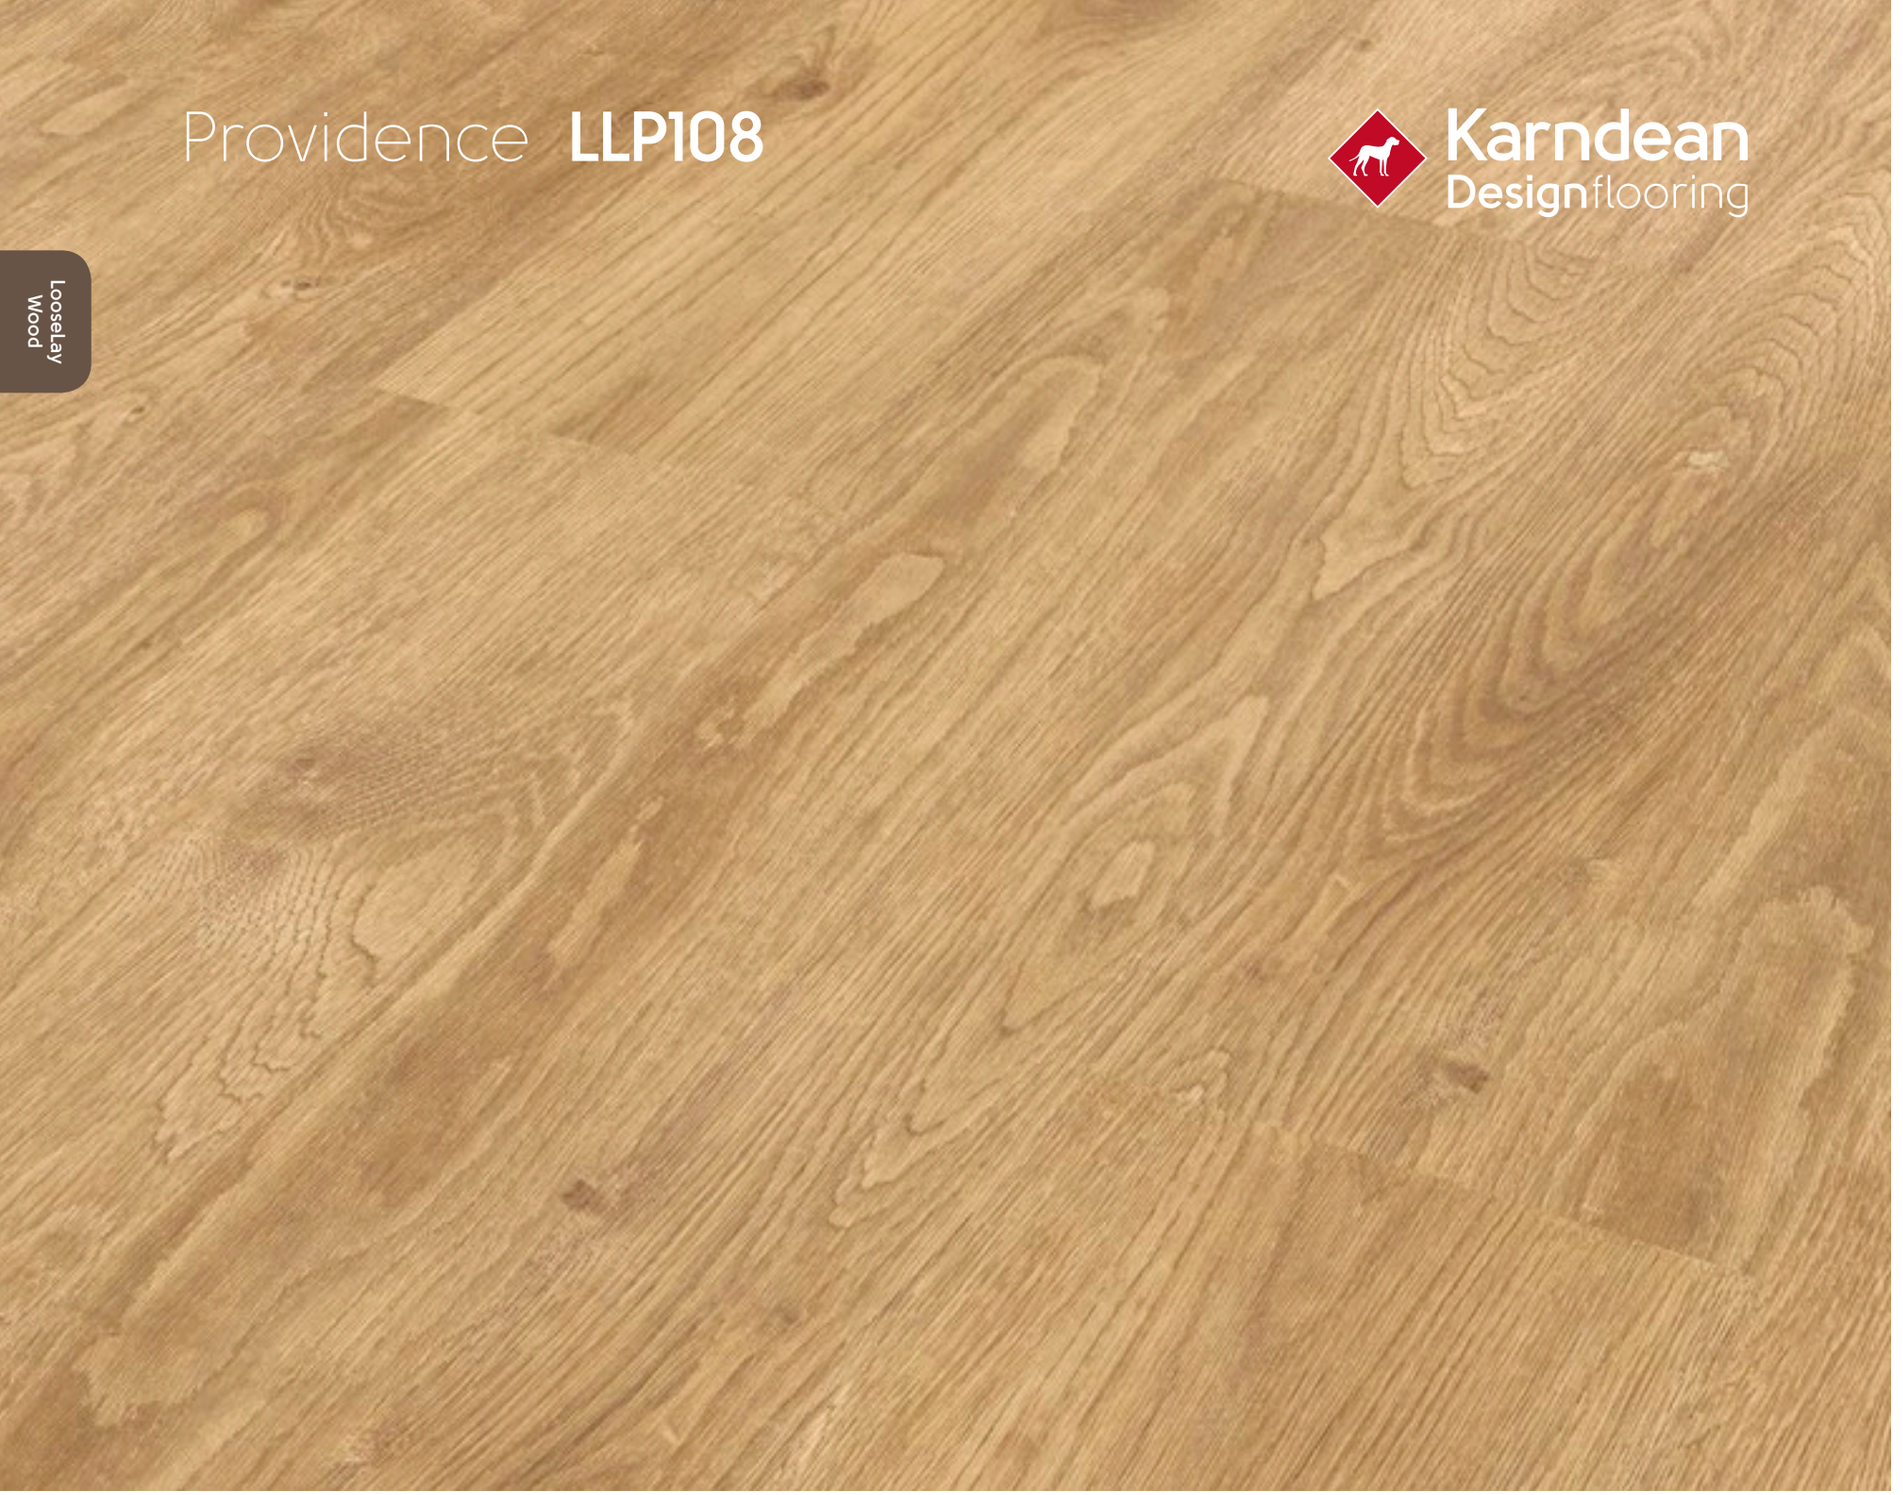

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP108
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Country Oak **LLP92**

Karndean Designflooring

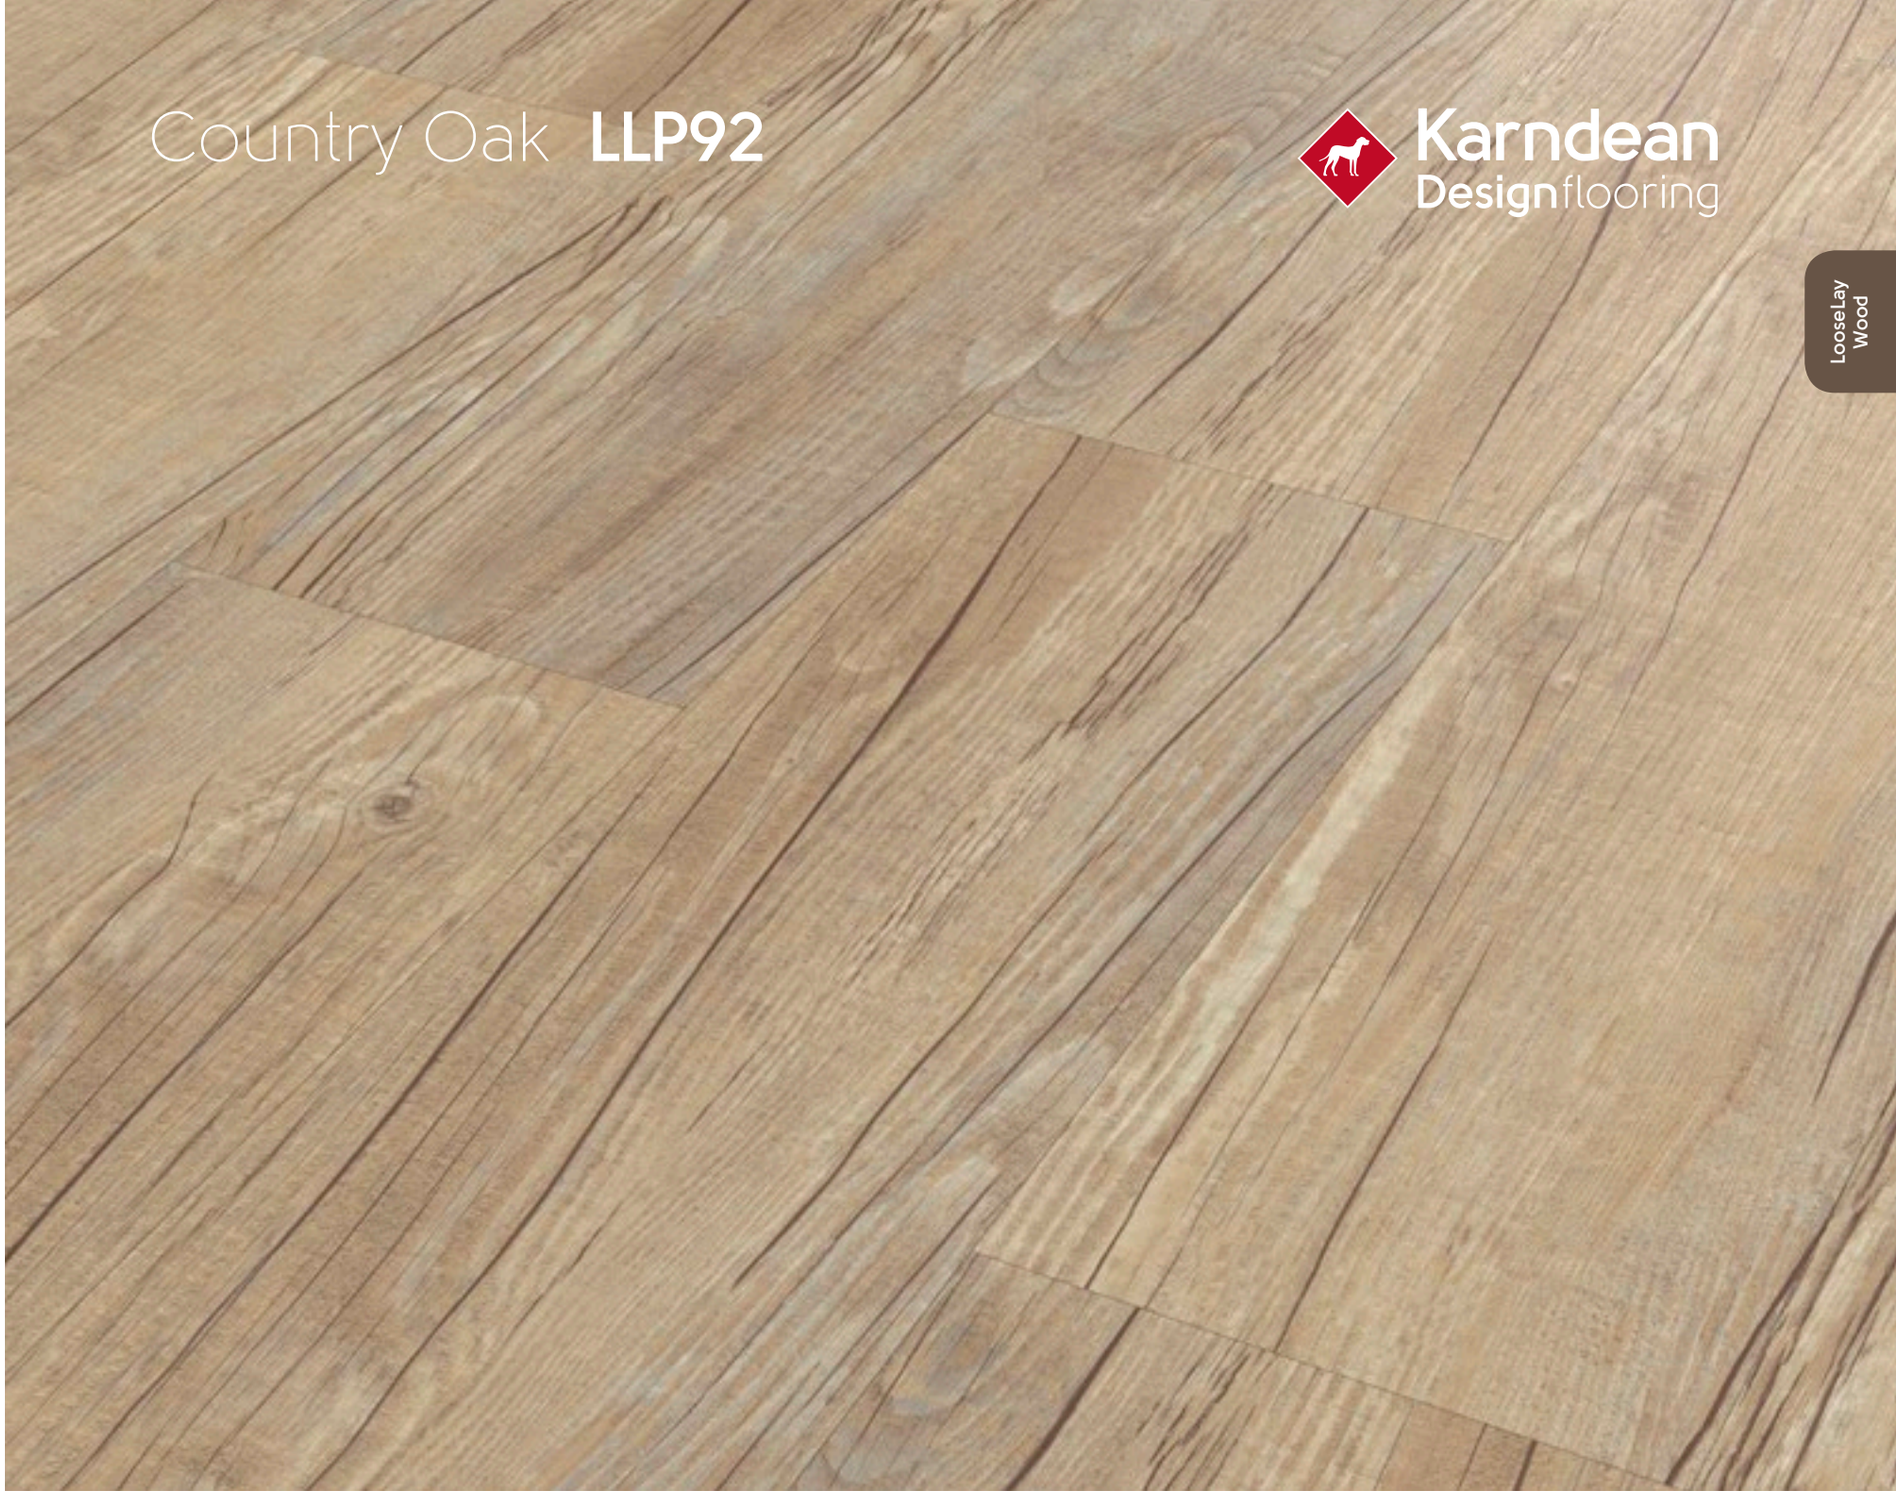

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP92
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Newport **LLP94**

Karndean Designflooring

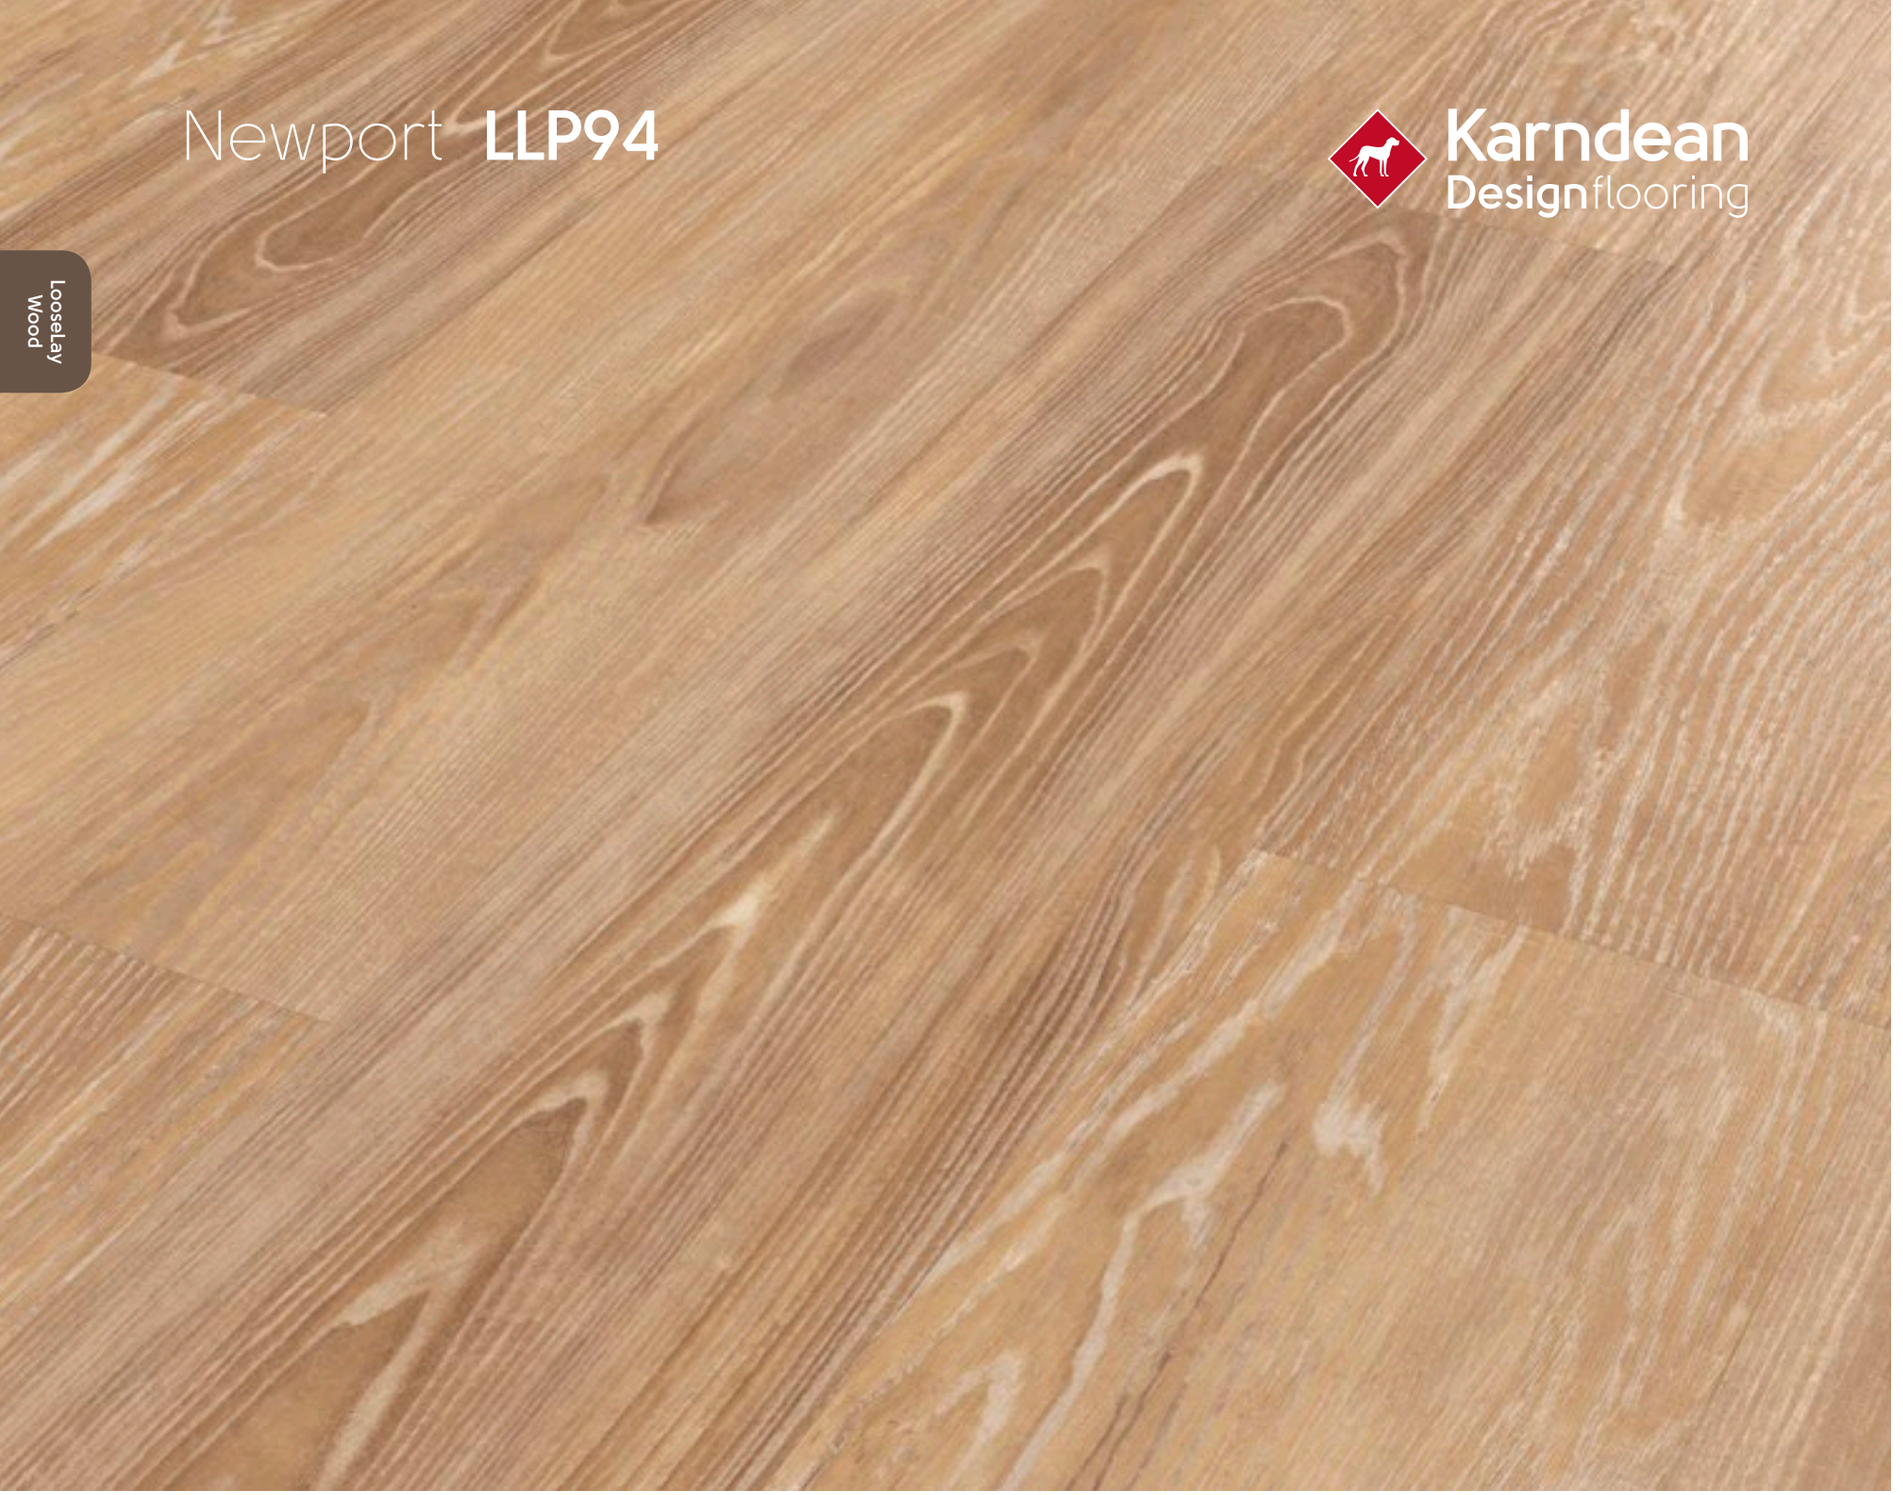

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP94
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Tasmanian Wattle **LLP38**

Karndean Designflooring

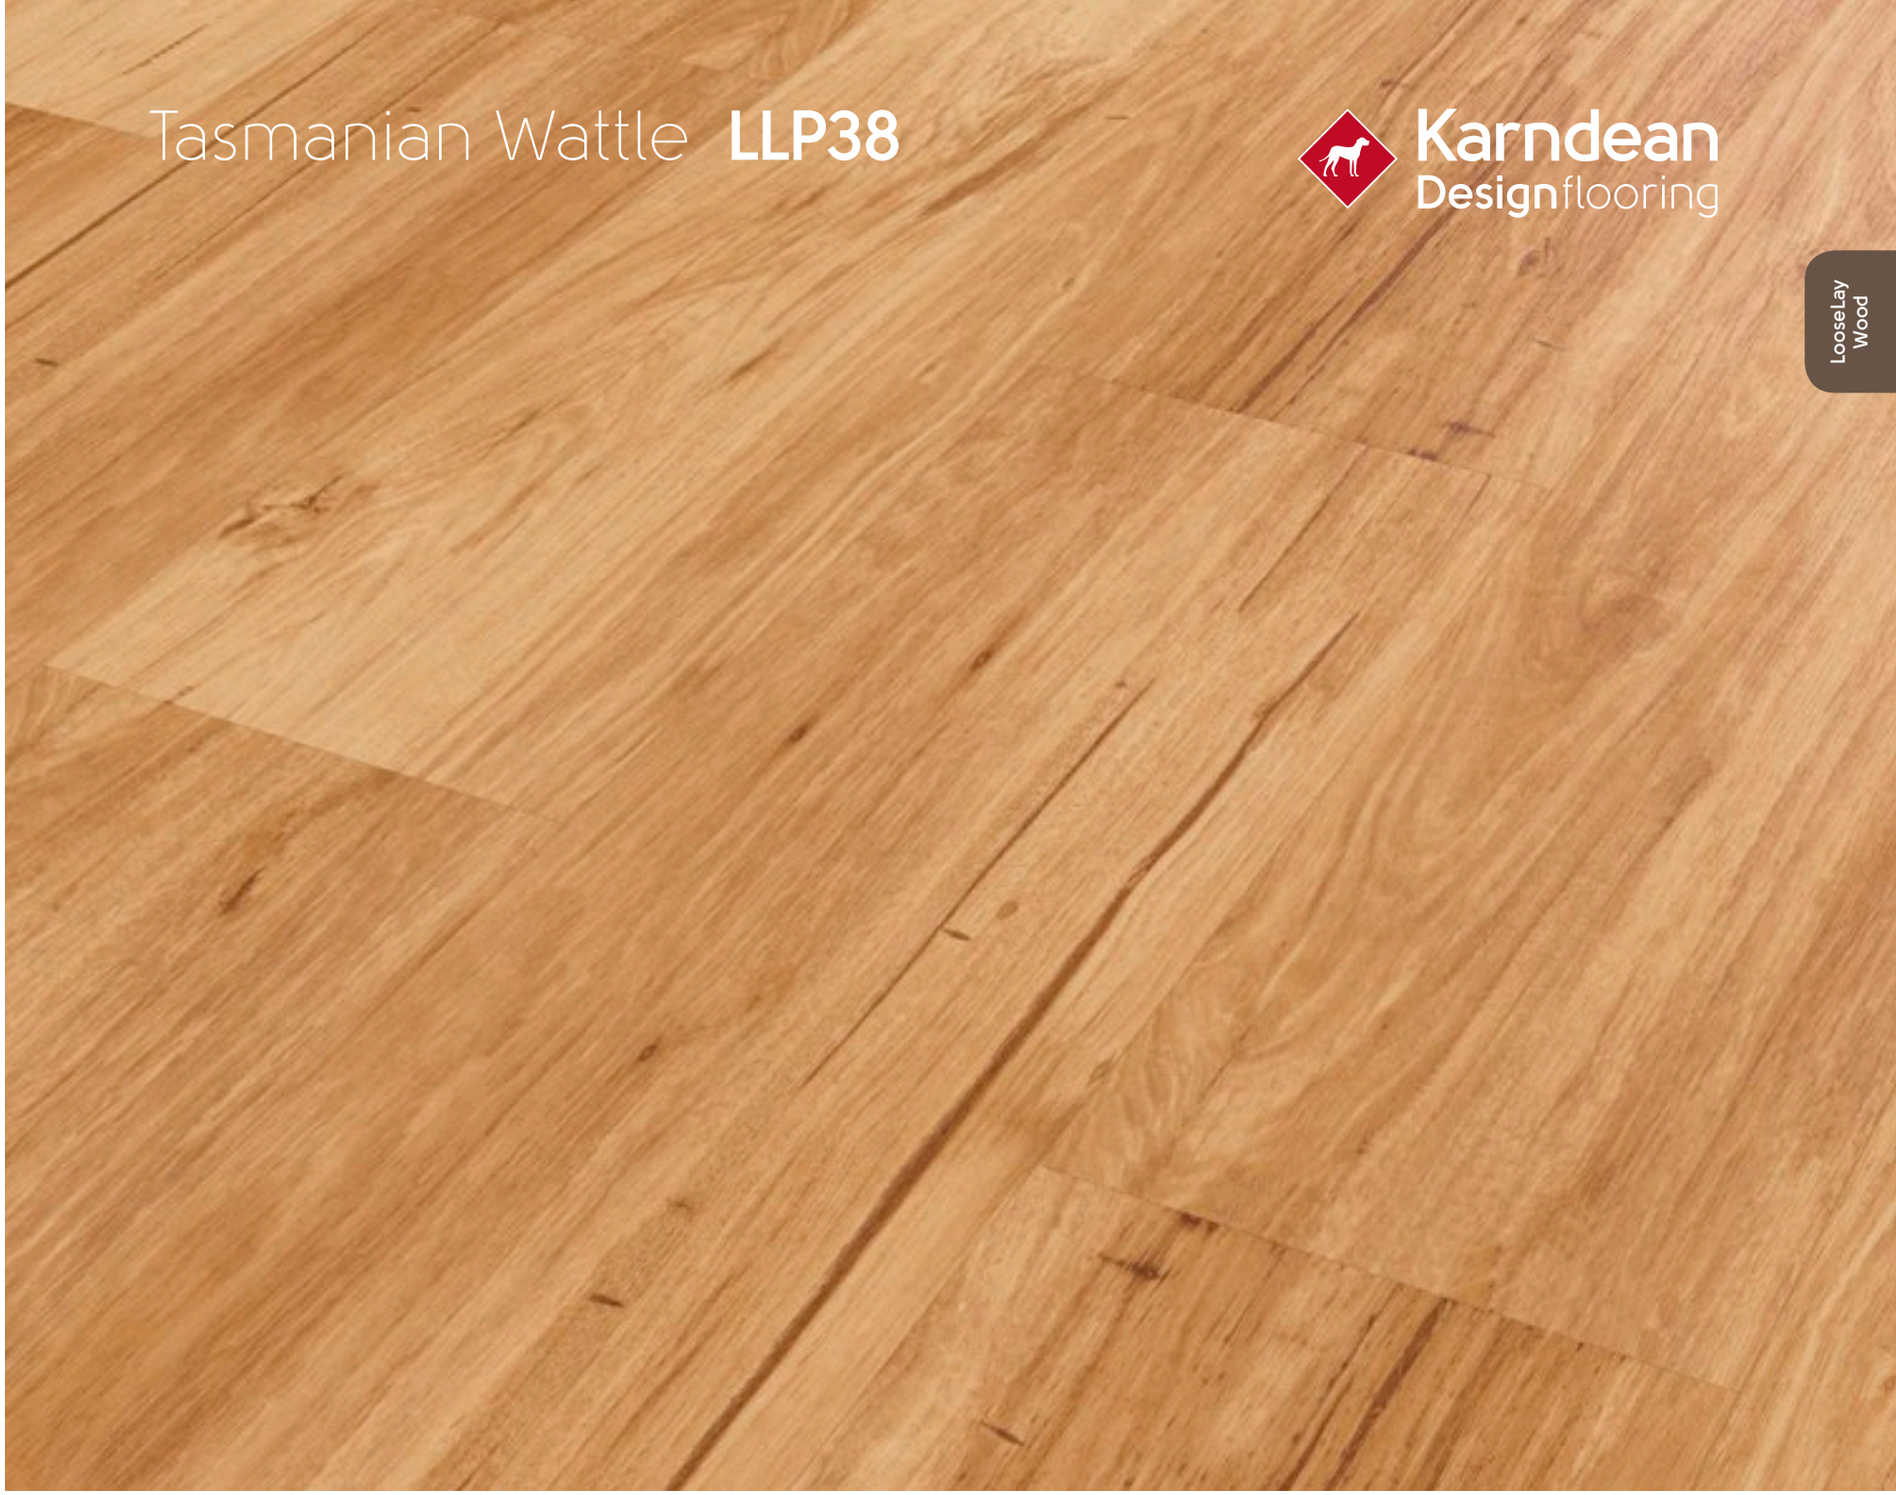

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP38
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Antique Karri **LLP39**

Karndean Designflooring

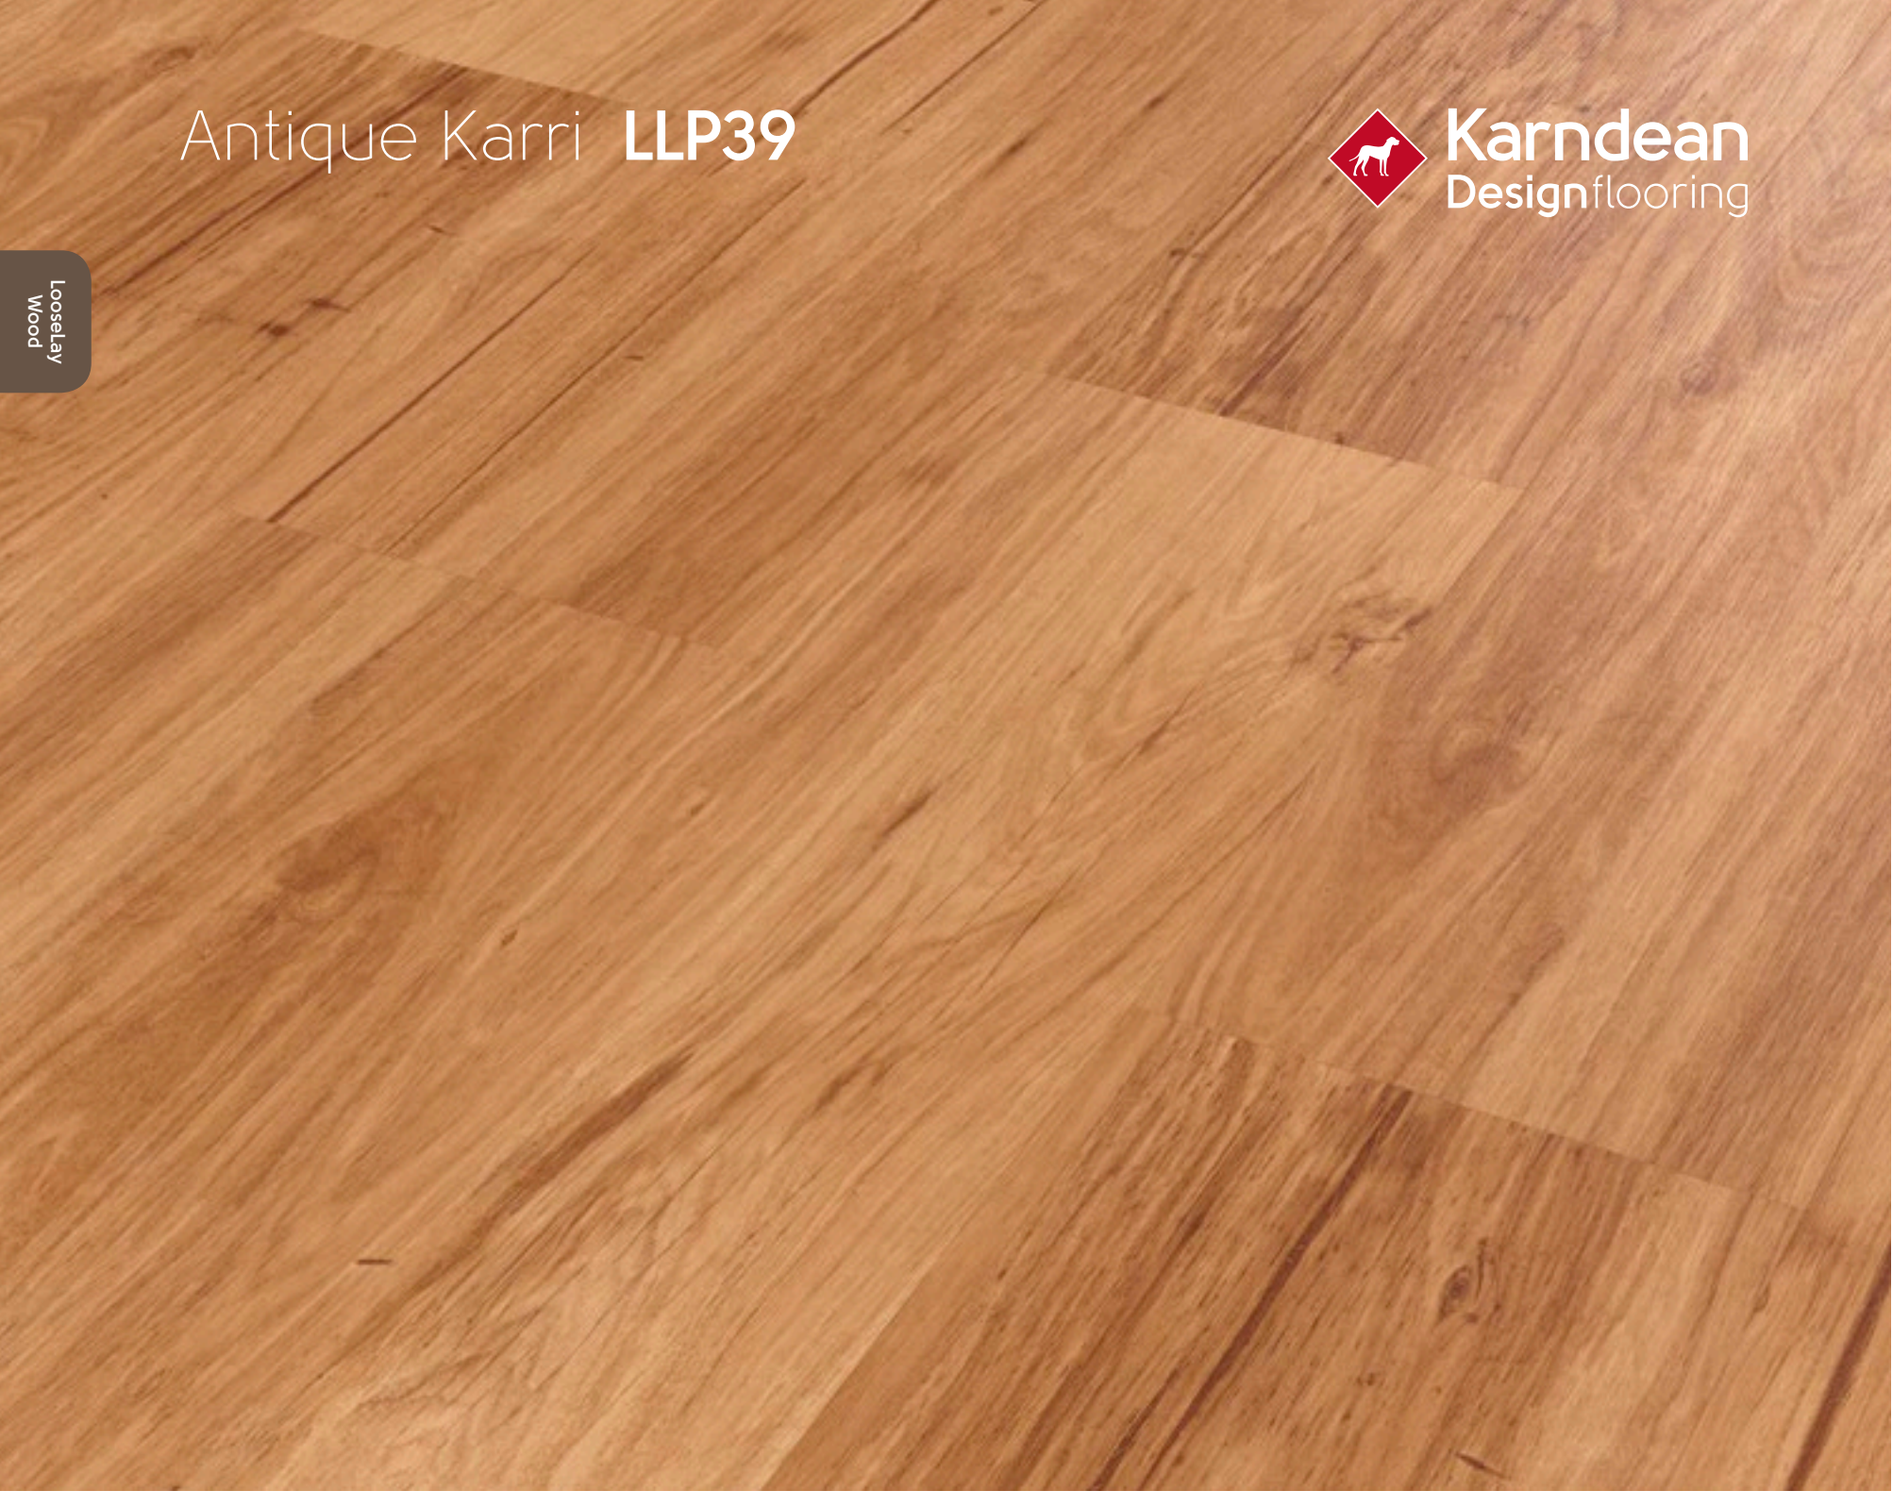

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 285

TEXT
LLP39
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hudson **LLP99**

Karndean Designflooring



Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP99
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Stamford **LLP109**

Karndean Designflooring

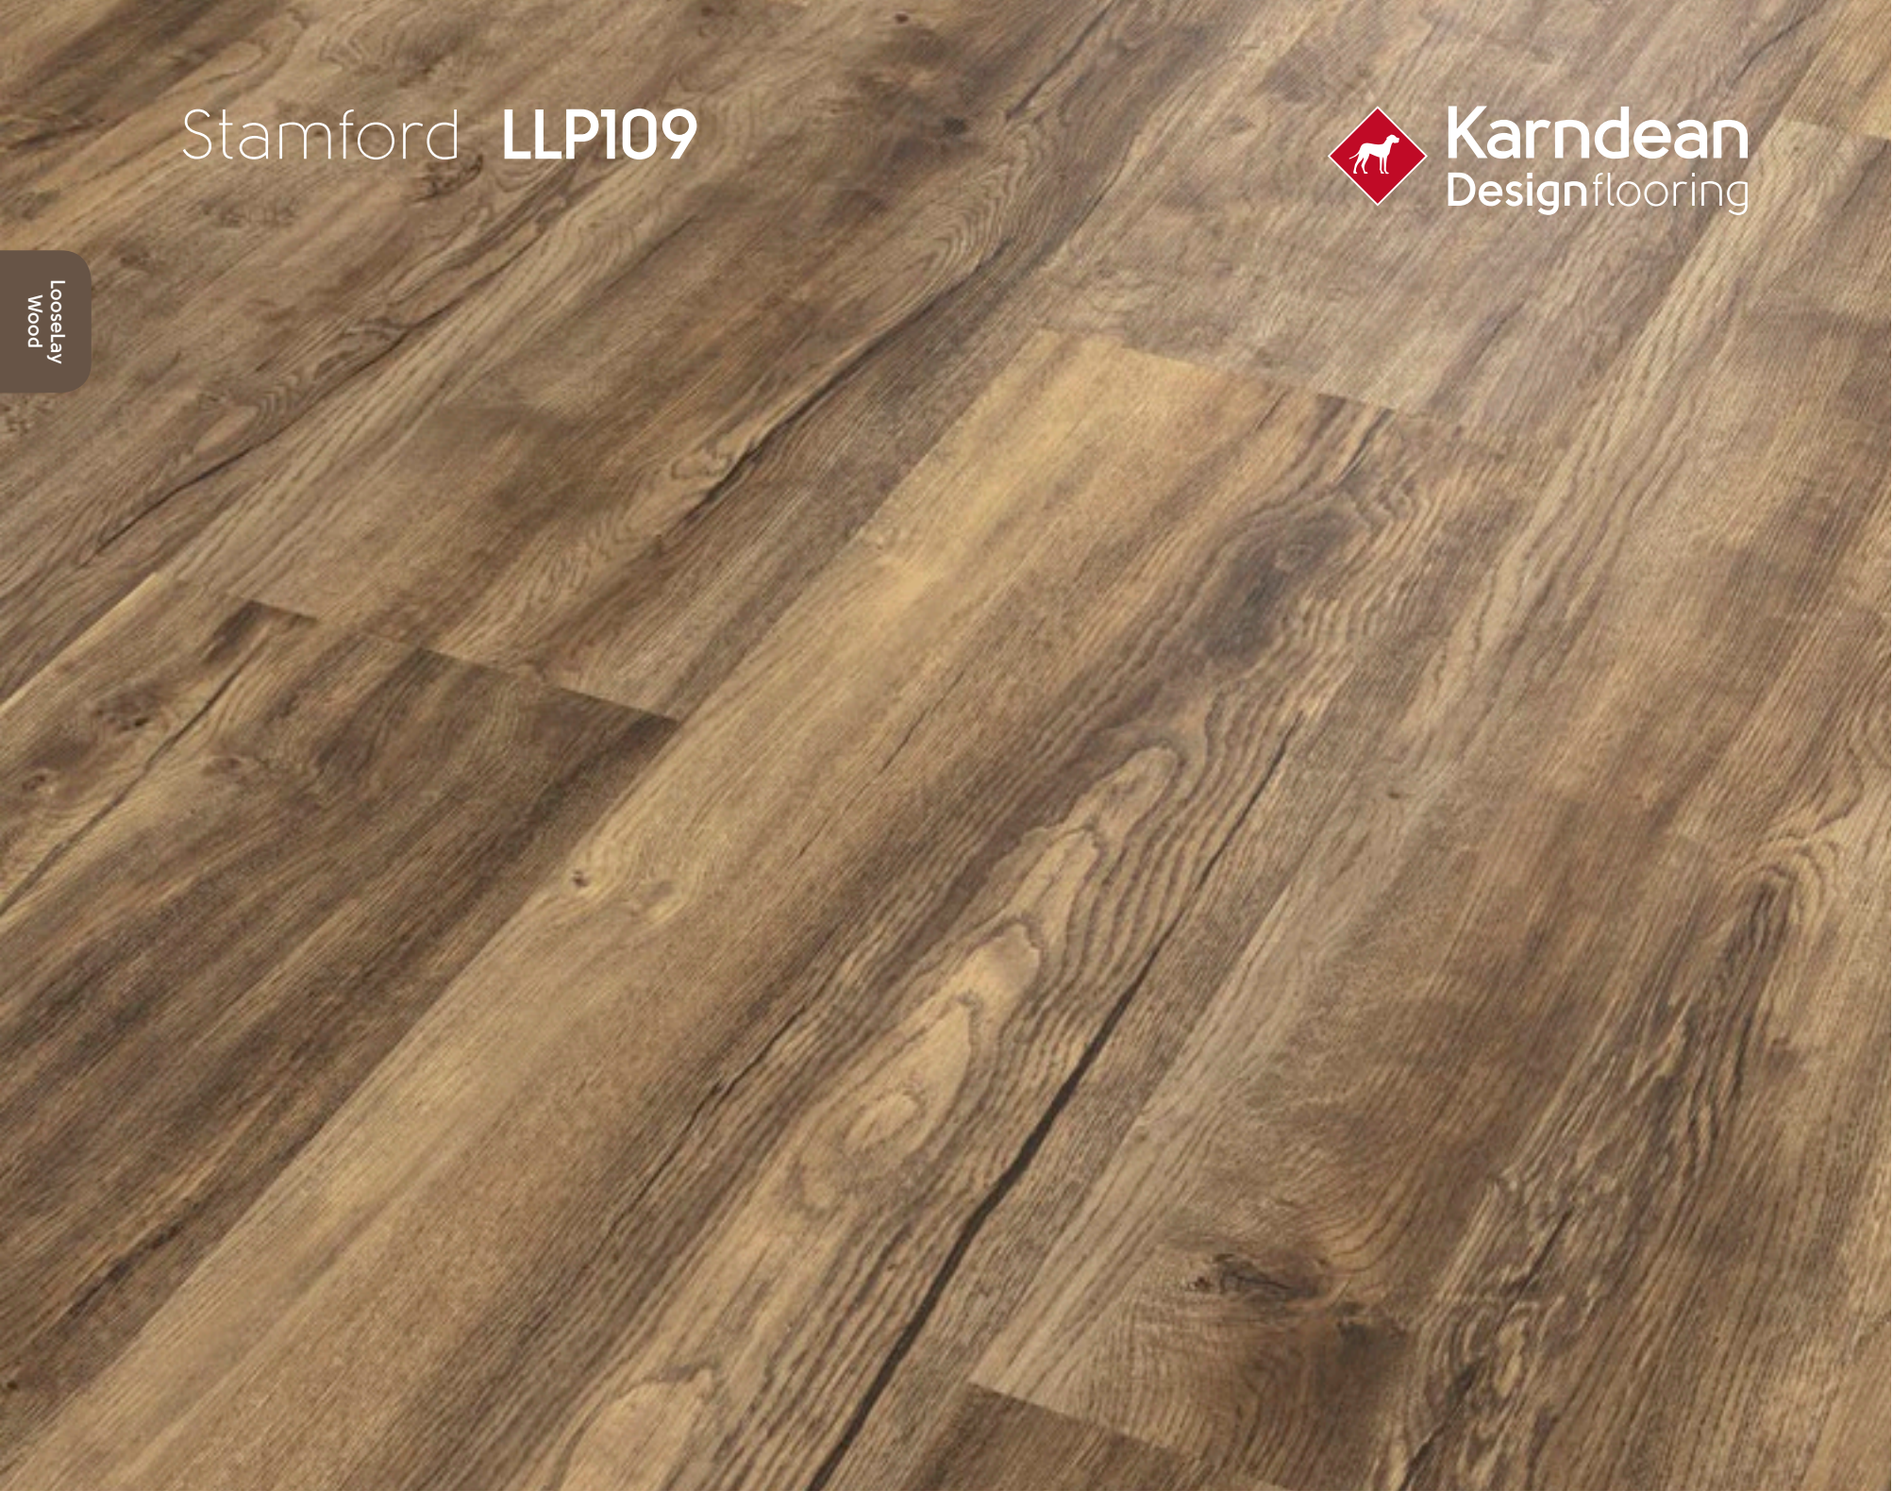

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP109
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burnt Ginger **LLP5-7**

Karndean Designflooring

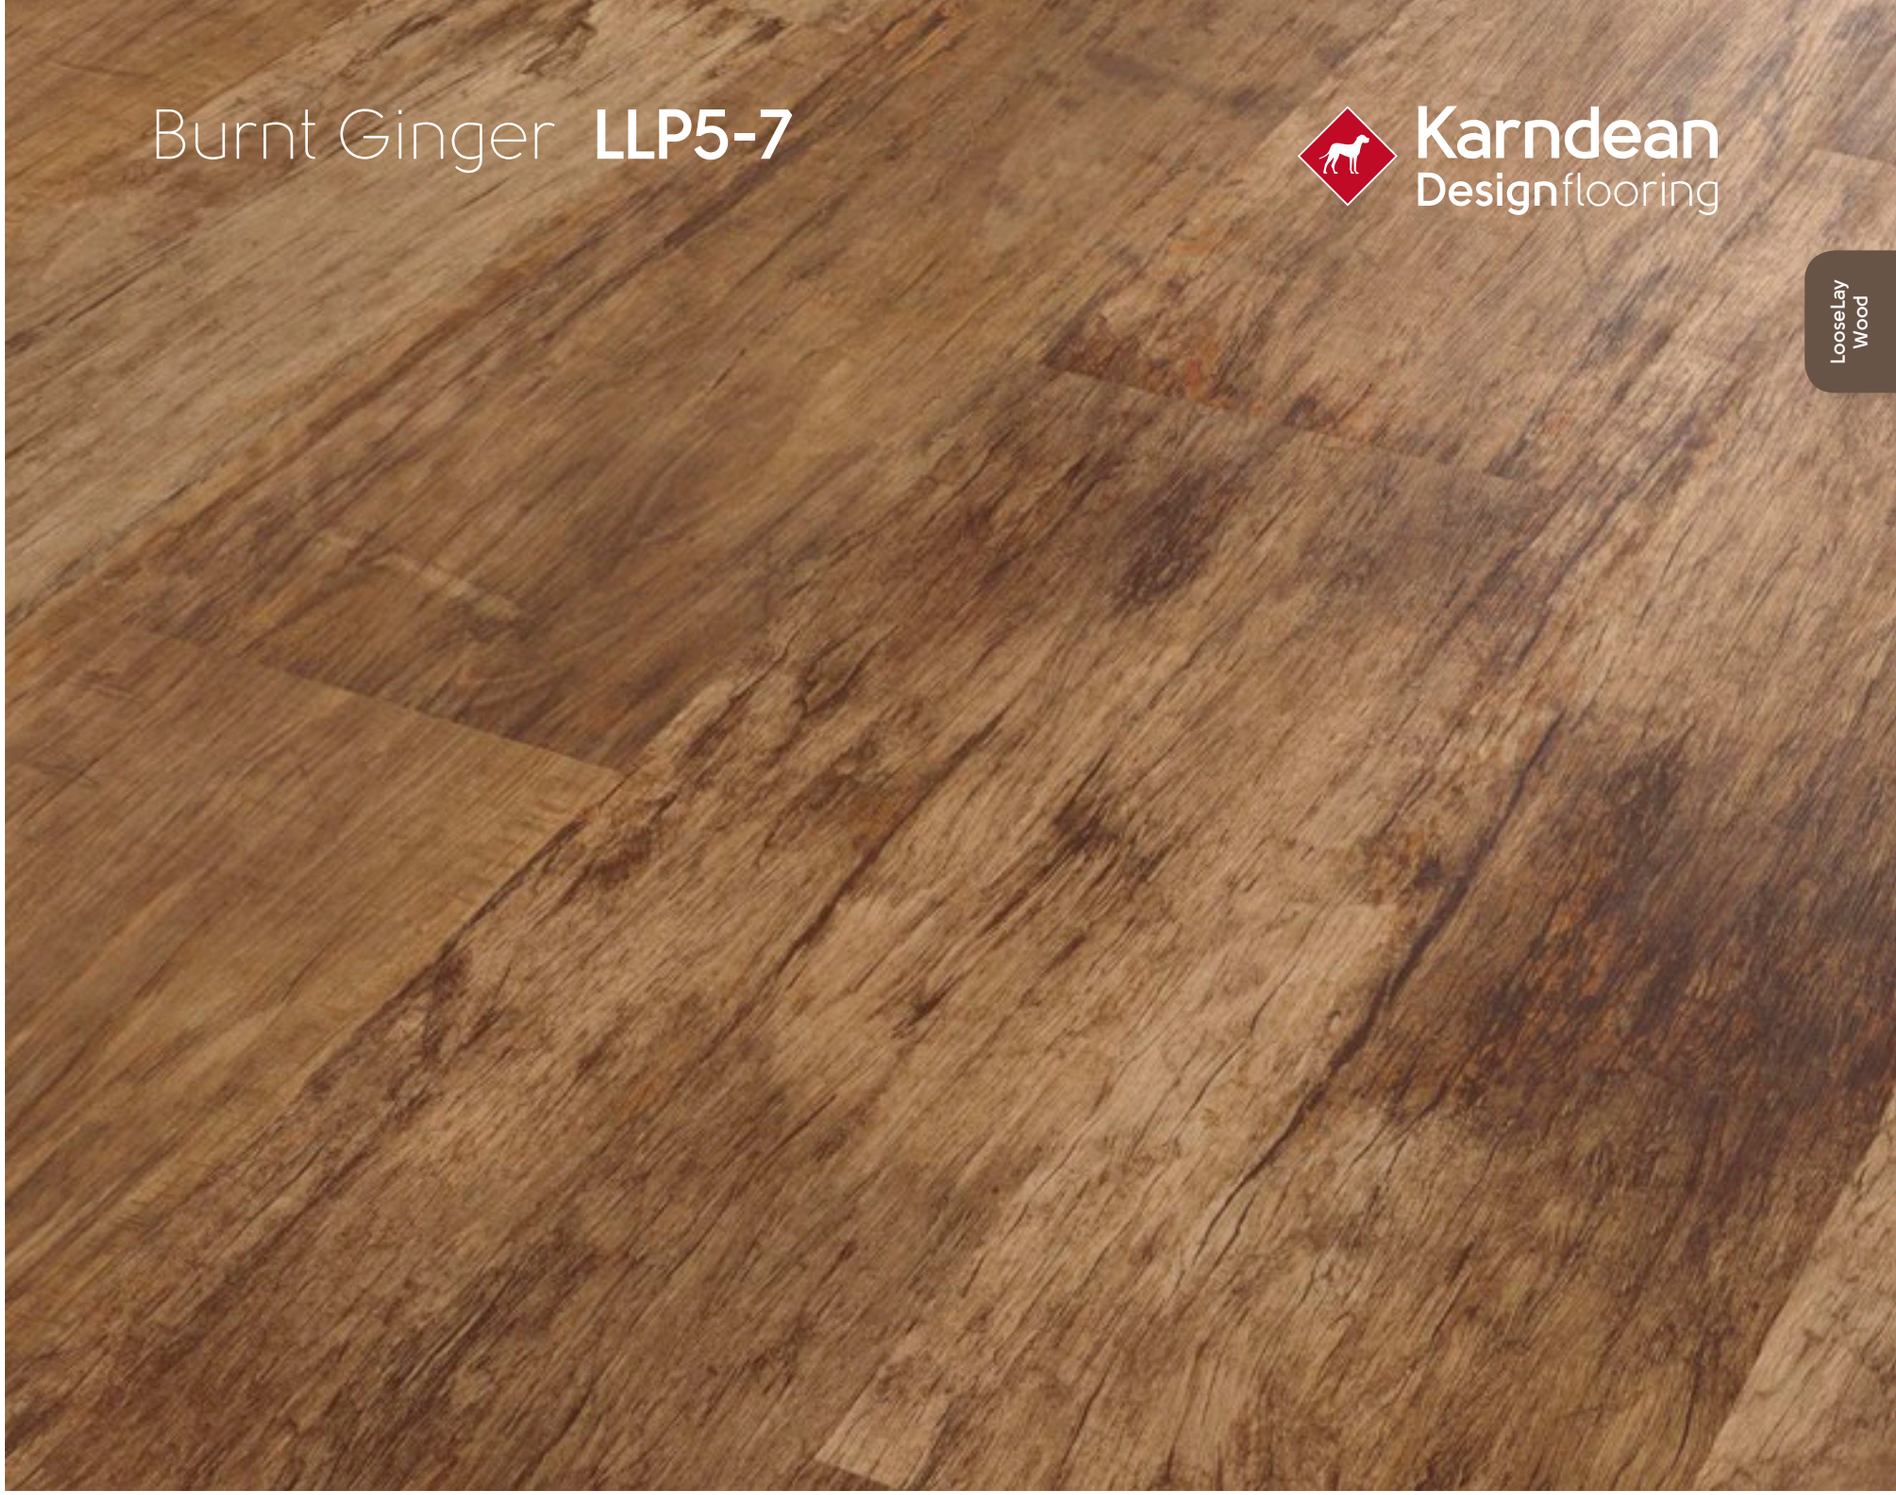

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 285

TEXT
LLP5-7
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Copper Gum **LLP33**

Karndean Designflooring



Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP33
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Winchester **LLP97**

Karndean Designflooring

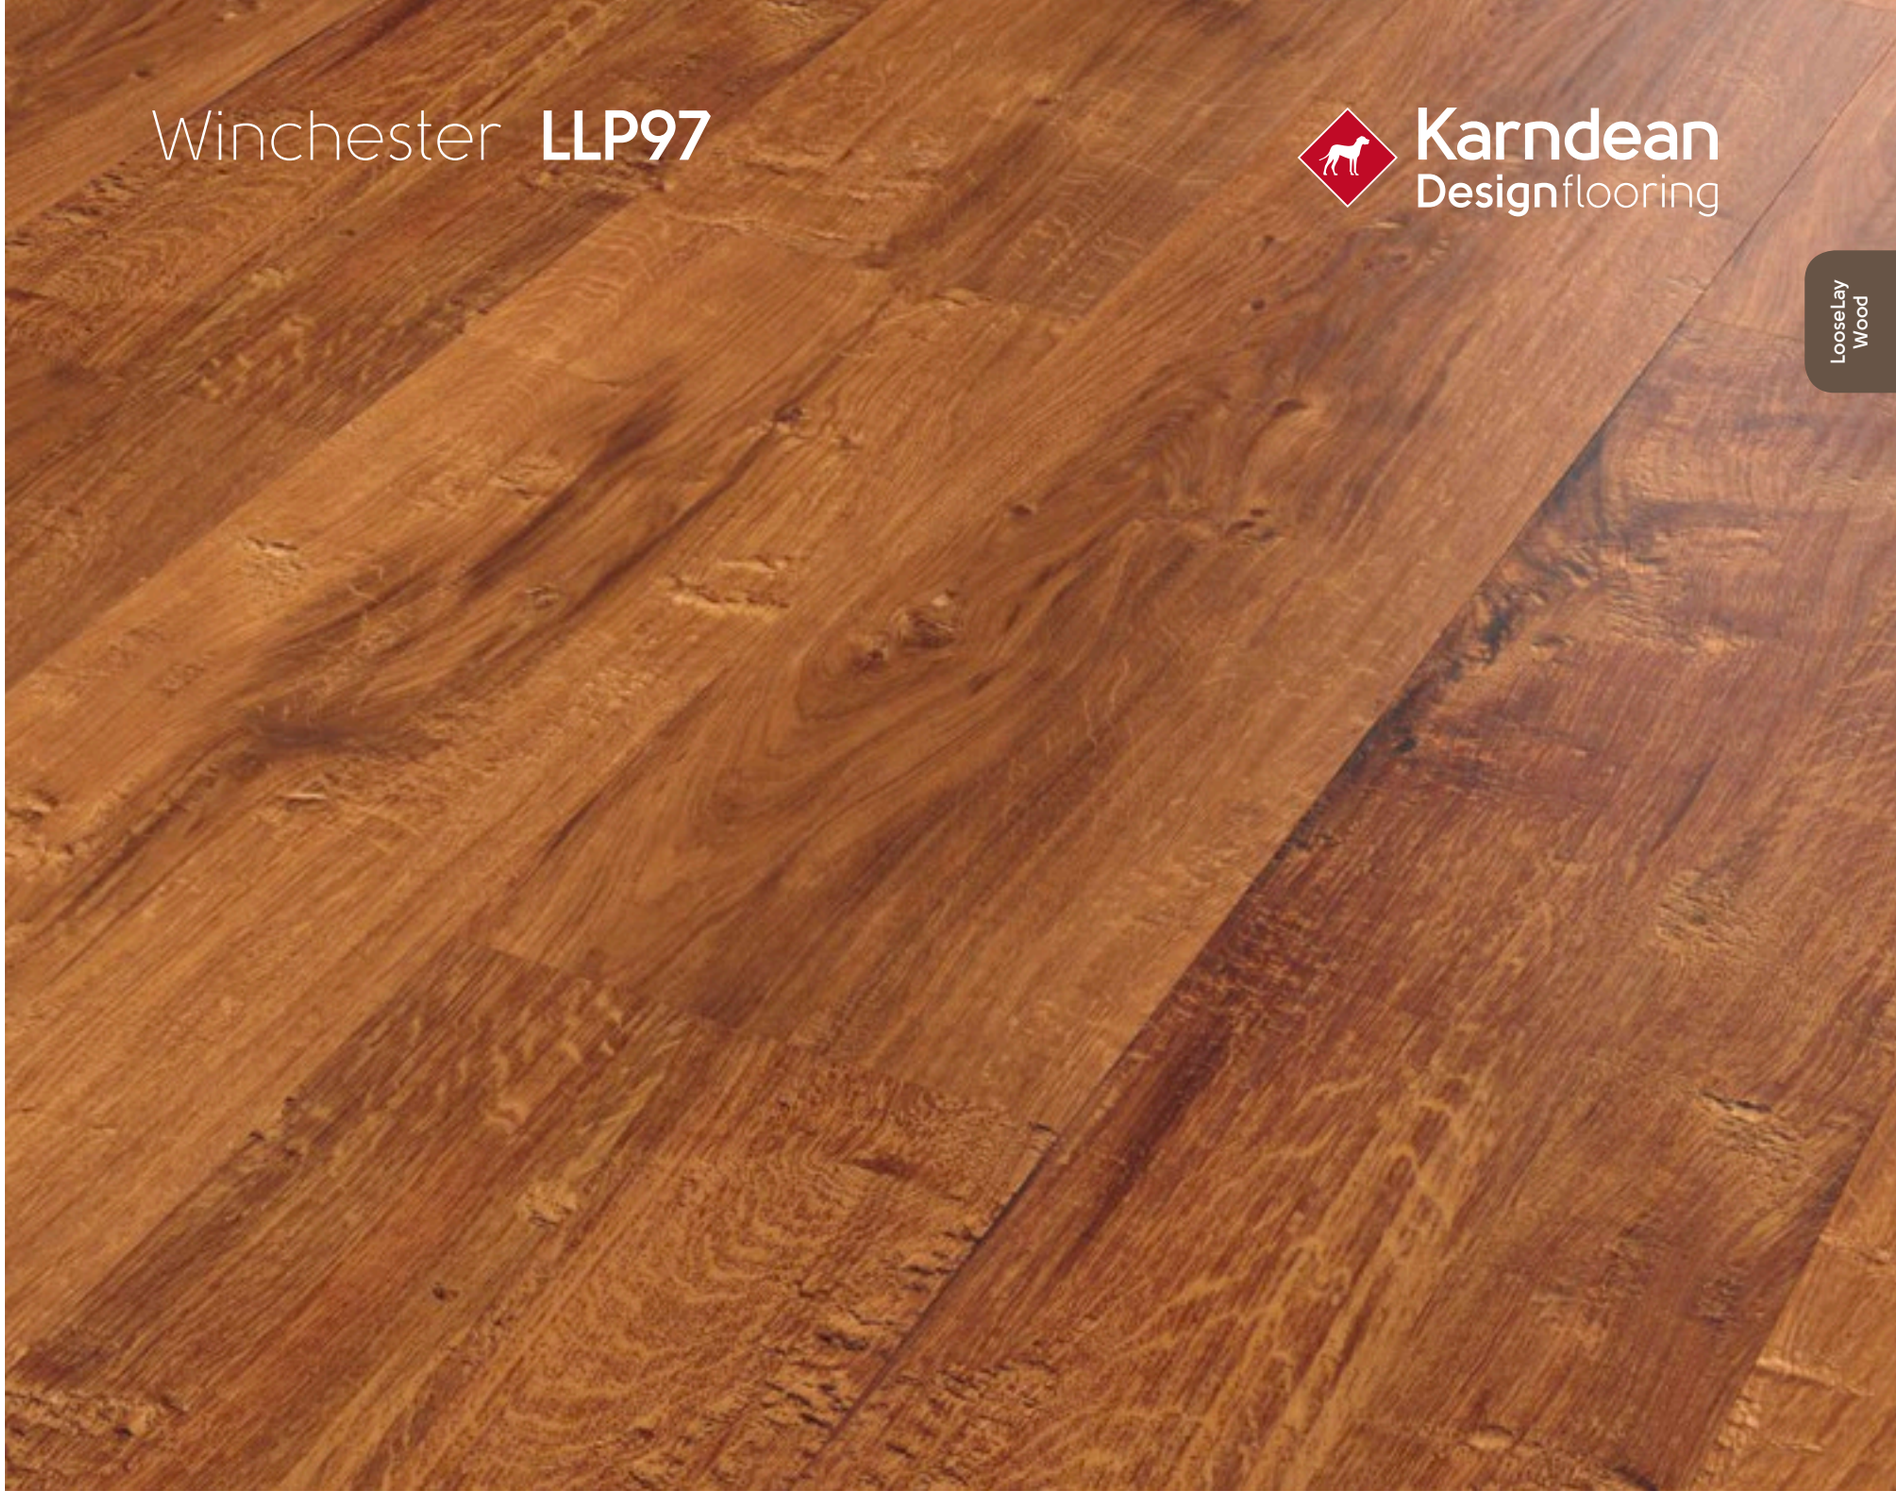

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP97
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Burlington **LLP110**

Karndean Designflooring

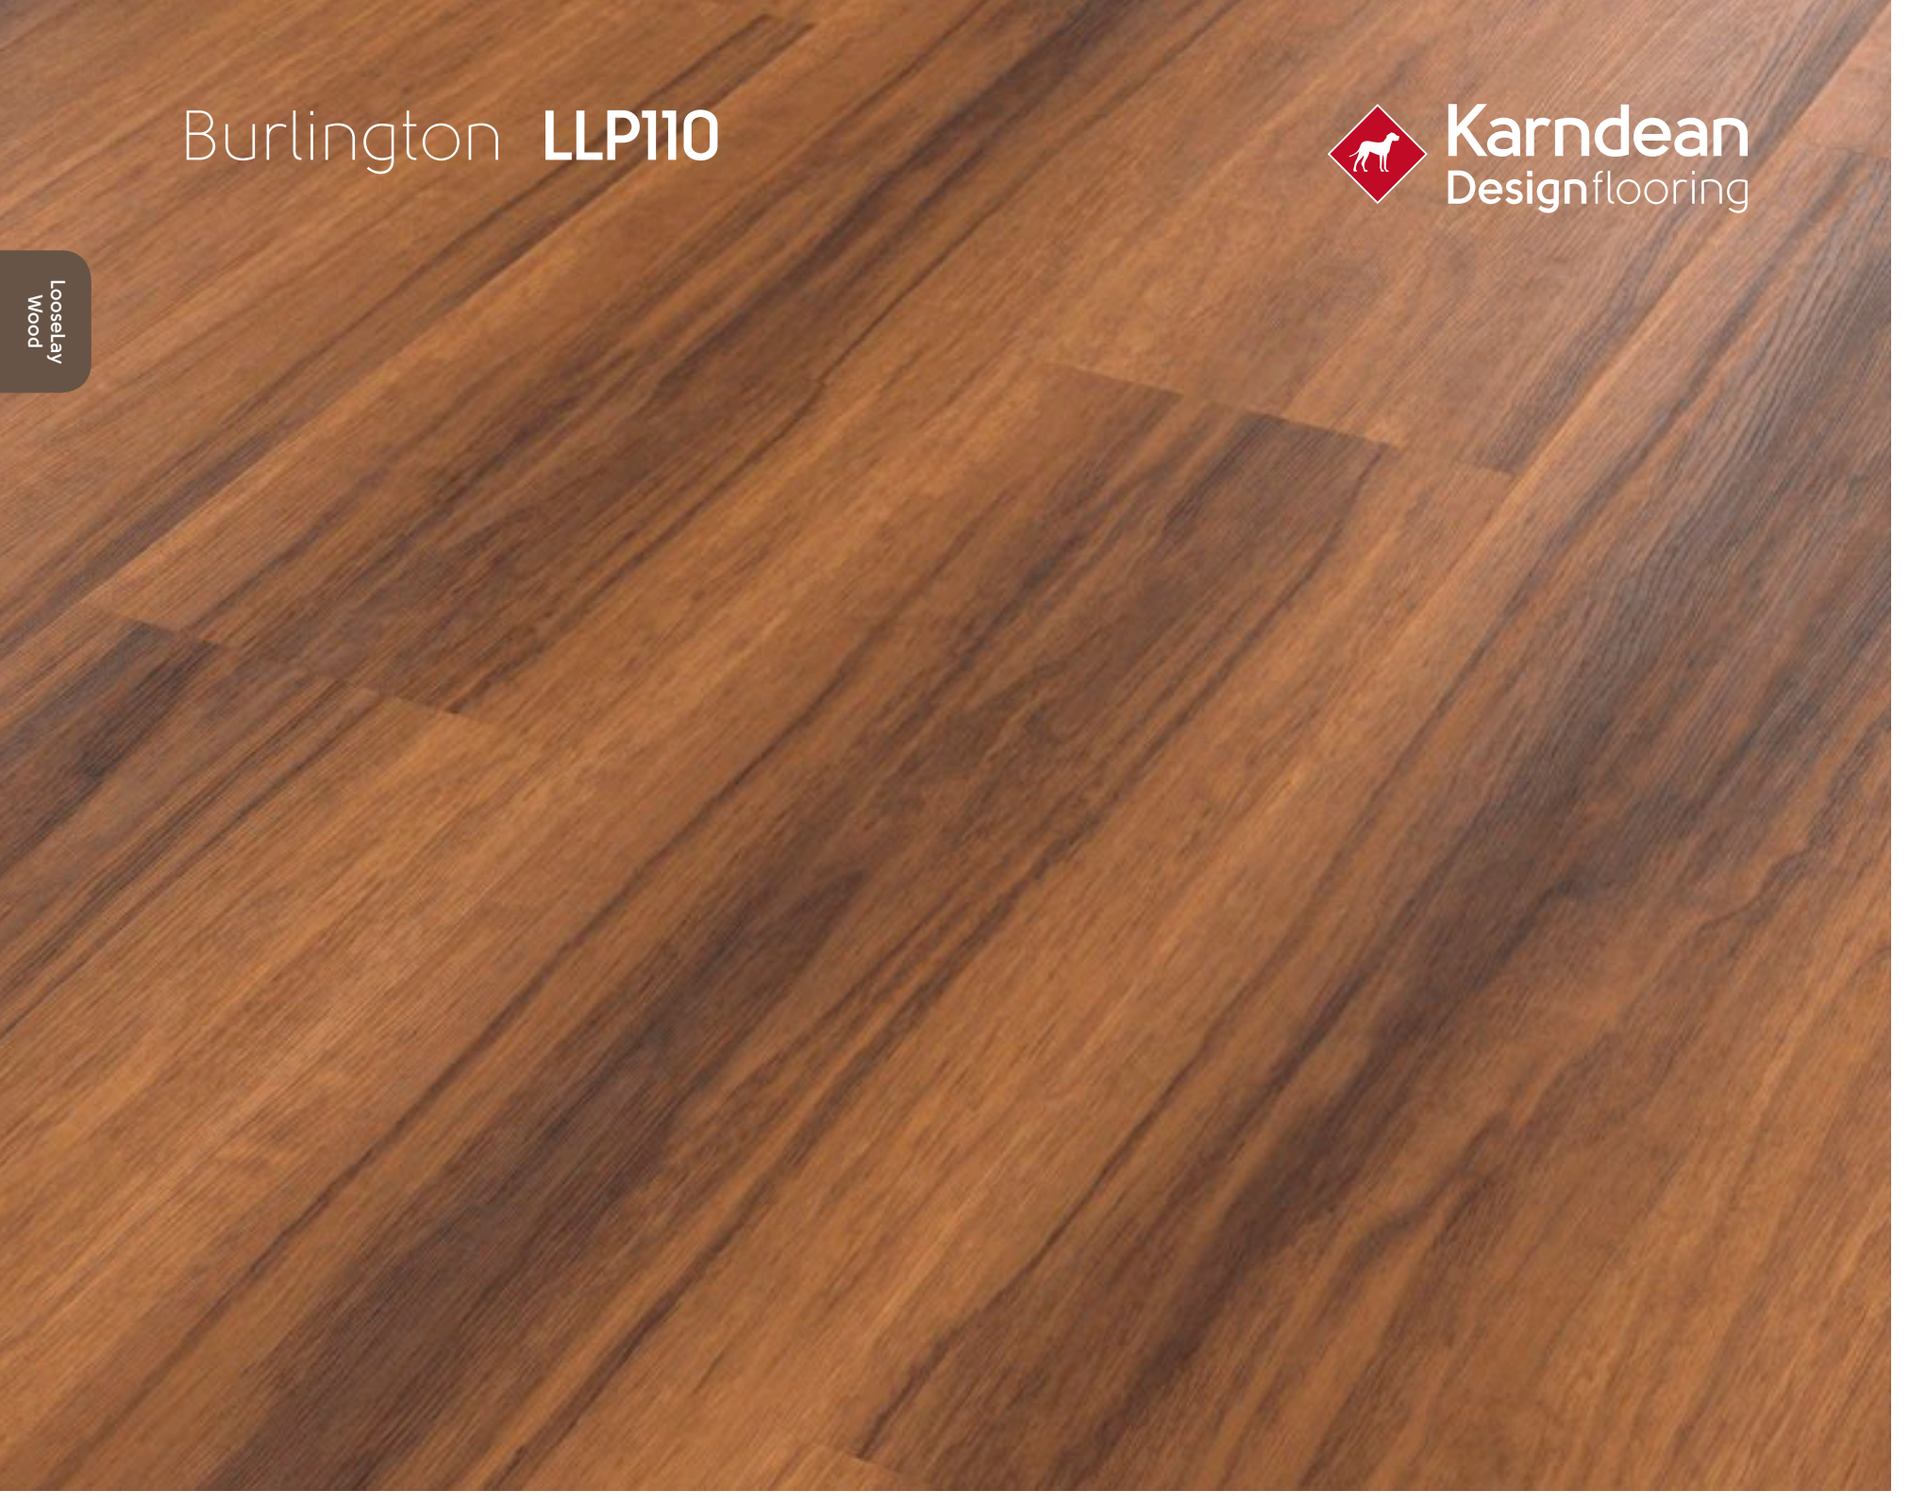

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 285

TEXT
LLP110
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Salem **LLP96**

Karndean Designflooring



Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 285

TEXT
LLP96
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Merbau **LLP91**

Karndean Designflooring



Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP91
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hartford **LLP112**

Karndean Designflooring

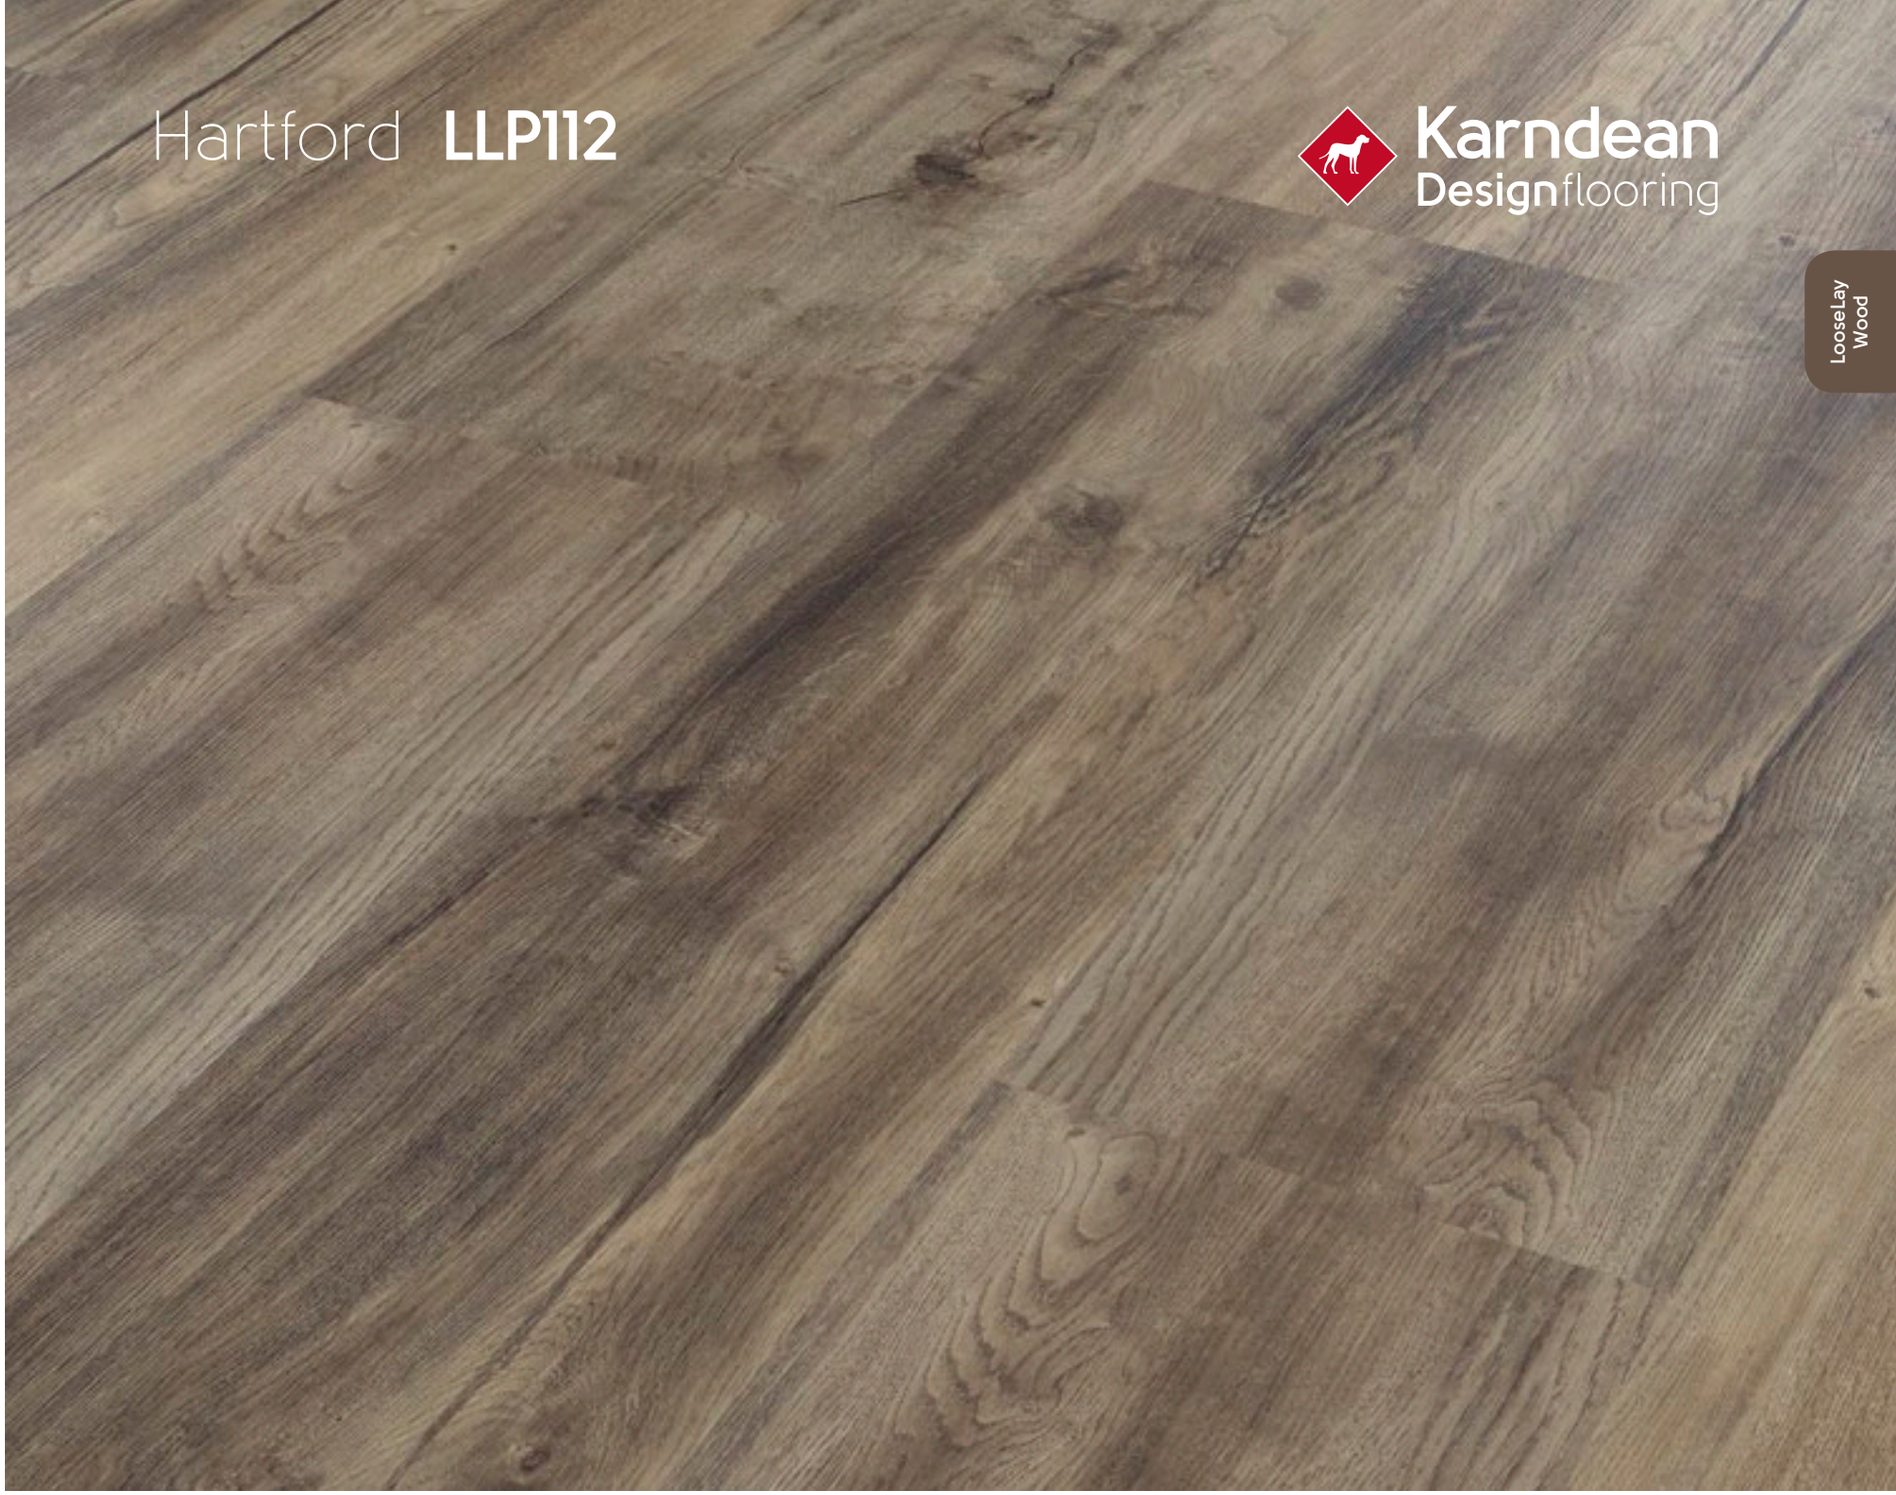

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 285

TEXT
LLP112
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Boston **LLP111**

Karndean Designflooring



Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP111
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Dover **LLP93**

Karndean Designflooring

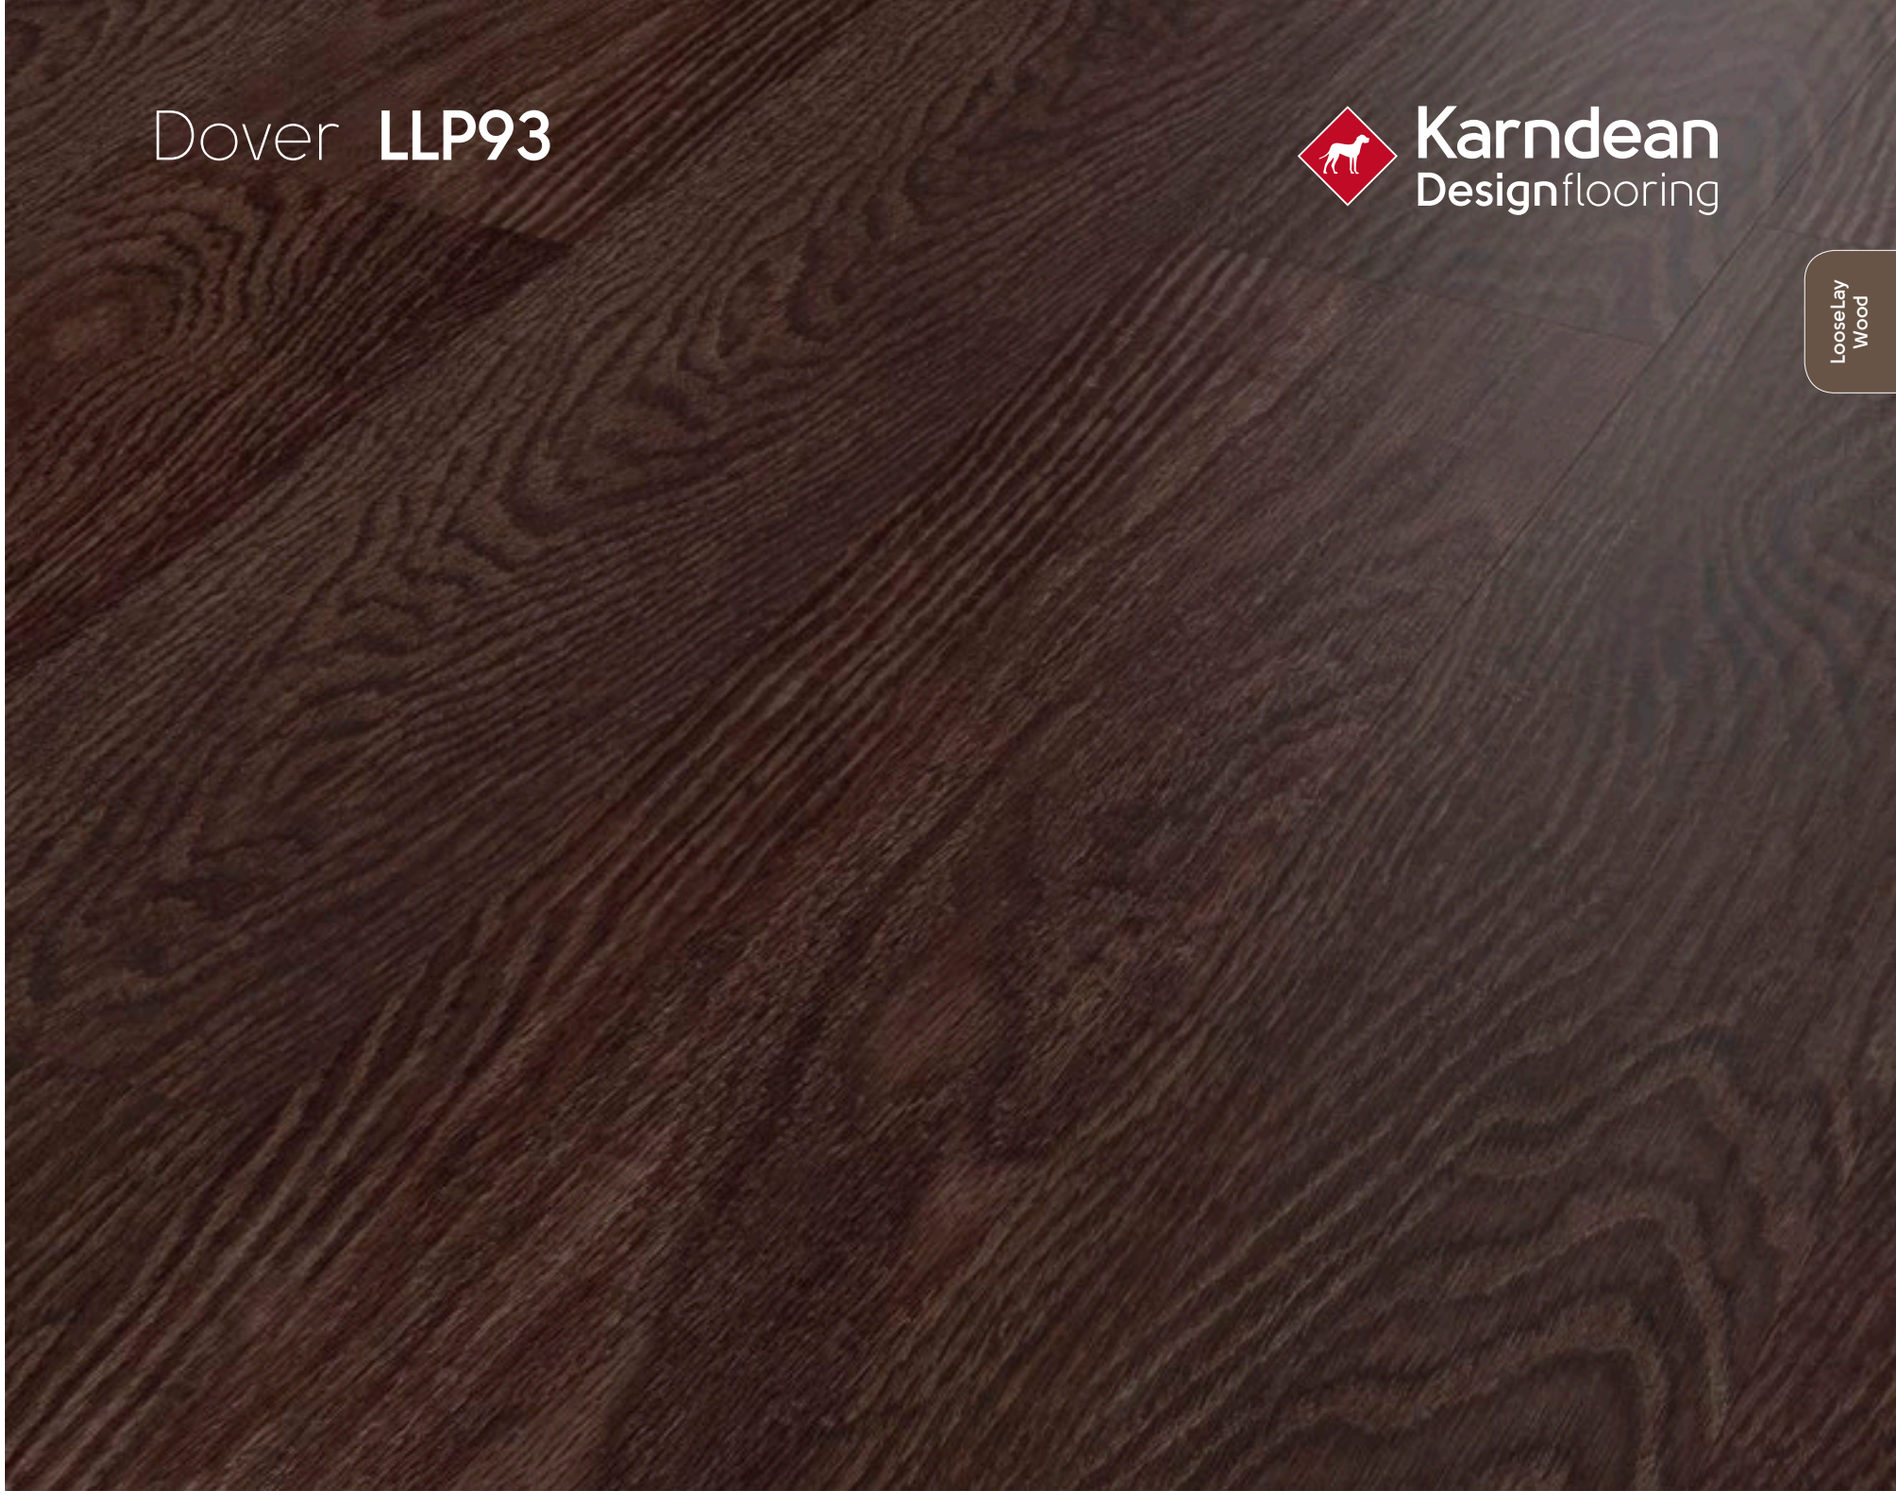

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 285

TEXT
LLP93
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.


Karndean LooseLay **Stone**

19.7" x 24" (500mm x 610mm)*

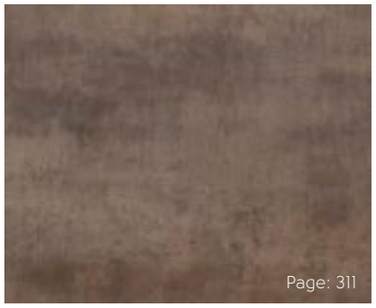
Page: 311
Arizona **LLT200**


Page: 307
Colorado **LLT201**


Page: 306
Indiana **LLT202**

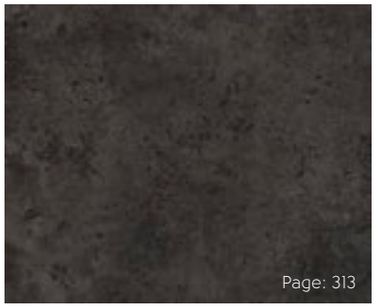
Page: 313
Montana **LLT203**


Page: 310
Pennsylvania **LLT204**


Page: 312
Nevada **LLT205**


Page: 308
Georgia **LLT206****


Page: 309
Texas **LLT207****

* Actual product size: 19.68" x 24.01"

**Please note: as a feature of the design, these products incorporate a high color variation between individual tiles.

Karndean LooseLay **Stone**

Karndean LooseLay LOOSE LAY

Karndean LooseLay is an innovative format of luxury vinyl flooring featuring a friction grip backing that holds the product in place without the need for clicking or locking. It's easy to install, boasts enhanced acoustic properties and is 100% recyclable. In some spaces we do recommend the use of a tackifier. Please see our website for details. The collections features eight distinctive visuals, including designs that replicate the striking look of natural slate, poured concrete and travertine, while our textiles feature a linear pattern for a distinct modern look.



☐ Colorado **LLT201** | Montana **LLT203**

	Standard	Result
Thickness		4.5 mm
Size		19.68" x 24.01" (500 mm x 610 mm)
Box quantity		10 Tiles/32.8 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass △E = 1.7
Abrasion resistance	ASTM D3884	113,000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 16 dB IIC = 56 (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + Quiet choice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass
Indentation – residual	ASTM F1914	<0.003"
Adhesive	Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 395.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Indiana **LLT202**

Karndean Designflooring



Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 305

TEXT
LLT202
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Colorado **LLT201**

Karndean Designflooring



Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 305

TEXT
LLT201
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Georgia **LLT206**

Karndean Designflooring

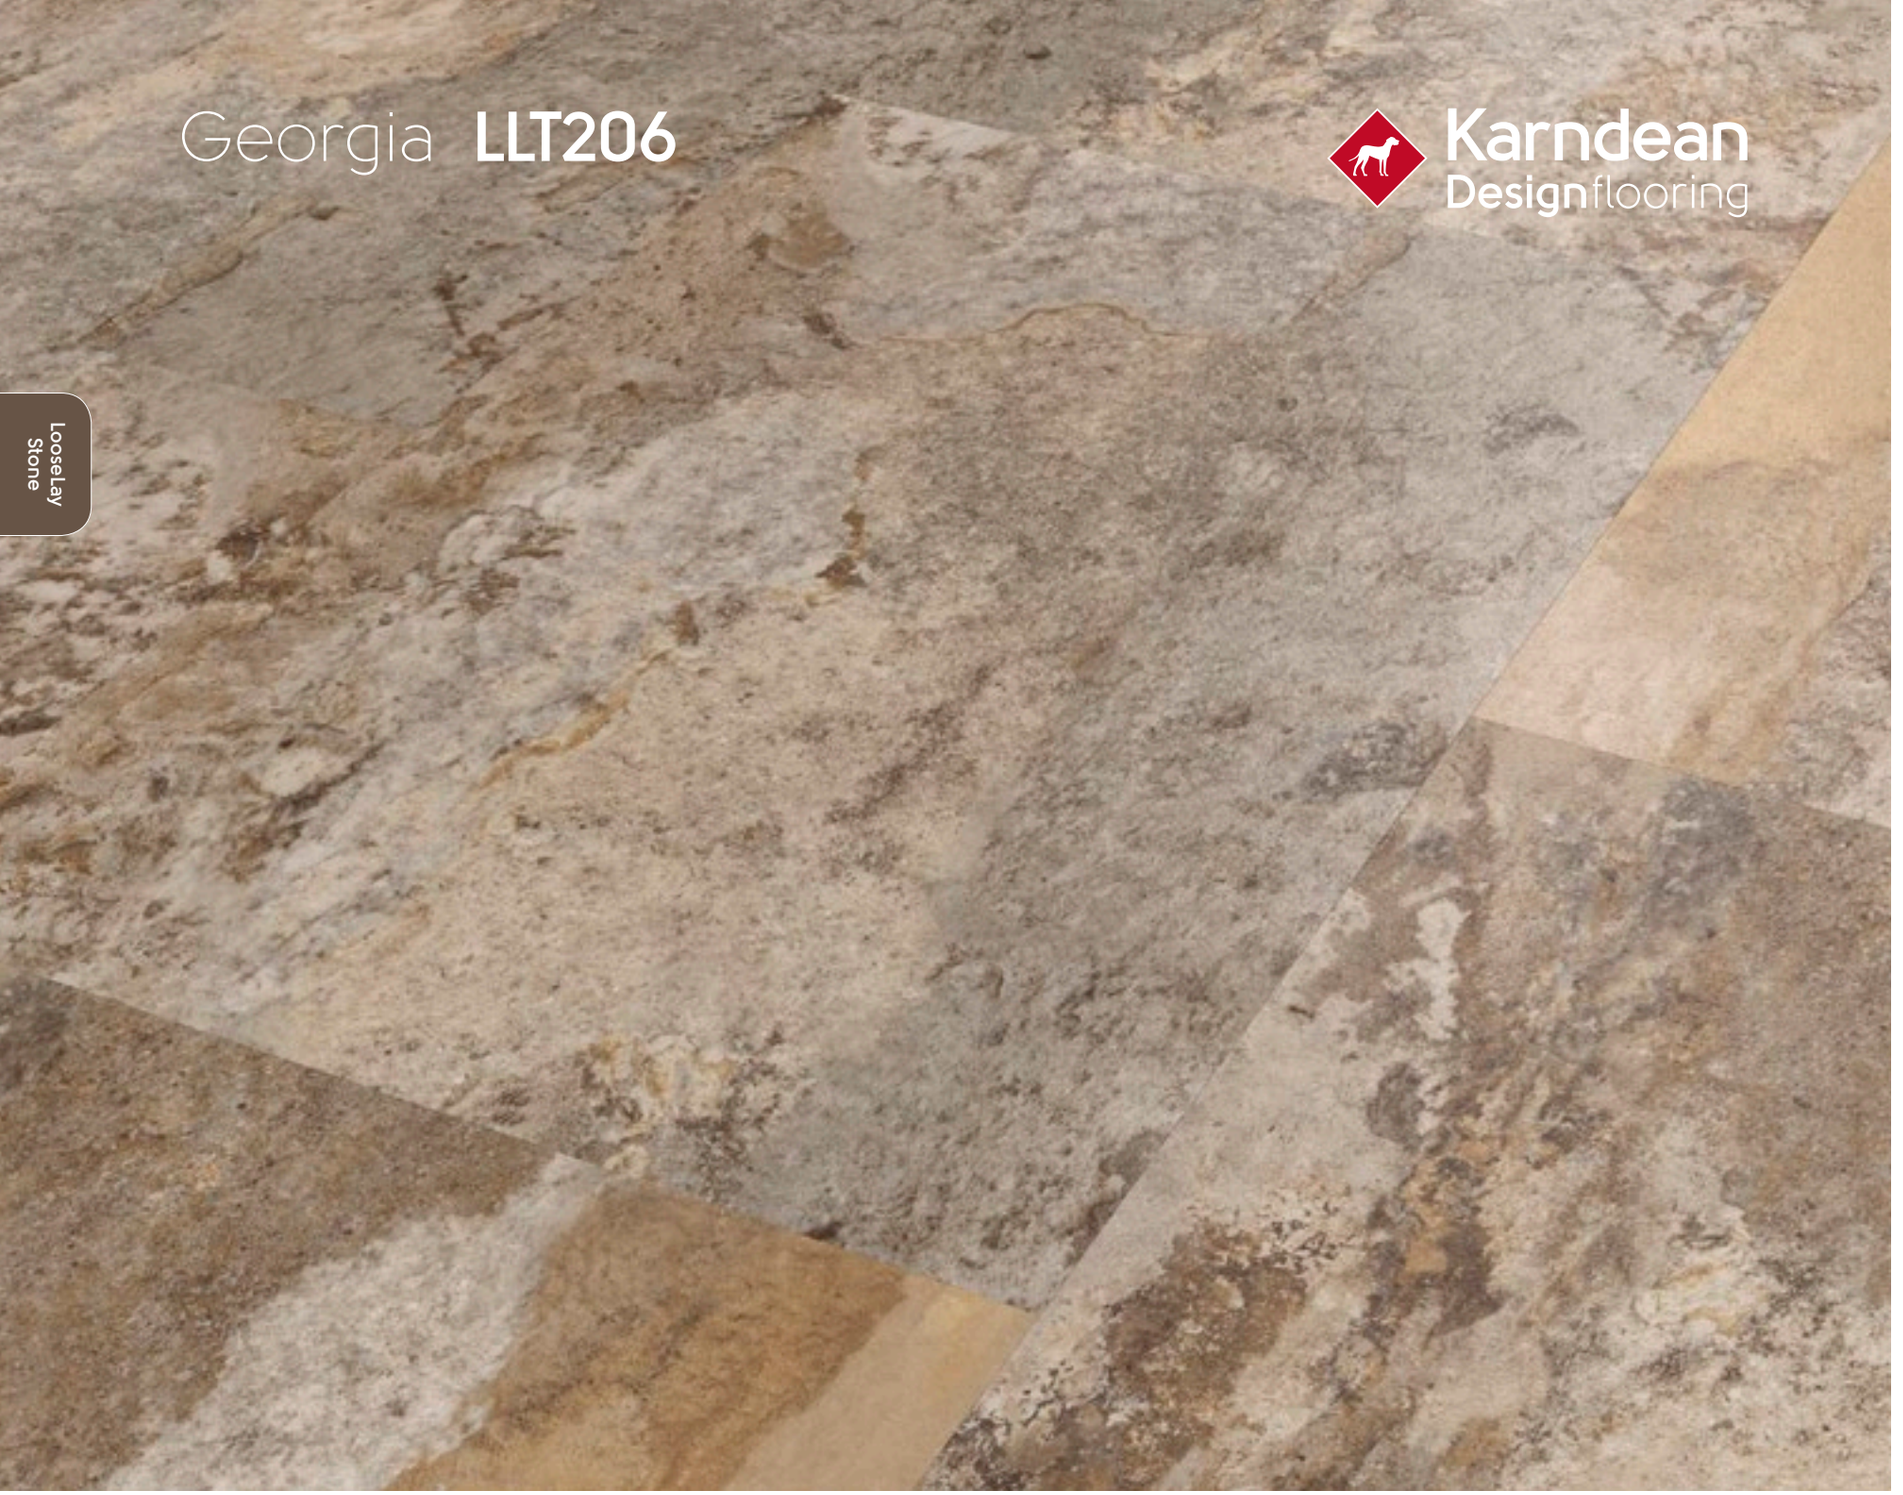

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 305

TEXT
LLT206
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Texas **LLT207**

Karndean Designflooring

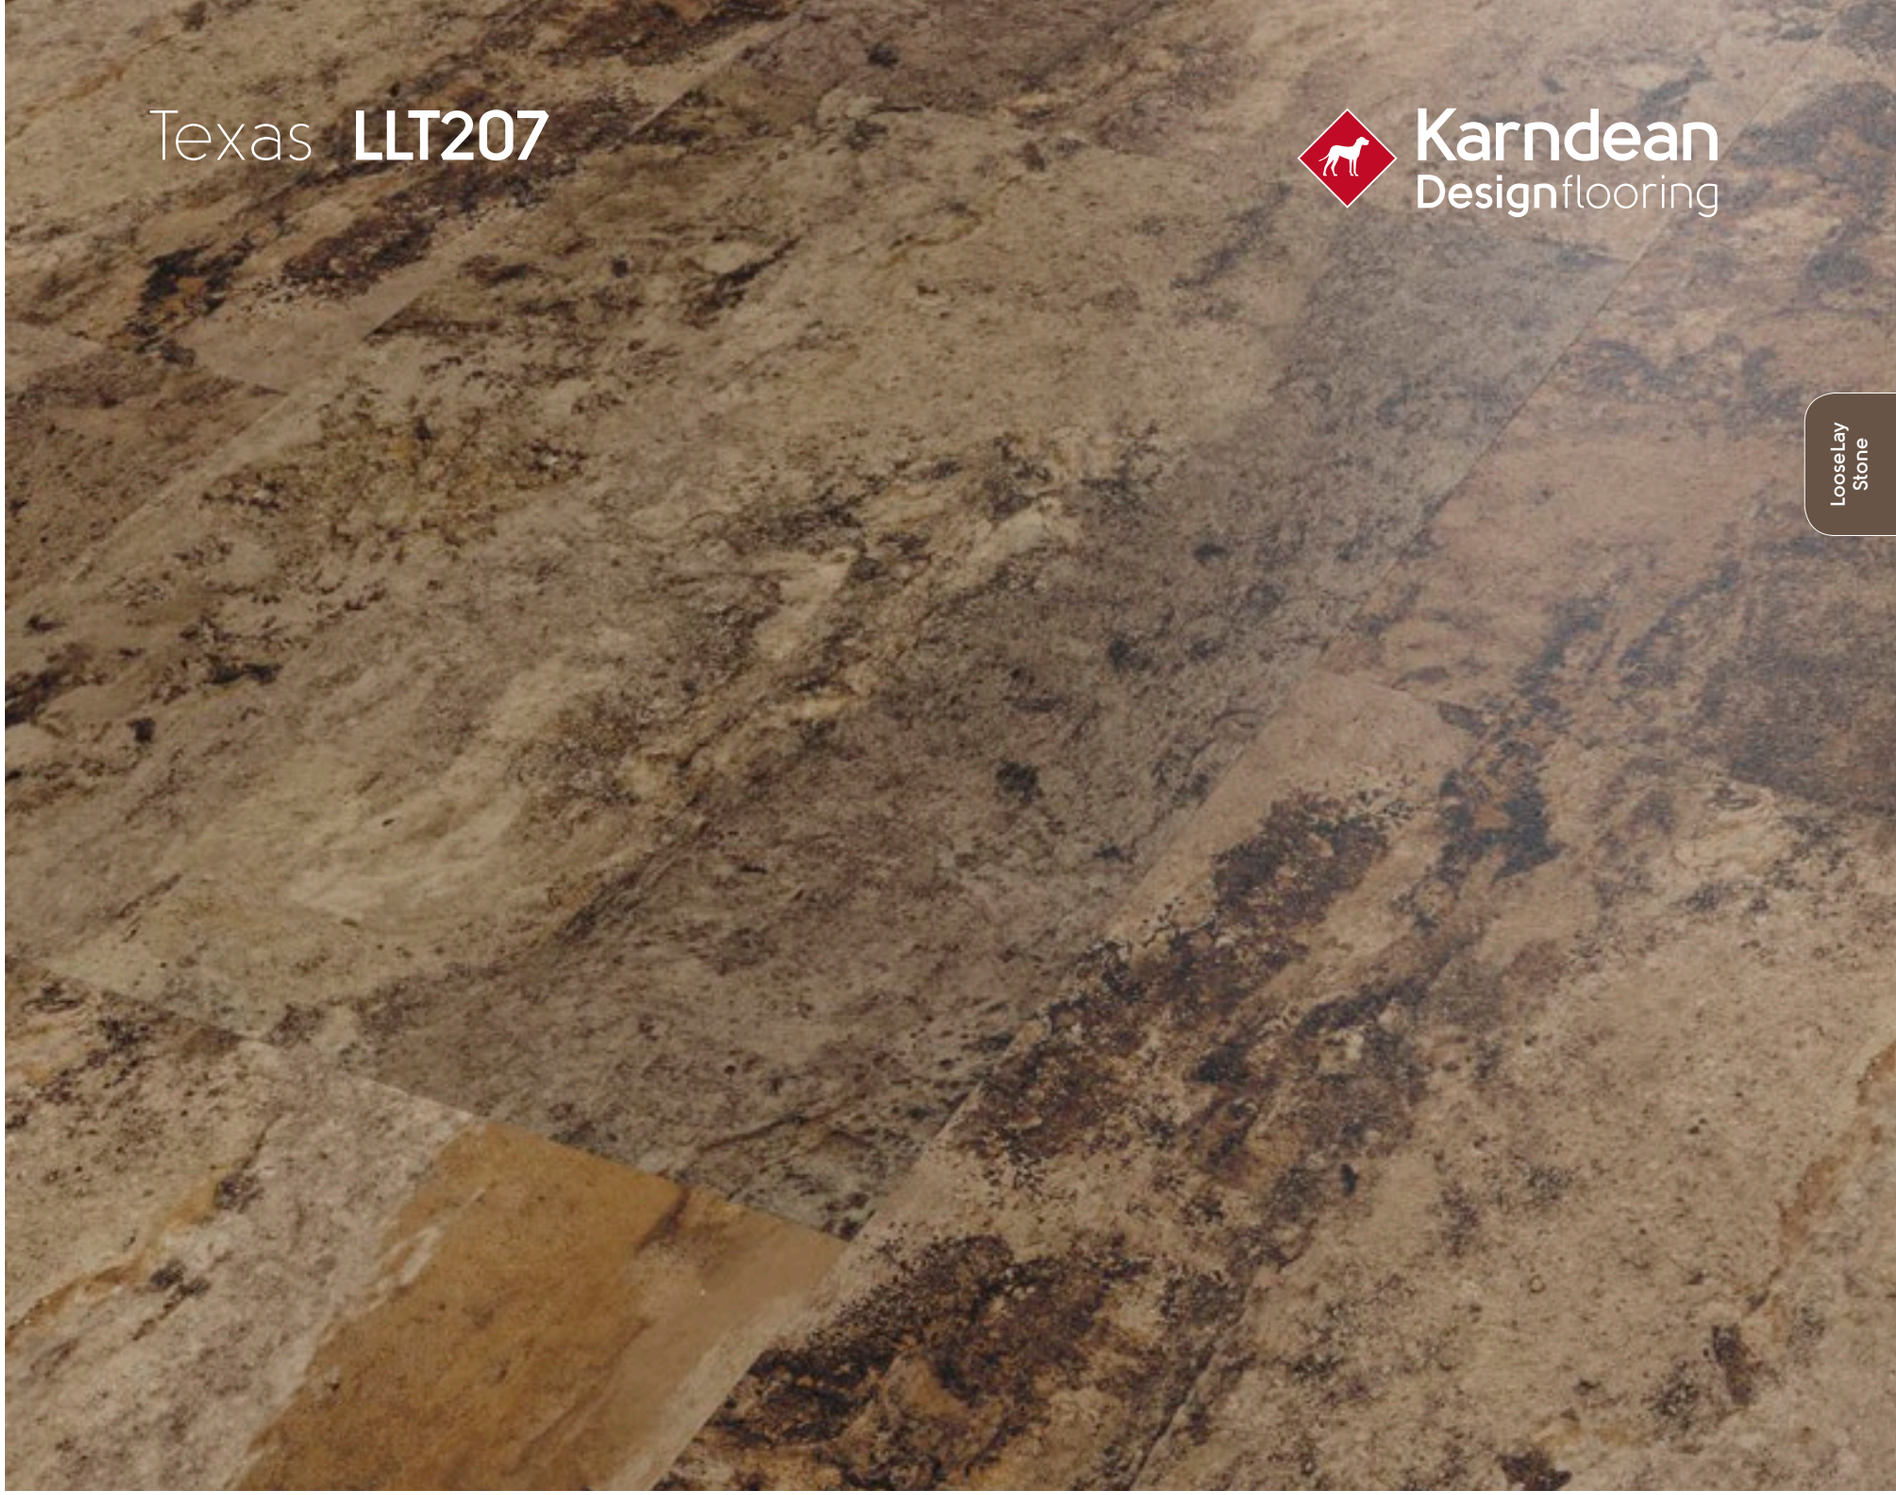

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 305

TEXT
LLT207
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Pennsylvania **LLT204**

Karndean Designflooring

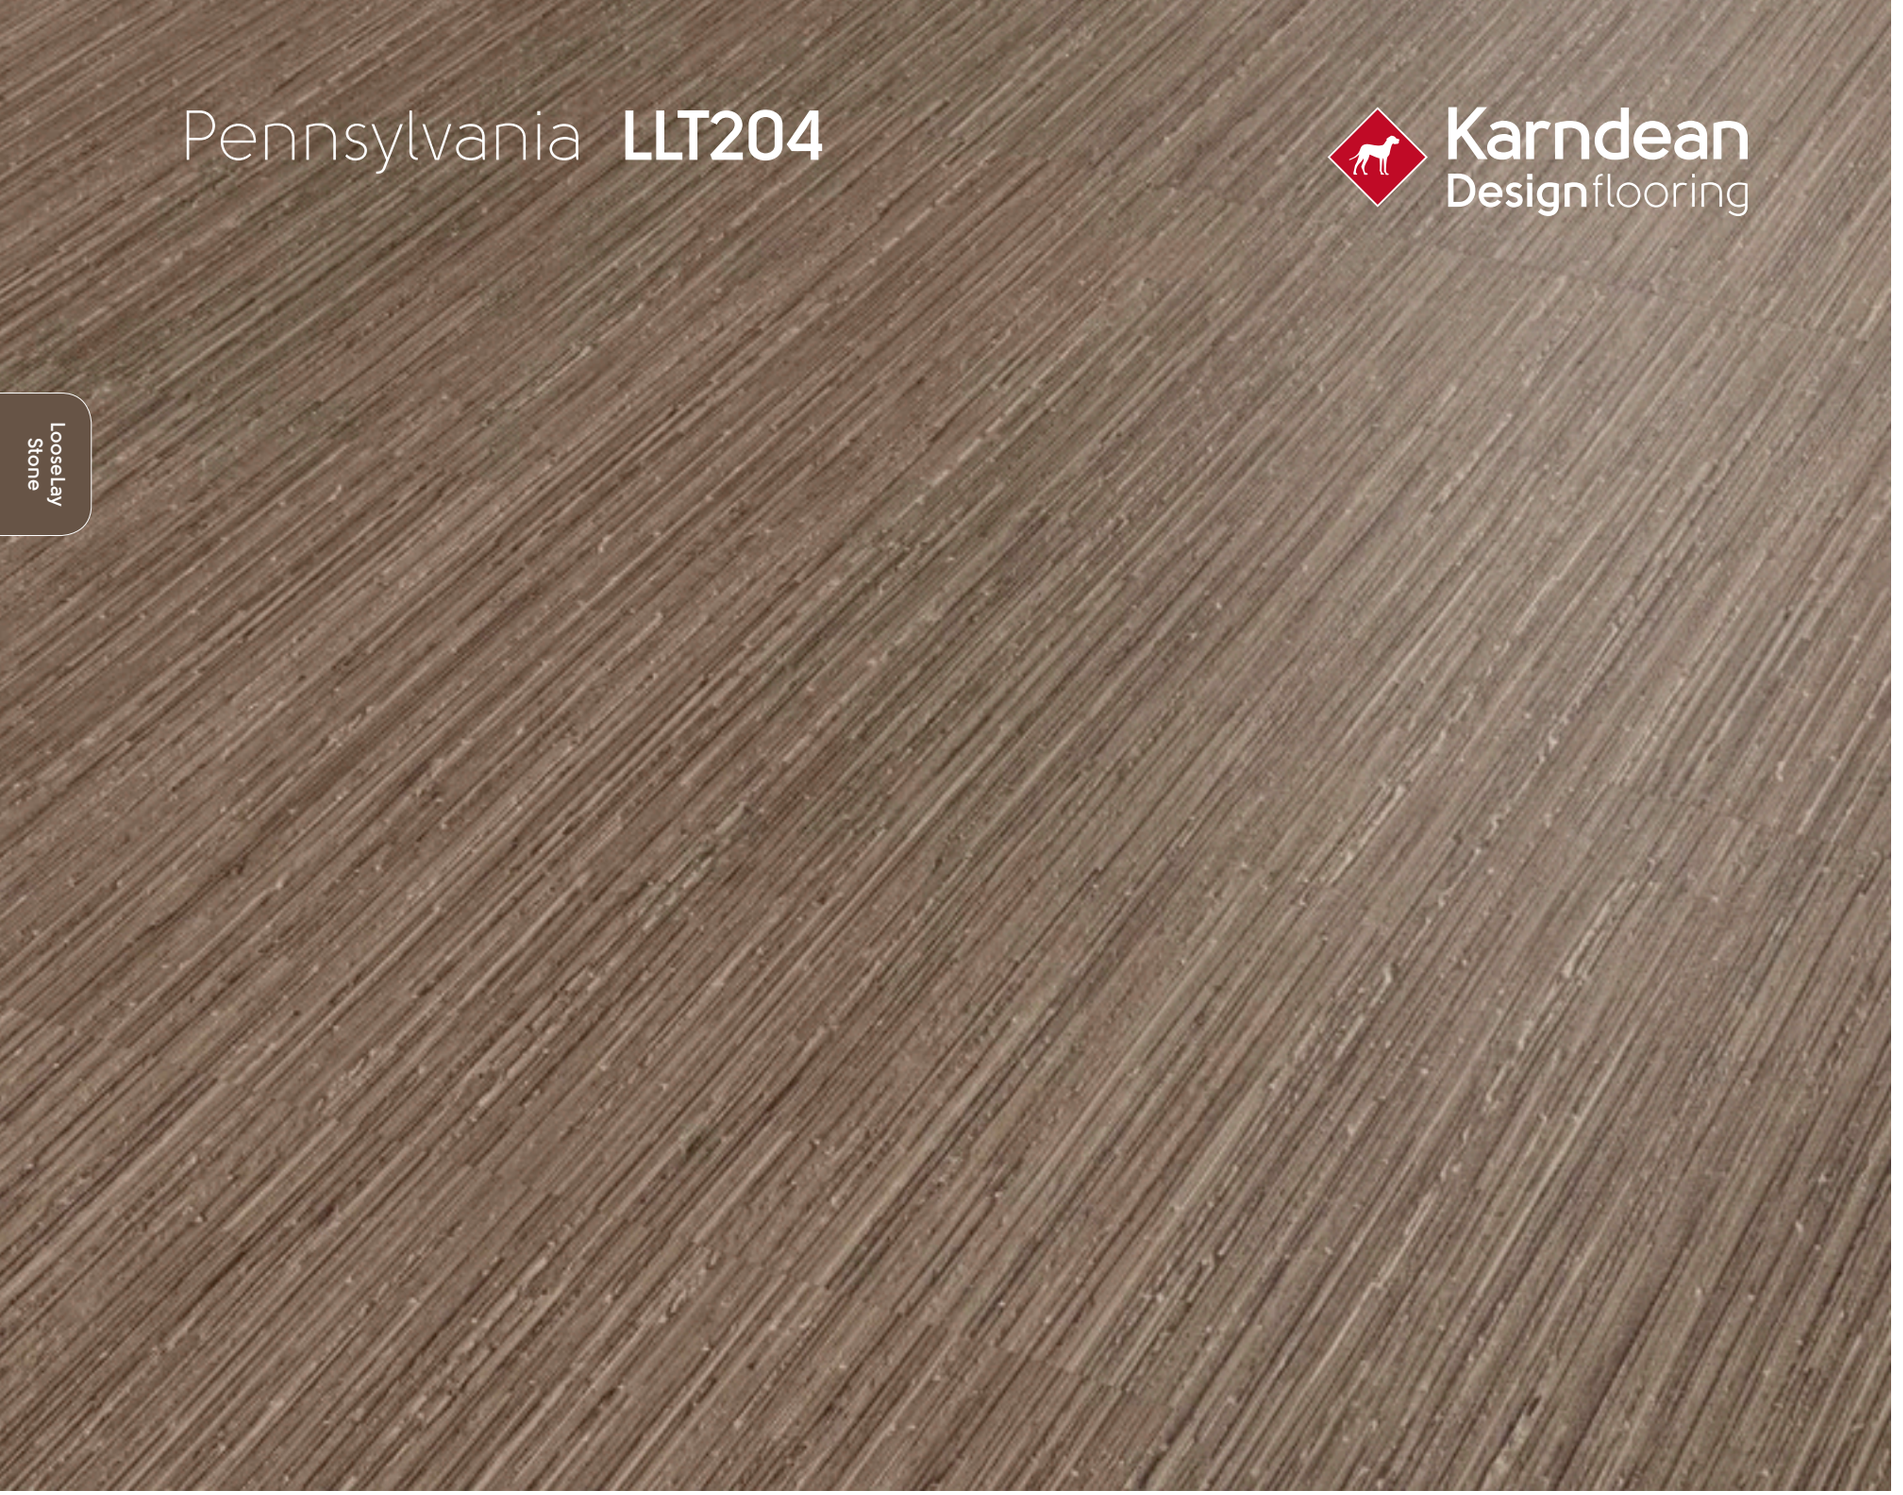

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 305

TEXT
LLT204
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Arizona **LLT200**

Karndean Designflooring



Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)


Technical Specifications:

Page: 305

TEXT
LLT200
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Nevada **LLT205**

Karndean Designflooring

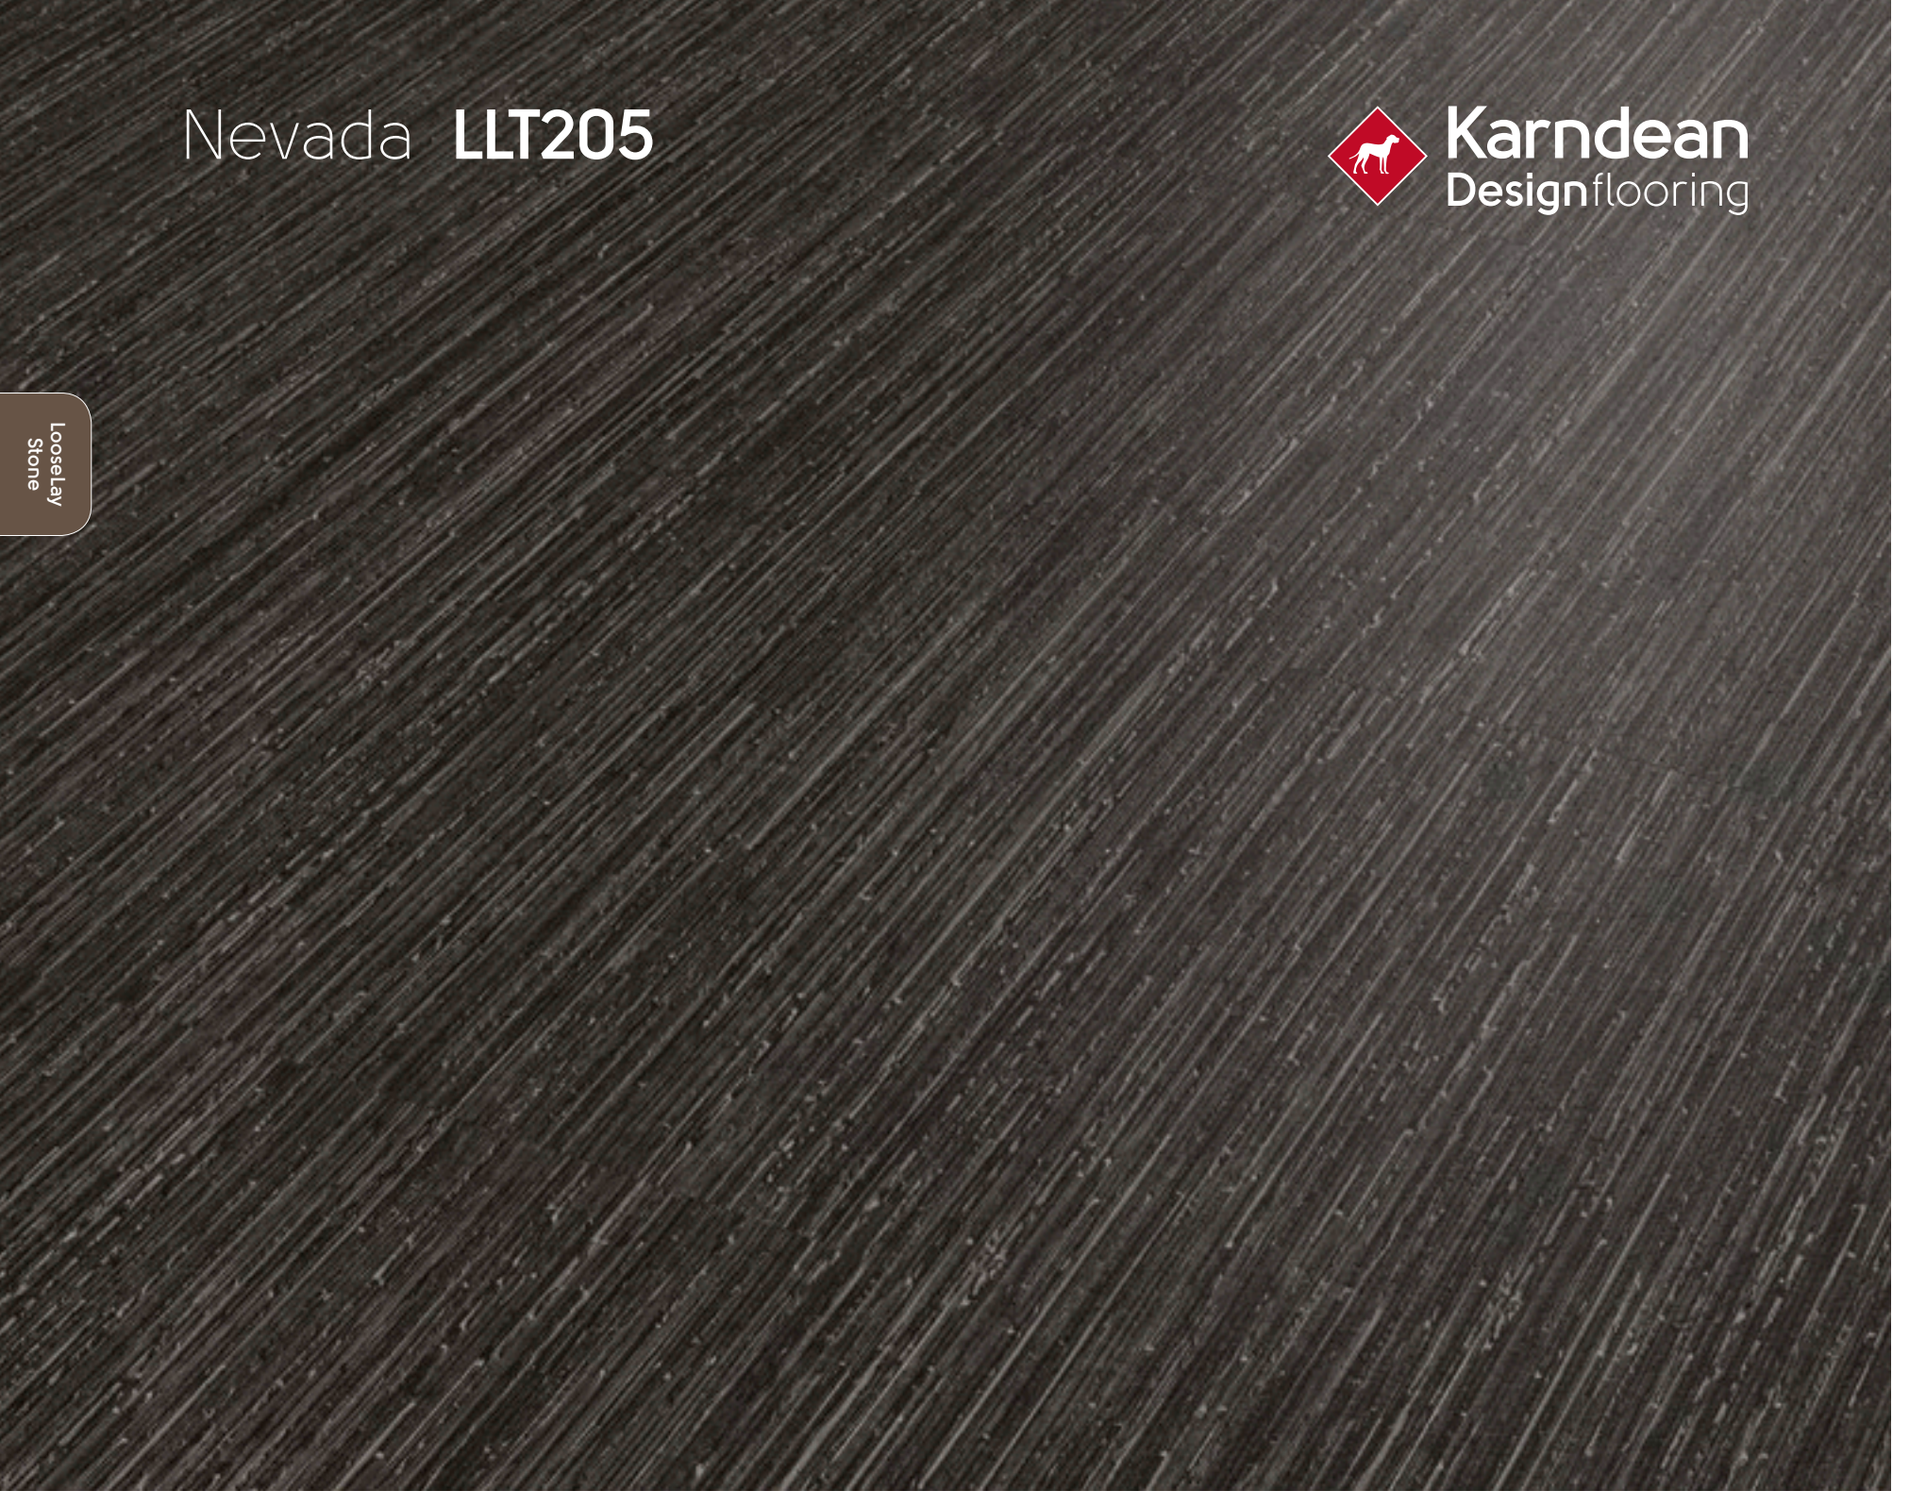

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 305

TEXT
LLT205
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Montana **LLT203**

Karndean Designflooring



Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:


ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 305

TEXT
LLT203
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.



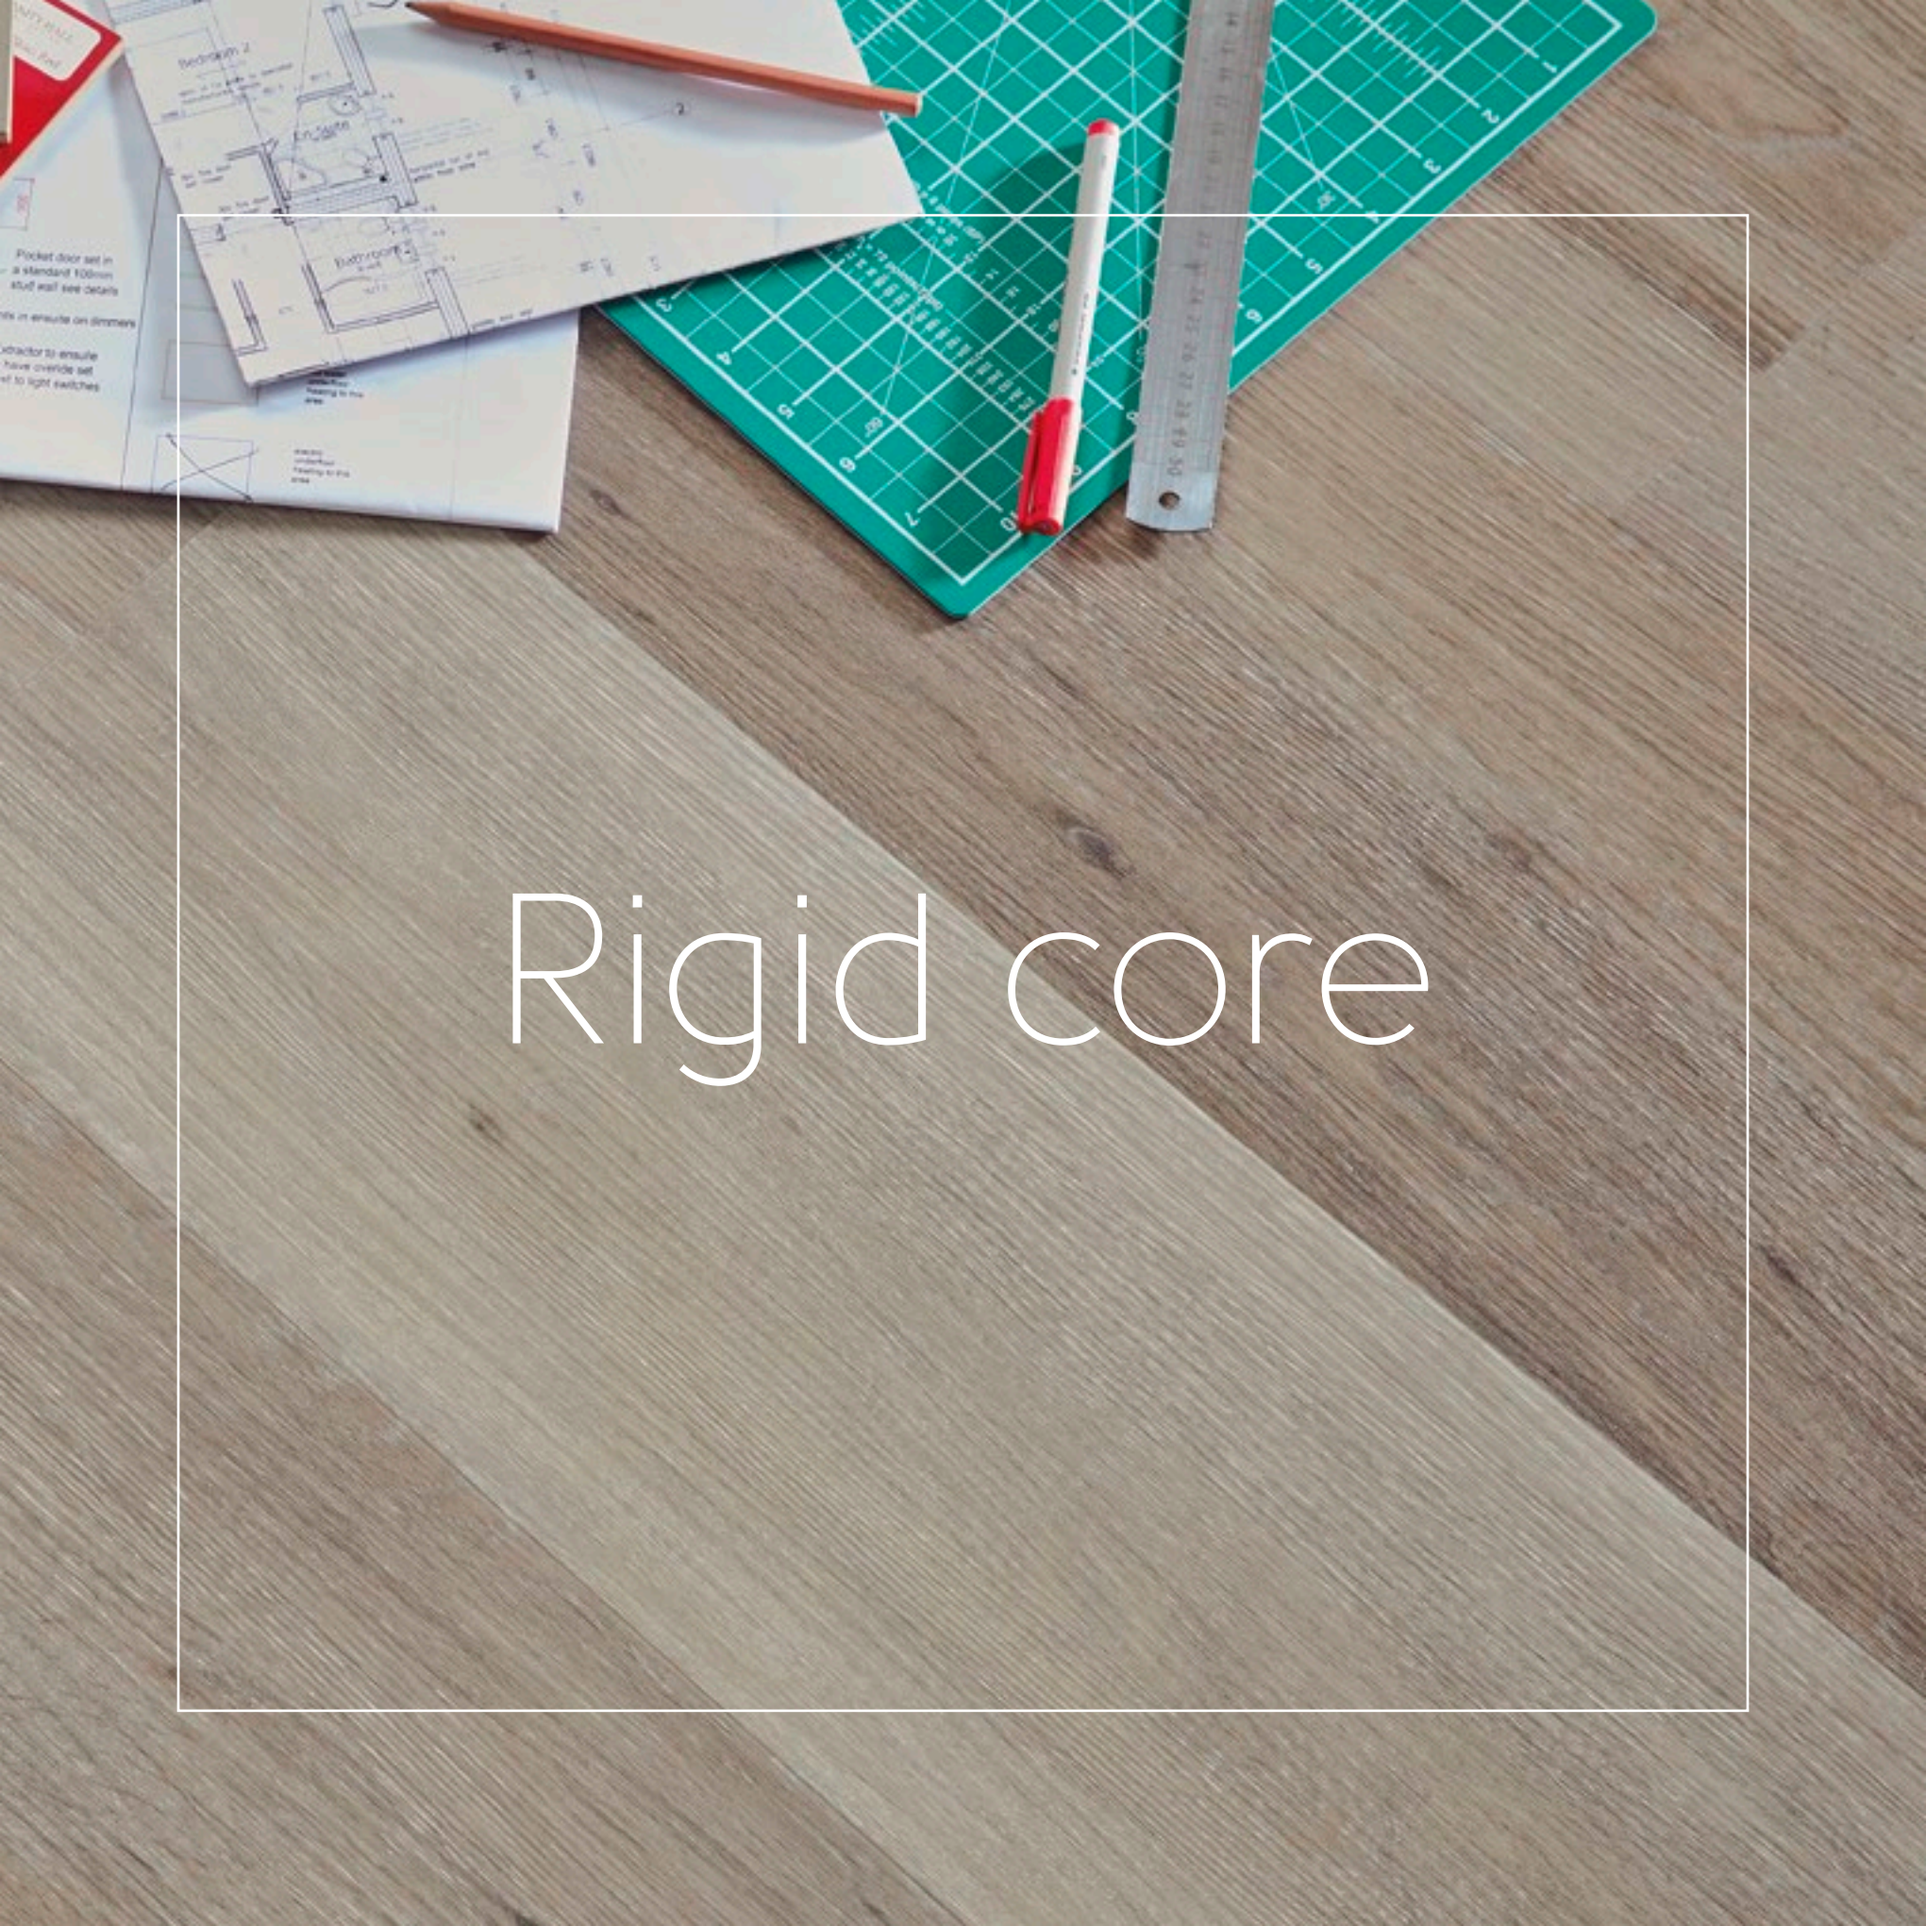

Rigid core



Antique French Oak **RKP8110**



Baltic Limed Oak **RKP8111**



Canadian Urban Oak **RKP8116**



Smoked Butternut **RKP8107**




Aged Spanish Oak **RCP6535**





Charred Weathered Pine **RCP6539**


Wood at a glance (rigid core only)


Rigid core: Korlok | Van Gogh



RKP8217 pg: 328



RKP8202 pg: 336



SCB100 pg: 378



RKP8203 pg: 337



SM-RKP8208 pg: 343



RKP8208 pg: 342



RCP6541 pg: 364



RKP8105 pg: 329



RCP6534 pg: 358



SCB81 pg: 377



RKP8104 pg: 338



RKP8126 pg: 345



RCP6535 pg: 363



SCB99 pg: 383



RKP8108 pg: 330



RKP8101 pg: 339



RCP6532 pg: 359



RKP8107 pg: 341



RKP8109 pg: 344



RCP6539 pg: 365



RKP8102 pg: 354



RKP8116 pg: 331



RKP8215 pg: 334



RCP6533 pg: 360



RCP6536 pg: 361



SCB93 pg: 382



RKP8124 pg: 346



RKP8110 pg: 348



RKP8103 pg: 332



SCB85 pg: 374



RKP8111 pg: 333



SCB71 pg: 375



SCB53 pg: 380



SCB44 pg: 379



SCB70 pg: 384


RKP8206 pg: 340


RKP8115 pg: 335



SCB39 pg: 372



SCB42 pg: 373



SCB86 pg: 381


RCP6531 pg: 362


SCB76 pg: 376



RCP6538 pg: 369



SCB91 pg: 385



SM-RKP8211 pg: 353



RKP8211 pg: 352



SM-RKP8209 pg: 351



RKP8209 pg: 350


RCP6537 pg: 367


RCP6542 pg: 368


RCP6540 pg: 366


RKP8114 pg: 349


RKP8122 pg: 347


North American Oak **RCP6533**

Pattern guide

Create an eye-catching design with rigid core, which can incorporate multiple colors into one design. Rigid core's multi-directional planks allow for added pattern flexibility.

Staggered Straight



Striped Diagonal



Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these designs into a future project.

Technical overview (rigid core only)

	Standard	Korlok Select (see page 326)	Korlok Reserve (see page 356)	Van Gogh (see page 370)
Thickness		6.5 mm	6.5 mm	4.5 mm
Size		Various, see individual product pages	48.03" x 7.05" (1220 mm x 179 mm)	48.03" x 7.09" (1219 mm x 178 mm)
Box quantity		Various, see individual product pages	10 Planks/23.51 sq.ft.	10 Planks/23.64 sq.ft.
Locking system*		5G® short edge; 2G long edge**	2G	Click-locking***
Wear layer		20 mil (0.5 mm)	20 mil (0.5 mm)	20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating	K-Guard+ PU coating	K-Guard+ PU coating
Warranty^	Commercial Residential	15 Years Lifetime	15 Years Lifetime	15 Years Lifetime
Beveled edge		Micro	Micro	Micro
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core	Pass; Resilient flooring with Rigid Polymeric Core	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1	Class 1	Class 1
Flammability	ASTM D2859	Pass	Pass	Pass
Slip resistance†	ASTM D2047	Pass (Dry >0.8)	Pass (Dry >0.8)	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass (No change)	Pass (No change)	Pass
Smoke density	ASTM E662-06	–	–	Pass (<450)
Heat fastness	ASTM F1514	Pass	–	Pass
Light fastness	ASTM F1515	Pass	Pass	Pass
Electrostatic propensity	AATCC 134	1.6 kV	-1.4 kV	1.1 kV
Abrasion resistance	ASTM D4060	Pass 36000 Cycles	Pass 20000 Cycles	Pass 20000 Cycles
Dimensional stability	ASTM F2199	Pass (-0.003"/lin.ft)	Pass (width -0.003"/lin.ft) Pass (length -0.003"/lin.ft)	Pass
Static load	ASTM F970	Pass 800 psi at 0.005"	Pass 250 psi	Pass 600 psi at 0.005"
Small ball impact	NALFA 3.6	Pass class 4	Pass class 4	–
Large ball impact	NALFA 3.5	Pass class 4	Pass class 4	–
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 72 dB (6" slab w/drop ceiling + QuietChoice)	△IIC = 21 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	△IIC = 22 dB IIC = 69 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Indentation - residual	ASTM F 1914	Pass (2.3%)	Pass	Pass
Thickness swell	NALFA 3.2	Pass class 4	Pass class 4	–
Chair resistance	NALFA 3.9	Pass class 4	Pass class 4	–
Surface bond	NALFA 3.10	Pass class 4	Pass class 4	–
Adhesive		None required; Please refer to our installation instructions.	None required; Please refer to our installation instructions.	None required; Please refer to our installation instructions.
Recycling		Suitable	Suitable	Suitable
Phthalate free		Yes	Yes	Yes

* Produced under Licence from Valinge Innovations.
** 5G® short edge; 2G long edge except SM-RKP8208, SM-RKP8209, SM-RKP8211 which are modified 2G on short edge and standard 2G long edge.
*** Produced under Licence from Flooring Industries.
^ Subject to terms, see page 395.
† Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.



Warm Ash **RKP8103**

Korlok Select **Wood**

56" x 9" (1420mm x 225mm)*


Page: 339
Baltic Washed Oak **RKP8101**


Page: 354
Washed Velvet Ash **RKP8102**


Page: 332
Warm Ash **RKP8103**


Page: 338
Washed Grey Ash **RKP8104**


Page: 329
Texas White Ash **RKP8105**


Page: 341
Smoked Butternut **RKP8107**


Page: 330
Washed Butternut **RKP8108**


Page: 344
Reclaimed French Oak **RKP8109**


Page: 348
Antique French Oak **RKP8110**


Page: 333
Baltic Limed Oak **RKP8111**


Page: 349
Cathedral Oak **RKP8114**


Page: 335
English Character Oak **RKP8115**


Page: 331
Canadian Urban Oak **RKP8116**


Page: 347
Natural Koa **RKP8122**


Page: 346
Kilauea Koa **RKP8124**


Page: 345
Smoked Koa **RKP8126**


Page: 336
Oyster Oak **RKP8202**


Page: 337
Shadow Oak **RKP8203**


Page: 340
Barley Oak **RKP8206**


Page: 342
Silver Barnwood **RKP8208**



Page: 350
Salvaged Barnwood **RKP8209**



Page: 352
Weathered Barnwood **RKP8211**



Page: 334
Warm Brushed Oak **RKP8215**


Page: 328
Ivory Brushed Oak **RKP8217**

24" x 6" (596mm x 149mm)*


Page: 343
Silver Barnwood **SM-RKP8208**


Page: 351
Salvaged Barnwood **SM-RKP8209**


Page: 353
Weathered Barnwood **SM-RKP8211**

15 Year Warranty HoldFast


Korlok Select's HoldFast warranty guarantees end joints stay secure

* Actual product sizes: 55.91" x 8.86" and 23.46" x 5.87"

Korlok Select **Wood**

Korlok Select RIGID CORE

Korlok Select is the premier rigid core range, with designs developed from rare and treasured American and European woods to create floors that are only available through Karndean Designflooring. From the expressive shadow sawn markings of Oyster Oak to the lively character shifts within the American Barnwoods, Korlok Select has plenty of options to suit your style. Available in 56" x 9" planks, Korlok Select is well-suited for open areas and small rooms alike. Only Korlok Select is equipped with the 5G® locking mechanism, backed by the 15-year HoldFast Warranty, which guarantees that securely locked planks will stay together at the end seams.

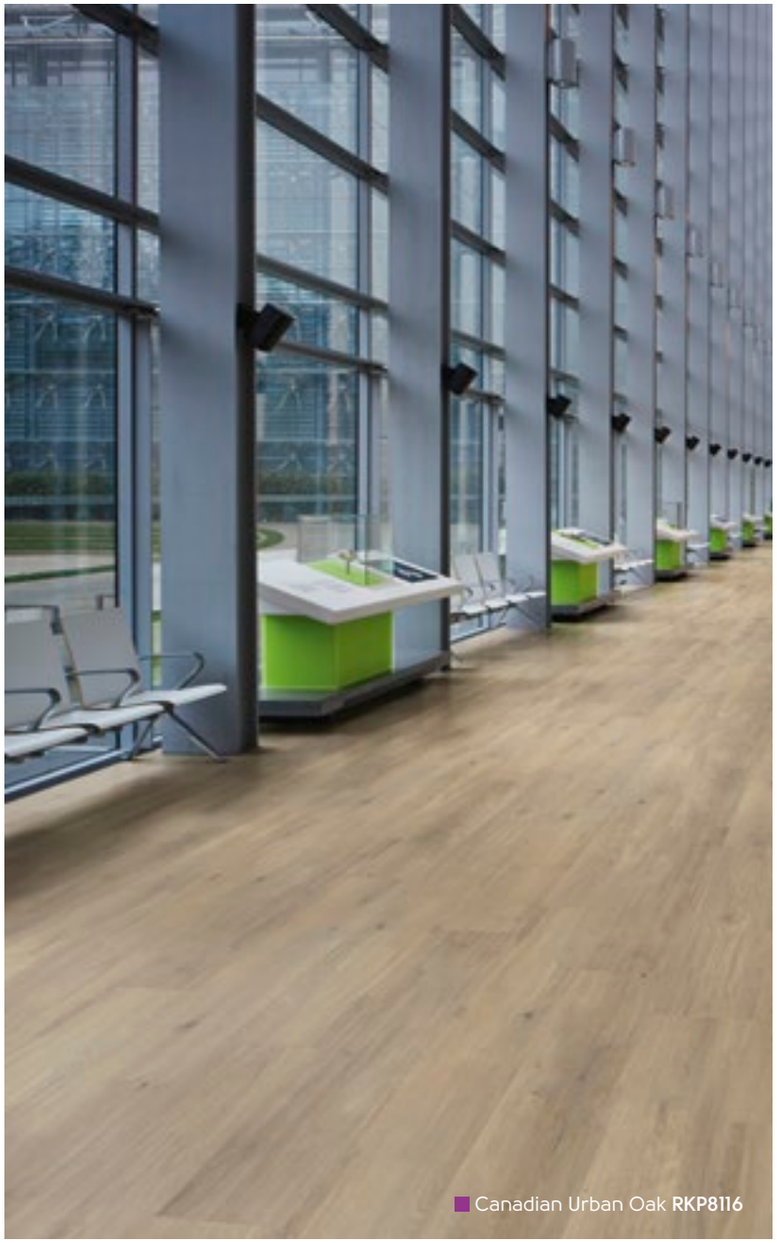

Canadian Urban Oak **RKP8116**

	Standard	Result
Thickness	ASTM F386	6.5 mm
Box quantity		Various, see individual product pages
Size	ASTM F2421	Various, see individual product pages
Locking system*		5G® short edge; 2G long edge
Surface treatment		K-Guard+ PU coating
Wear layer	ASTM F410	20 mil (0.5 mm)
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Reaction to fire	ASTM E648-06	Class 1
Flammability	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry >0.8)
Staining resistance	ASTM F925	Pass (No change)
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	1.6 kV
Abrasion resistance	ASTM D4060	Pass 36000 Cycles
Dimensional stability	ASTM F2199	Pass (-0.003"/lin.ft)
Static load	ASTM F970	Pass 800 psi at 0.005"
Small ball impact	NALFA 3.6	Pass class 4
Large ball impact	NALFA 3.5	Pass class 4
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 72 dB (6" slab w/drop ceiling + QuietChoice)
Indentation-residual	ASTM F 1914	Pass (2.3%)
Thickness swell	NALFA 3.2	Pass class 4
Chair resistance	NALFA 3.9	Pass class 4
Surface bond	NALFA 3.10	Pass class 4
Adhesive	None required; please install according to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Valinge Innovations.
** 5G® short edge; 2G long edge except SM-RKP8208, SM-RKP8209, SM-RKP8211 which are modified 2G on short edge and standard 2G long edge.
** Subject to terms, see page:395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Ivory Brushed Oak **RKP8217**

Karndean Designflooring

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8217
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Texas White Ash **RKP8105**

Karndean Designflooring

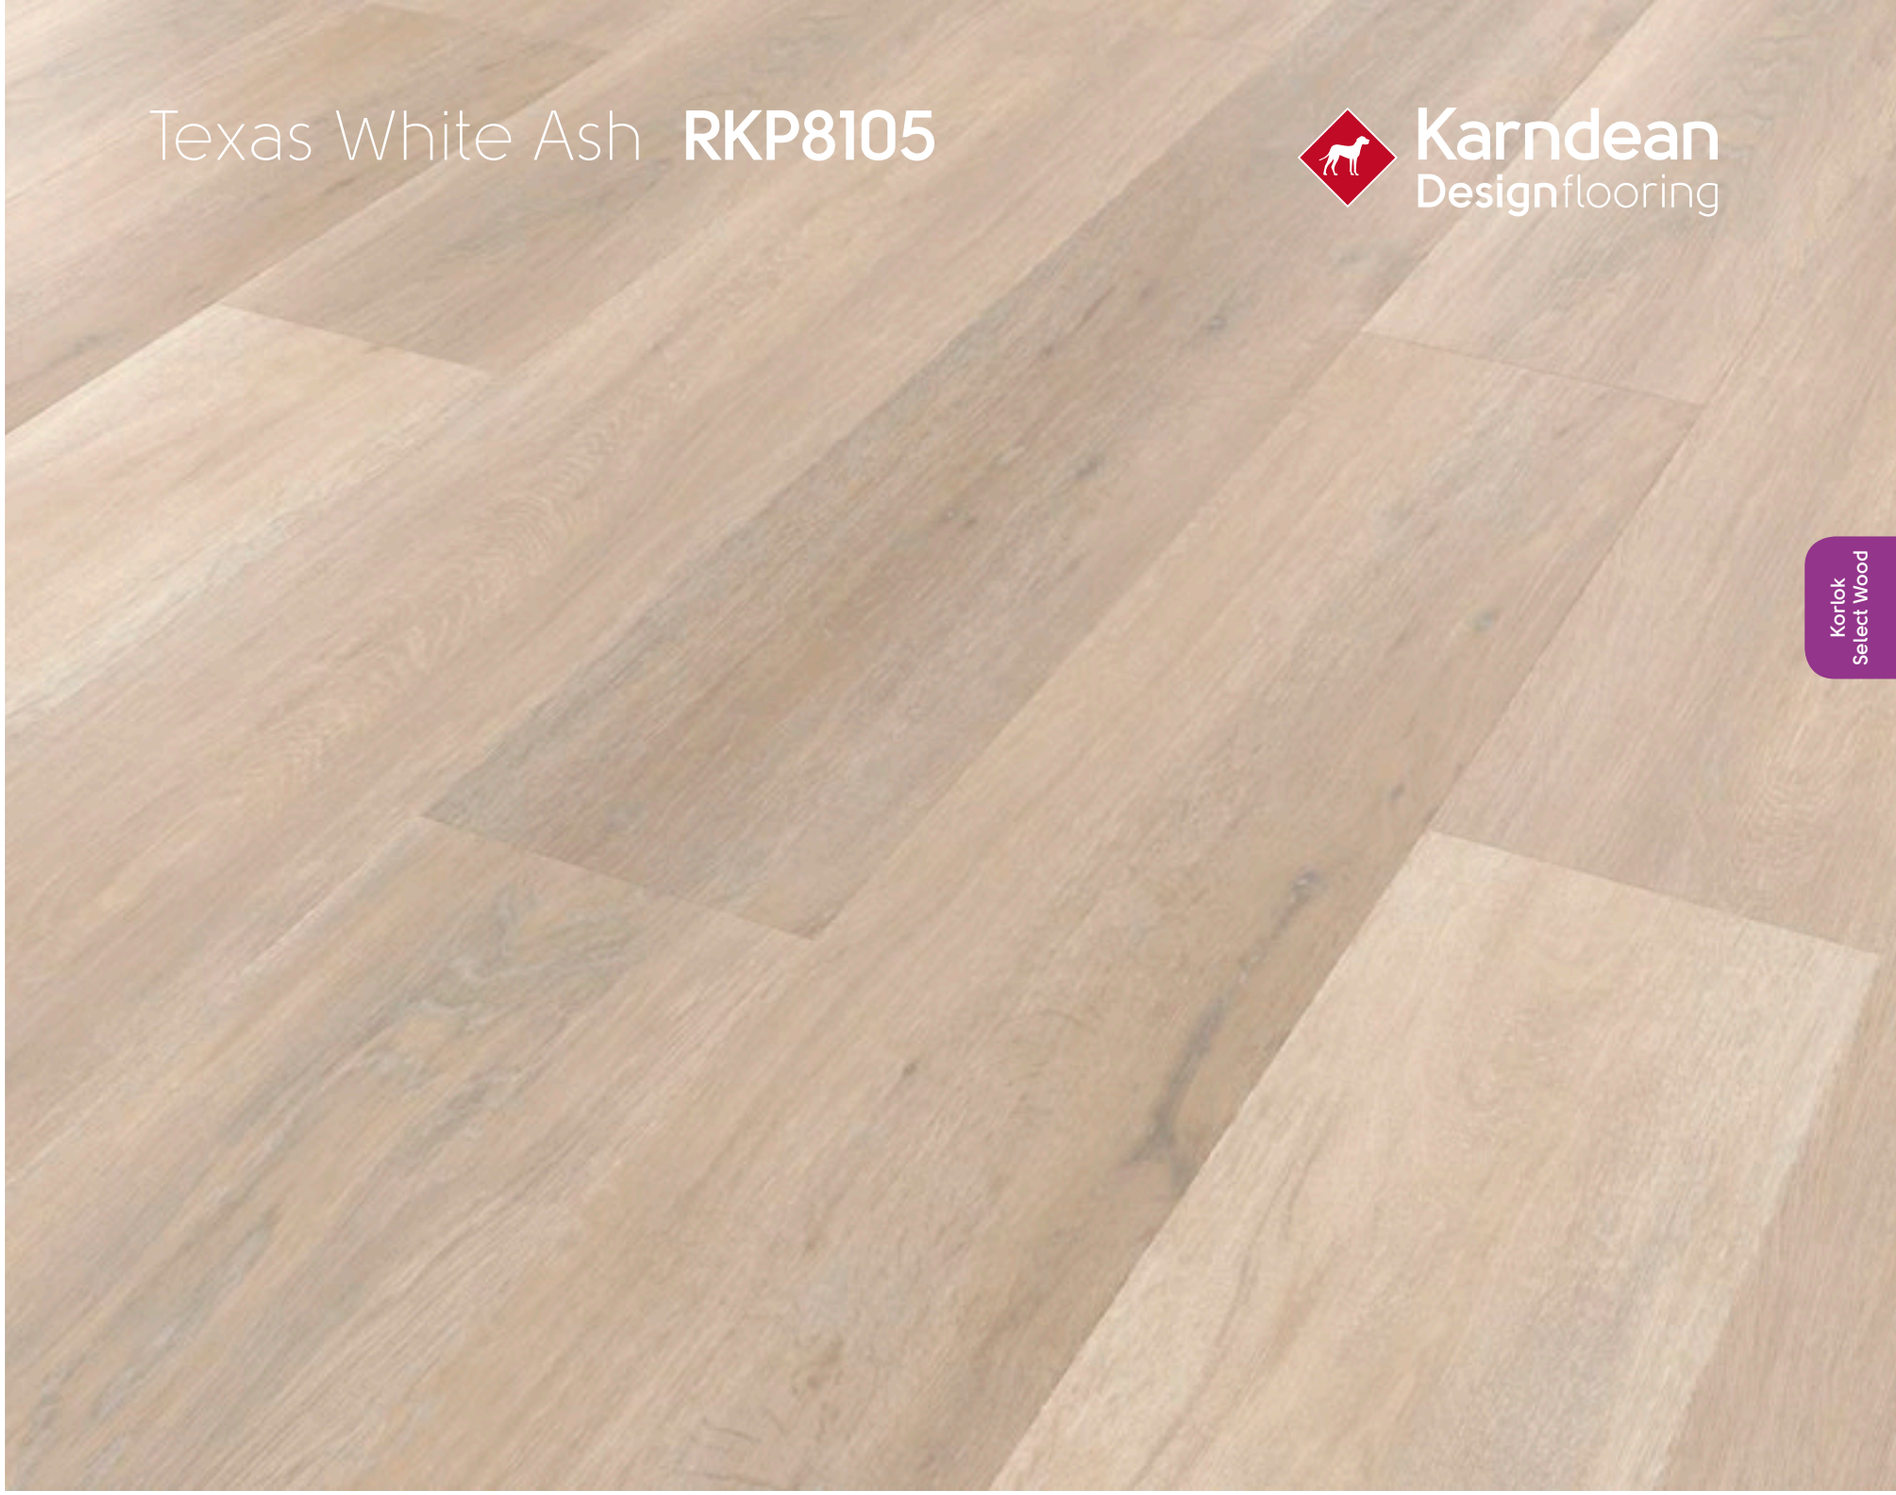

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

25 Year Warranty HoldFast

TEXT
RKP8105
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Washed Butternut **RKP8108**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty HoldFast

TEXT
RKP8108
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Canadian Urban Oak **RKP8116**

Karndean Designflooring

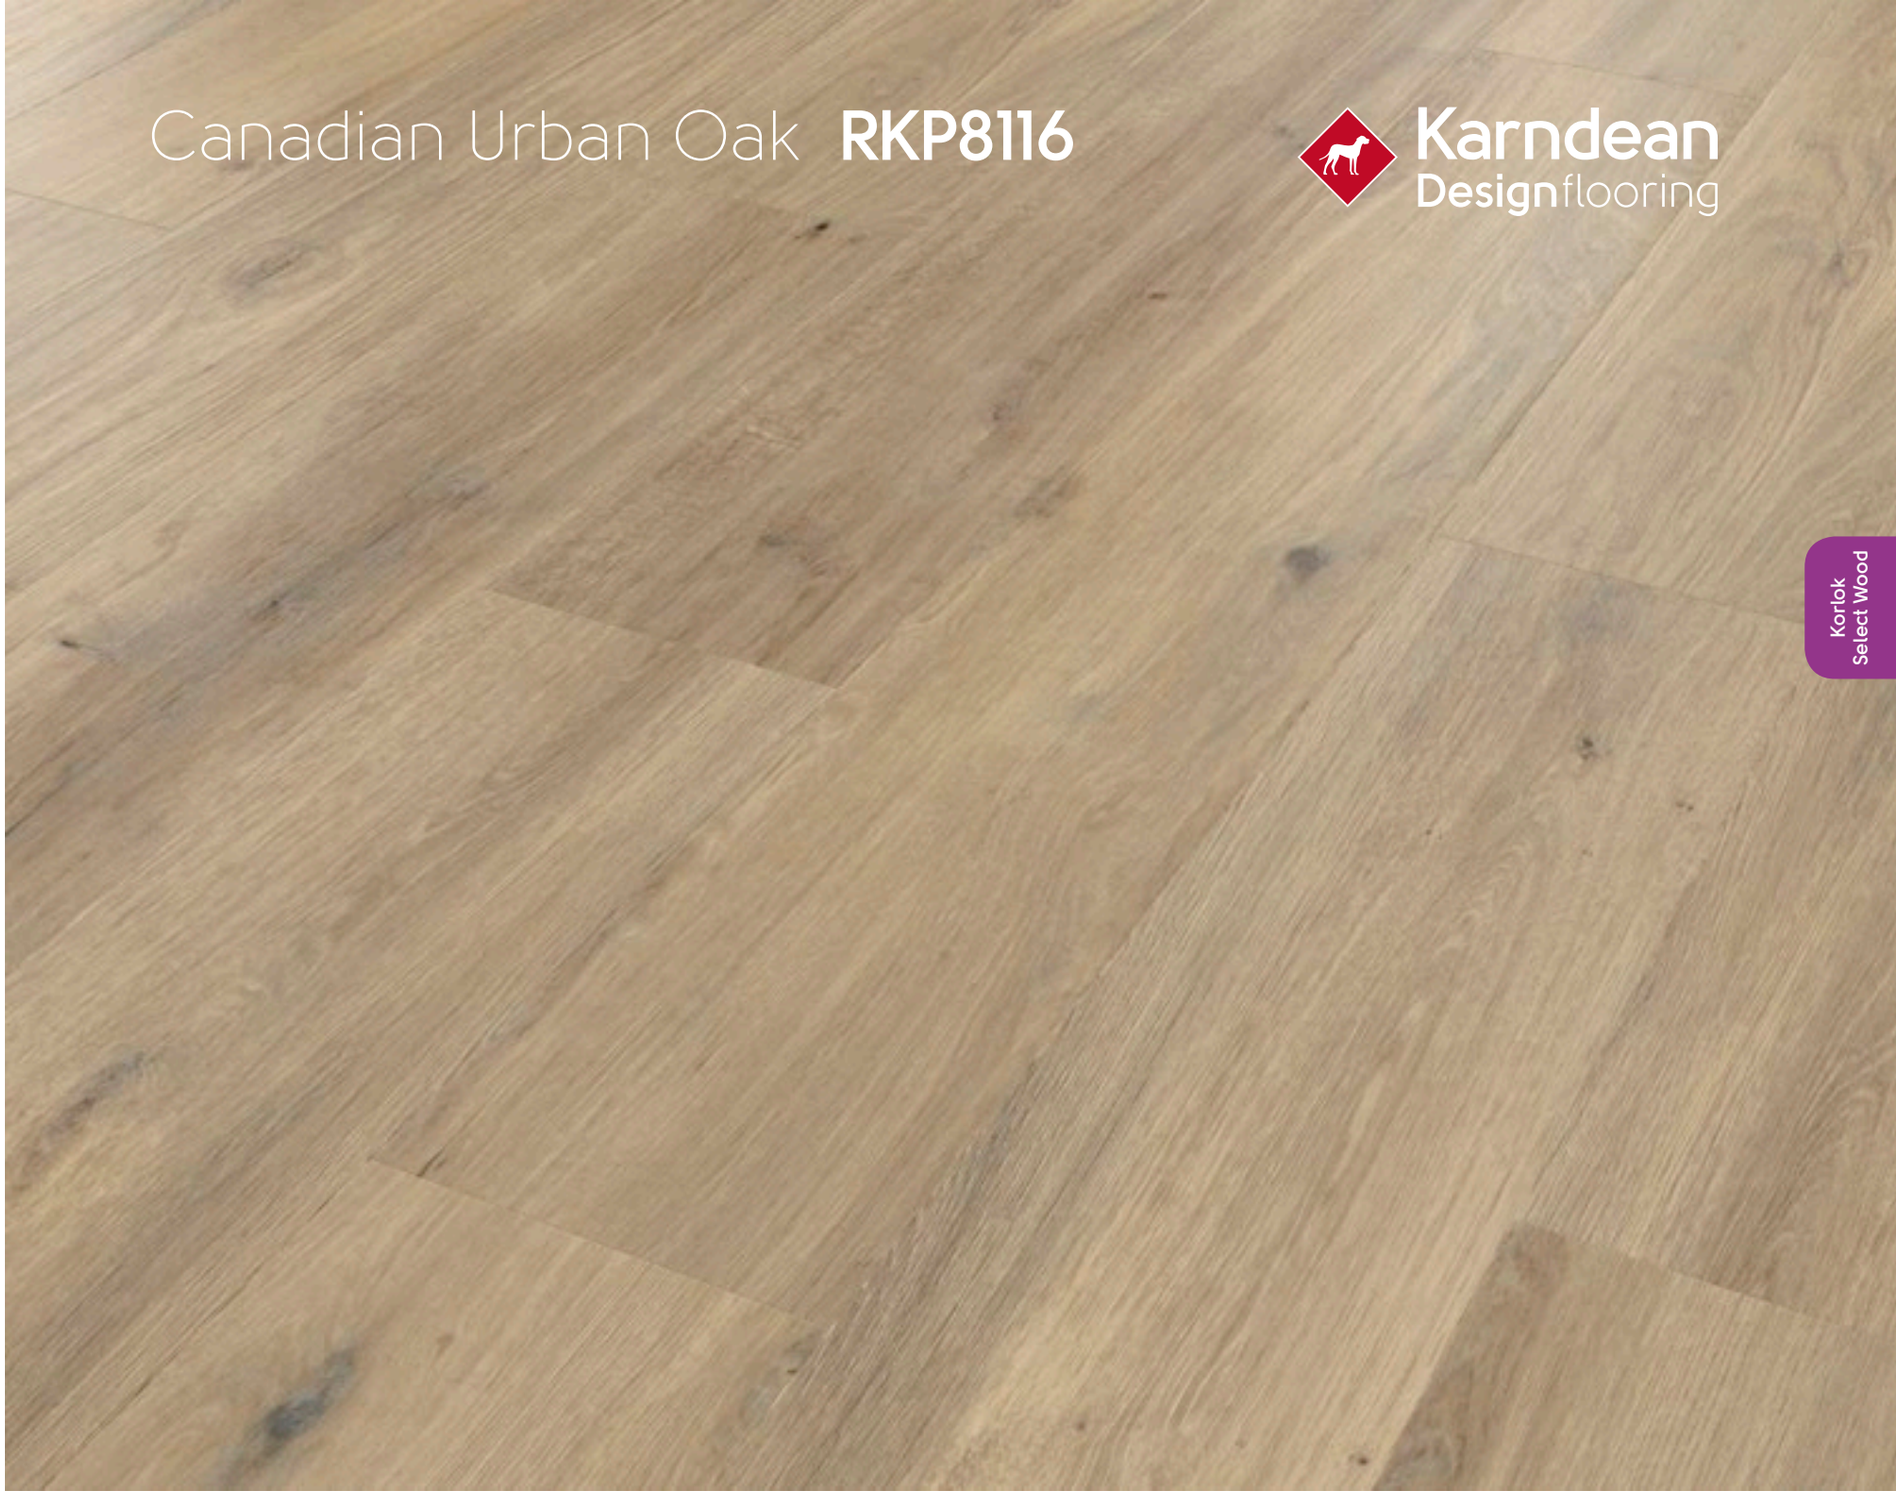

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

25 Year Warranty
HoldFast

TEXT
RKP8116
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Warm Ash **RKP8103**

Karndean Designflooring

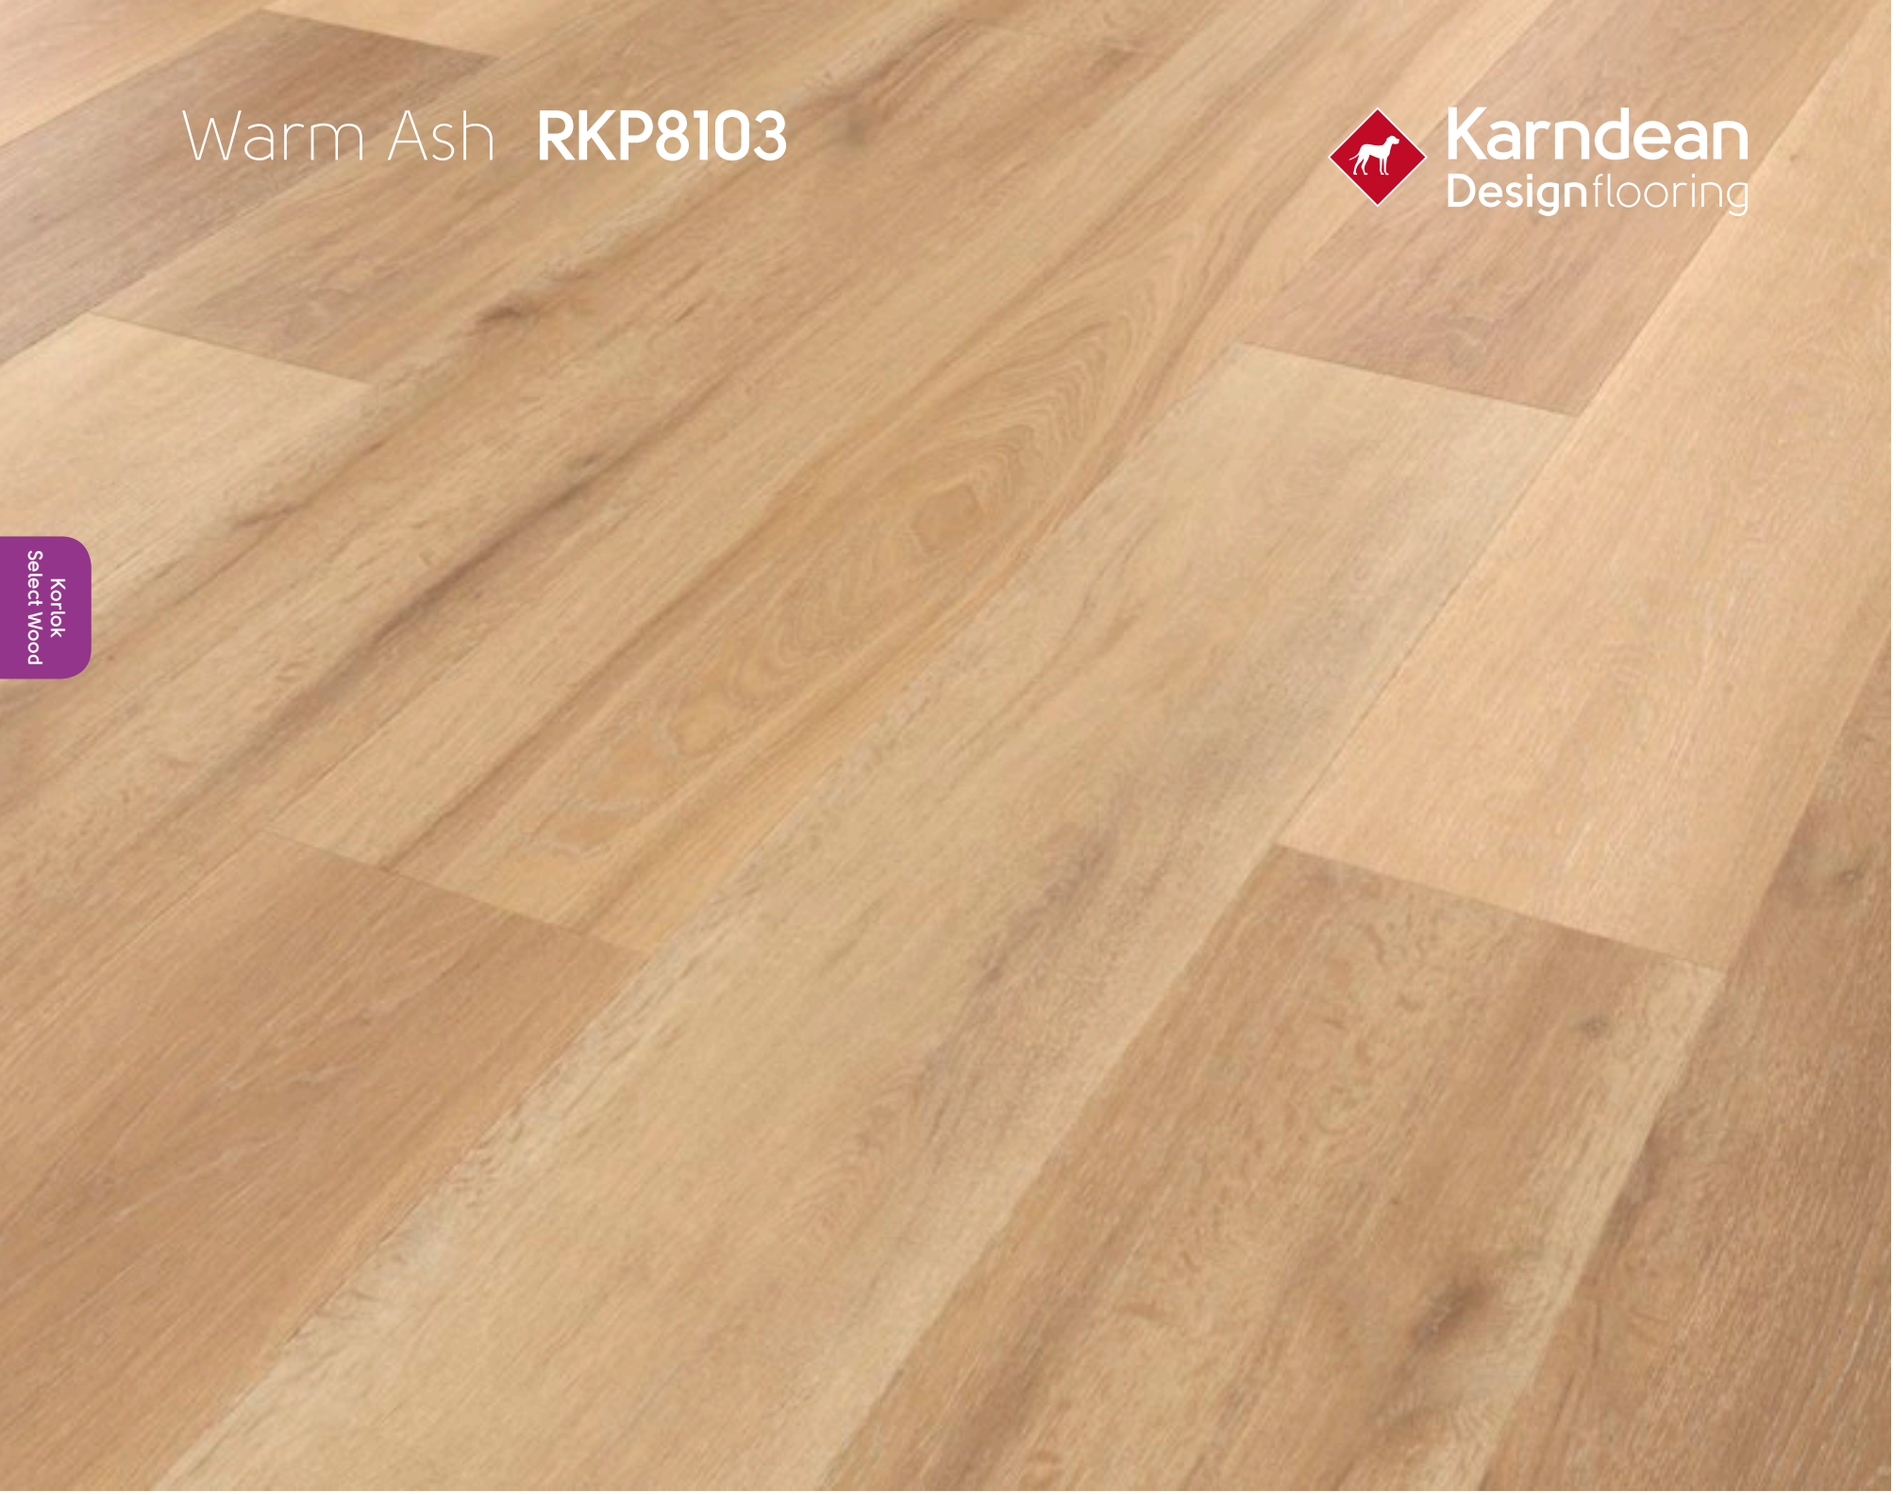

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8103
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Baltic Limed Oak **RKP8111**

Karndean Designflooring

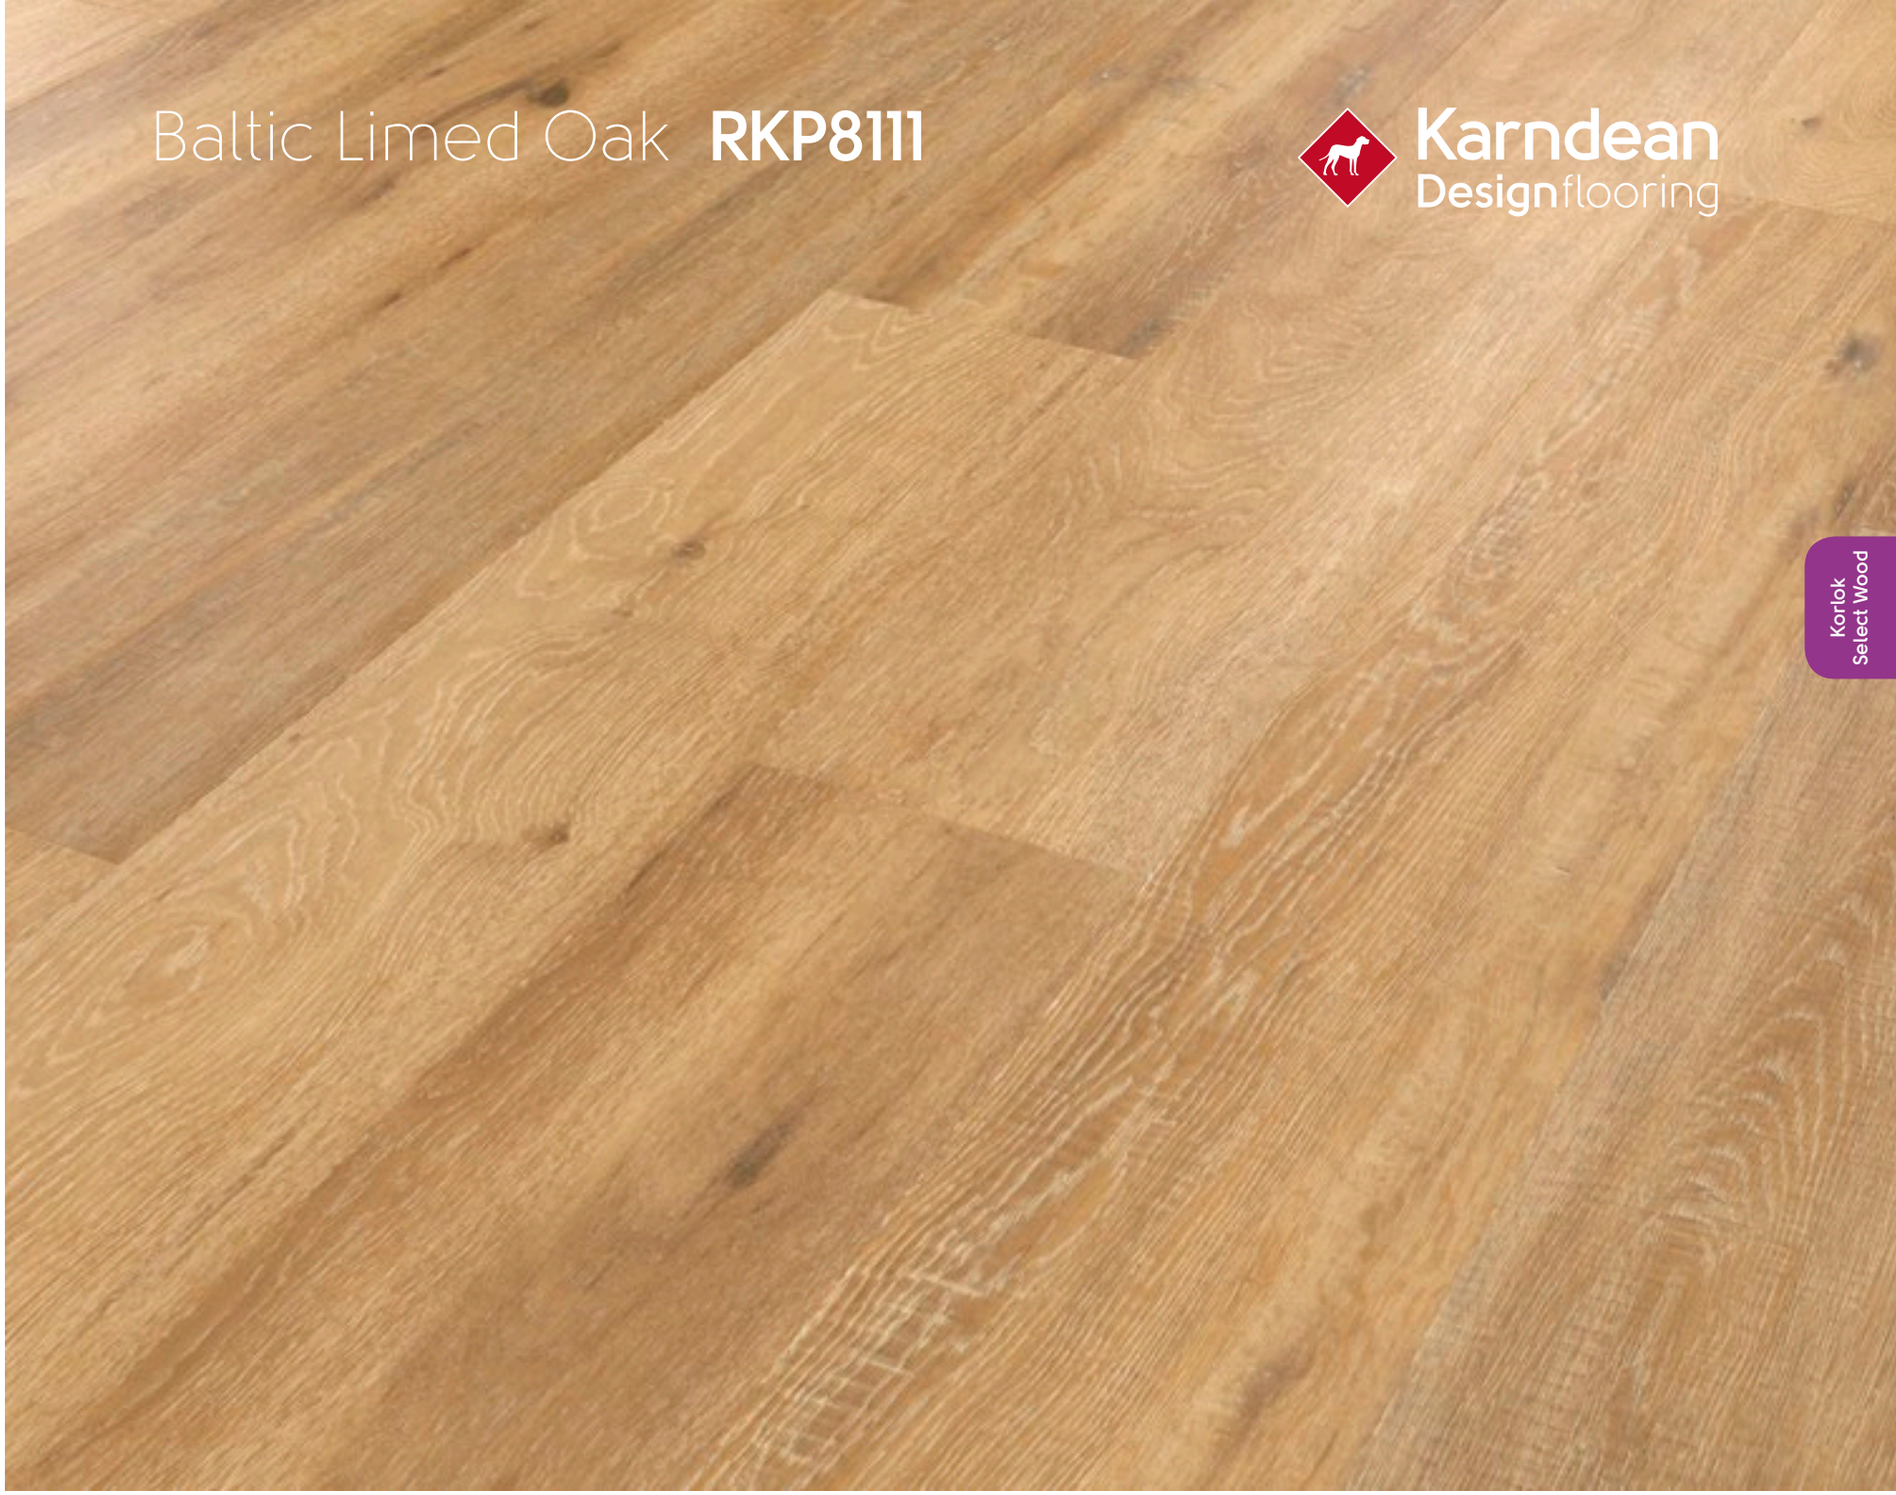

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

25 Year Warranty
HoldFast

TEXT
RKP8111
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Warm Brushed Oak **RKP8215**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8215
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

English Character Oak **RKP8115**

Karndean Designflooring

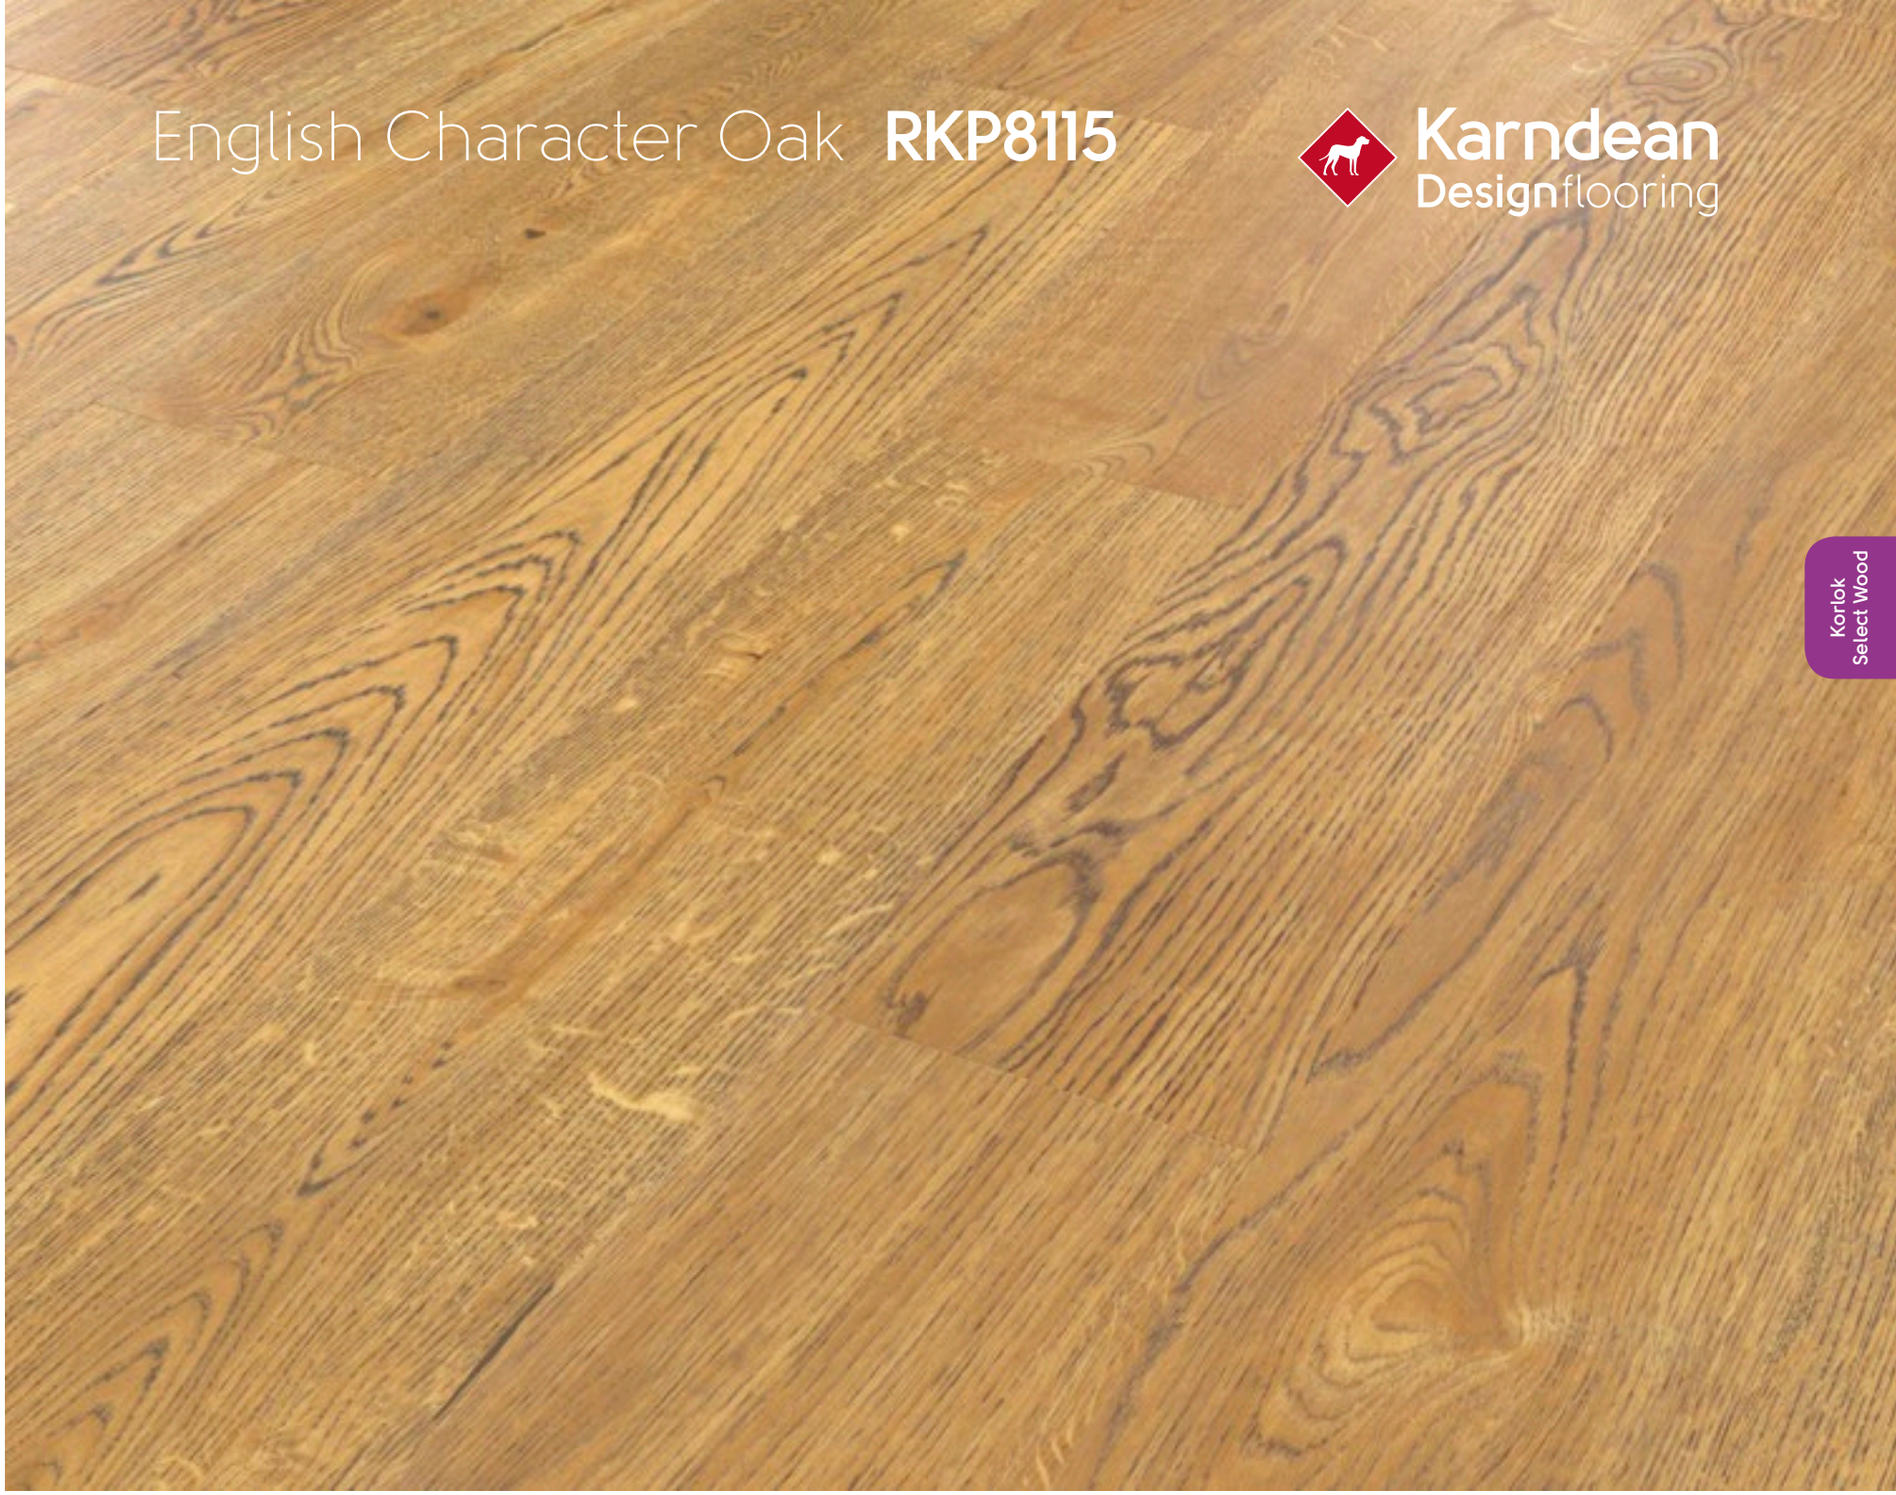

Korlok Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

25 Year Warranty HoldFast

TEXT
RKP8115
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Oyster Oak **RKP8202**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8202
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Shadow Oak **RKP8203**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

25 Year Warranty
HoldFast

TEXT
RKP8203
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Washed Grey Ash **RKP8104**

Karndean Designflooring

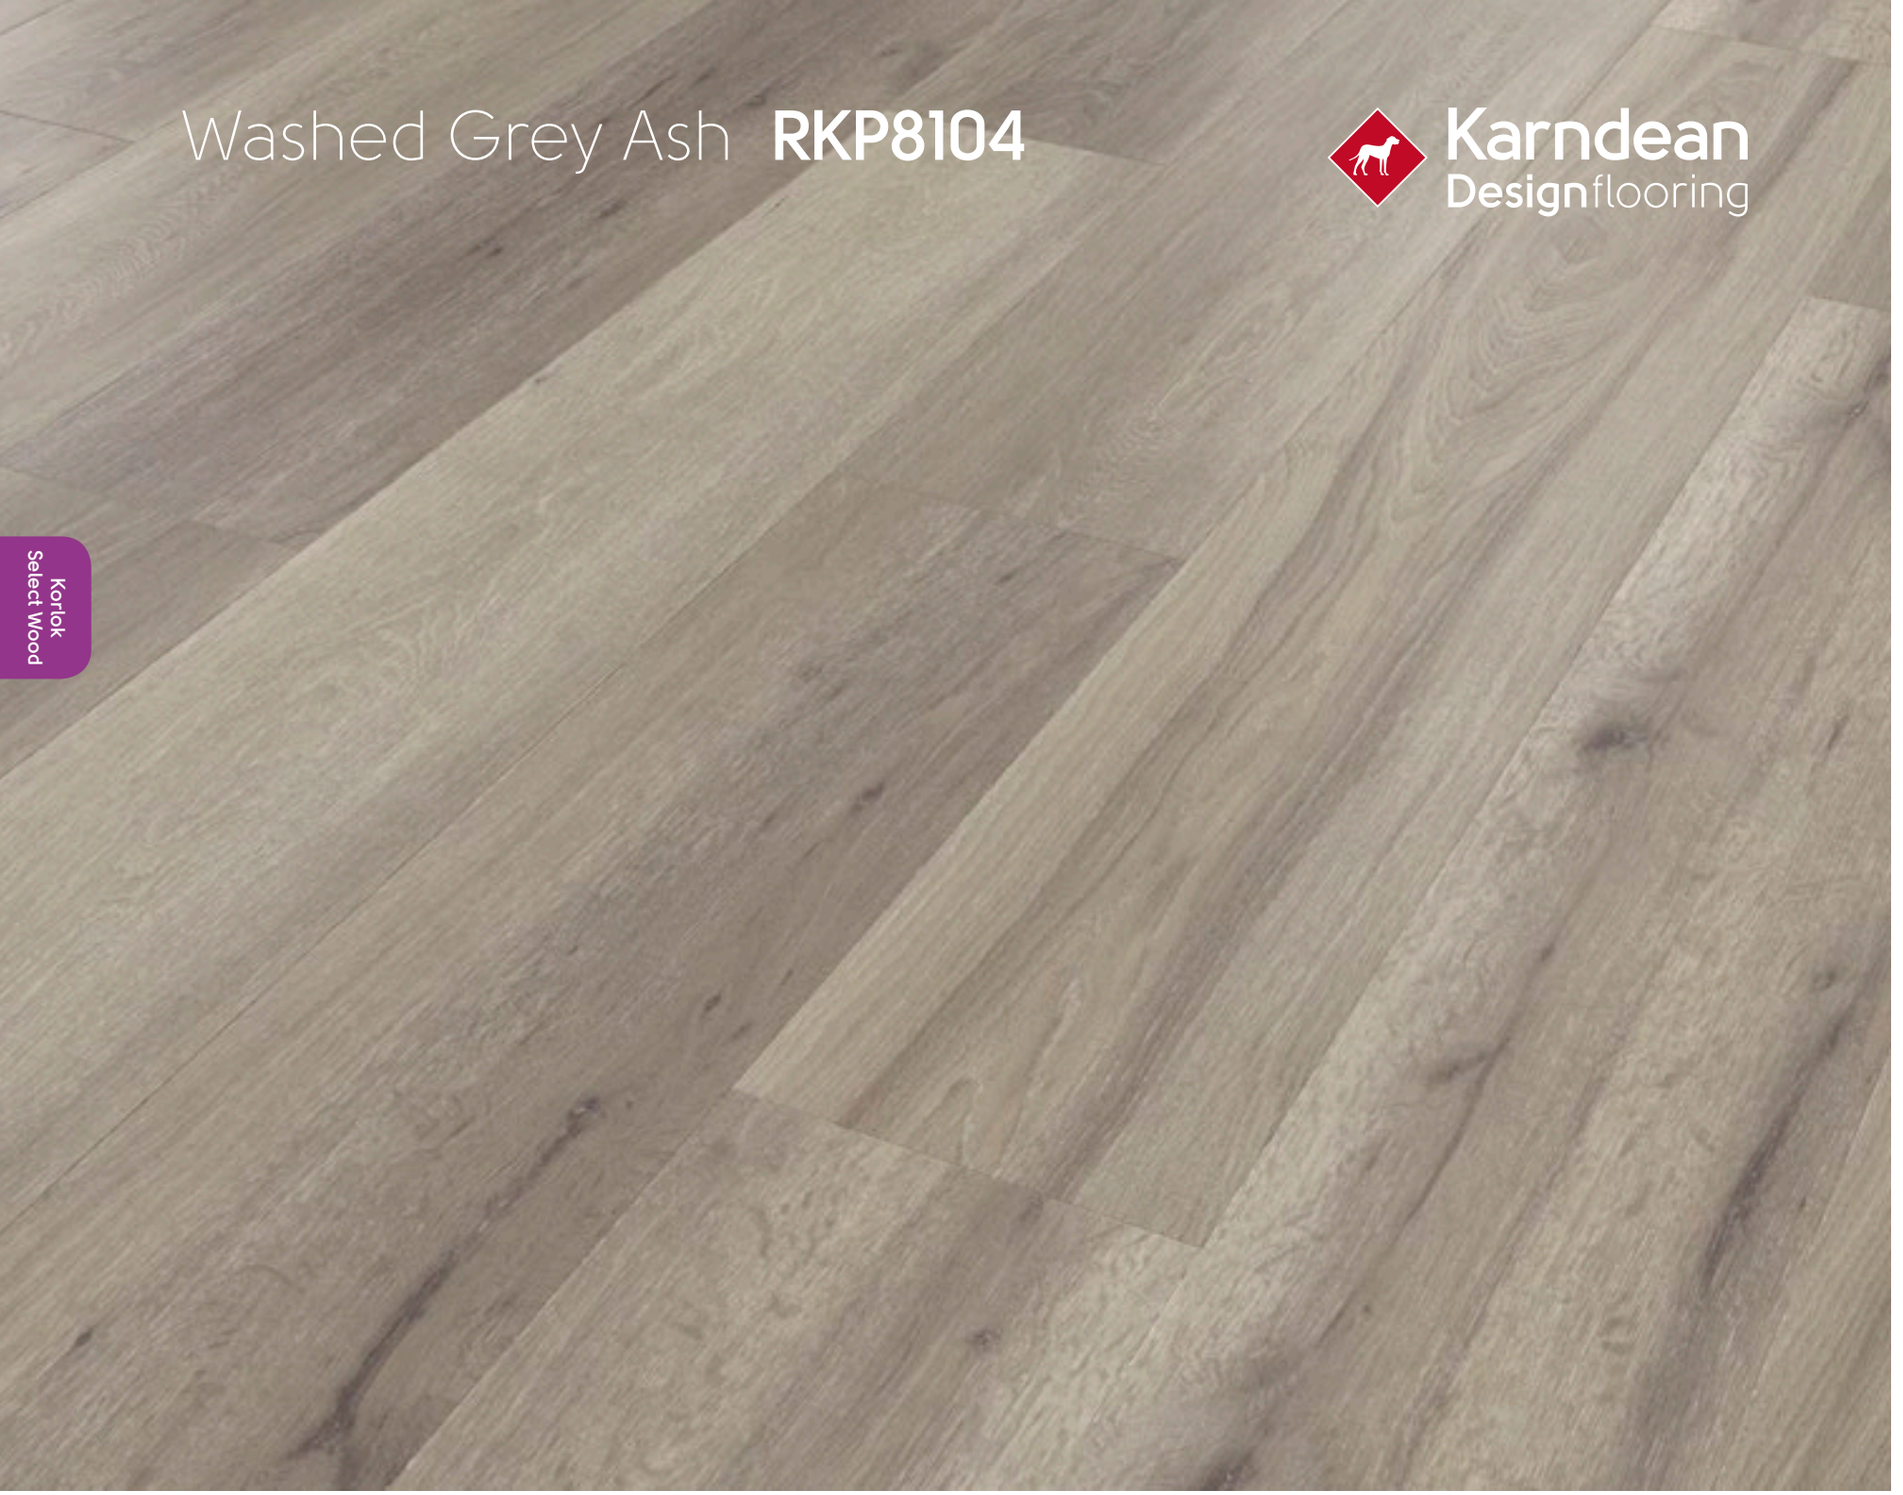

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty HoldFast

TEXT
RKP8104
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Baltic Washed Oak **RKP8101**

Karndean Designflooring

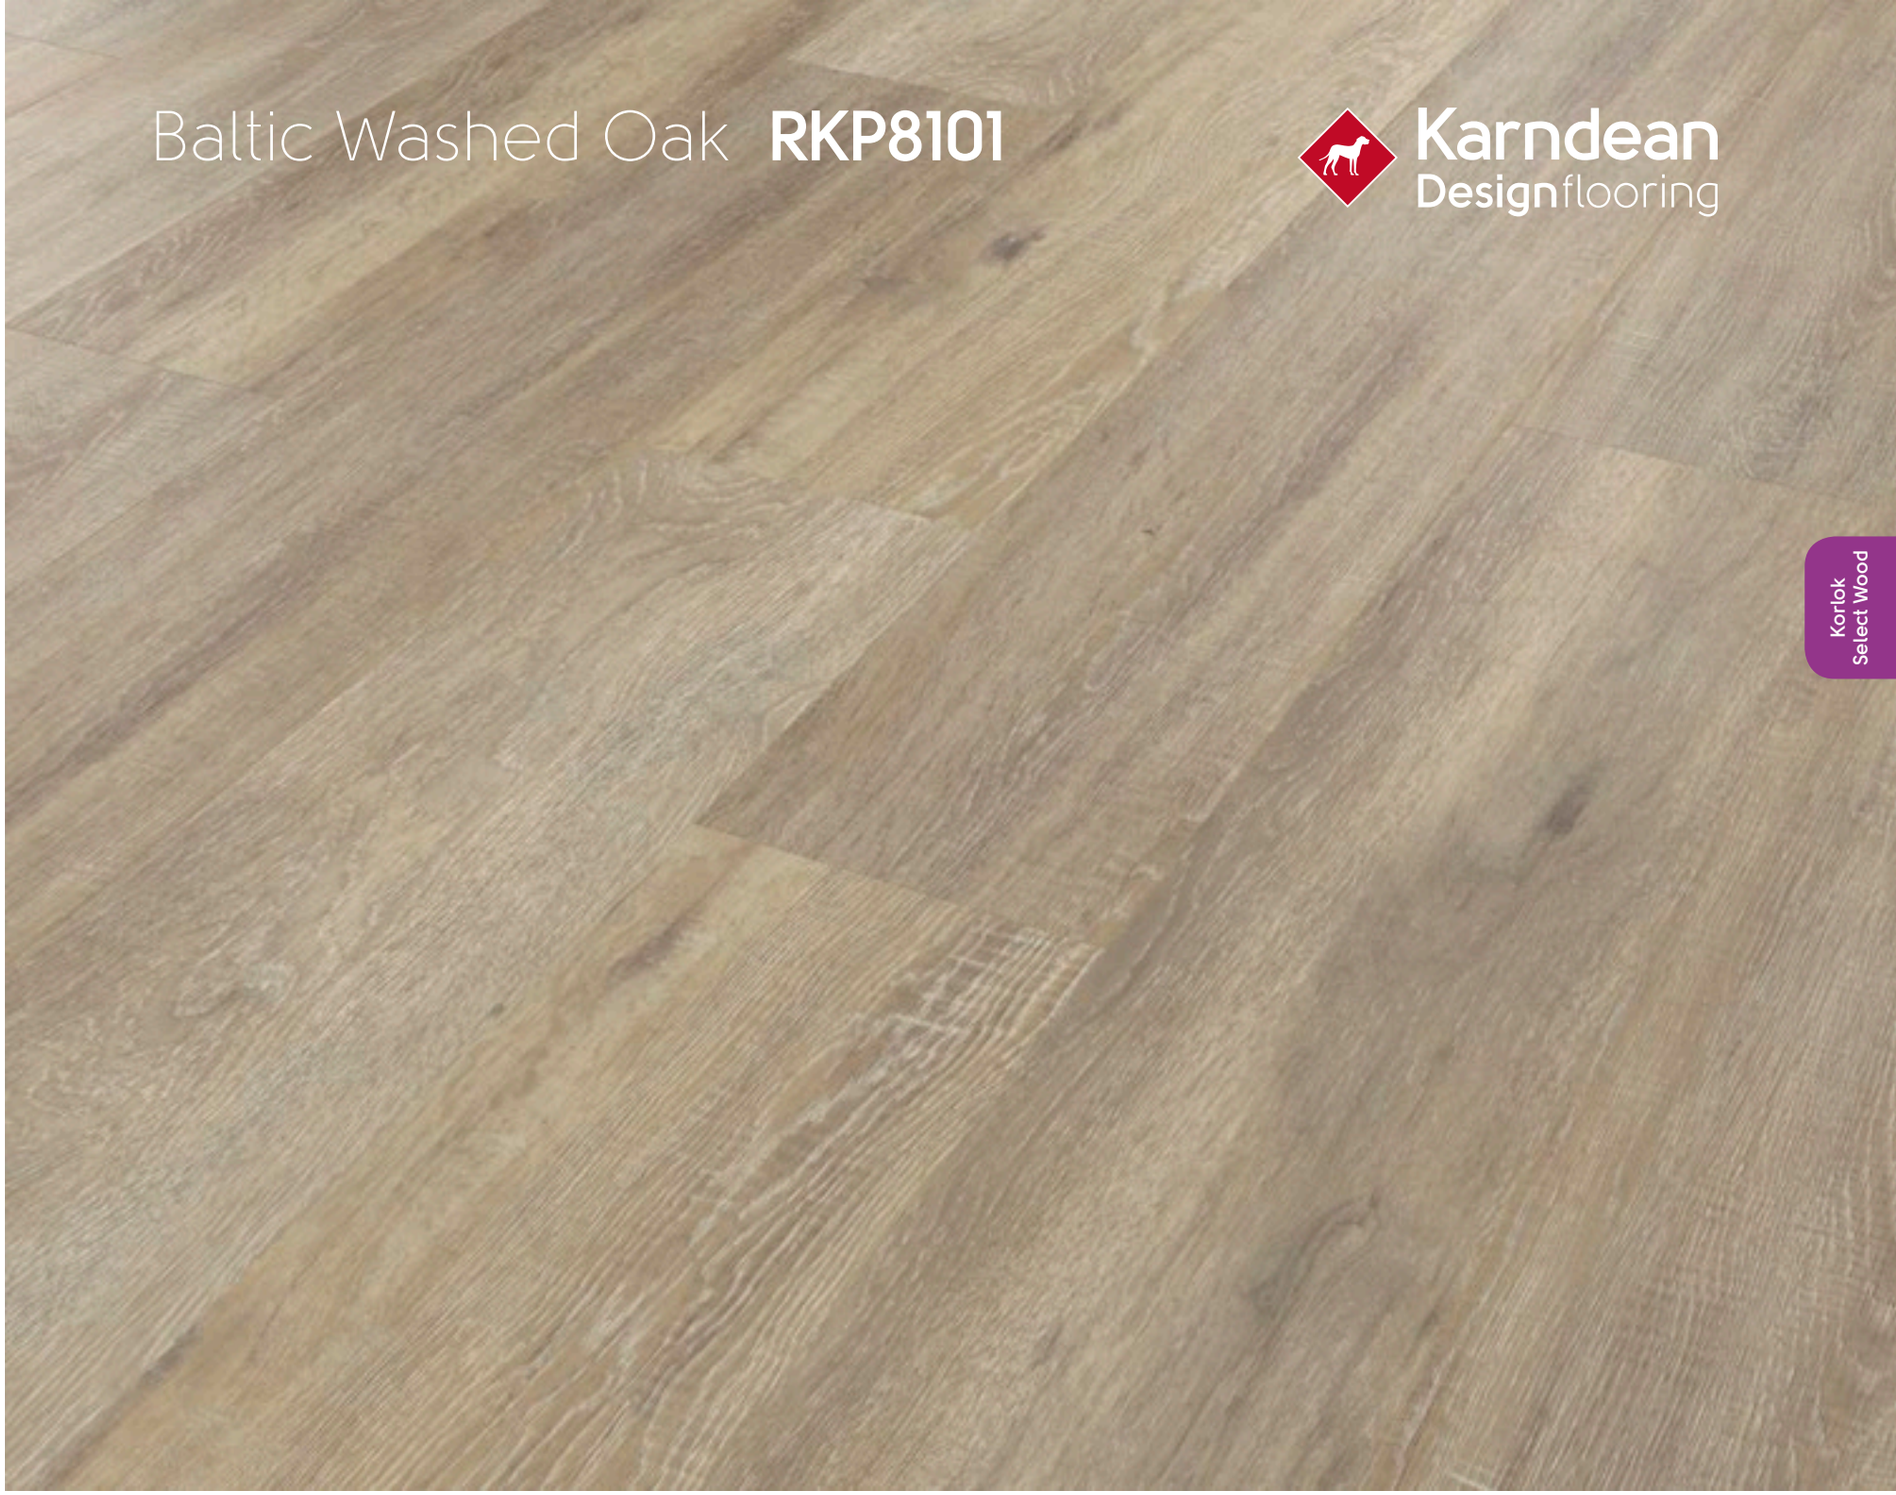

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

25 Year Warranty HoldFast

TEXT
RKP8101
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Barley Oak **RKP8206**

Karndean Designflooring

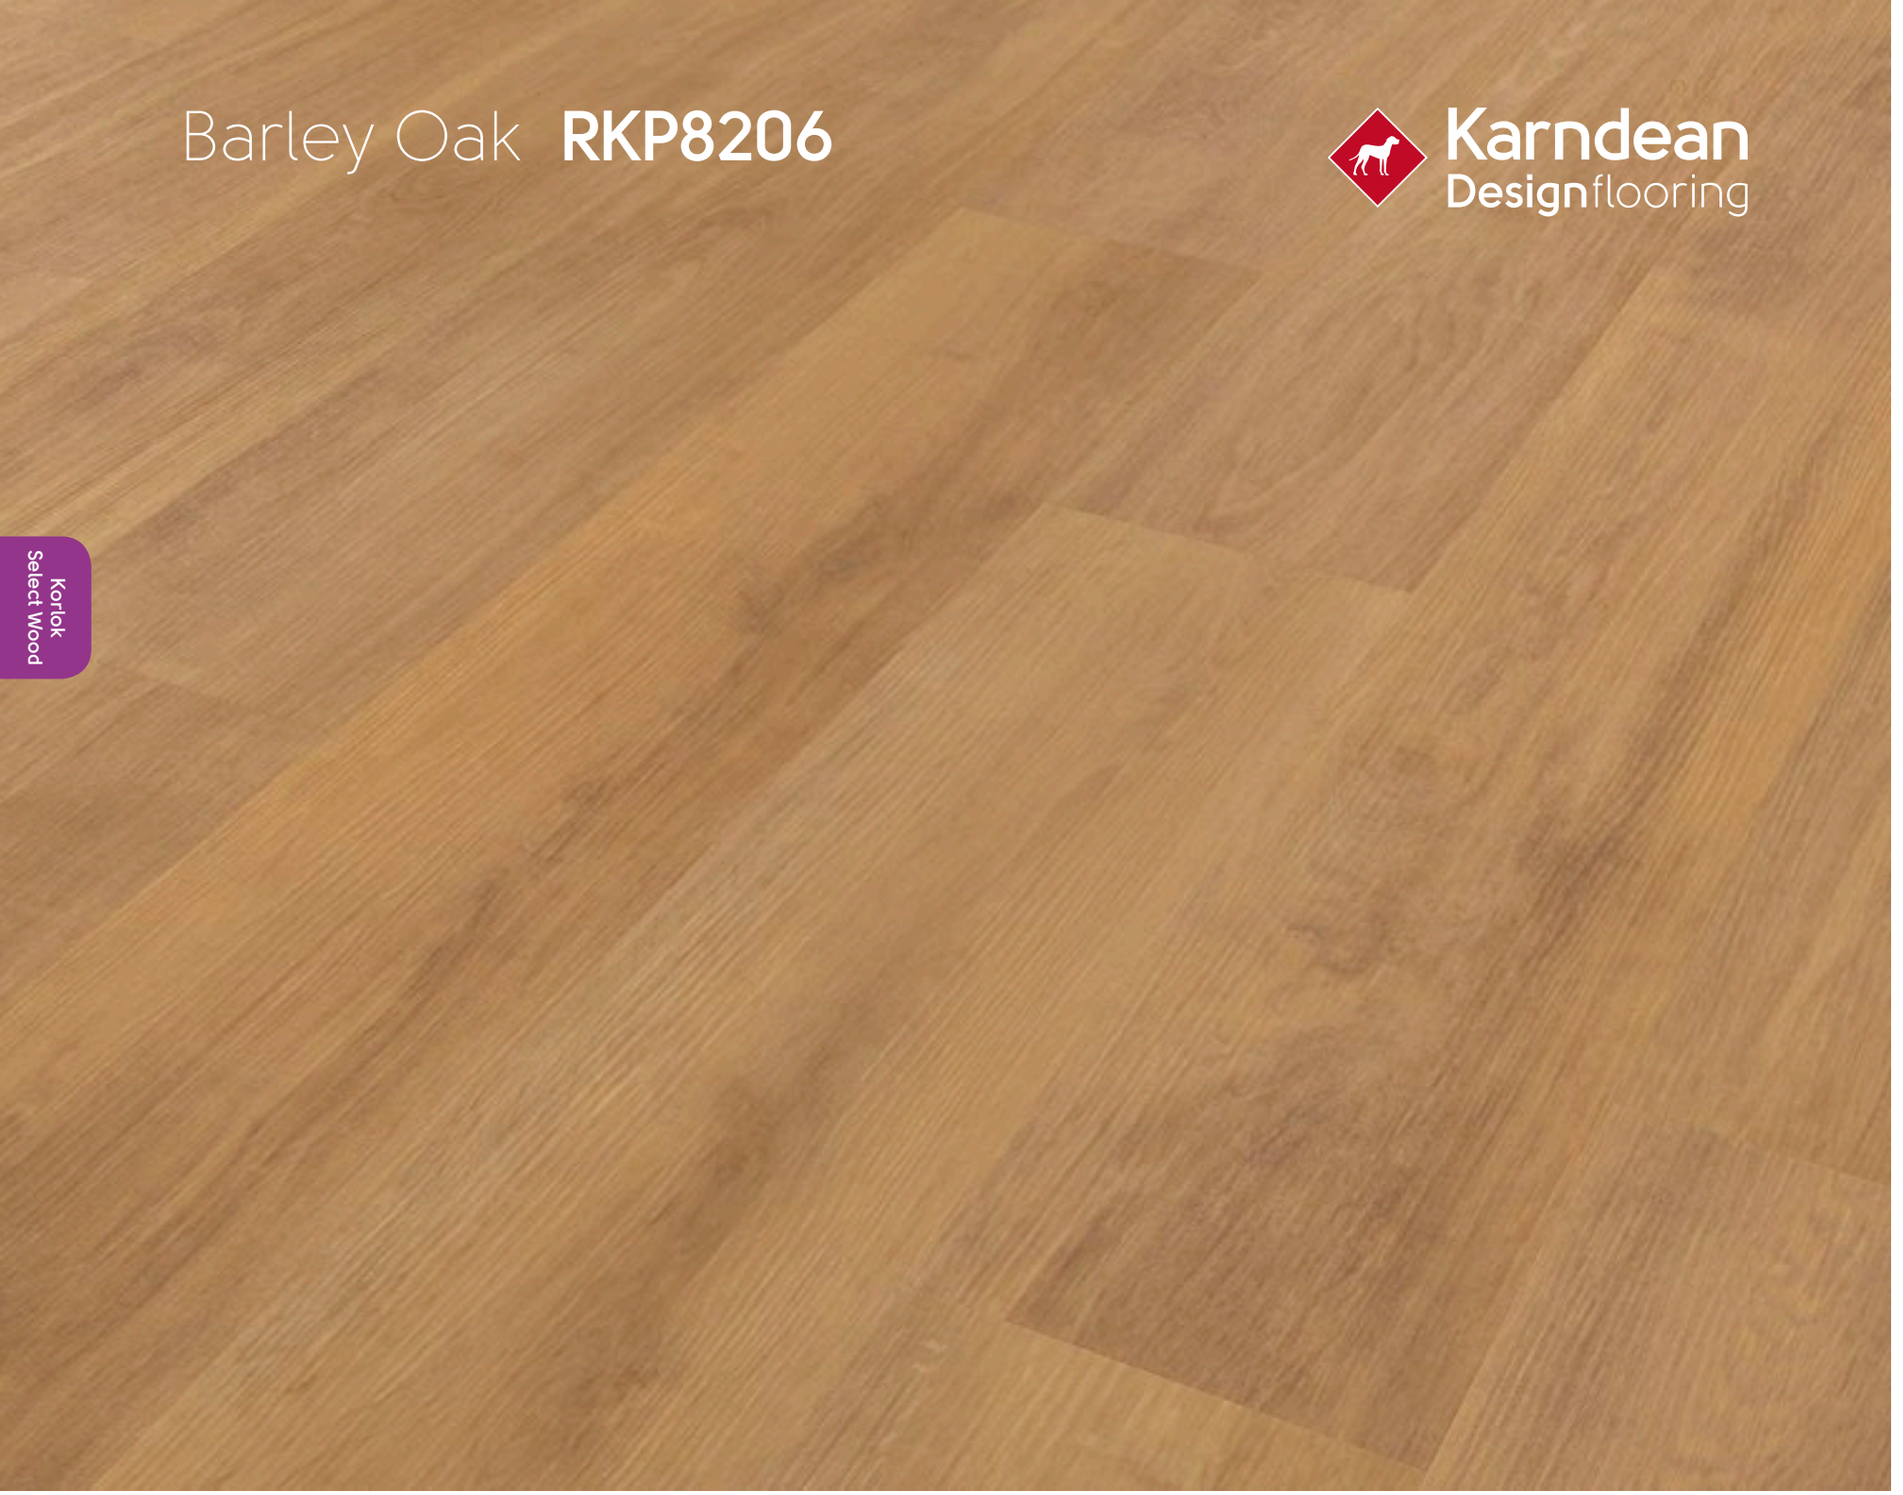

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8206
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Smoked Butternut **RKP8107**

Karndean Designflooring

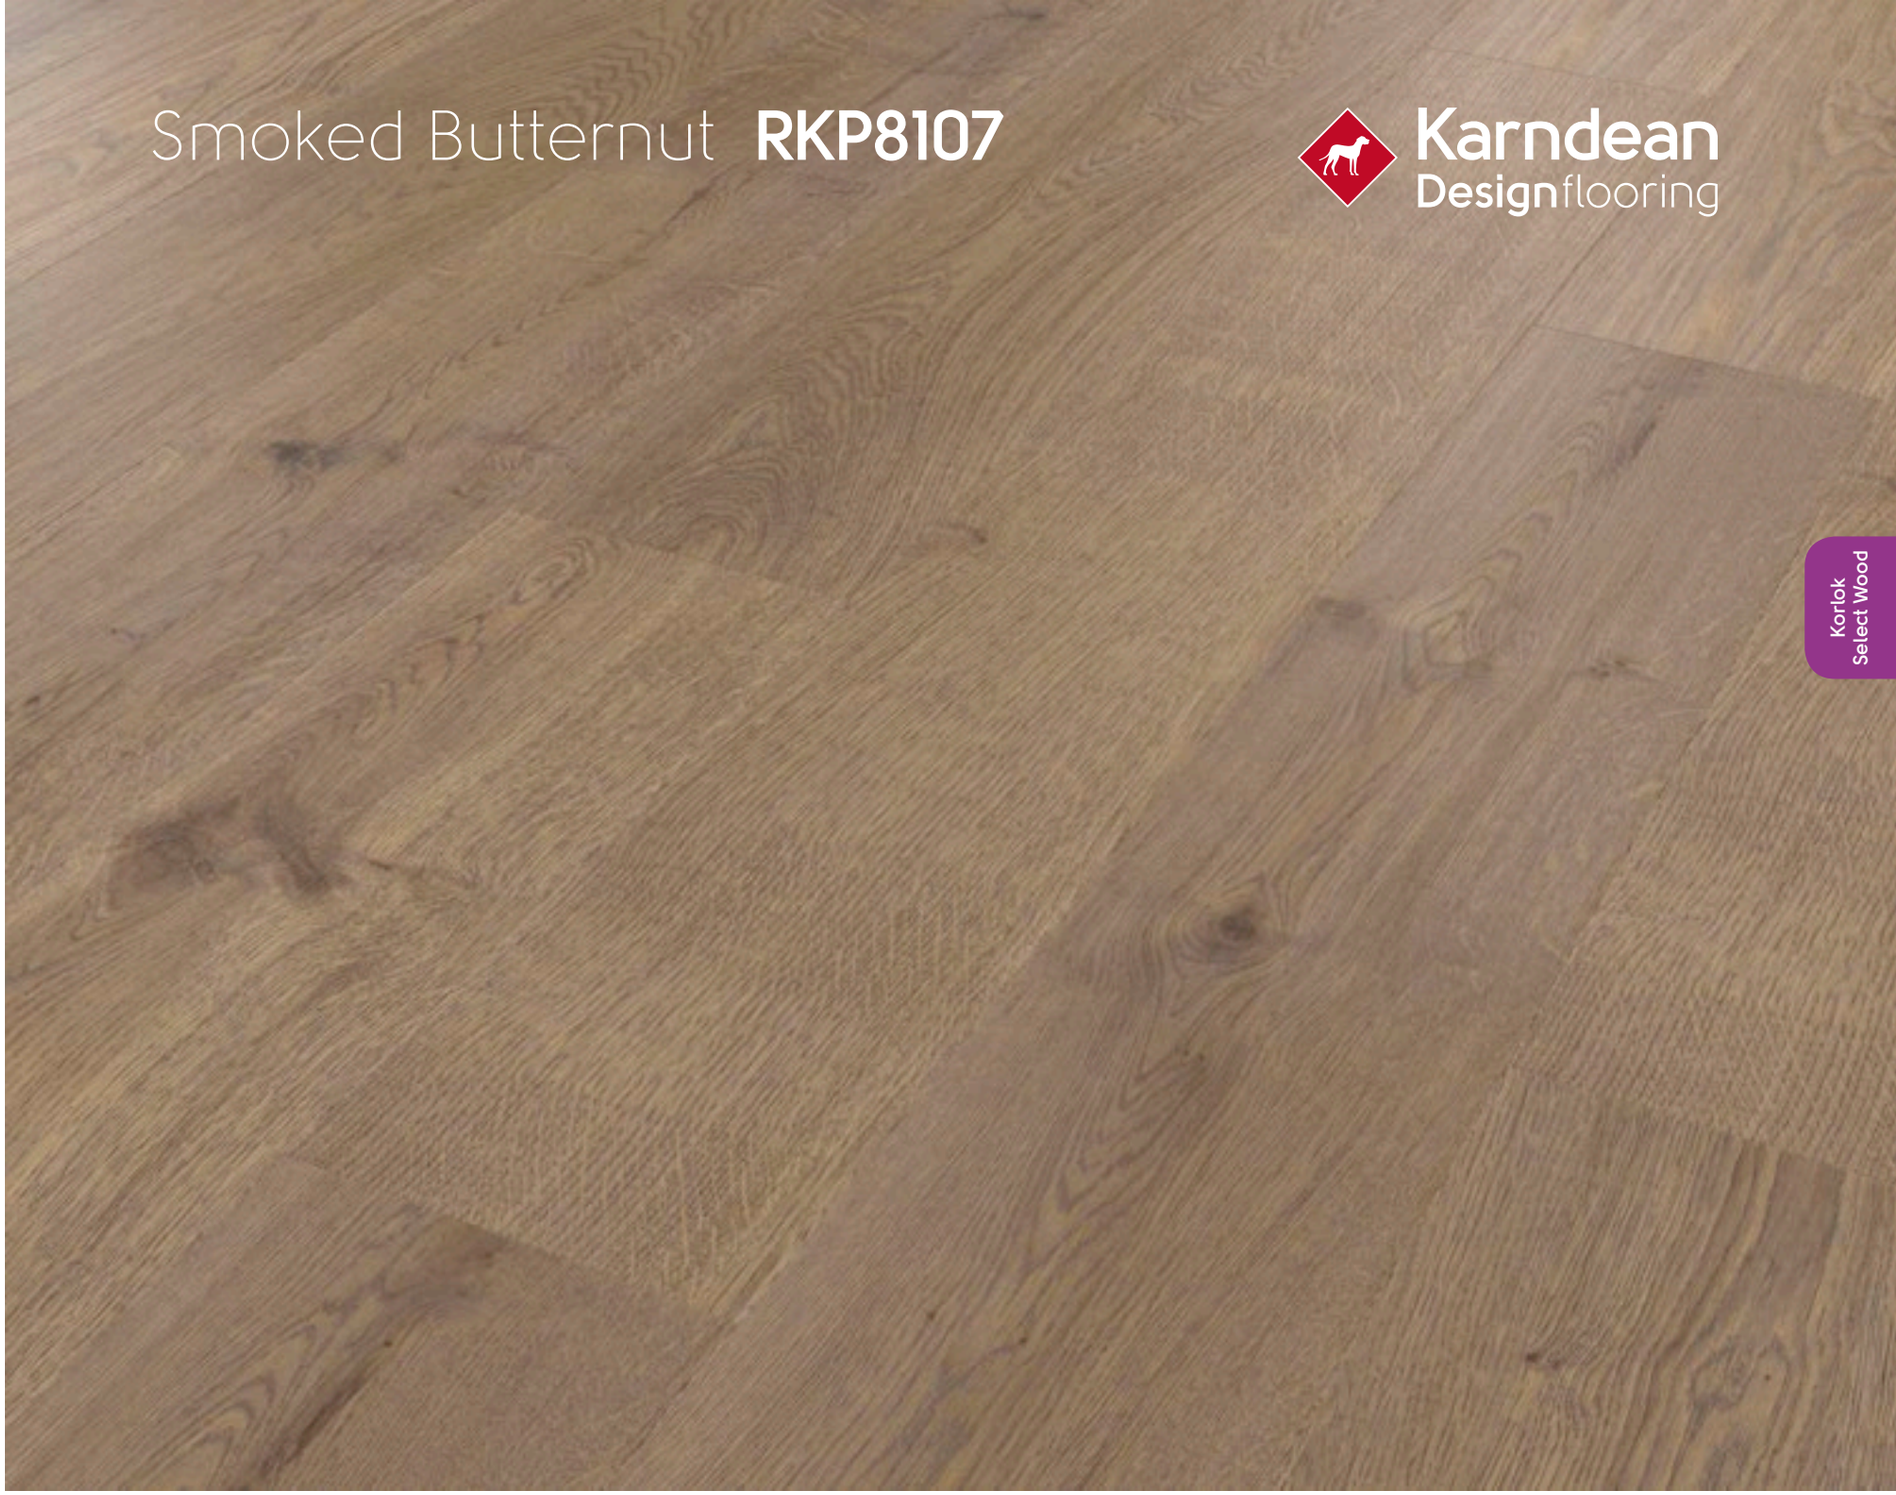

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

25 Year Warranty HoldFast

TEXT
RKP8107
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Silver Barnwood **RKP8208**

Karndean Designflooring

Korlok Select Wood



Size	56" x 9" (1420mm x 225mm)
Thickness	0.25" (6.5mm)
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8208
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Silver Barnwood **SM-RKP8208**

Karndean Designflooring

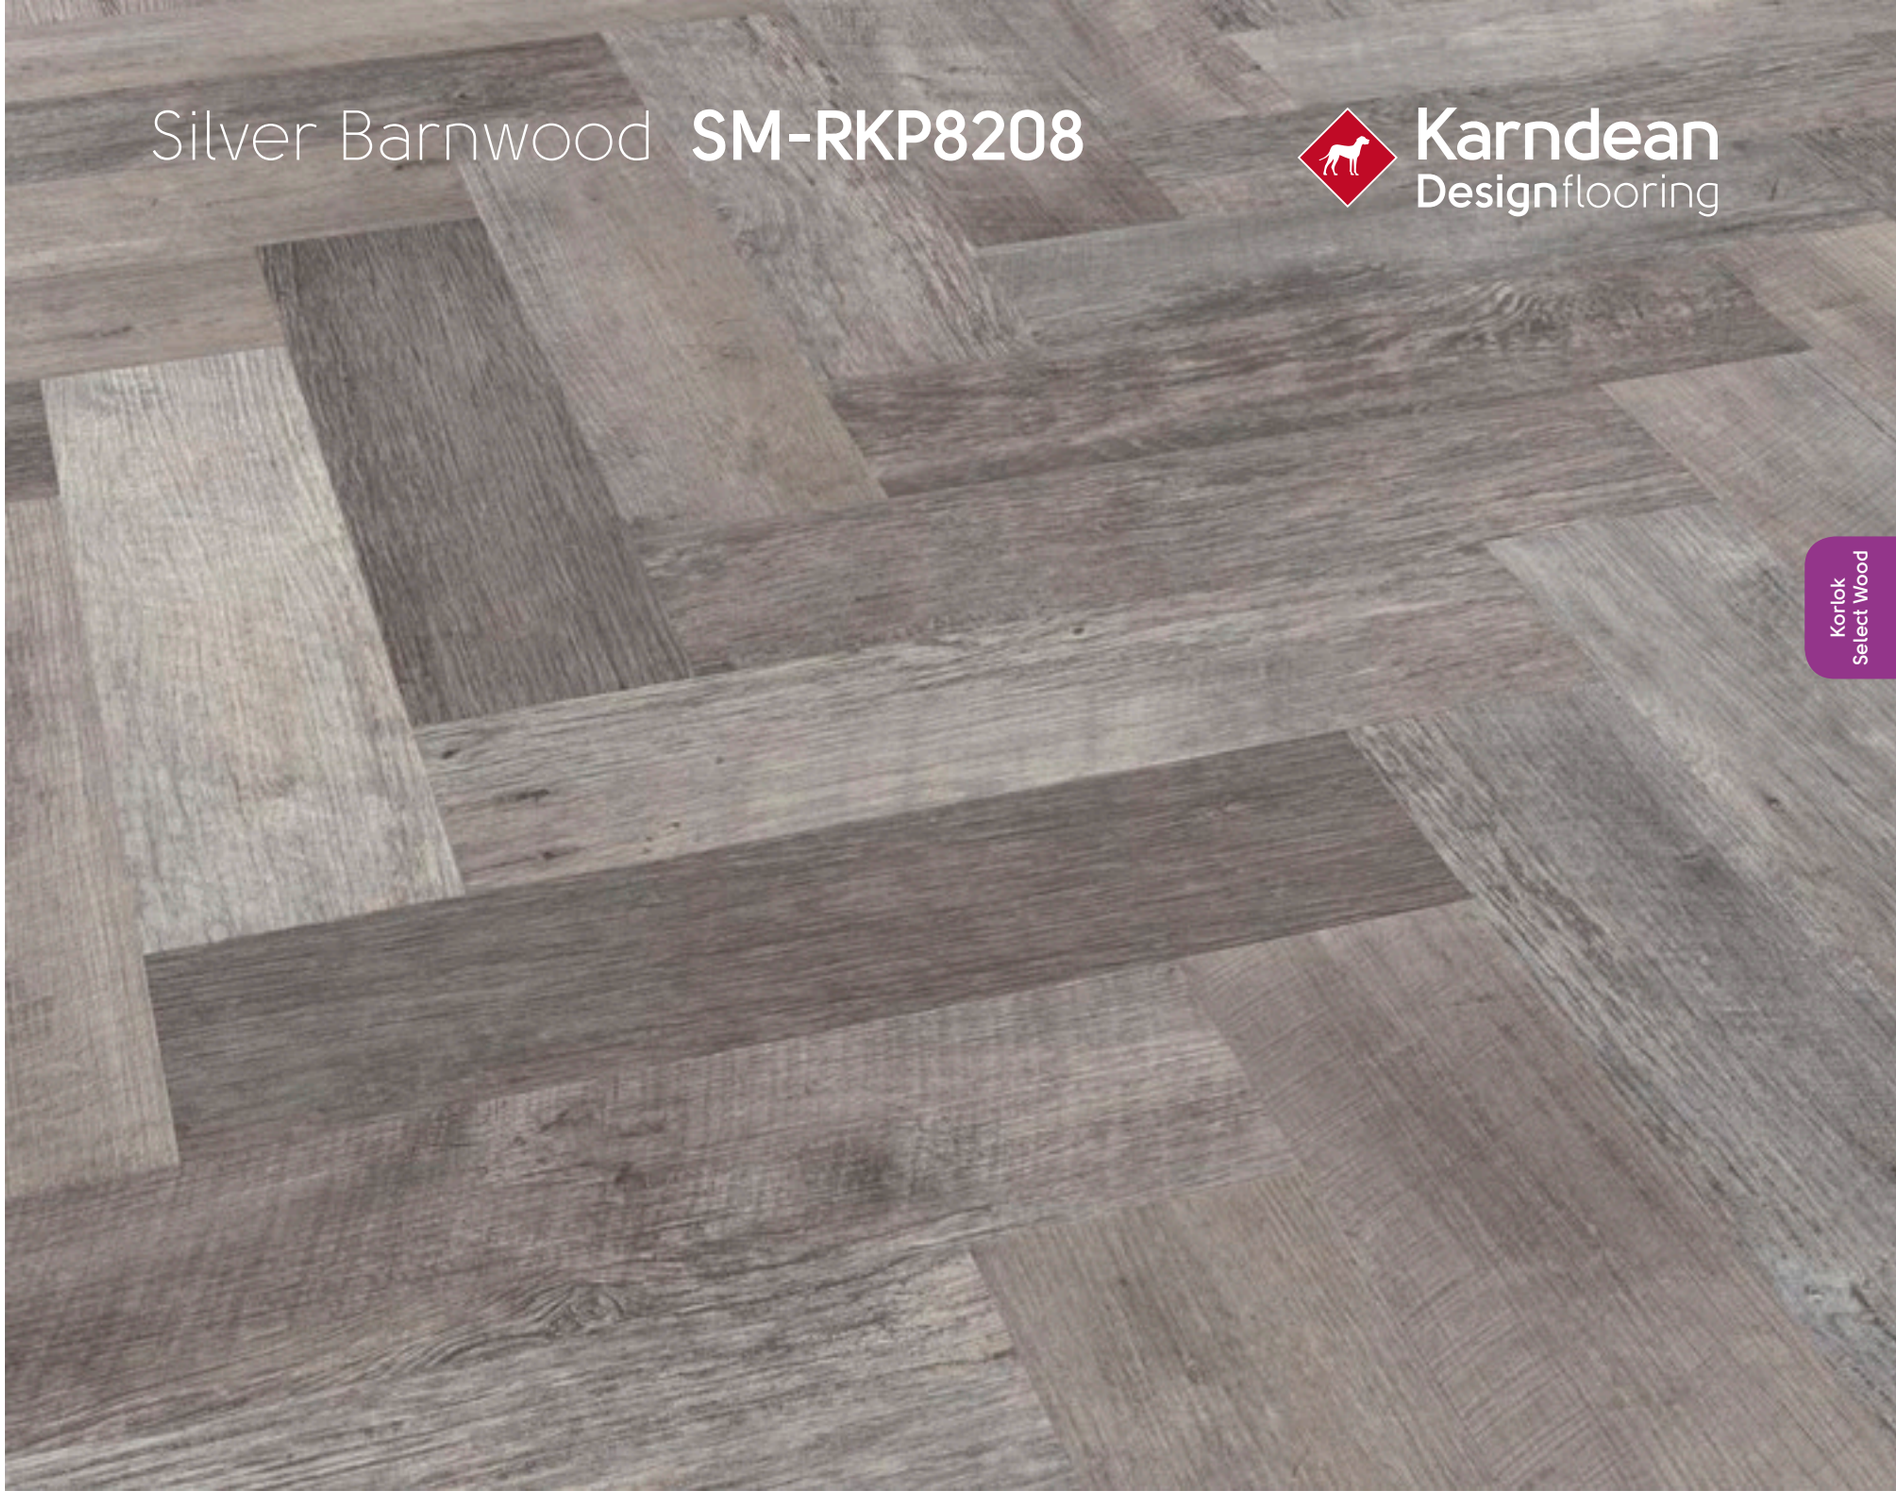

Size	24" x 6" (596mm x 149mm)
Thickness	0.25" (6.5mm)
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Planks/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

25 Year Warranty HoldFast

TEXT
SM-RKP8208
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed French Oak **RKP8109**

Karndean Designflooring

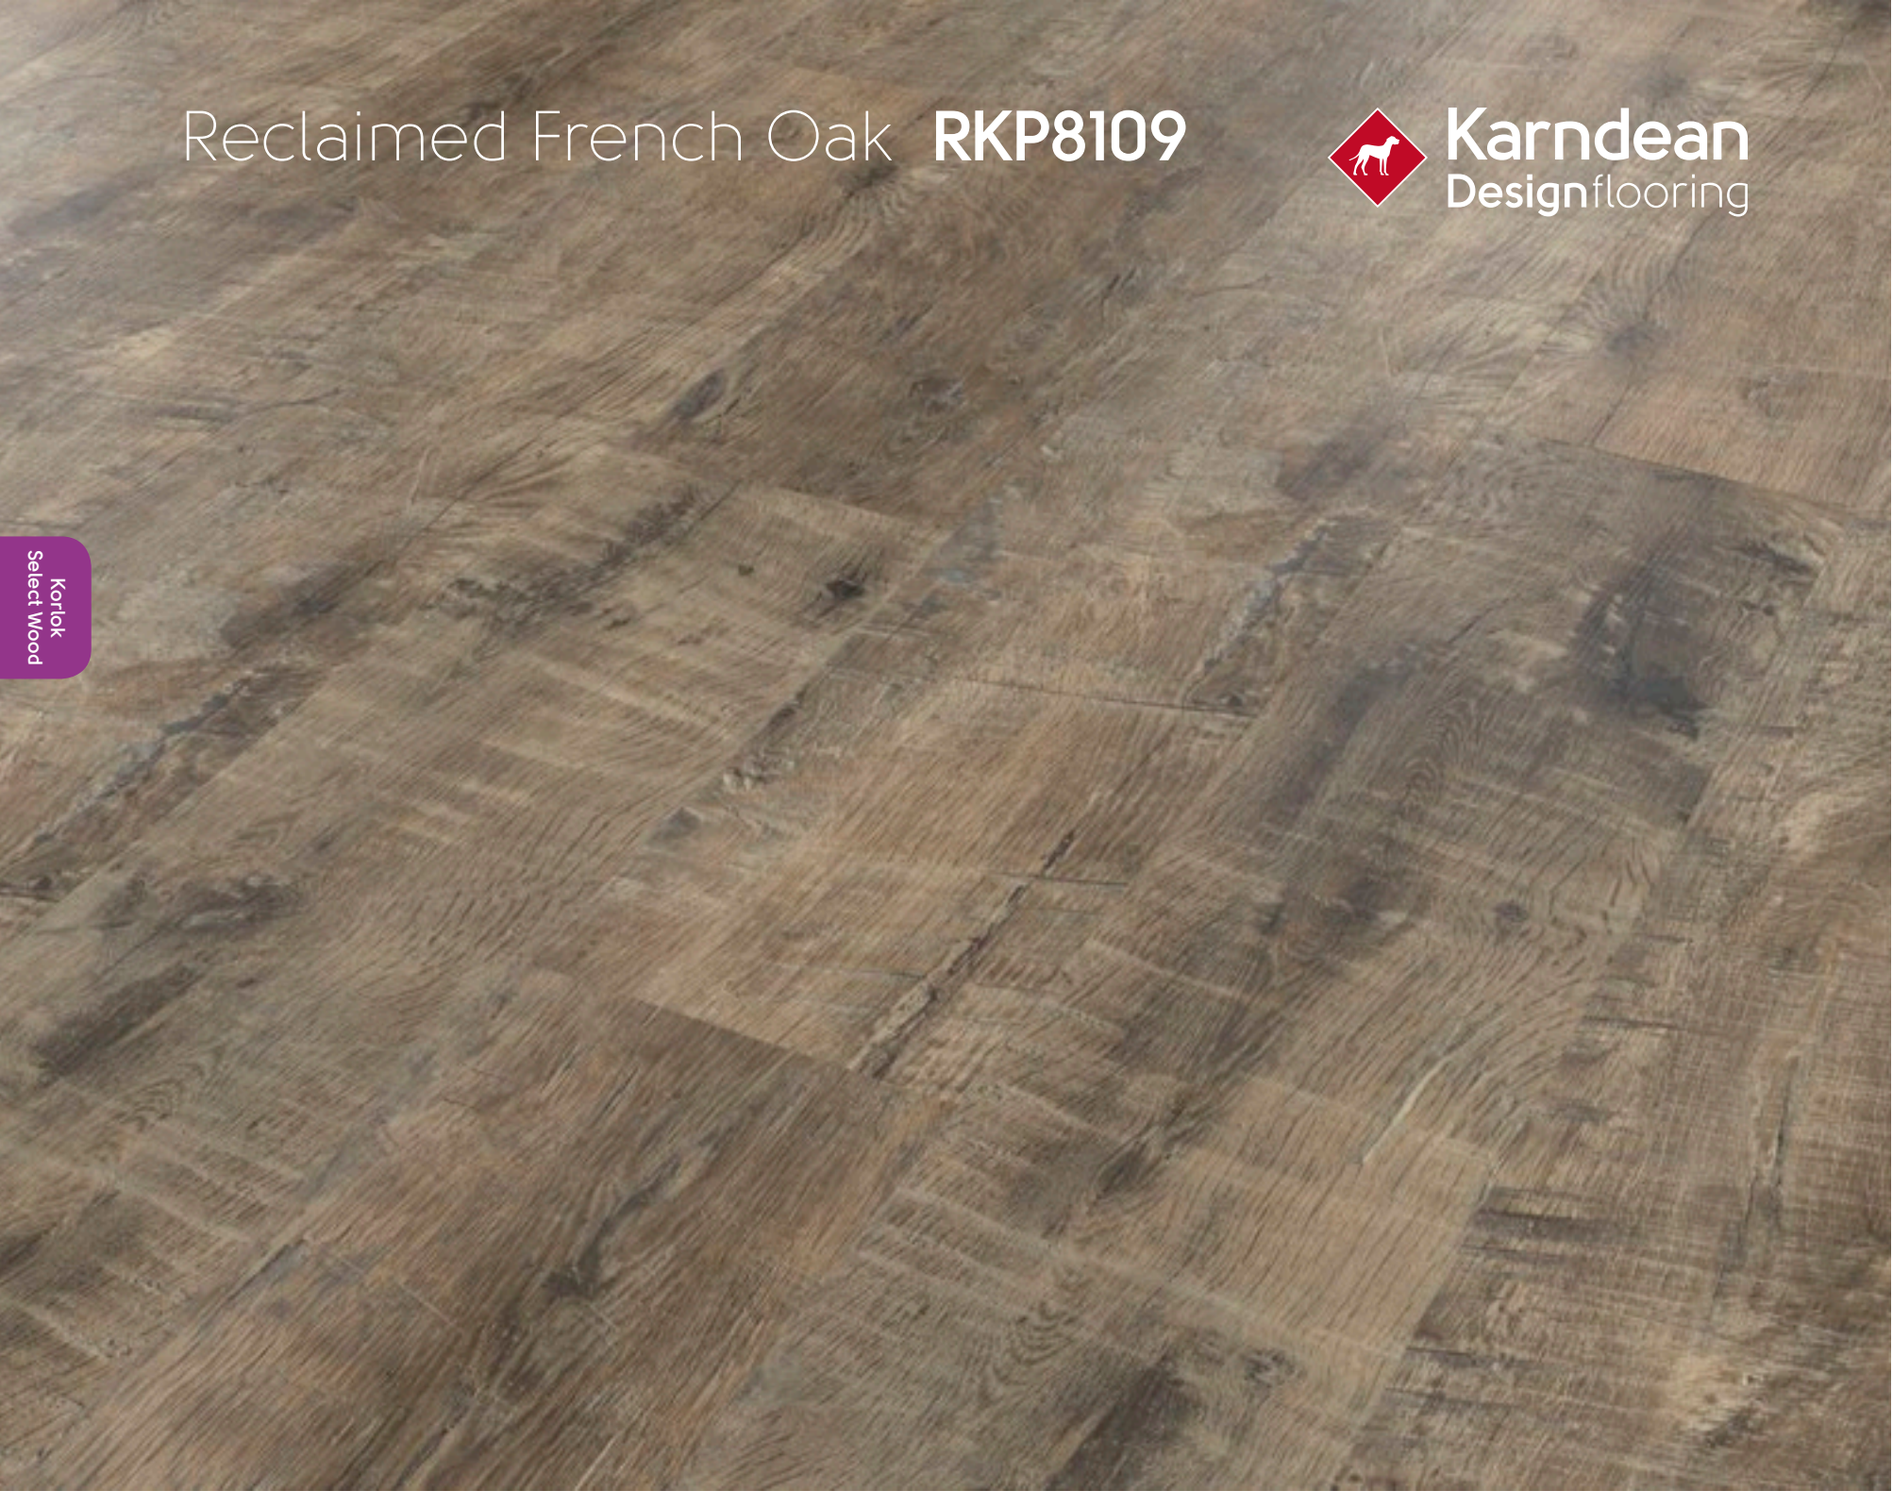

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8109
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Smoked Koa **RKP8126**

Karndean Designflooring

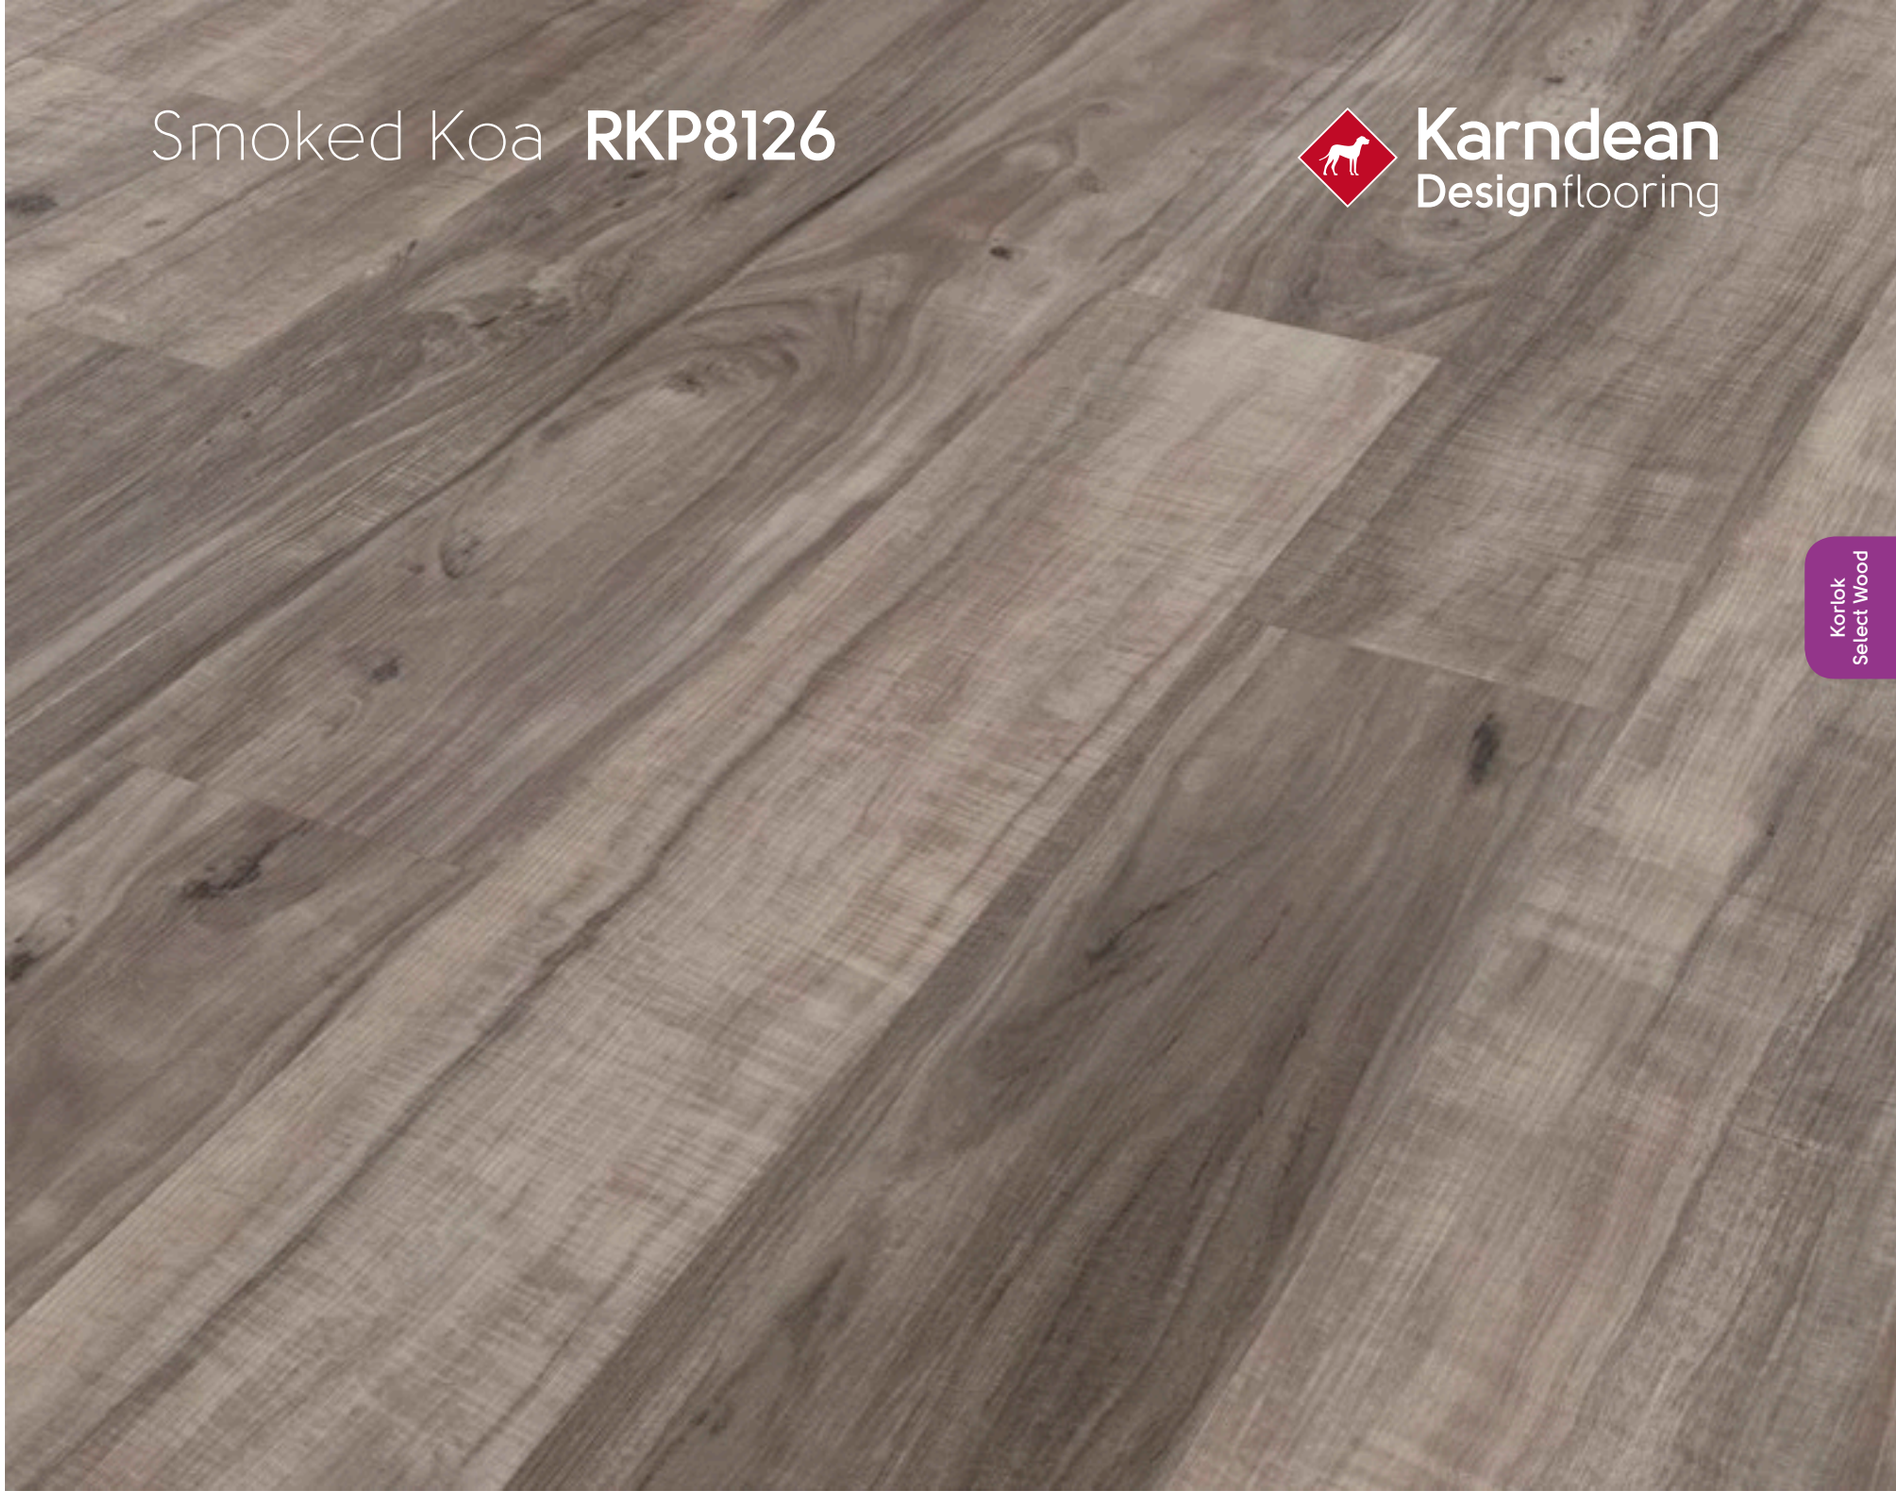

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8126
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Kilauea Koa **RKP8124**

Karndean Designflooring

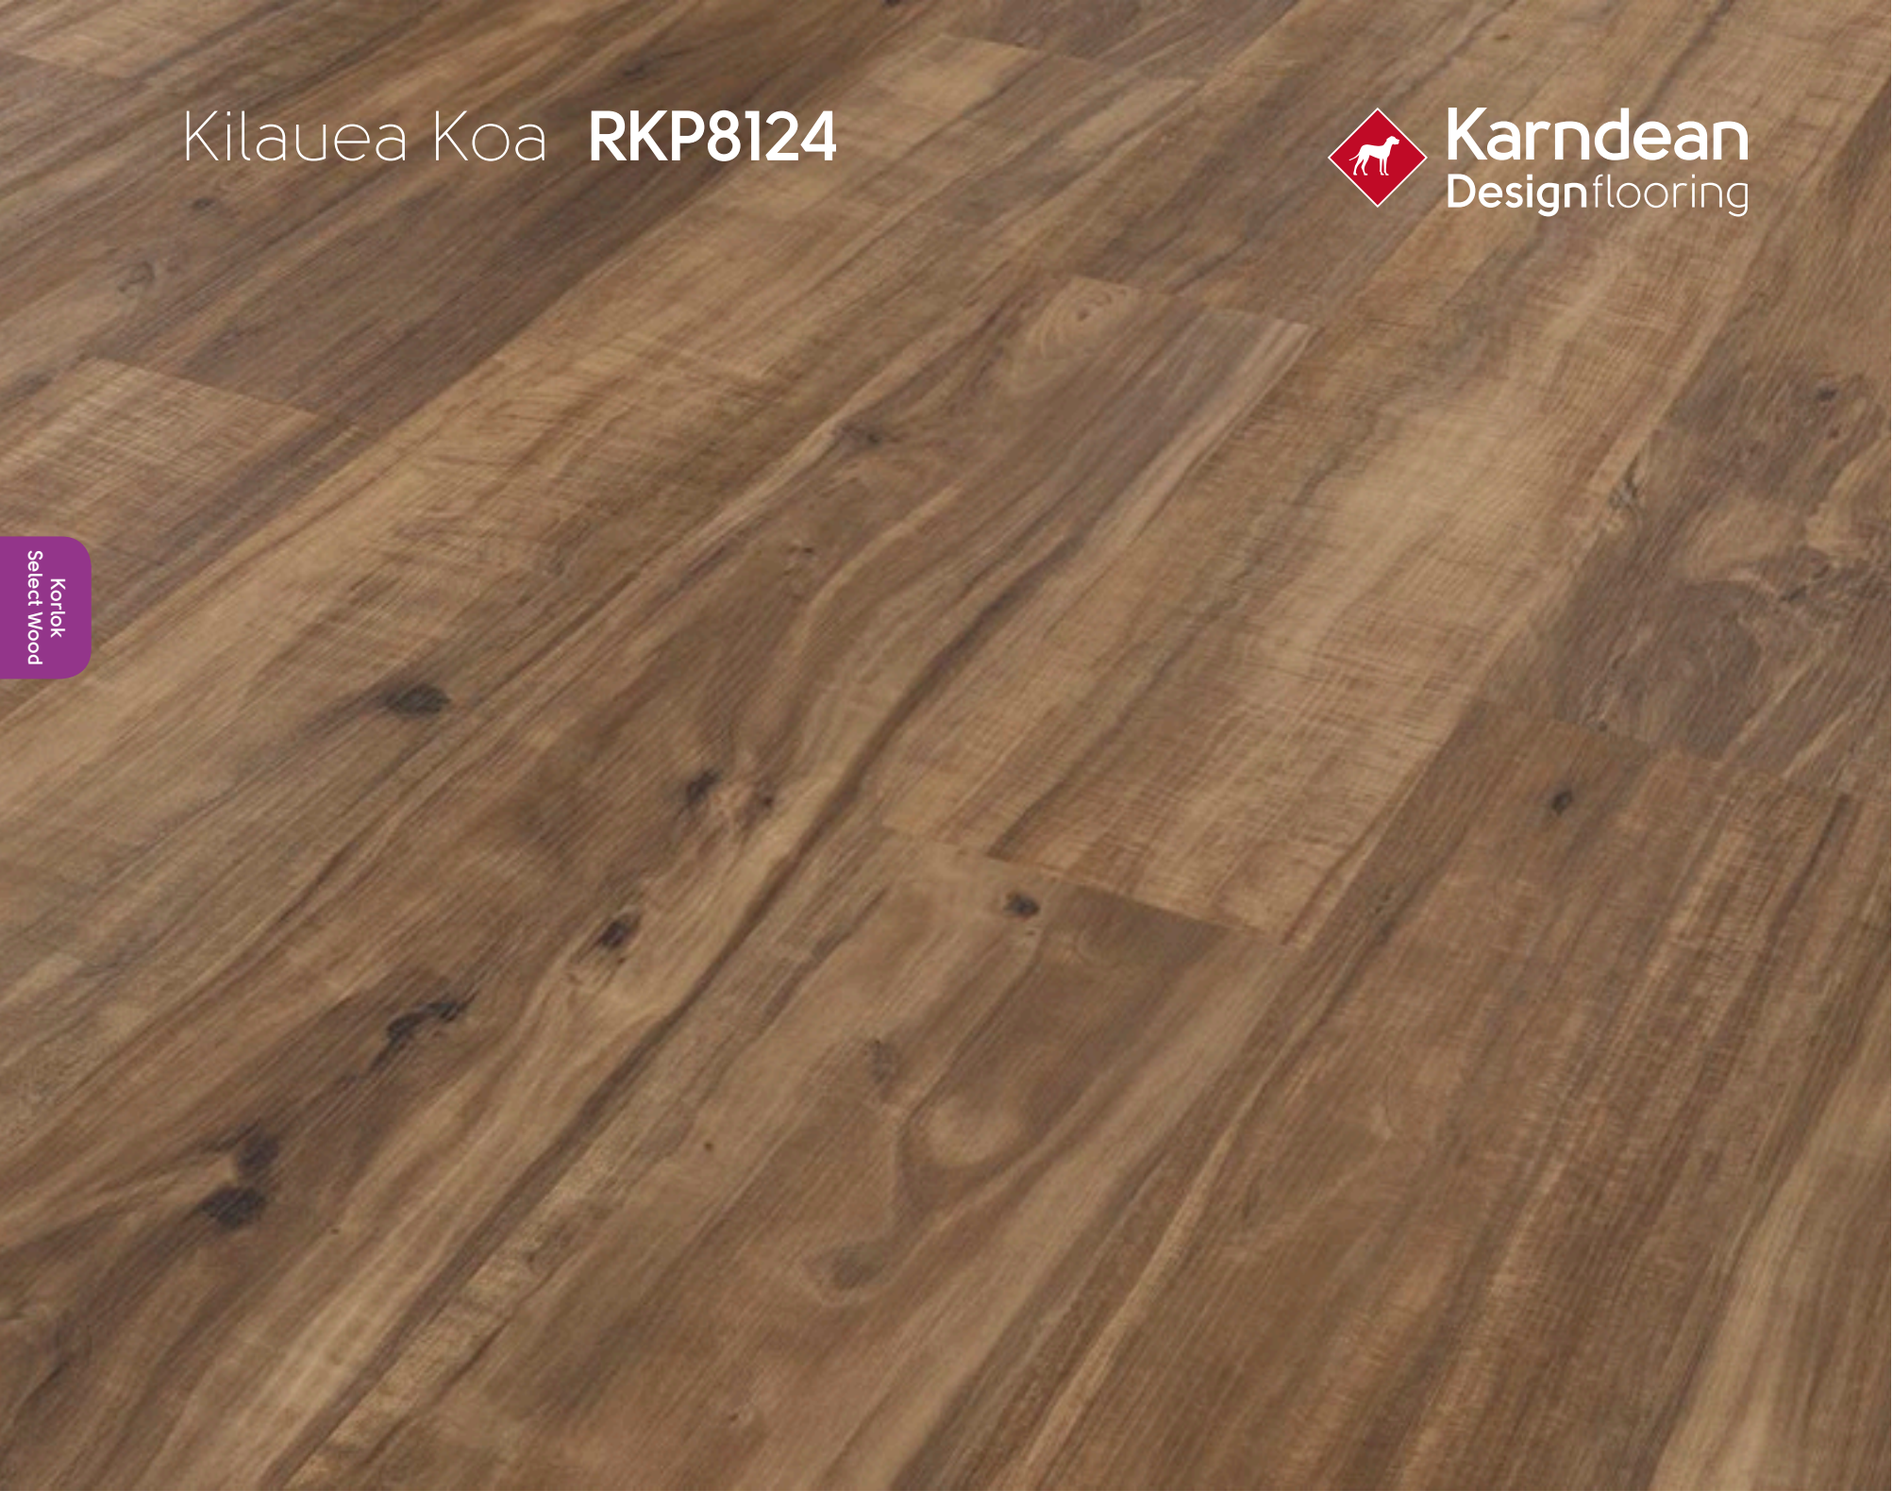

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8124
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Natural Koa **RKP8122**

Karndean Designflooring

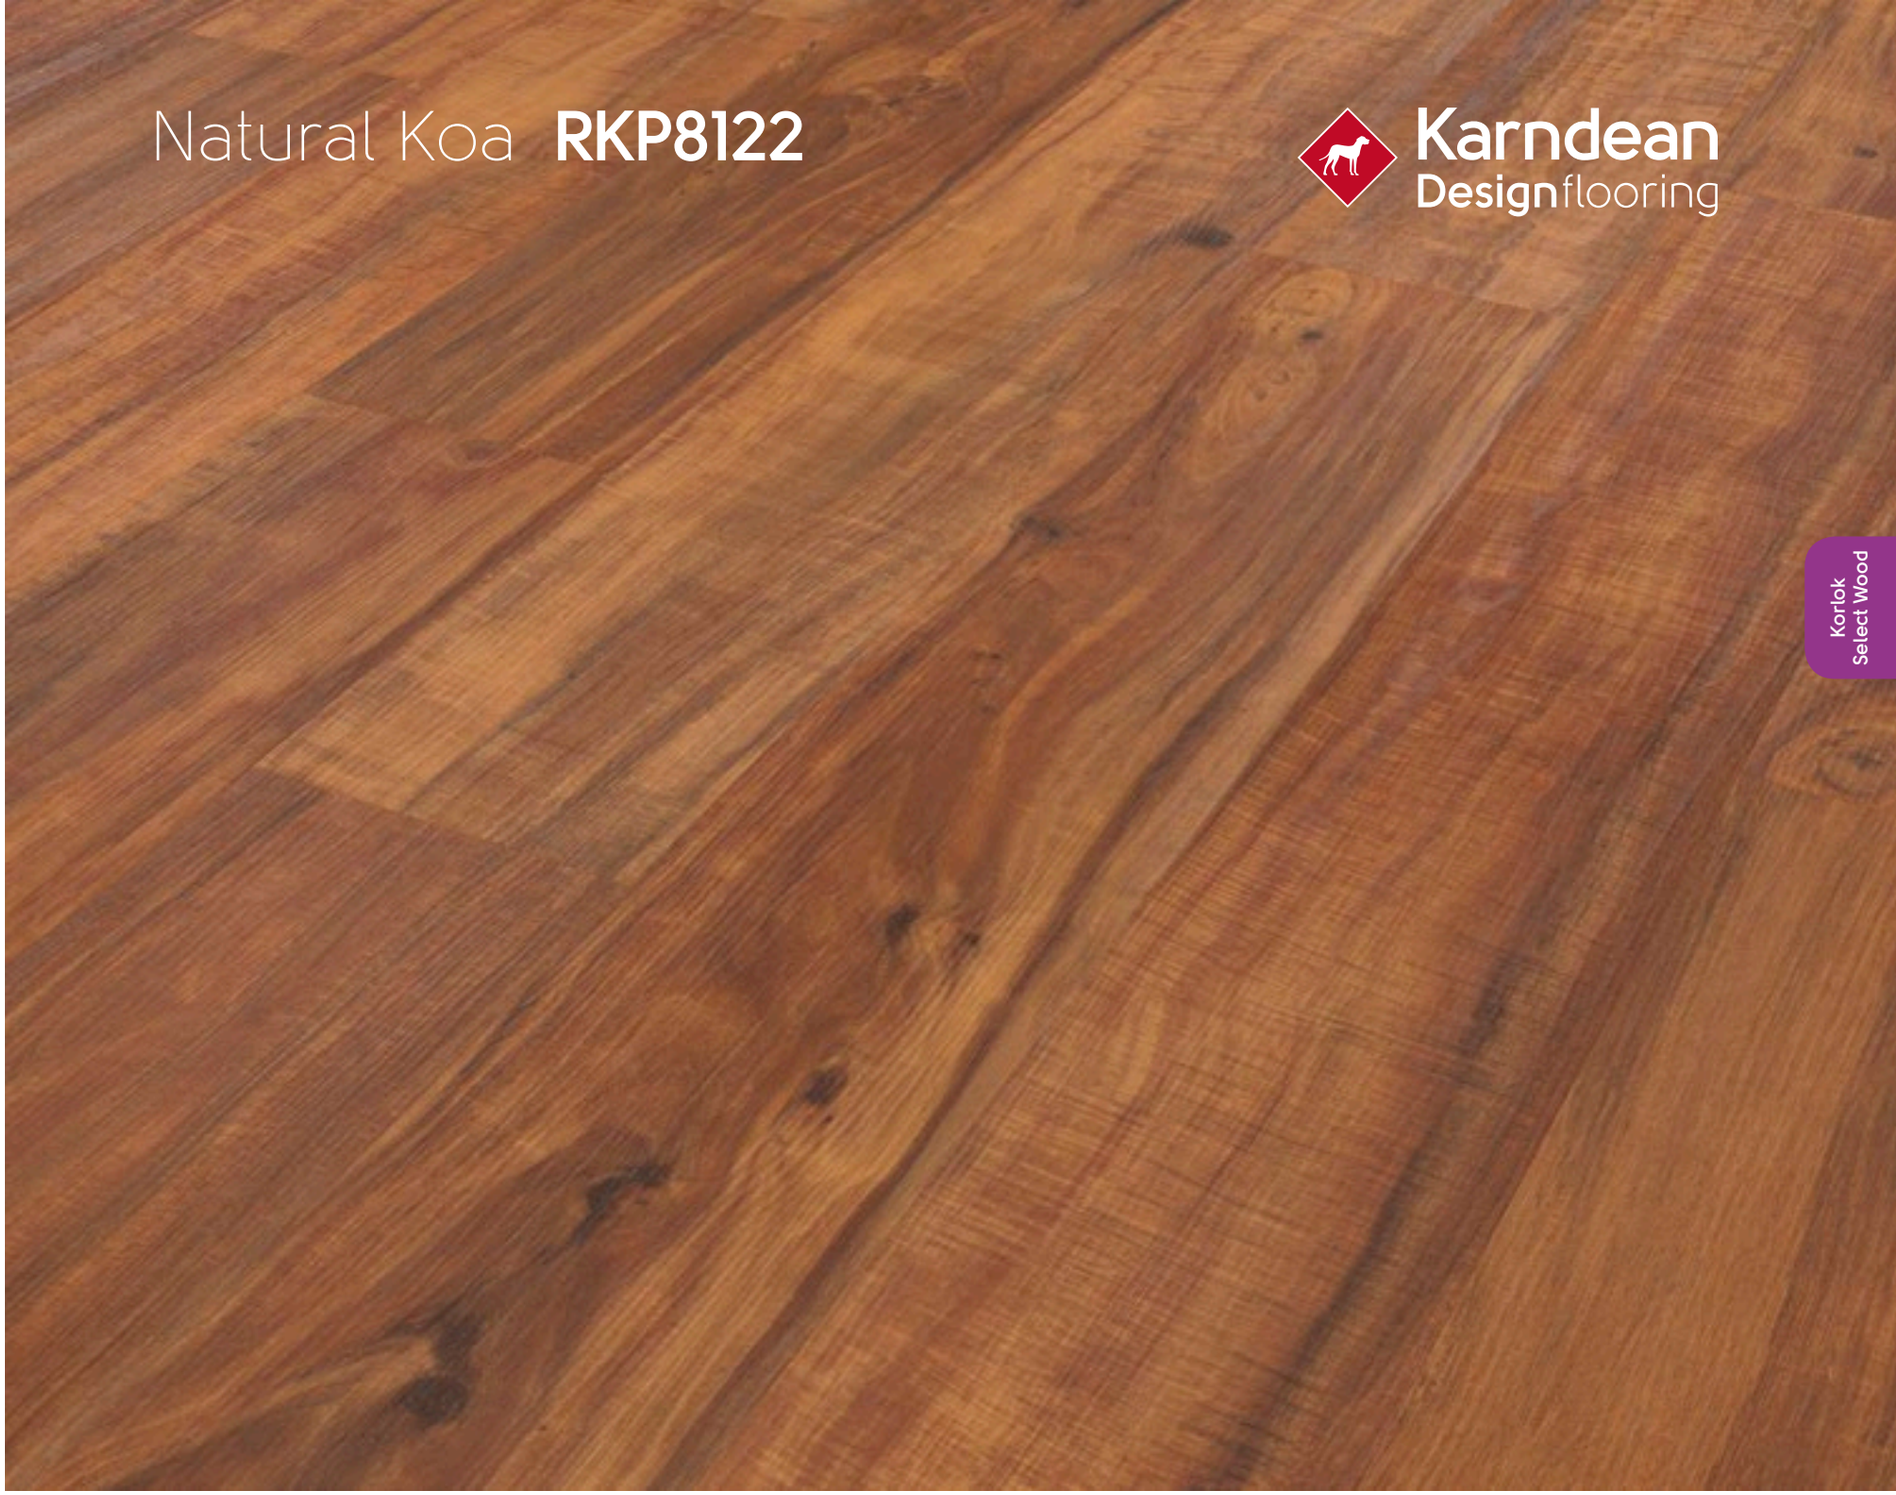

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

25 Year Warranty
HoldFast

TEXT
RKP8122
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Antique French Oak **RKP8110**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

15 Year Warranty HoldFast

TEXT
RKP8110
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Cathedral Oak **RKP8114**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

15 Year Warranty HoldFast

TEXT
RKP8114
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Salvaged Barnwood **RKP8209**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	0.25" (6.5mm)
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8209
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Salvaged Barnwood **SM-RKP8209**

Karndean Designflooring

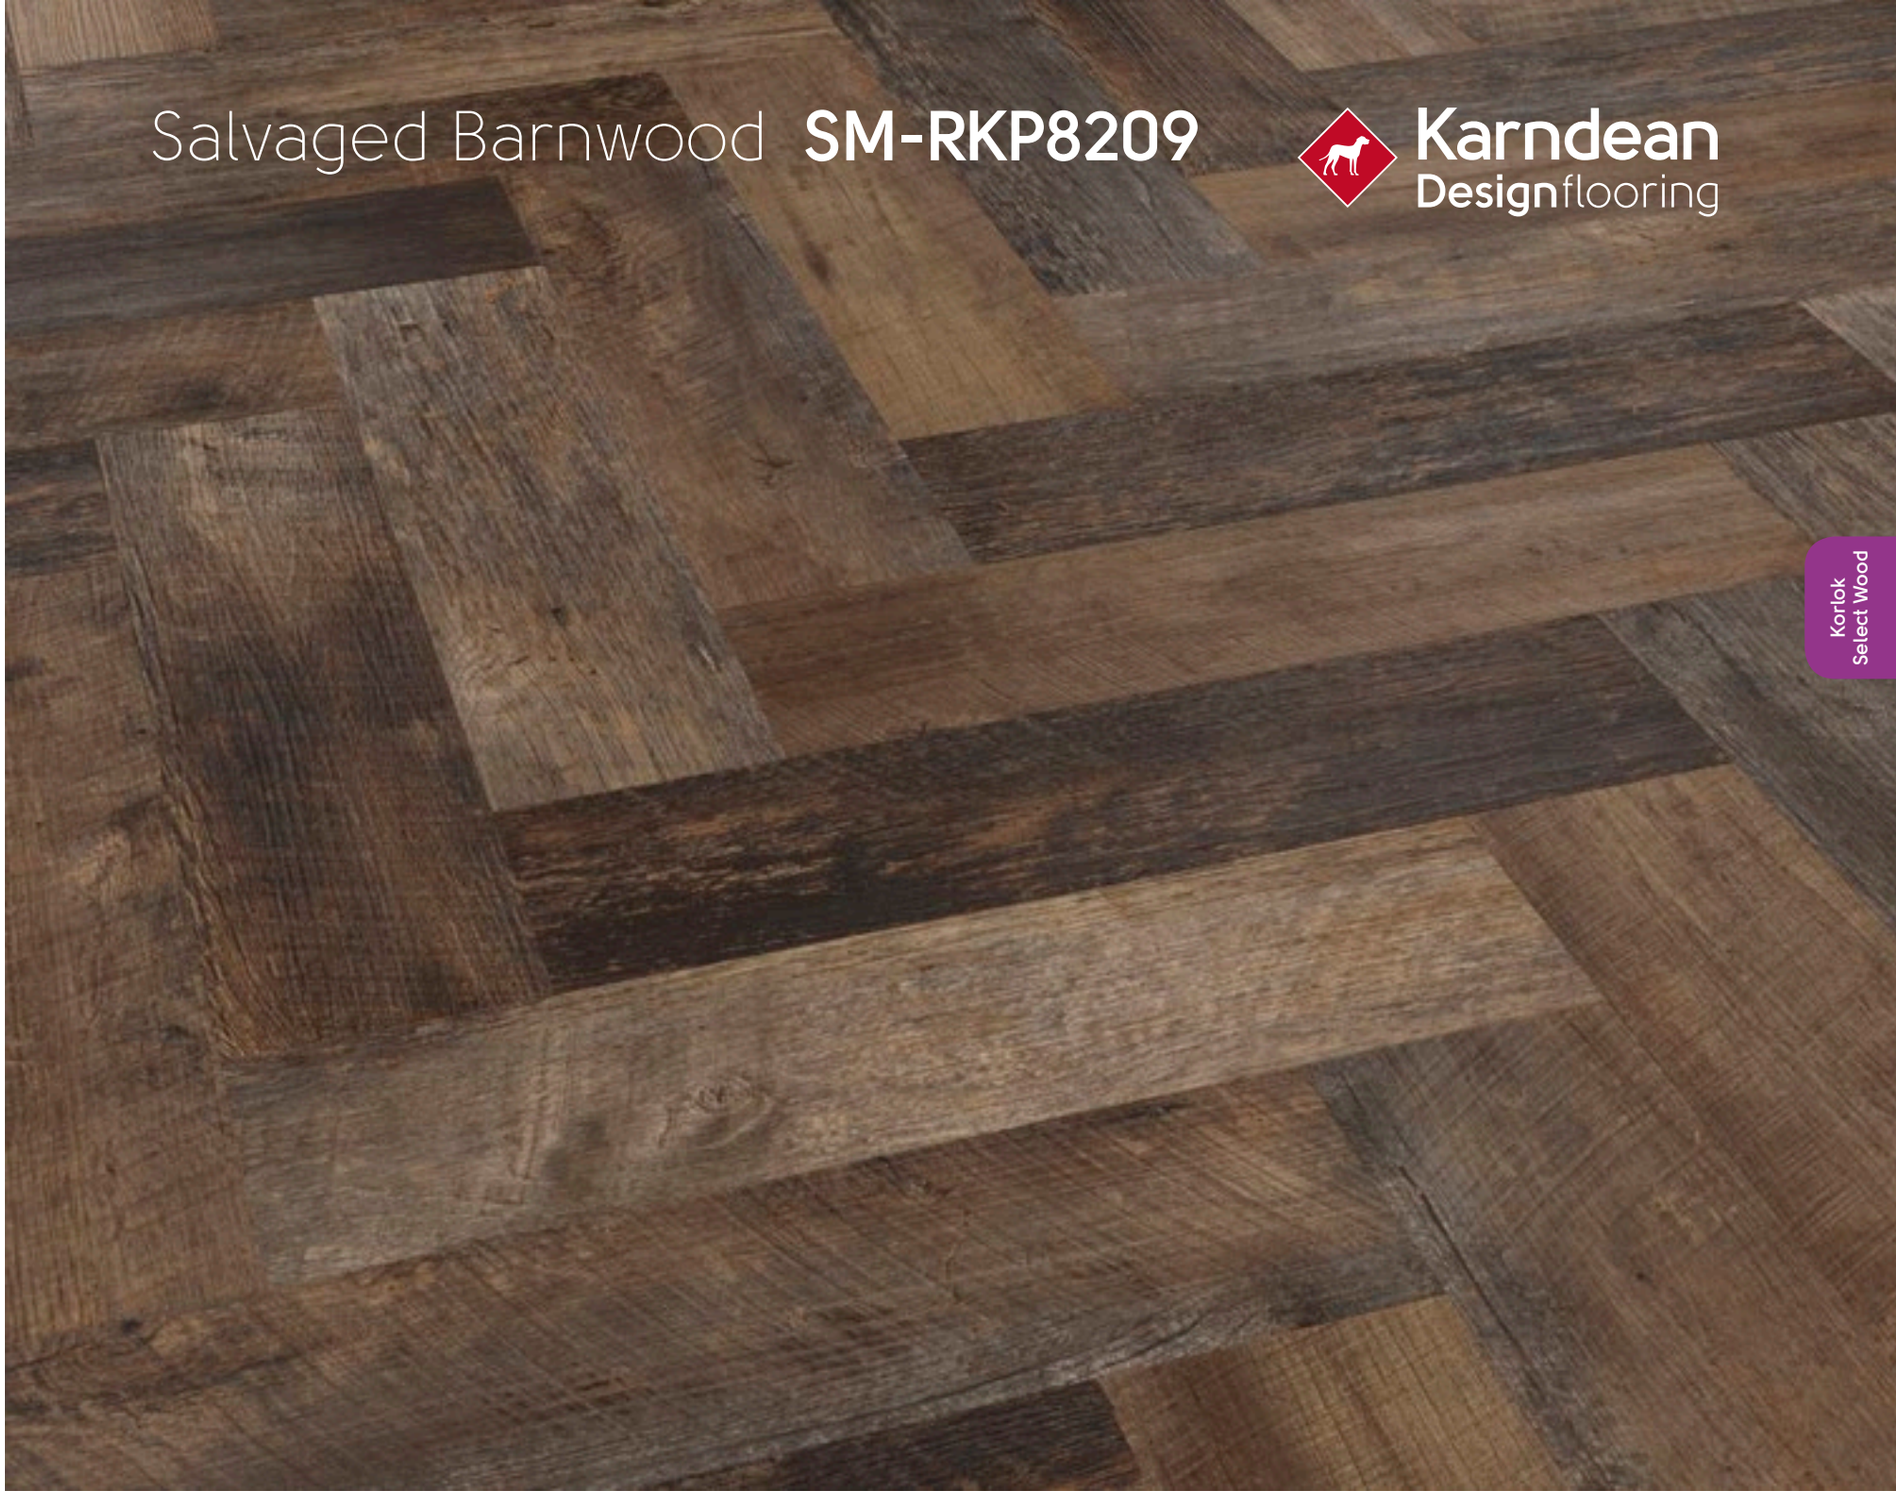

Size	24" x 6" (596mm x 149mm)
Thickness	0.25" (6.5mm)
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Planks/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
SM-RKP8209
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Barnwood **RKP8211**

Karndean Designflooring

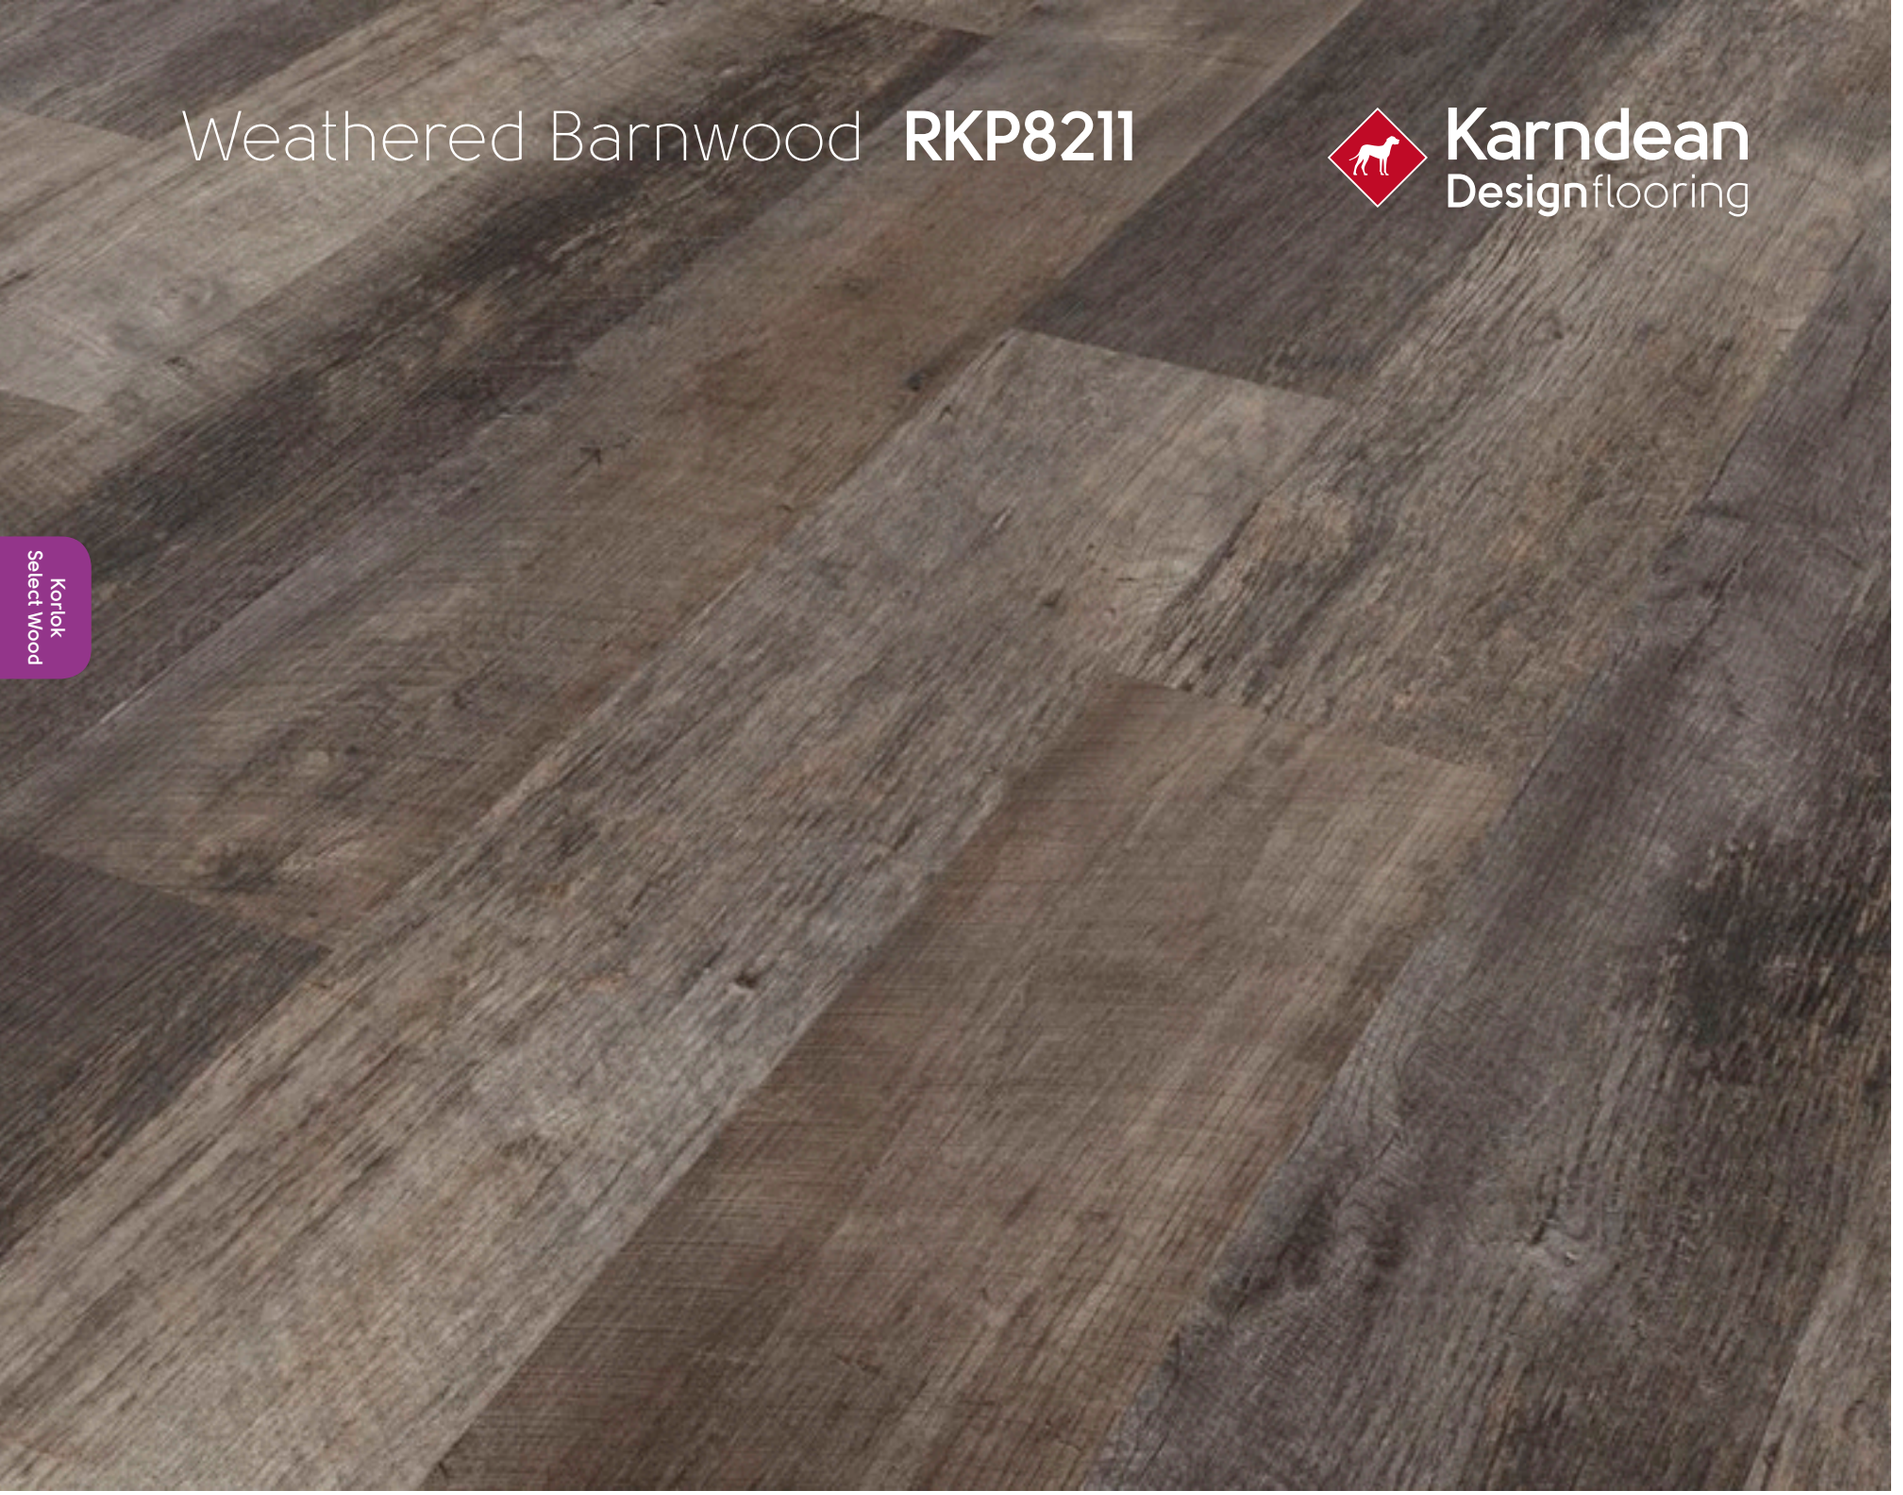

Size	56" x 9" (1420mm x 225mm)
Thickness	0.25" (6.5mm)
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:


Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8211
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Barnwood SM-RKP8211

Karndean Designflooring

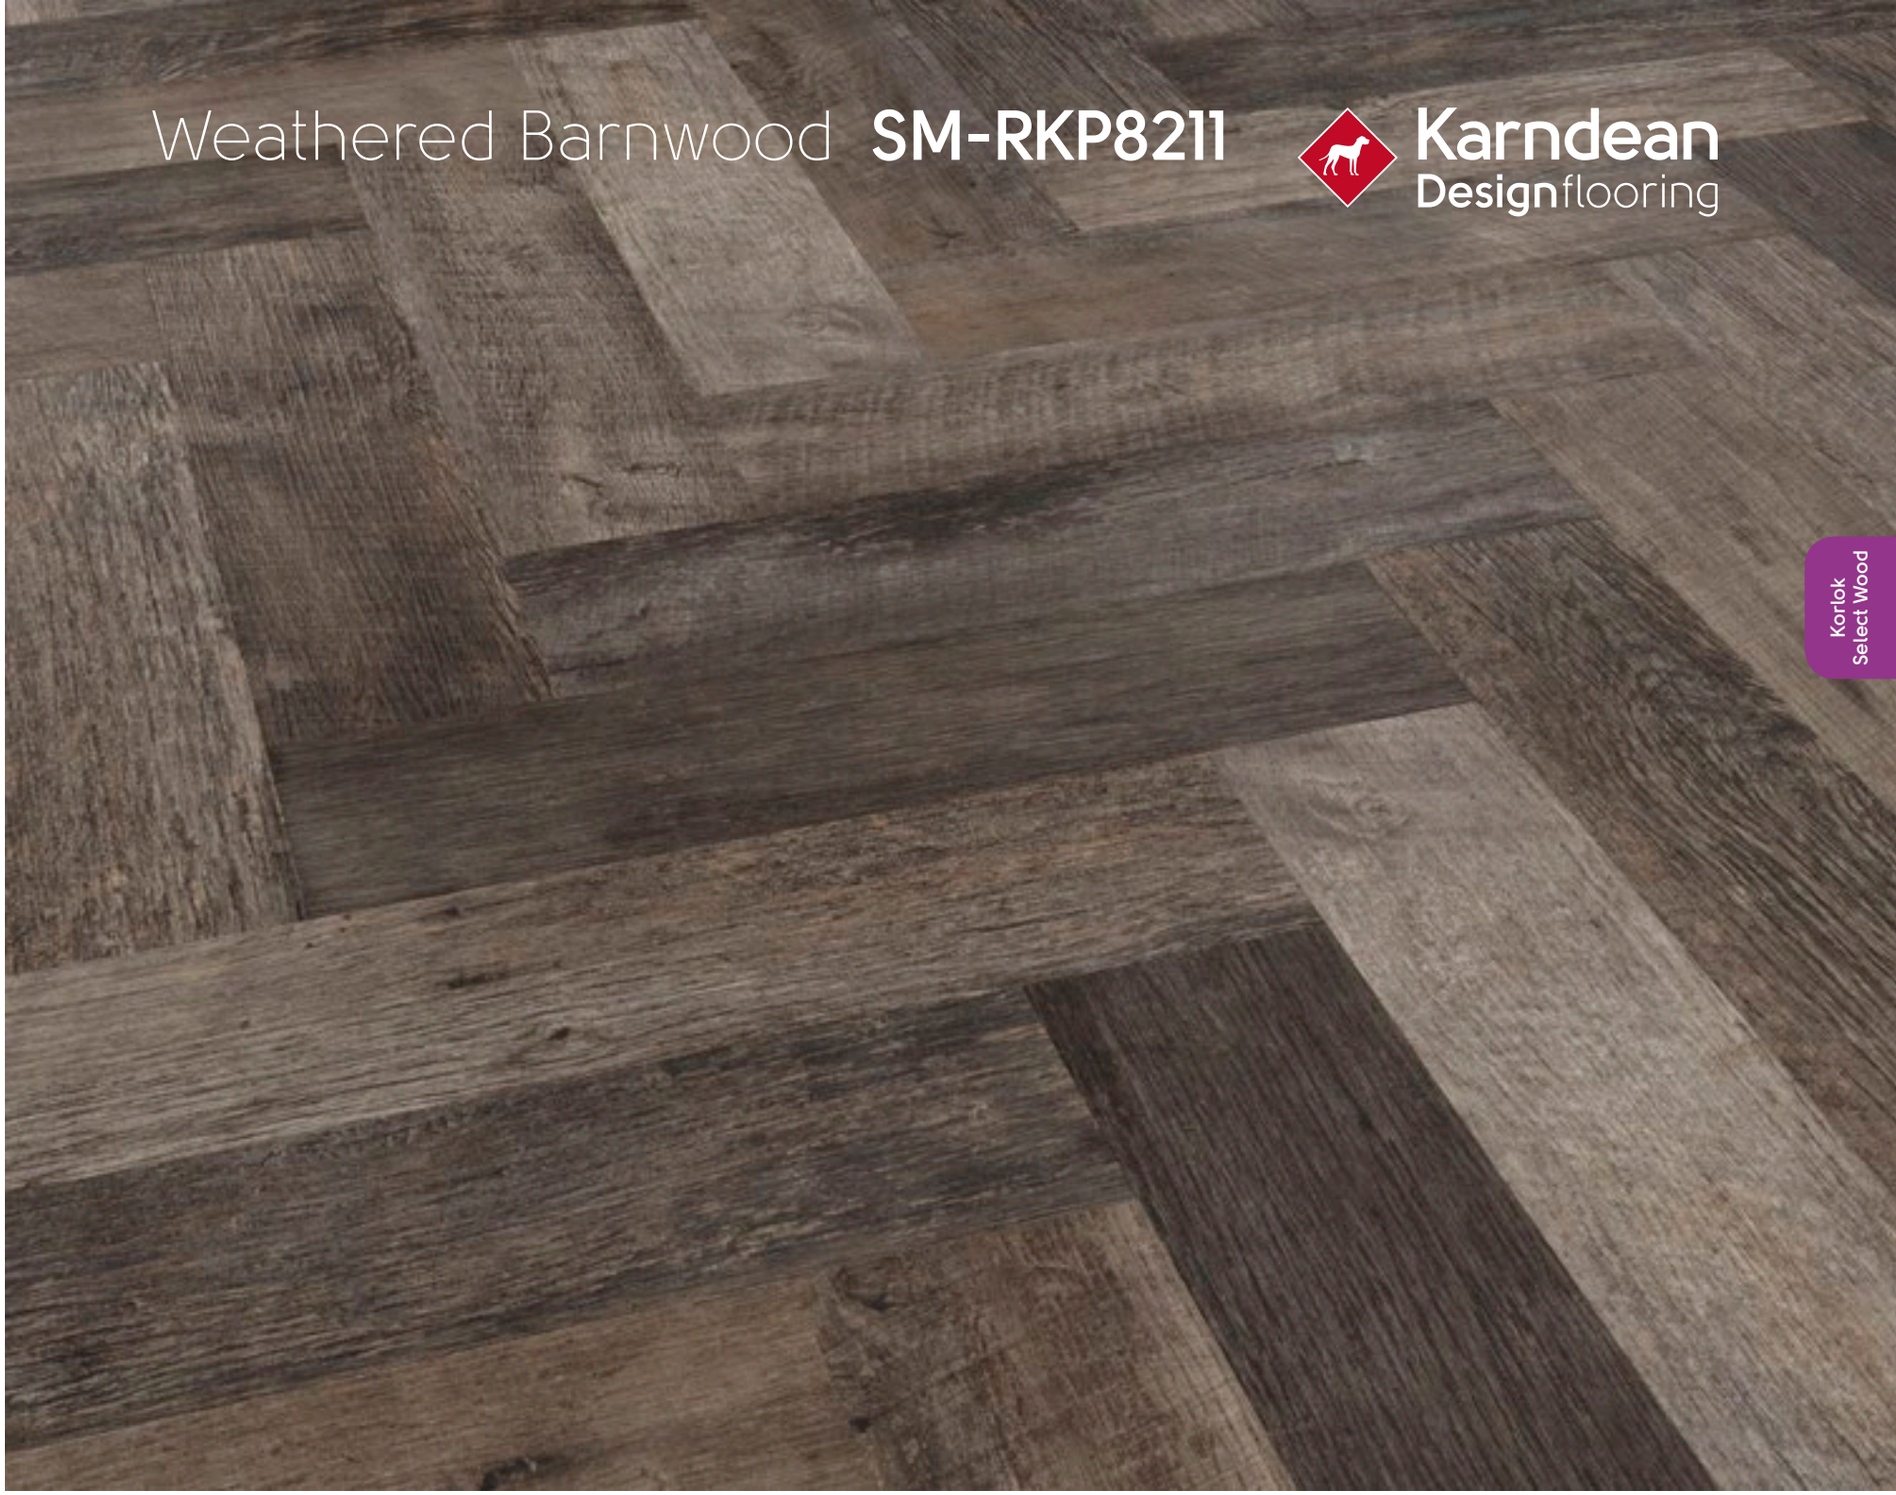

Size	24" x 6" (596mm x 149mm)
Thickness	0.25" (6.5mm)
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Planks/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

25 Year Warranty HoldFast

TEXT
SM-RKP8211
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Washed Velvet Ash **RKP8102**

Karndean Designflooring



Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 327

15 Year Warranty
HoldFast

TEXT
RKP8102
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.



Silver Barnwood **RKP8208**

Korlok Reserve **Wood**

48" x 7" (1220mm x 179mm)*


Page 362
Vintage Oregon Oak **RCP6531**


Page 359
Weathered Oak **RCP6532**


Page 360
North American Oak **RCP6533**


Page 358
Limed Coastal Oak **RCP6534**


Page 363
Aged Spanish Oak **RCP6535**


Page 361
Natural Oiled Oak **RCP6536**


Page 367
Tavern Oiled Oak **RCP6537**


Page 369
Limed Charcoal Oak **RCP6538**


Page 365
Charred Weathered Pine **RCP6539**


Page 366
Provincial Oiled Oak **RCP6540**


Page 364
Grey Oiled Oak **RCP6541**


Page 368
Texan Whiskey Walnut **RCP6542**

* Actual product size: 48.03" x 7.05"

Korlok Reserve **Wood**

Korlok Reserve | RIGID CORE

The Korlok Reserve collection combines cutting-edge technology with our original designs to create a beautiful and reliable rigid core option that accommodates imperfect subfloors and areas in need of additional noise reduction qualities. These 48" x 7" planks are equipped with a 2G locking mechanism and feature designs developed from oiled, limed and aged oaks, as well as pine and walnut.



Aged Spanish Oak **RCP6535**

	Standard	Result
Thickness		6.5 mm
Size		48.03" x 7.05" (1220 mm x 179 mm)
Box quantity		10 Planks/23.51 sq.ft.
Locking system*		2G
Wear layer		20 mil (0.5 mm)
Surface treatment		PU coating
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Flammability	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry >0.8)
Staining resistance	ASTM F925	Pass (No change)
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	-1.4 kV
Abrasion resistance	ASTM D4060	Pass 20000 Cycles
Dimensional stability	ASTM F2199	Pass (width -0.003"/lin.ft) Pass (length -0.003"/lin.ft)
Static load	ASTM F970	Pass 250 psi
Small ball impact	NALFA 3.6	Pass class 4
Large ball impact	NALFA 3.5	Pass class 4
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 21 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Indentation - residual	ASTM F 1914	Pass
Thickness swell	NALFA 3.2	Pass class 4
Chair resistance	NALFA 3.9	Pass class 4
Surface bond	NALFA 3.10	Pass class 4
Adhesive	None required; Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Valinge Innovations.
** Subject to terms, see page: 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Limed Coastal Oak **RCP6534**

Karndean Designflooring



Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6534
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Oak **RCP6532**

Karndean Designflooring

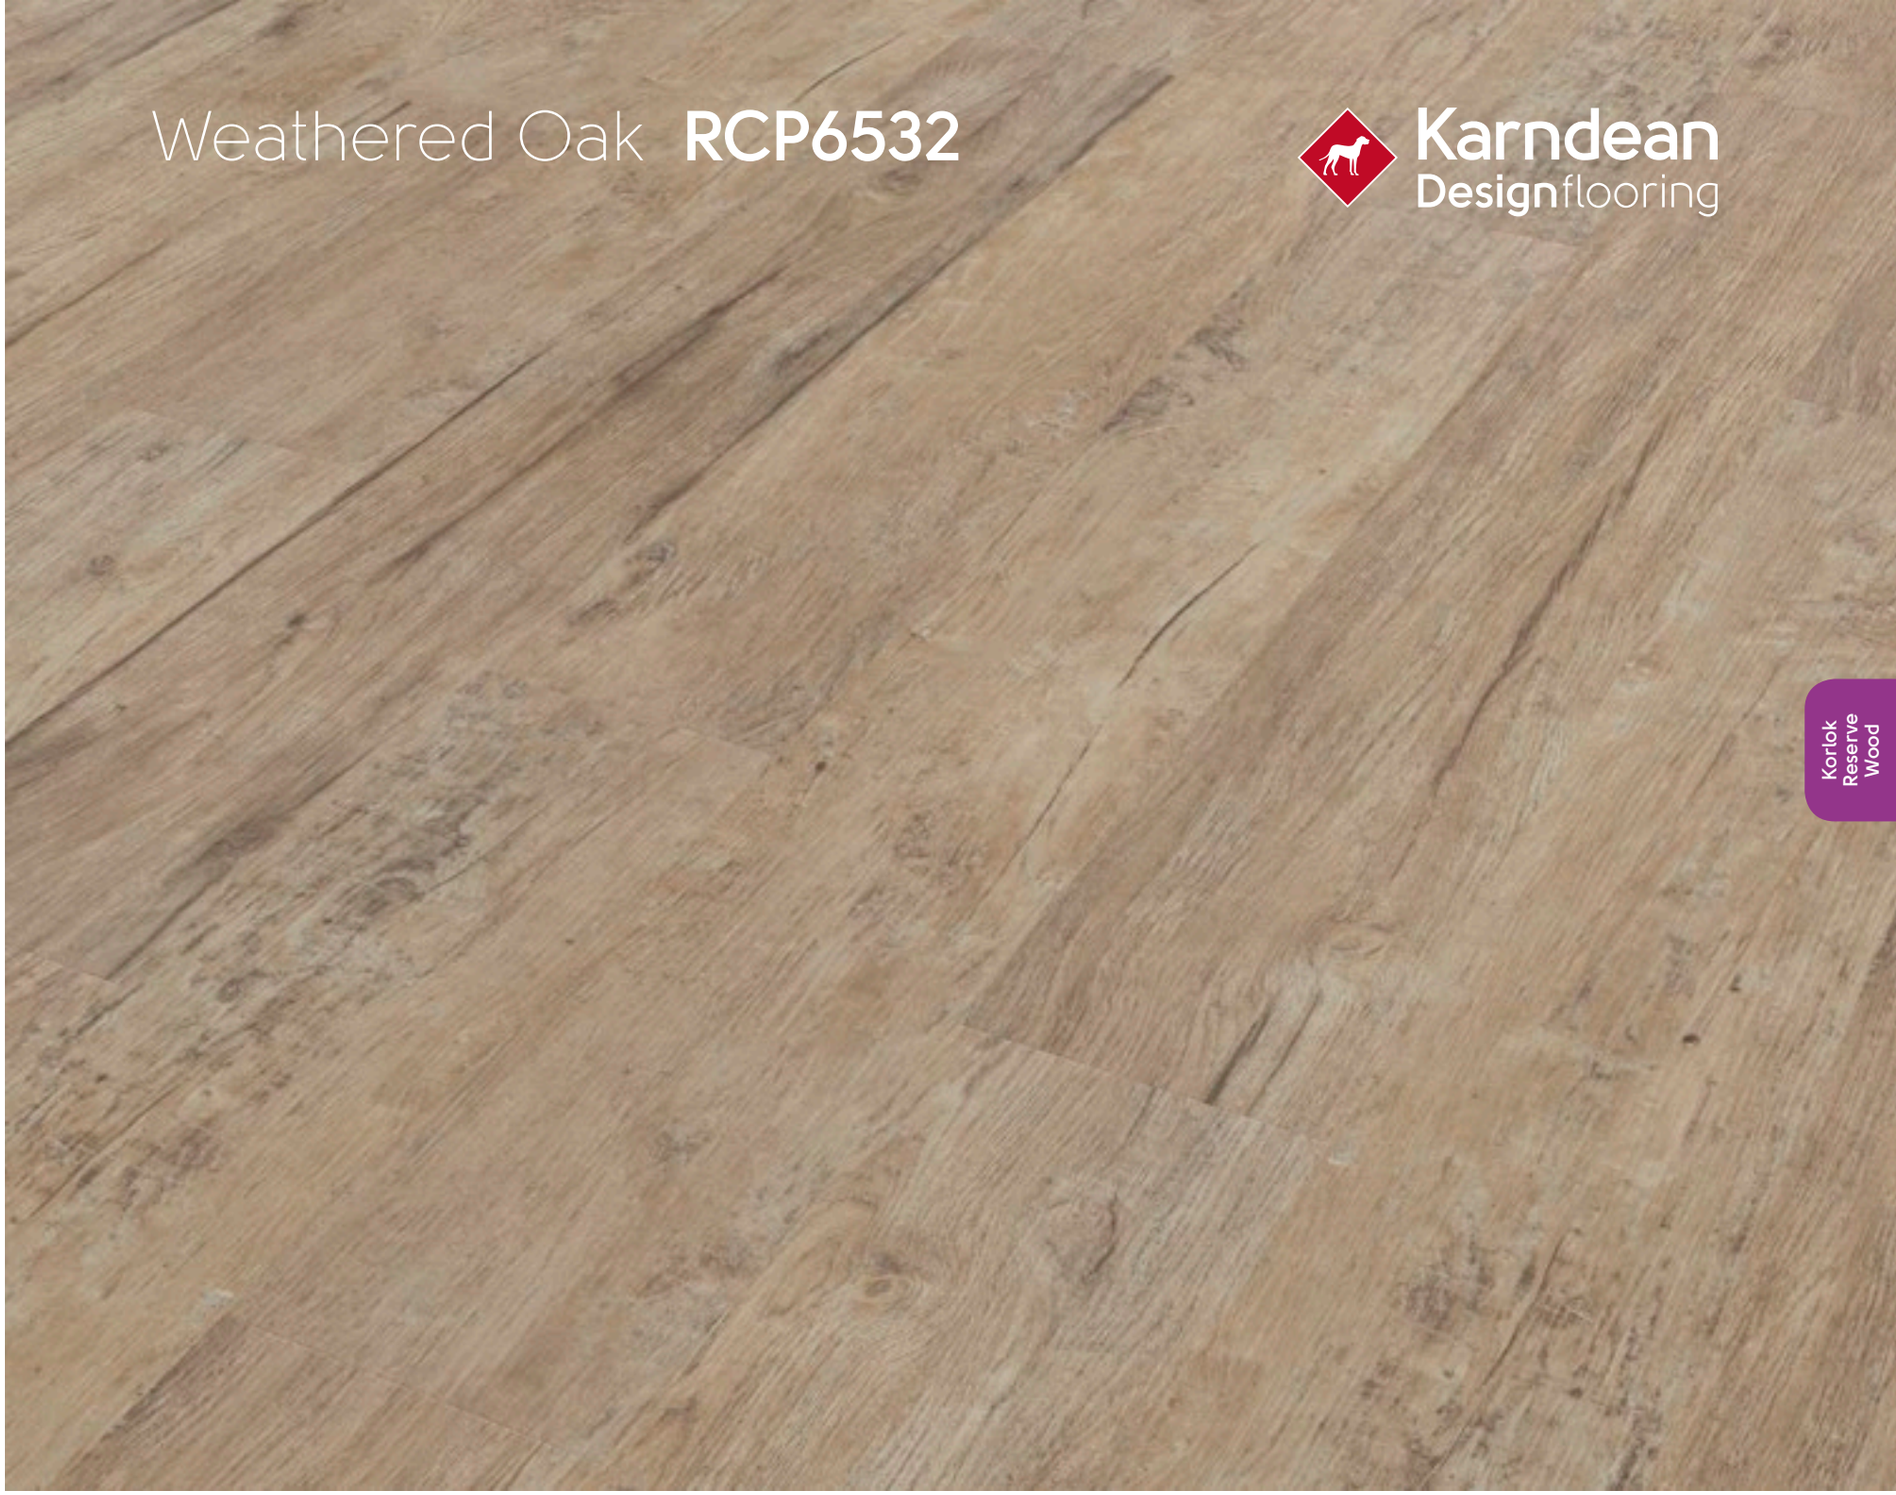

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 357

TEXT
RCP6532
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

North American Oak **RCP6533**

Karndean Designflooring



Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6533
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Natural Oiled Oak **RCP6536**

Karndean Designflooring

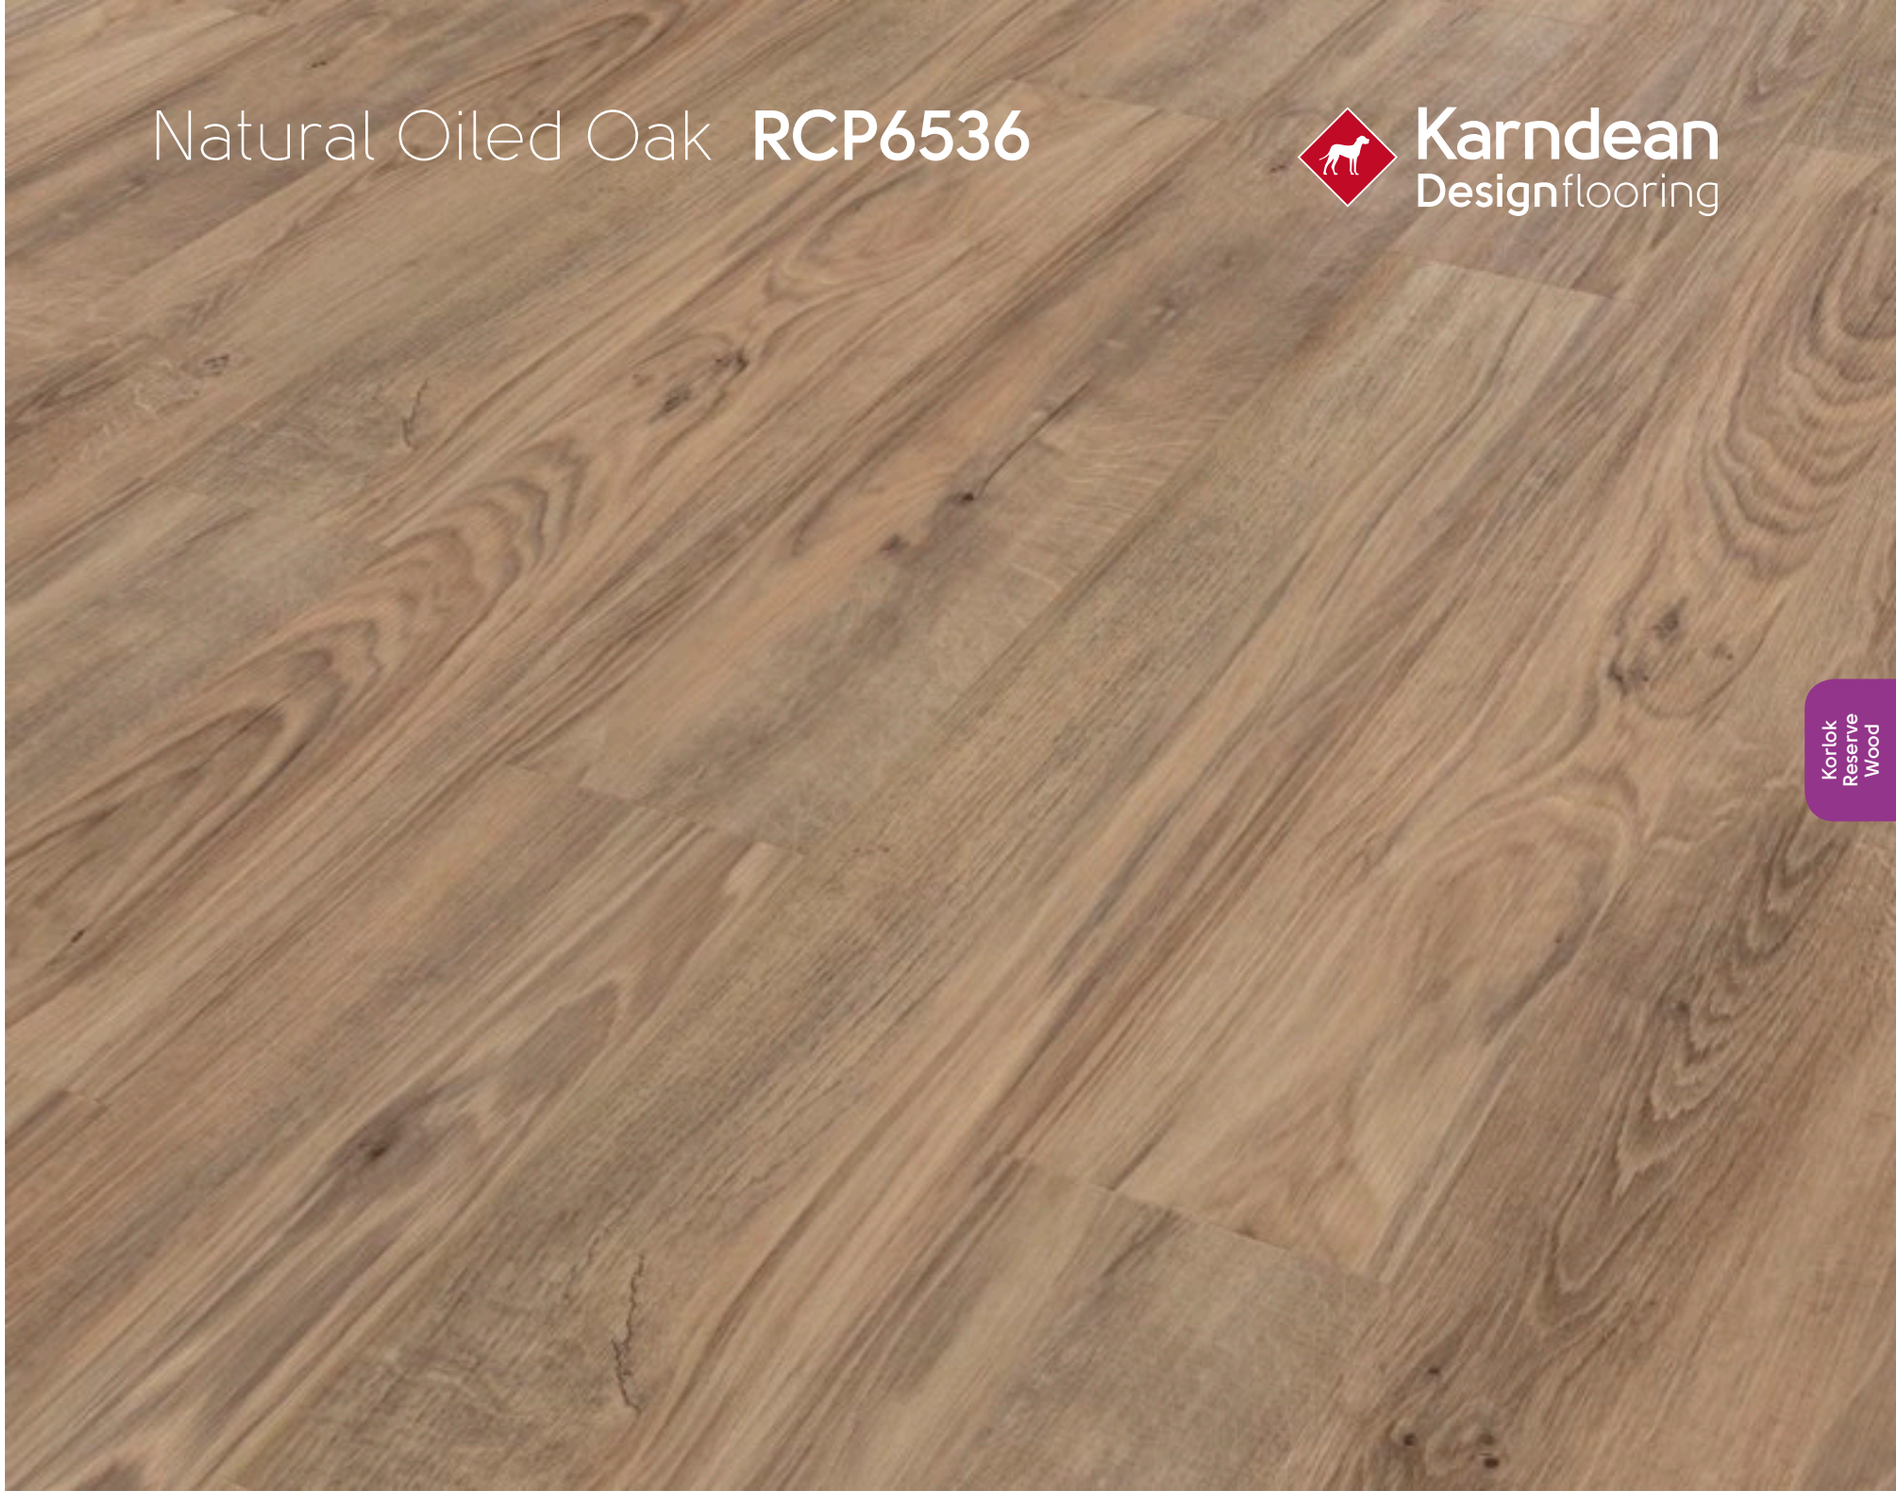

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 357

TEXT
RCP6536
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Vintage Oregon Oak **RCP6531**

Karndean Designflooring



Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6531
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aged Spanish Oak **RCP6535**

Karndean Designflooring

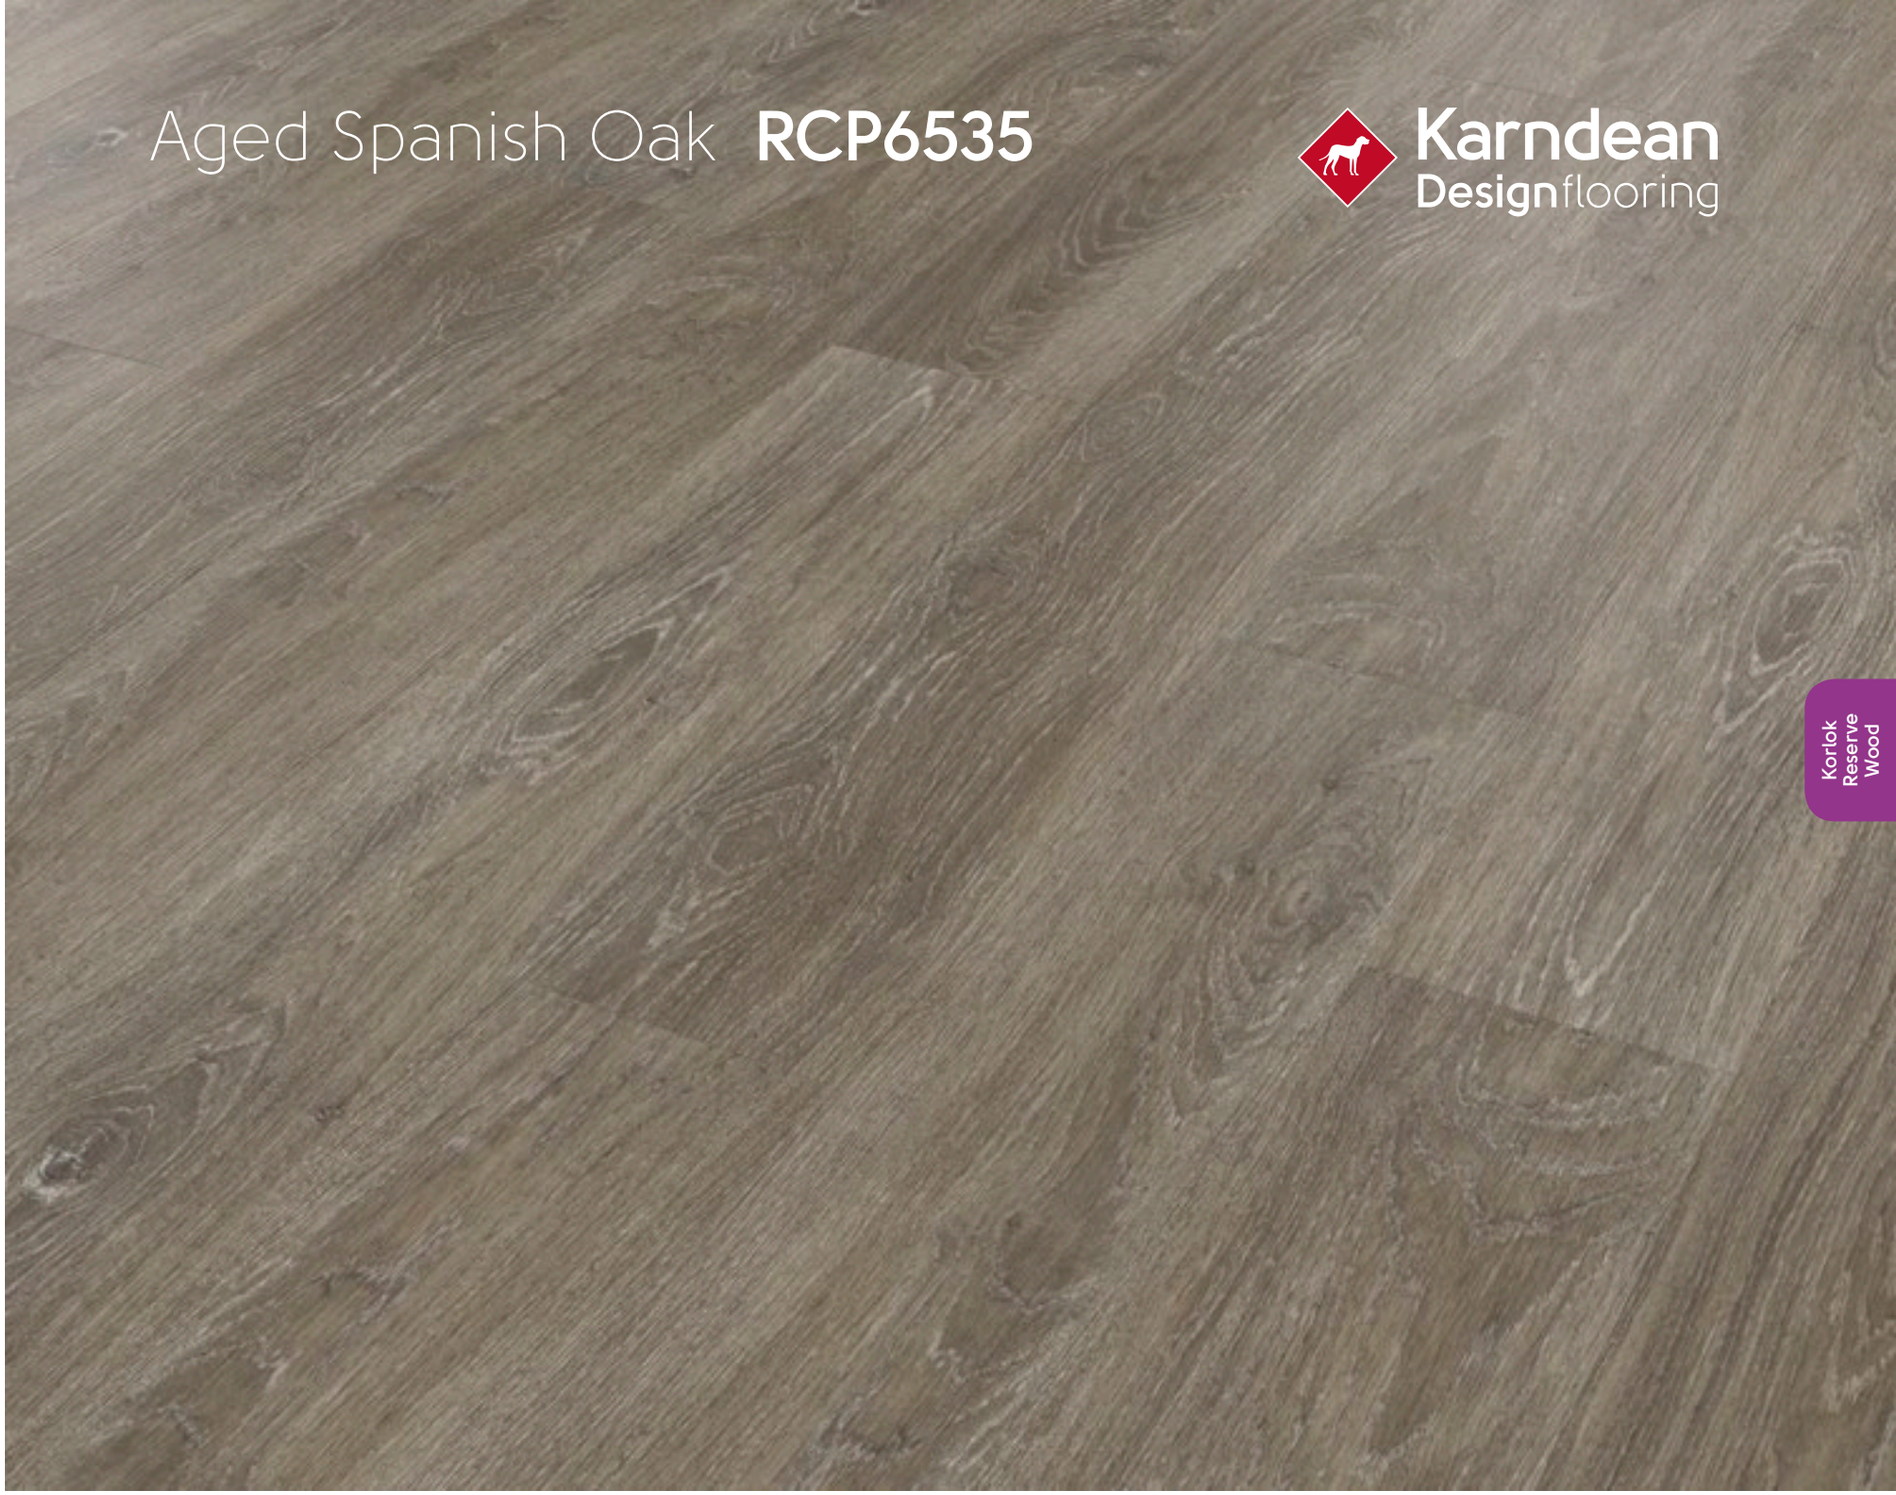

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6535
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Grey Oiled Oak **RCP6541**

Karndean Designflooring

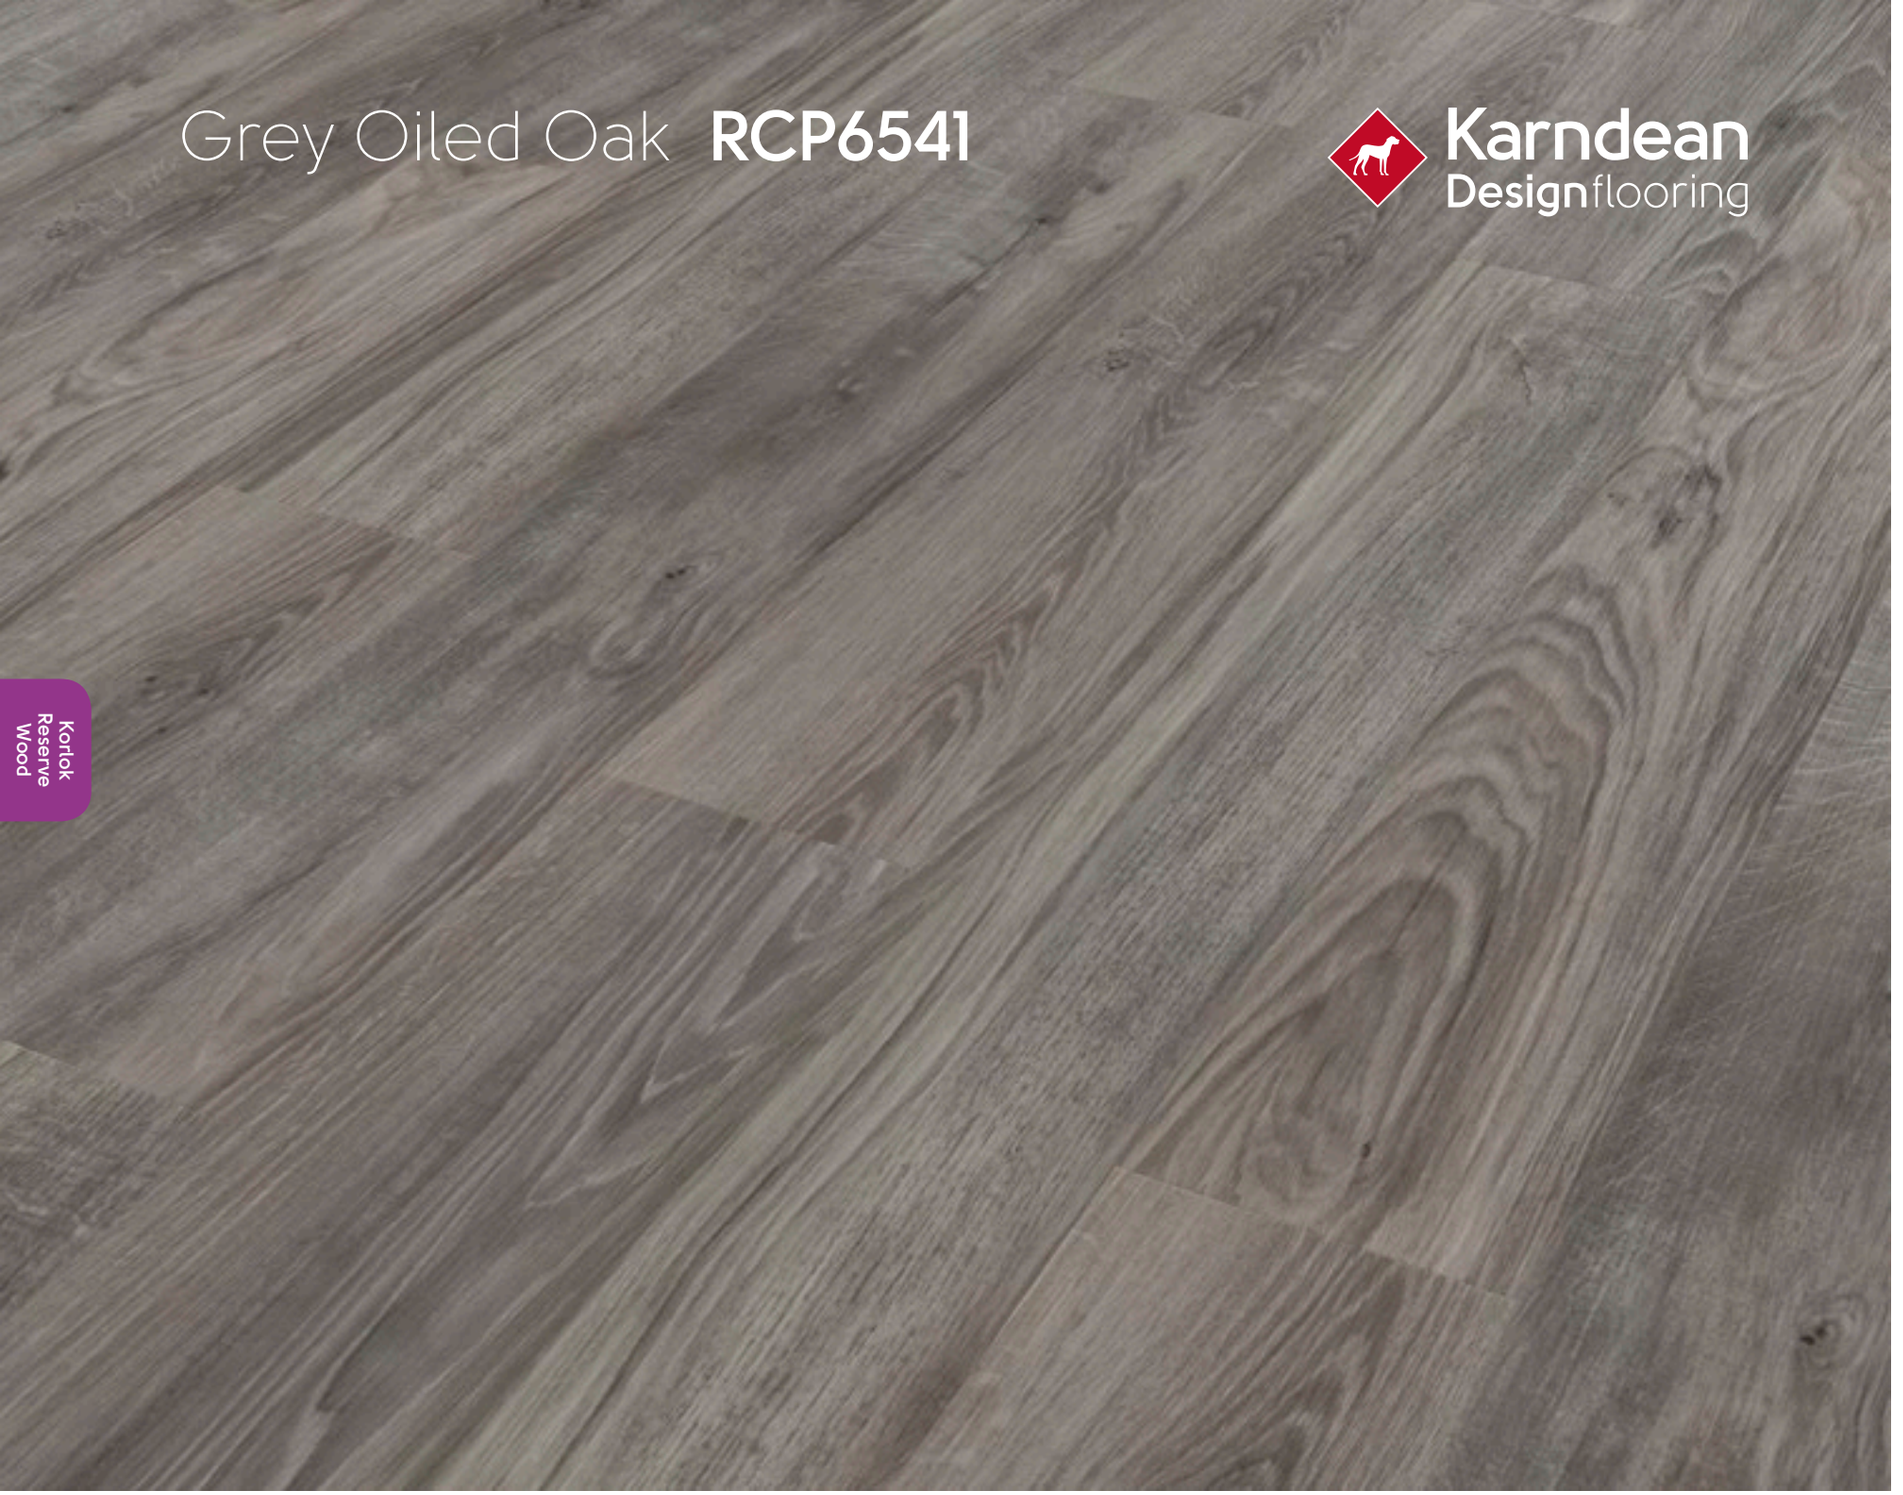

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6541
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Charred Weathered Pine **RCP6539**

Karndean Designflooring

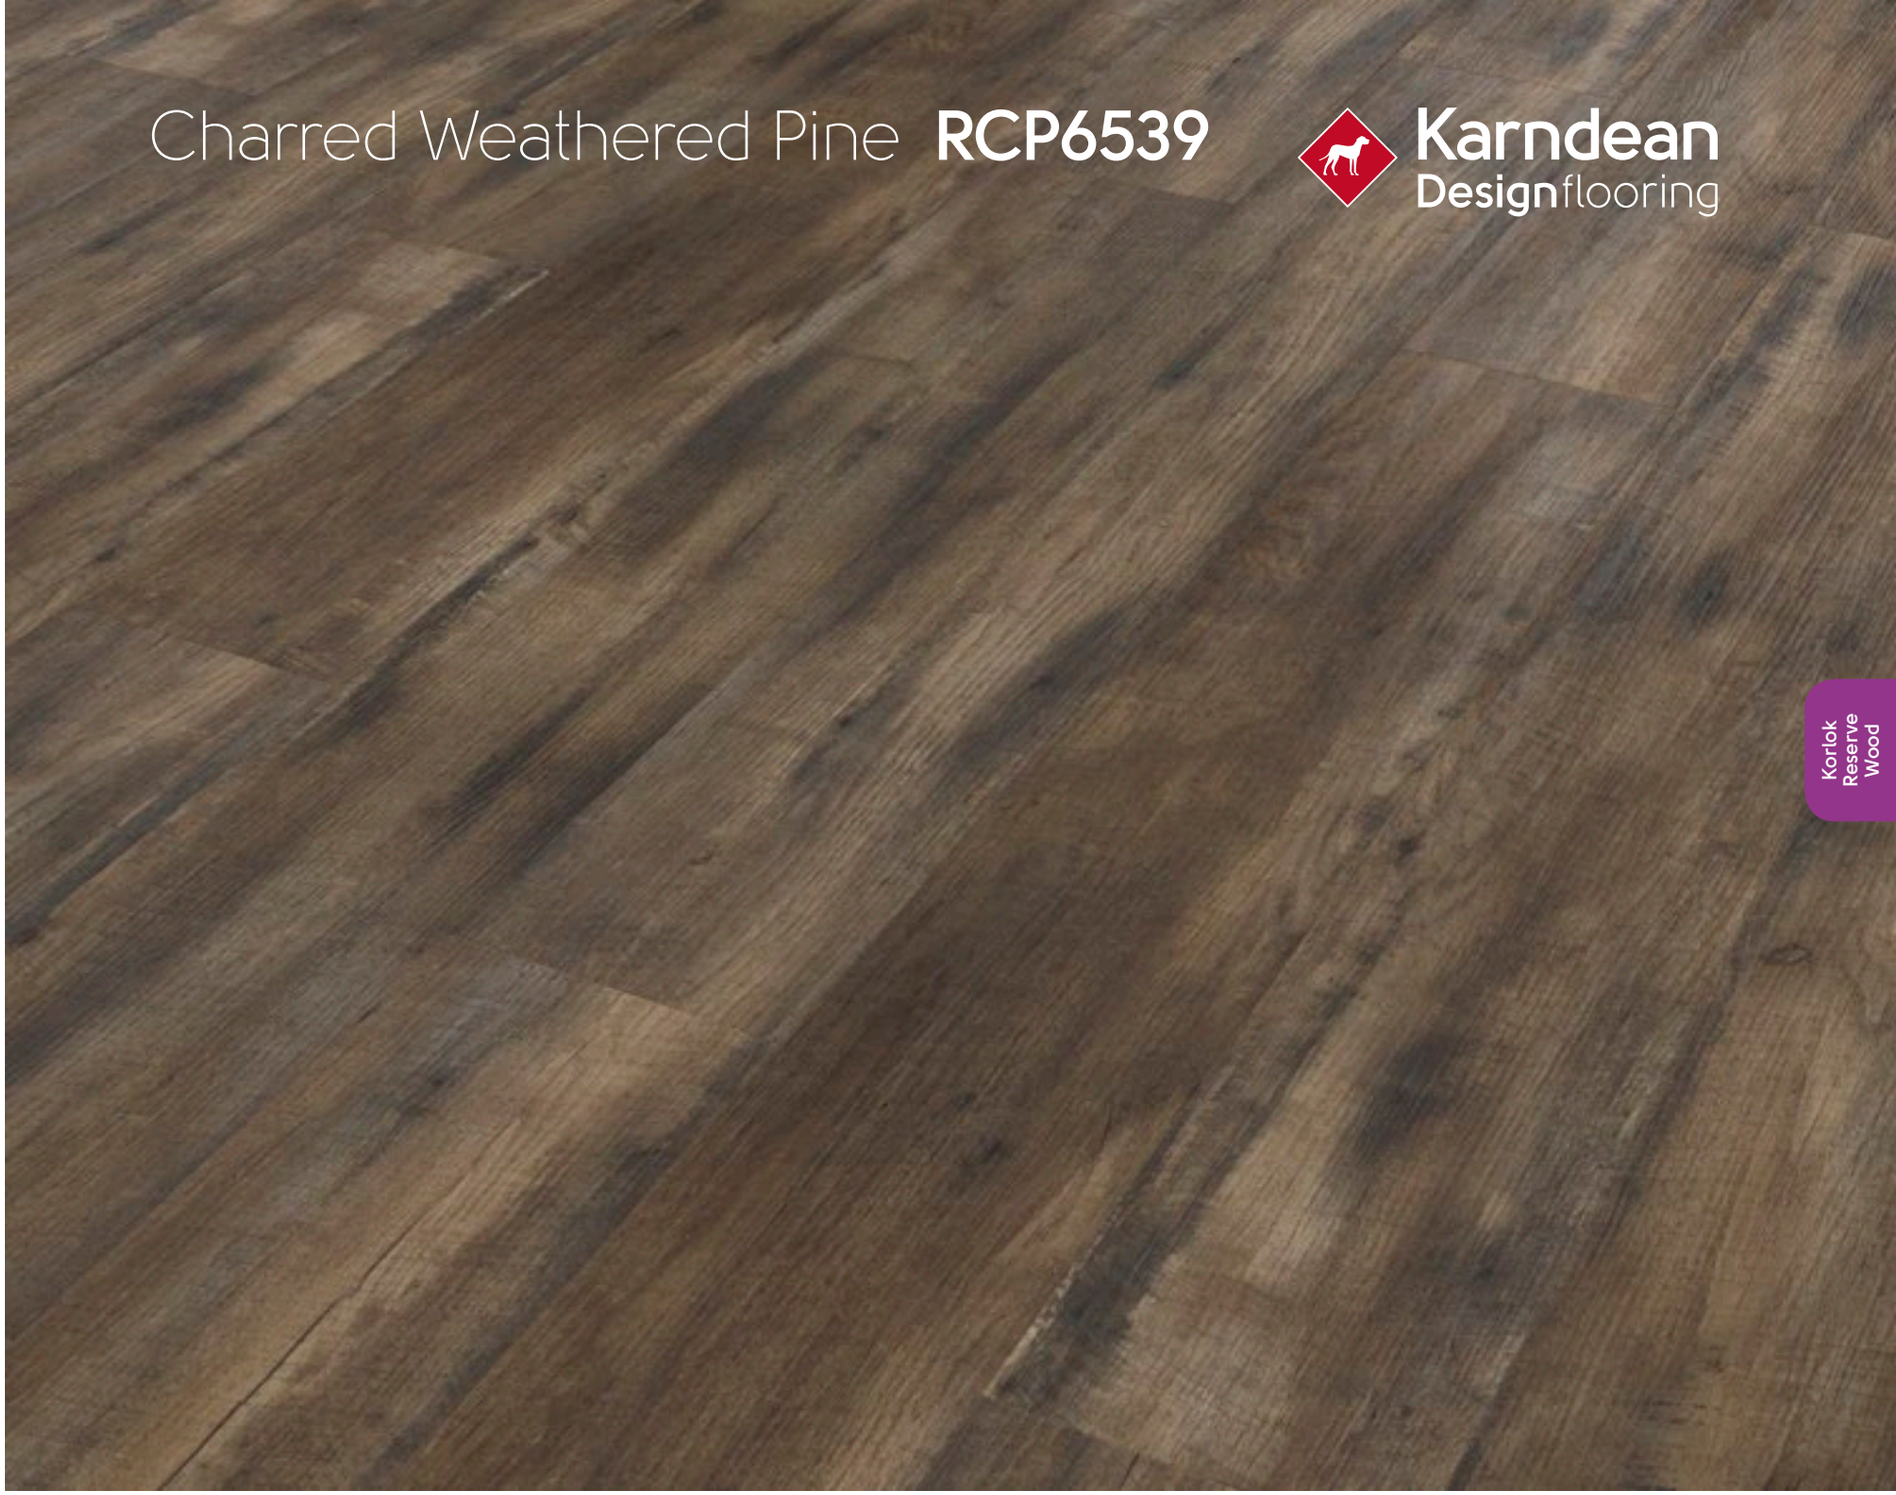

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6539
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Provincial Oiled Oak **RCP6540**

Karndean Designflooring

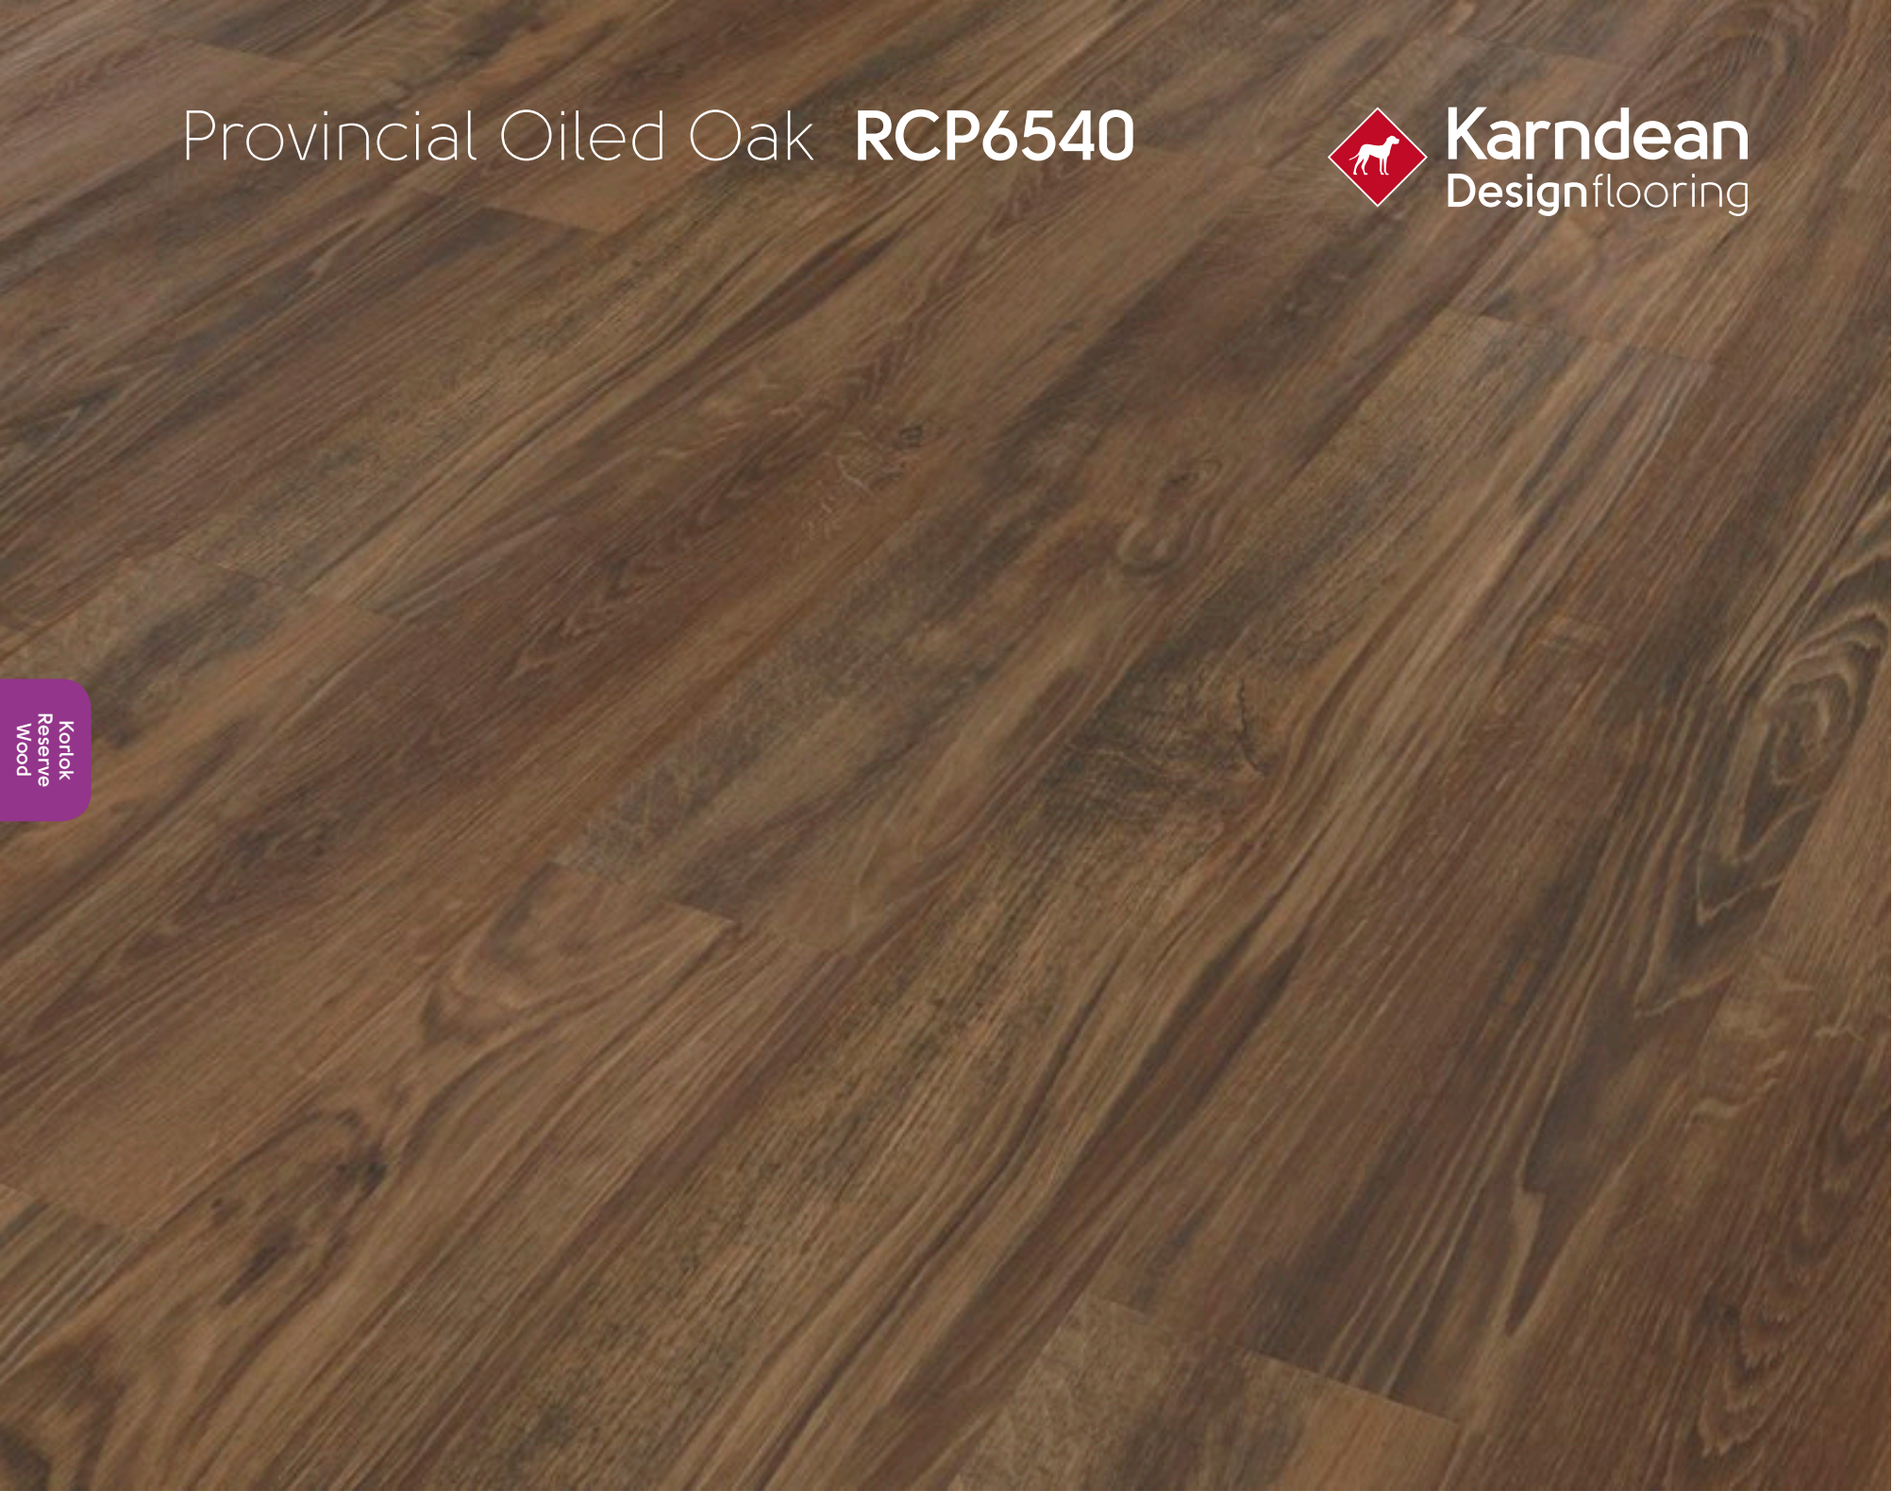

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)


Technical Specifications:

Page 357

TEXT
RCP6540
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Tavern Oiled Oak **RCP6537**

Karndean Designflooring

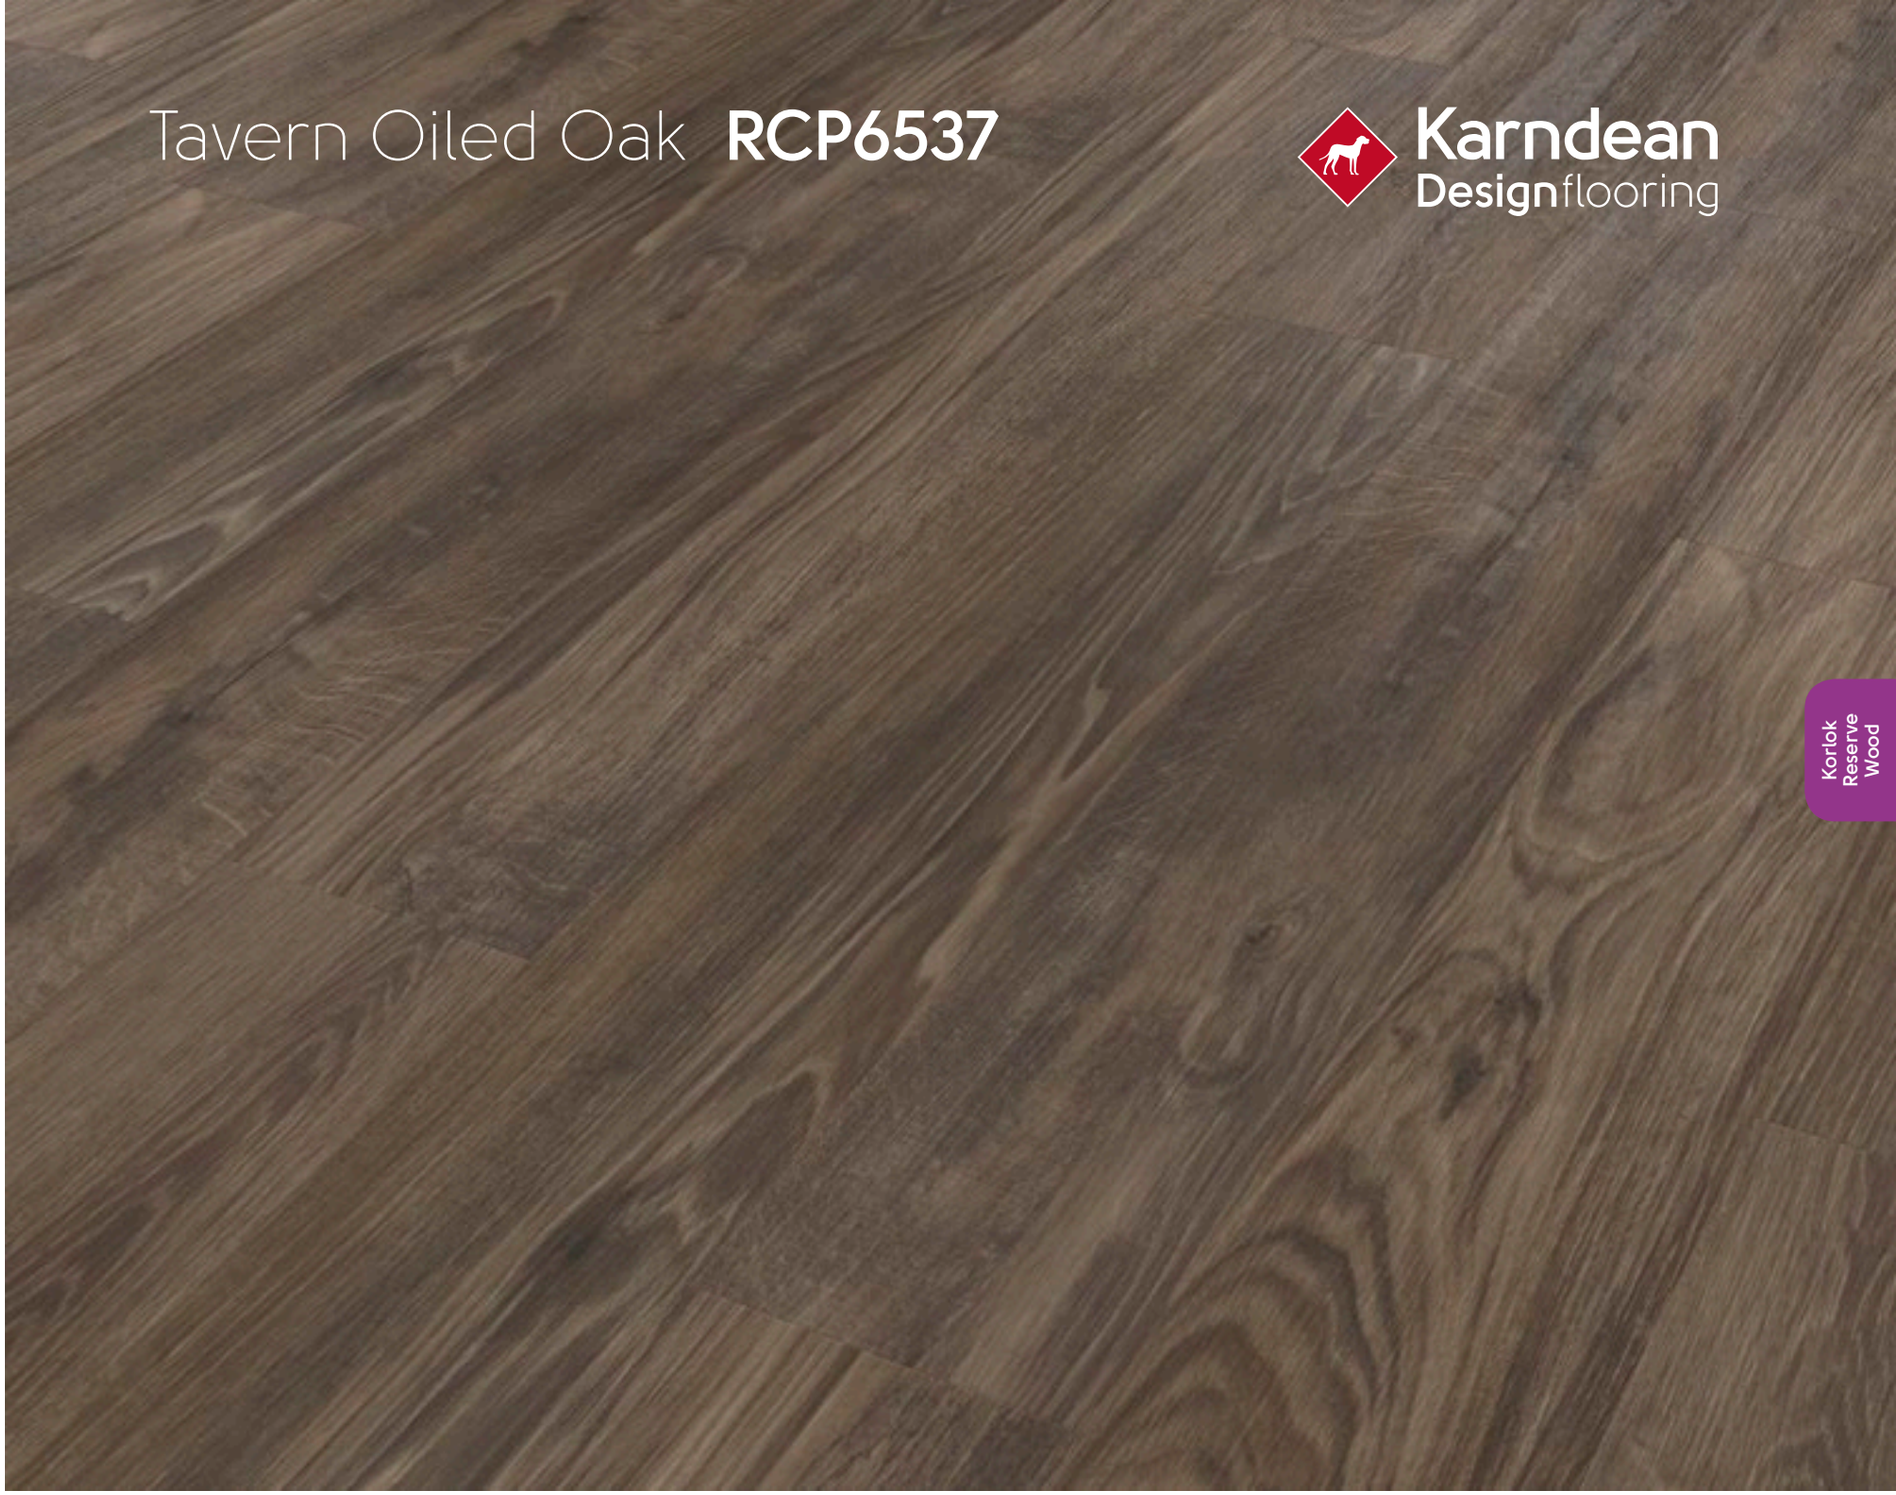

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 357

TEXT
RCP6537
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Texan Whiskey Walnut **RCP6542**

Karndean Designflooring



Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 357

TEXT
RCP6542
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Limed Charcoal Oak **RCP6538**

Karndean Designflooring



Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 357

TEXT
RCP6538
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Van Gogh **Wood**

48" x 7" (1220mm x 179mm)*


Page: 372
Antique Karri **SCB39**


Page: 373
Jatoba **SCB42****


Page: 379
Lancewood **SCB44****


Page: 380
Wellington Oak **SCB53****


Page: 384
Smoked Oak **SCB70**


Page: 375
Reclaimed Maple **SCB71**


Page: 376
Vintage Pine **SCB76****



Page: 377
Country Oak **SCB81**



Page: 374
French Oak **SCB85**


Page: 381
Classic Oak **SCB86**


Page: 385
Tawny Oak **SCB91**


Page: 382
Hessian Oak **SCB93**


Page: 383
Reclaimed Redwood **SCB99****


Page: 378
Aged Redwood **SCB100****

* Actual product size: 48.03" x 7.05"

**Please note: as a feature of the design, these products incorporate a high color variation between individual tiles.

Van Gogh **Wood**

Van Gogh | RIGID CORE

The iconic Van Gogh range showcases enduring American style and performance while capturing nature in its rawest form. A selection of these best-selling visuals are now available in a rigid core construction, giving you the visuals you want in the format you need.



Aged Redwood **SCB100**

	Standard	Result
Thickness	ASTM F386	4.5 mm
Size		48.03" x 7.09" (1220 mm x 180 mm)
Box quantity		10 Planks/23.64 sq.ft.
Locking system*		Click-locking
Wear layer	ASTM F410	20 mil (0.5 mm)
Surface treatment		K-Guard+ PU coating
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	1.1 kV
Abrasion resistance	ASTM D4060	Pass 20000 Cycles
Dimensional stability	ISO 23999	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	△IIC = 22 dB IIC = 69 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	Pass 600 psi at 0.005"
Indentation - residual	ASTM F1914	Pass
Adhesive	None required; please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Flooring Industries.
** Subject to terms, see page: 395.
*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Antique Karri **SCB39**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB39
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Jatoba **SCB42**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)


Technical Specifications:

Page: 371

TEXT
SCB42
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

French Oak **SCB85**

Karndean Designflooring

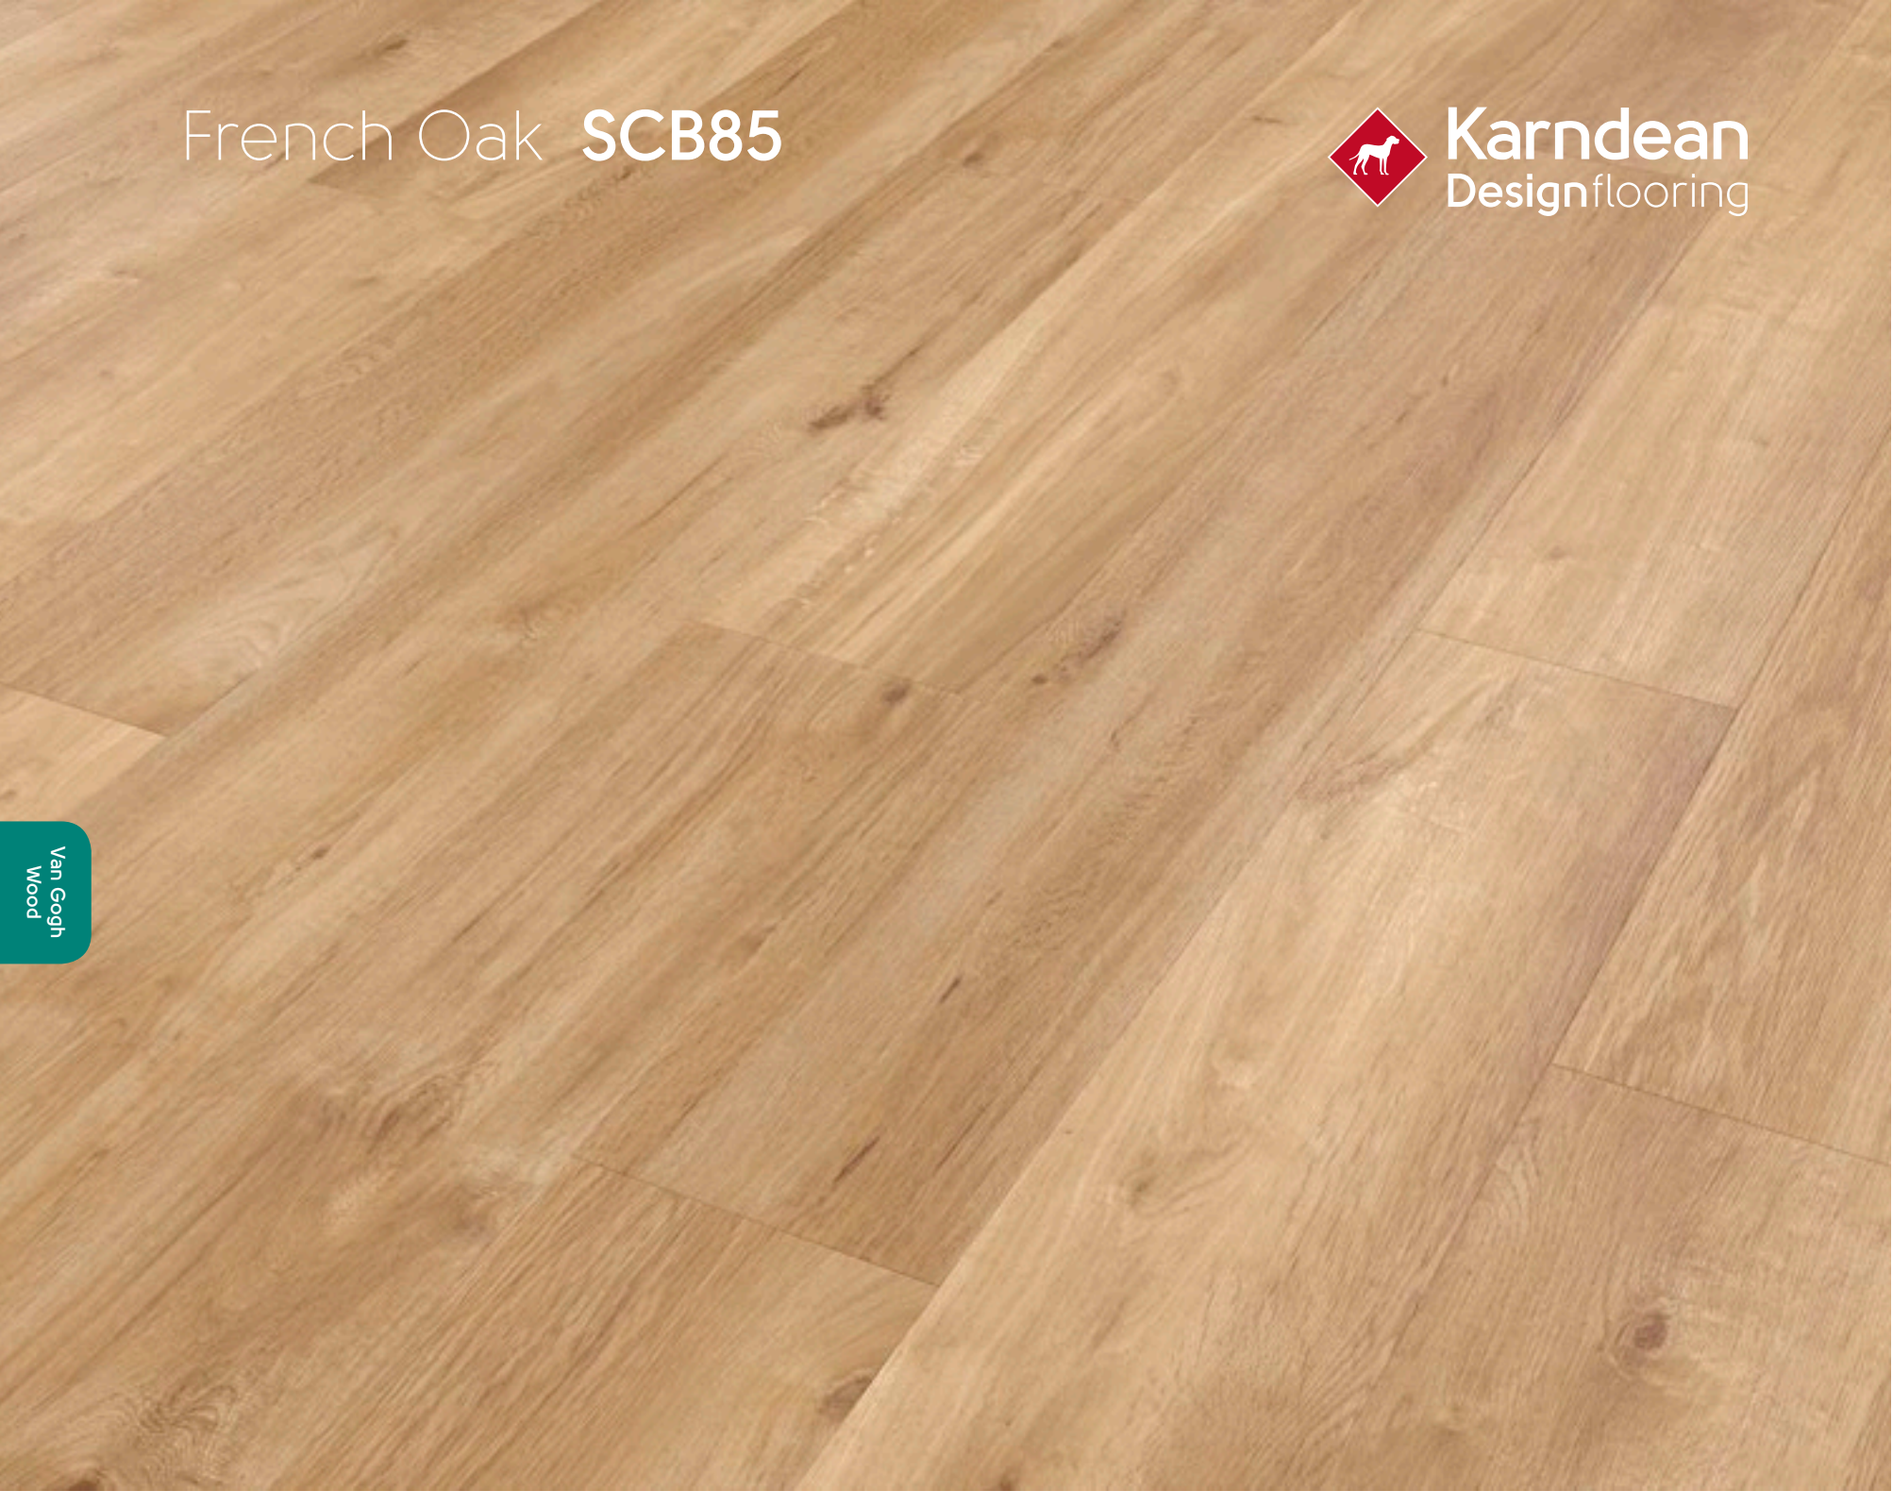

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)


Technical Specifications:

Page: 371

TEXT
SCB85
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed Maple **SCB71**

Karndean Designflooring

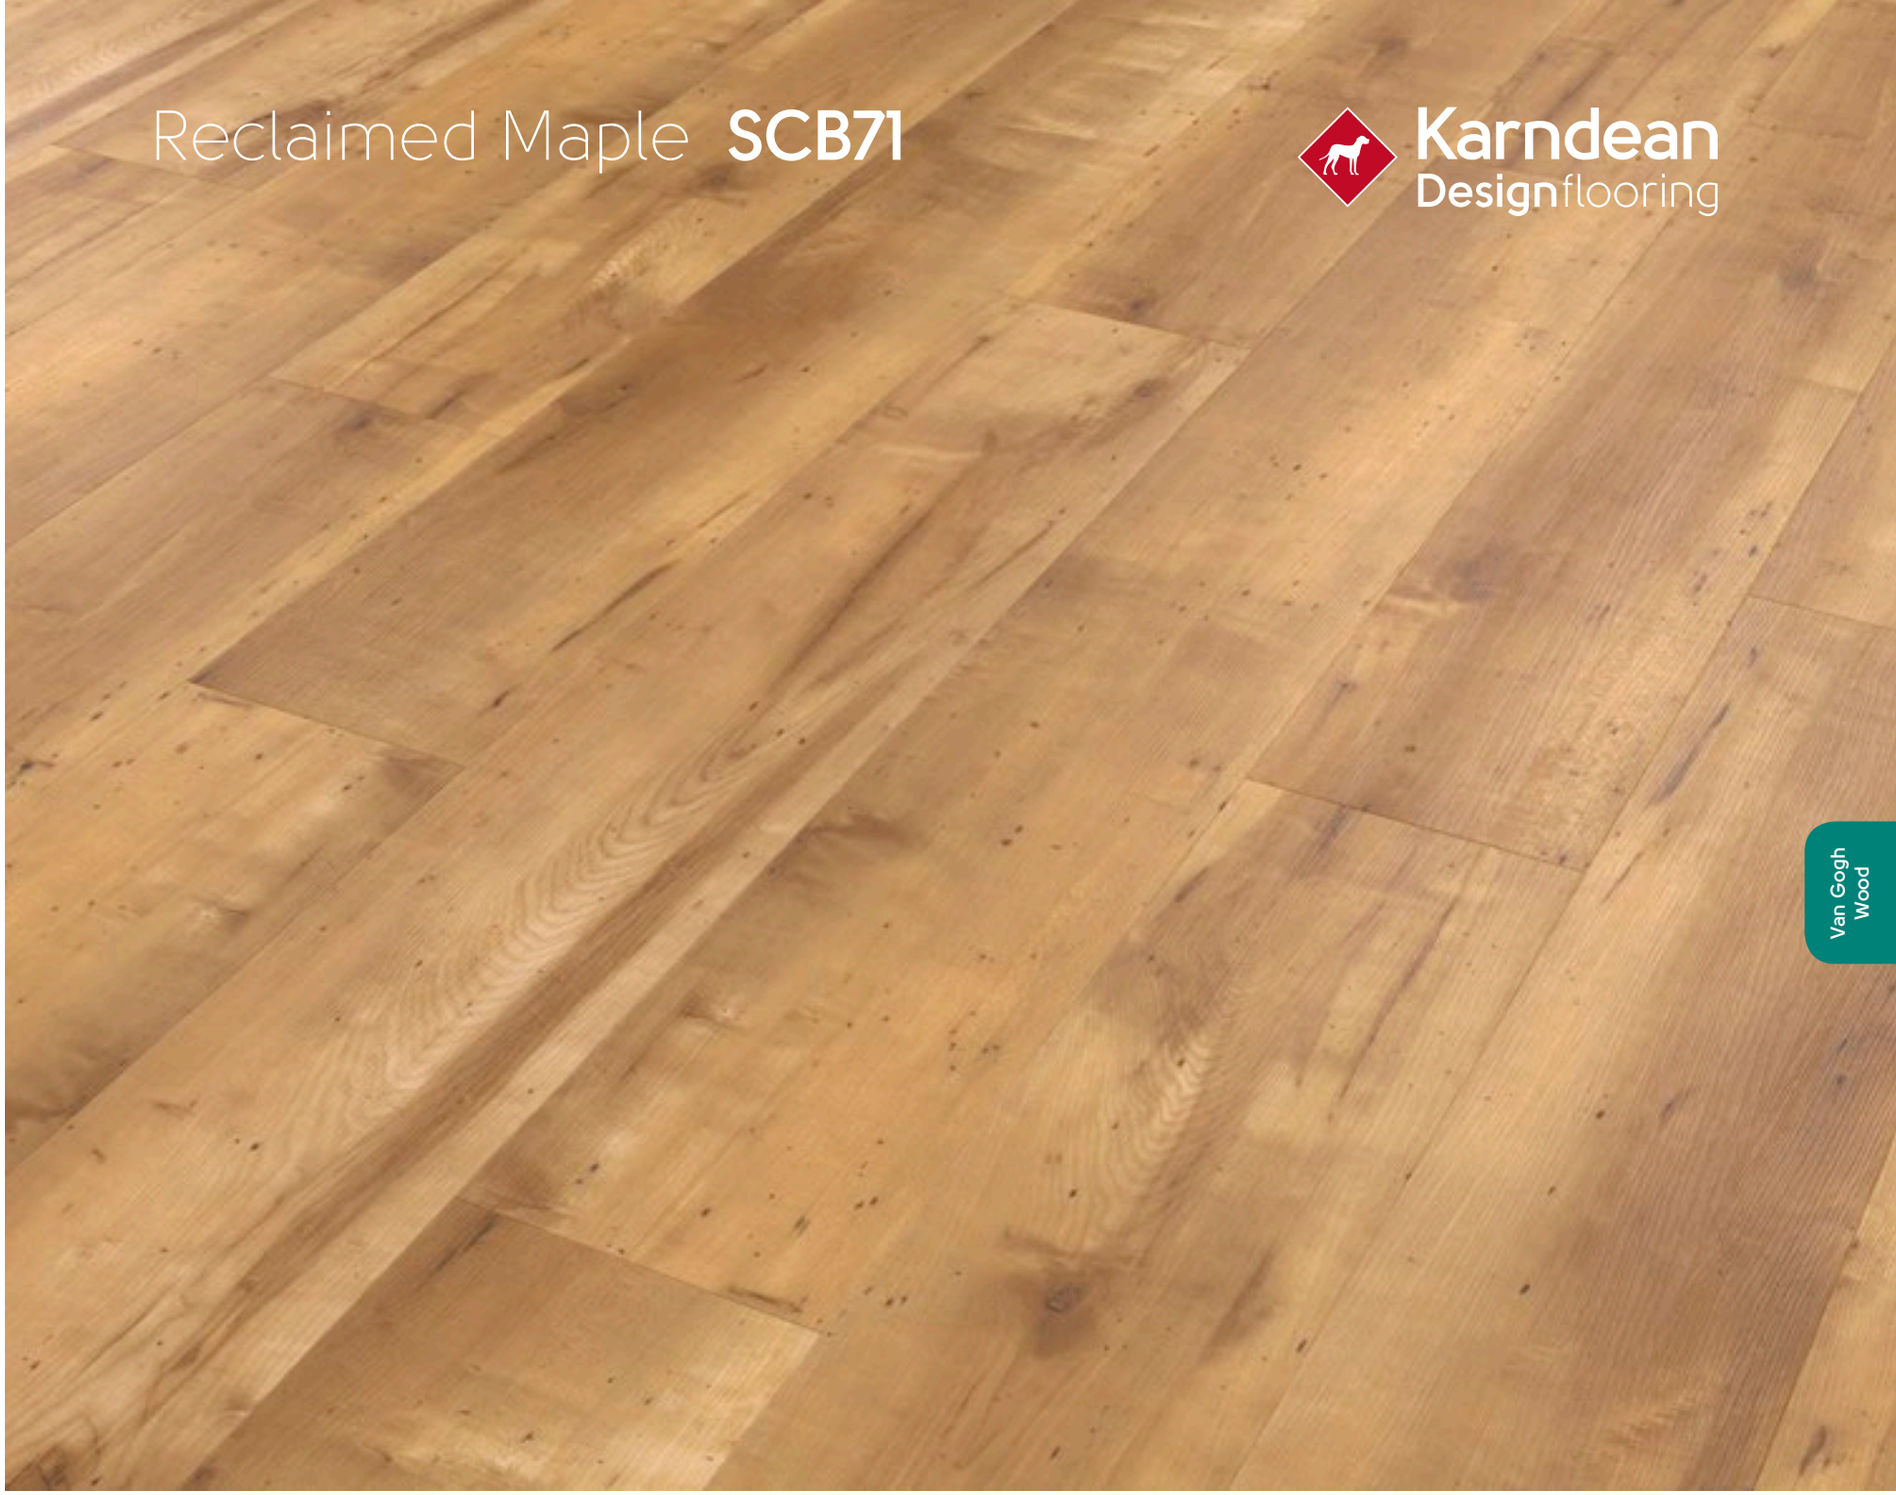

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB71
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Vintage Pine **SCB76**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB76
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Country Oak **SCB81**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)


Technical Specifications:

Page: 371

TEXT
SCB81
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Aged Redwood **SCB100**

Karndean Designflooring

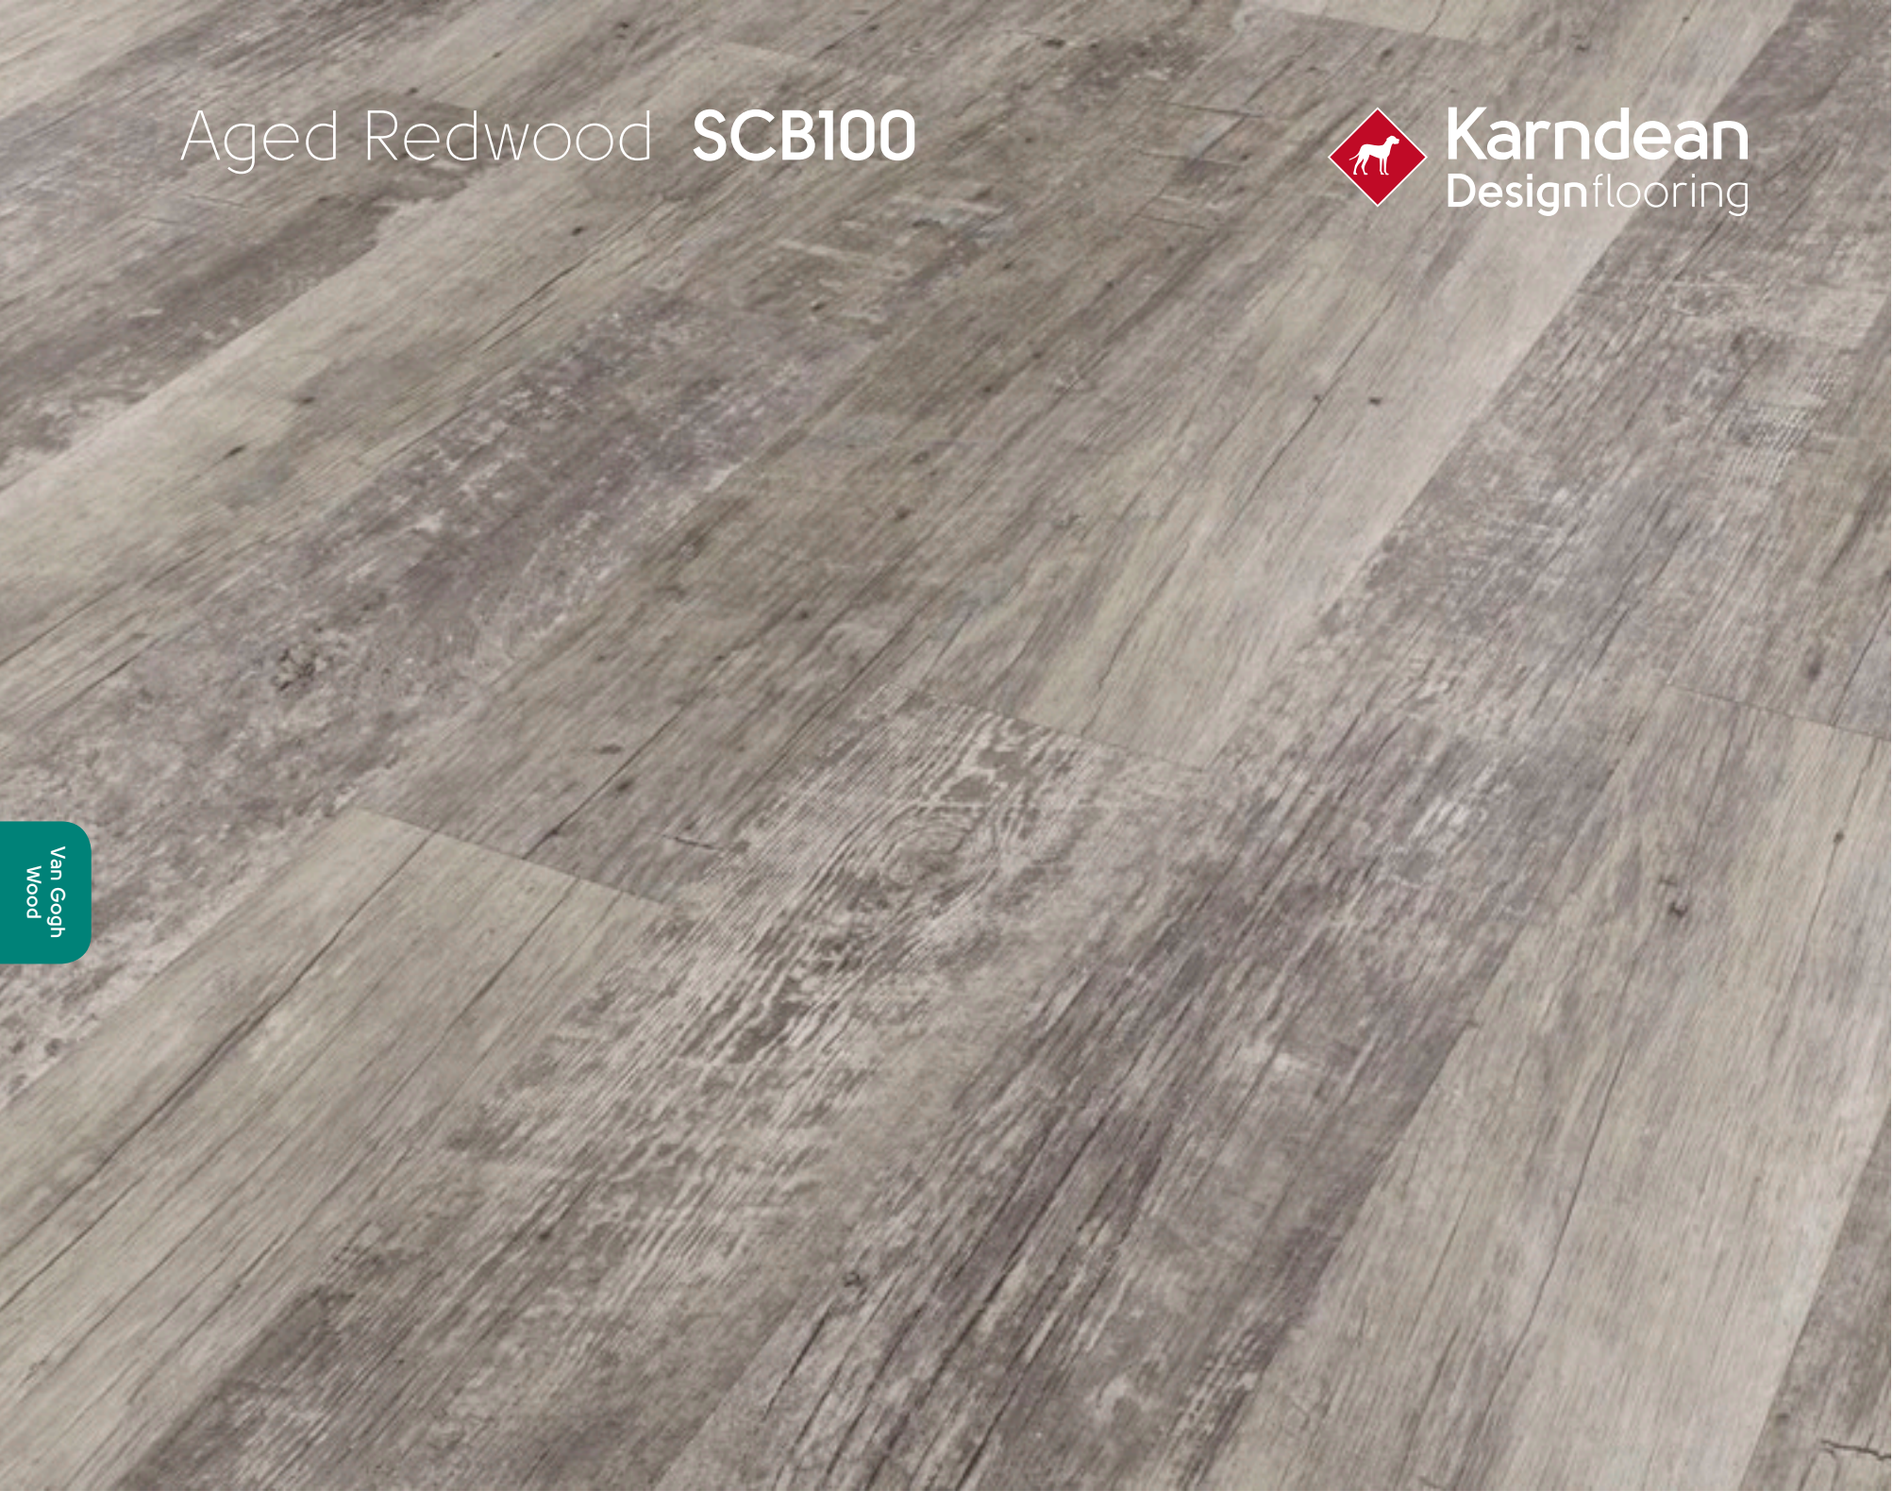

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)


Technical Specifications:

Page: 371

TEXT
SCB100
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Lancewood **SCB44**

Karndean Designflooring

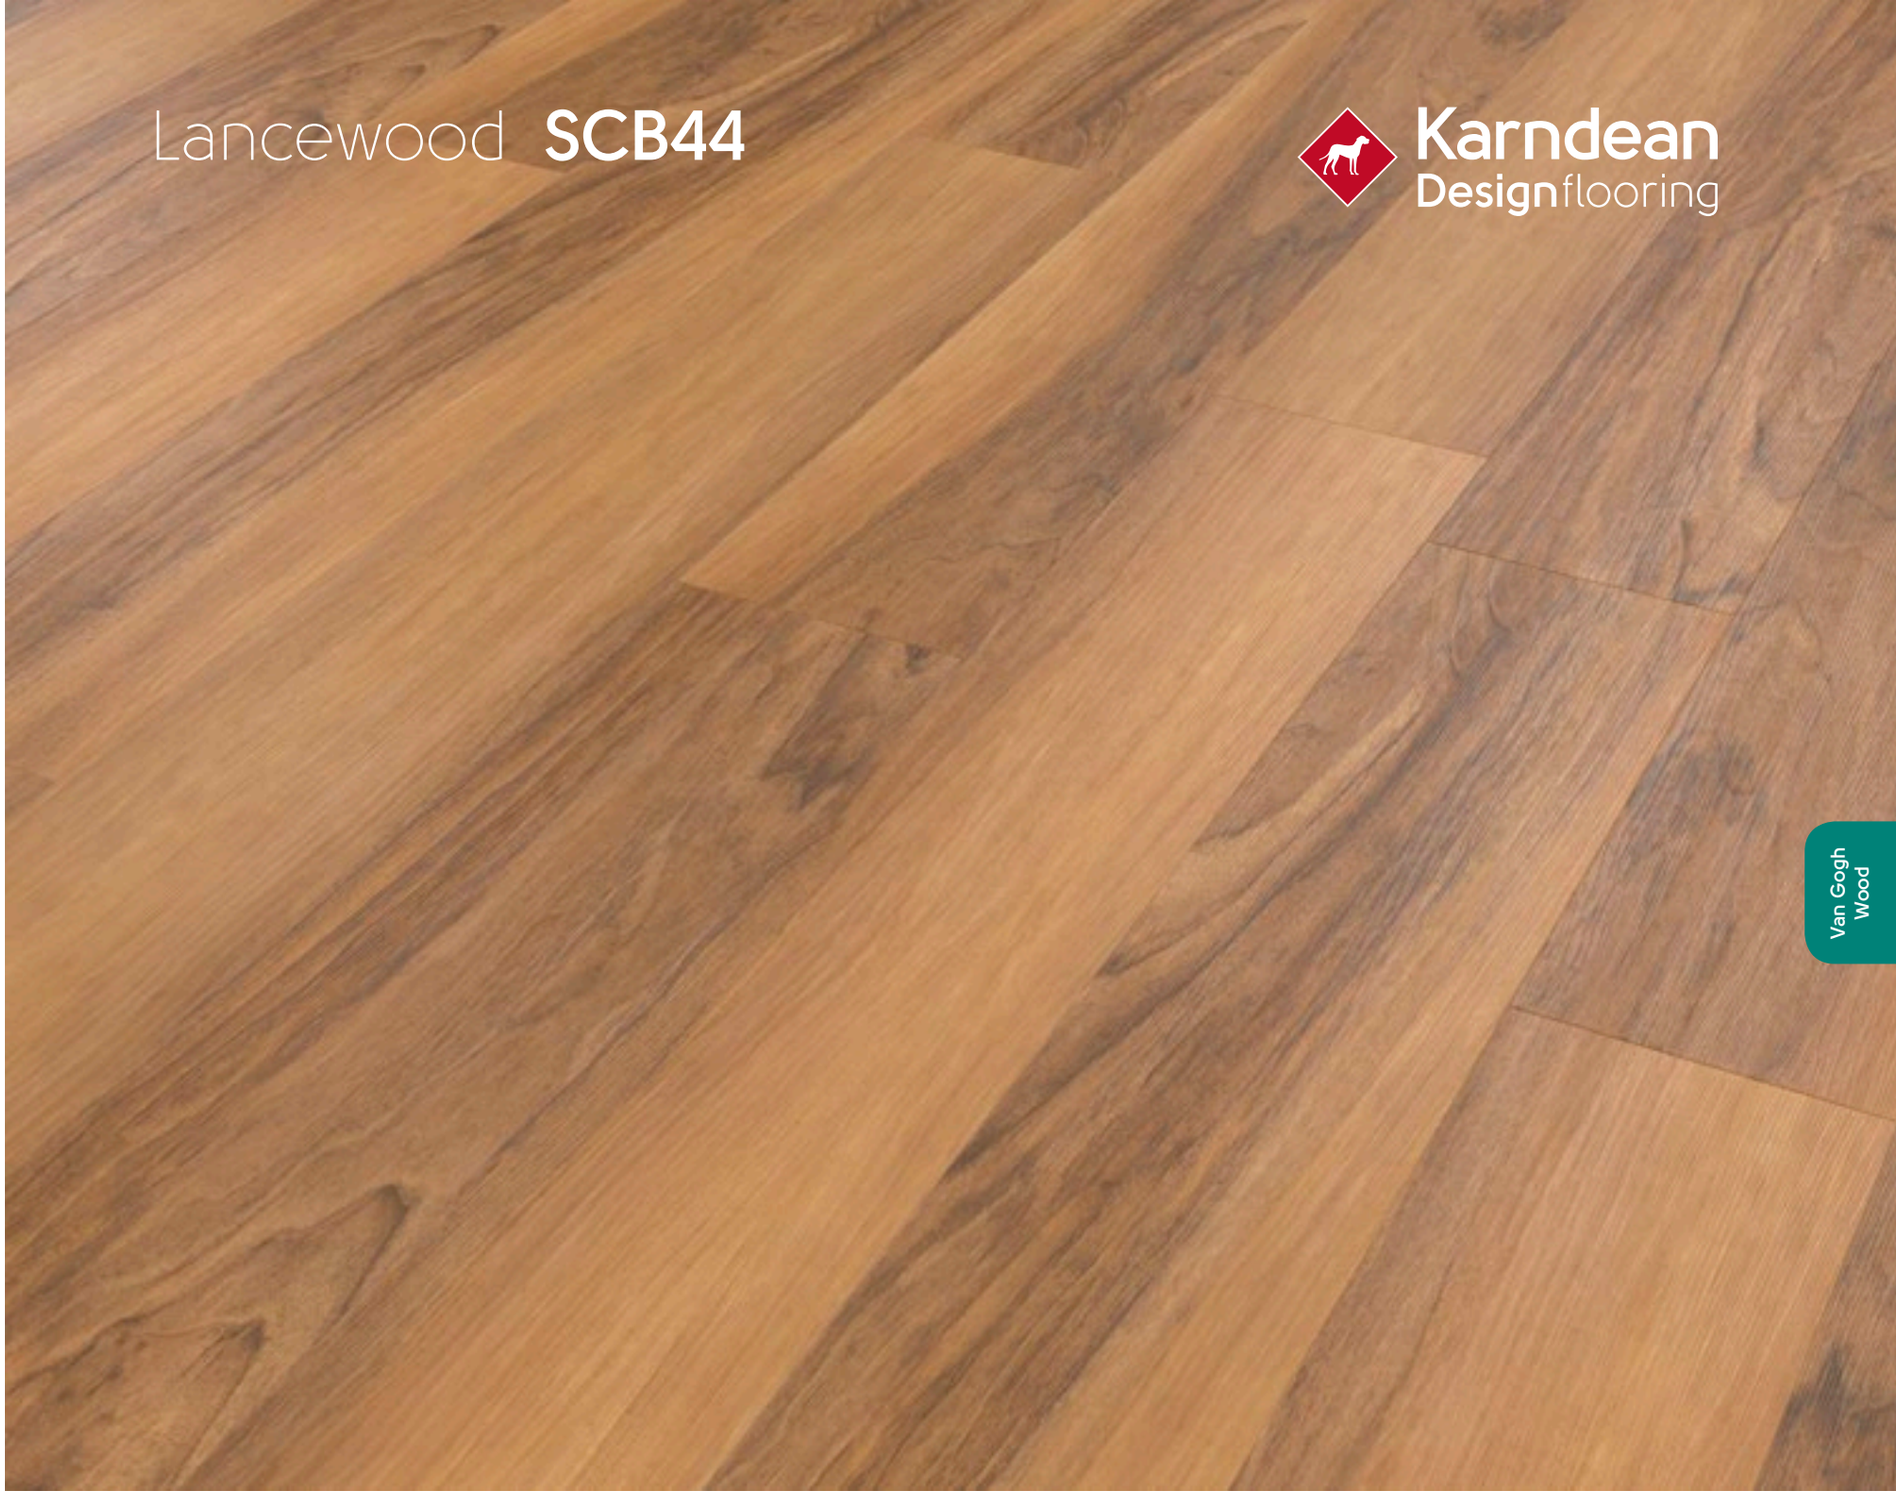

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB44
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Wellington Oak **SCB53**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)


Technical Specifications:

Page: 371

TEXT
SCB53
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Classic Oak **SCB86**

Karndean Designflooring

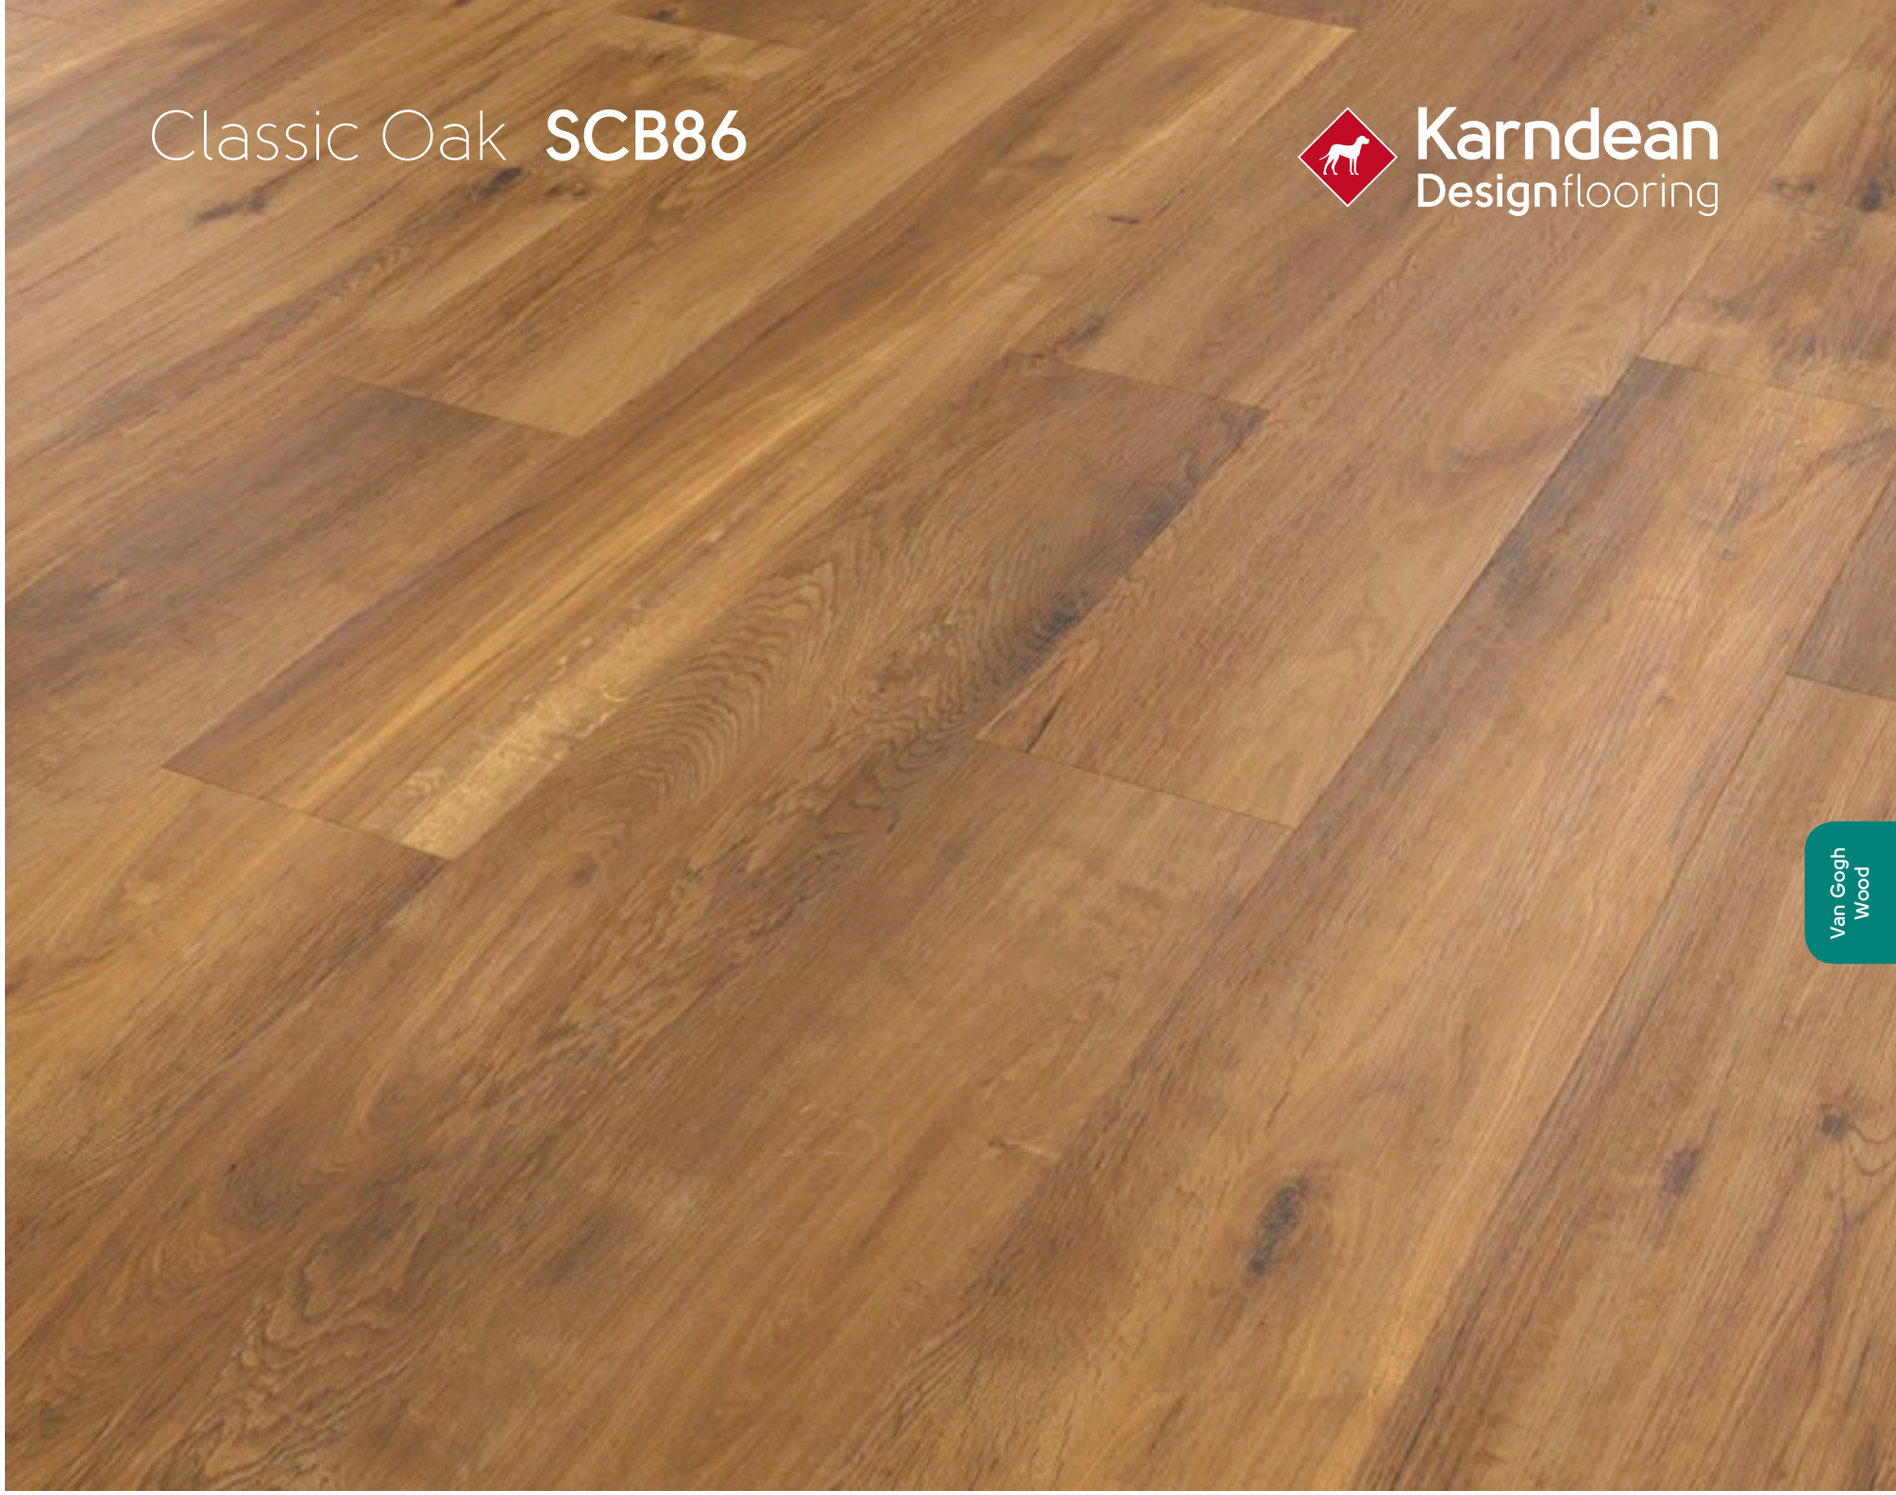

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB86
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Hessian Oak **SCB93**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB93
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Reclaimed Redwood **SCB99**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB99
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Smoked Oak **SCB70**

Karndean Designflooring



Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)


Technical Specifications:

Page: 371

TEXT
SCB70
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Tawny Oak **SCB91**

Karndean Designflooring

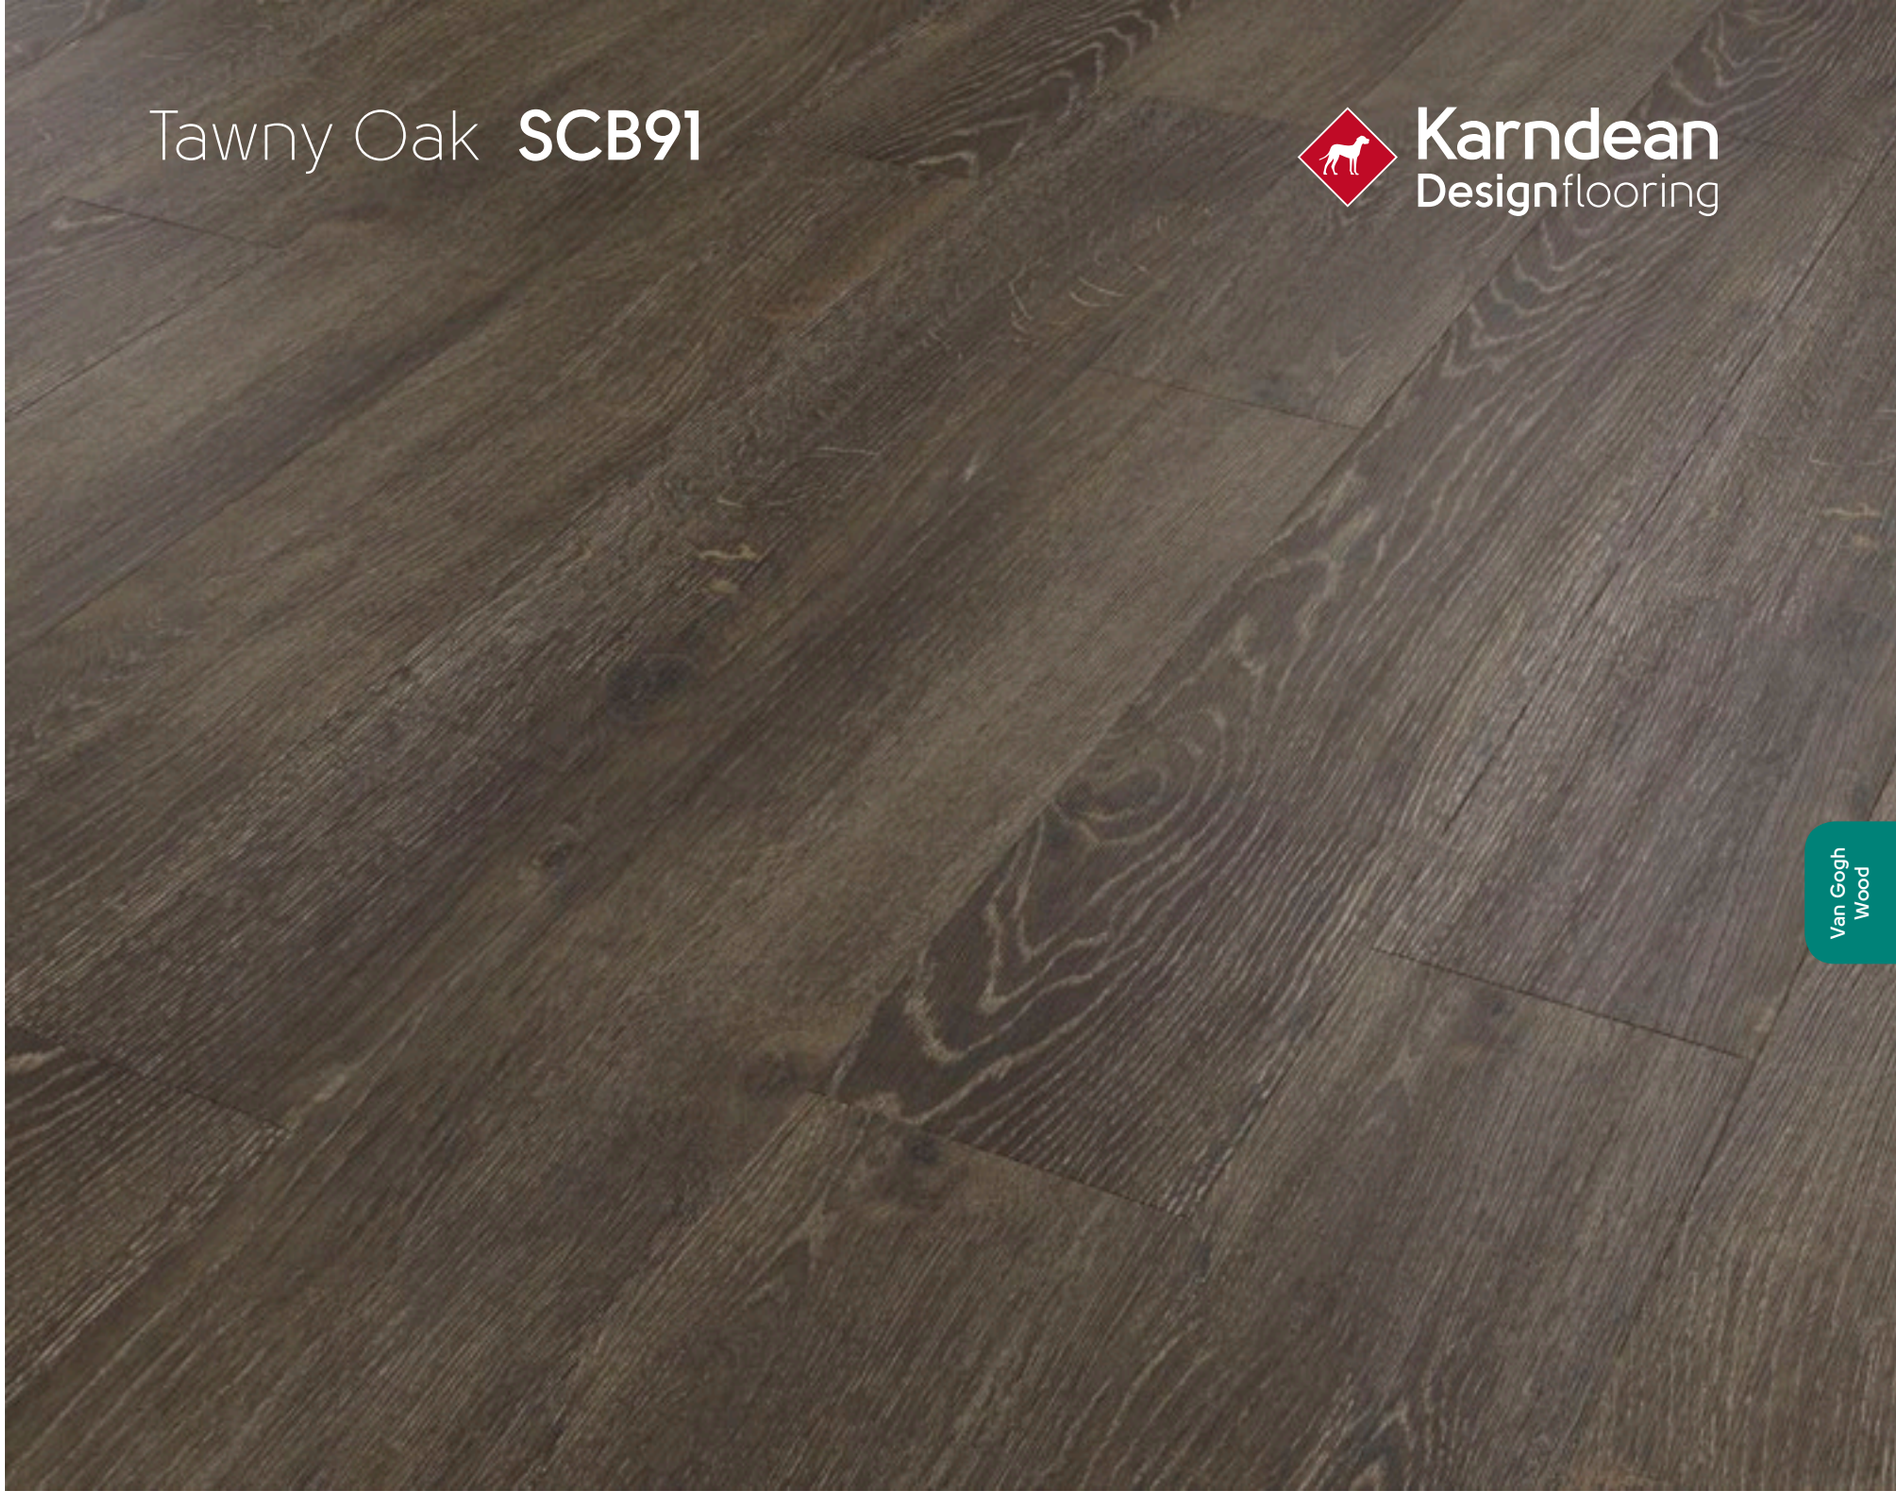

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 371

TEXT
SCB91
to 877-850-0376
for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.



Resources



Adhesives & sundries

Specially formulated products designed for optimum performance of your Karndean Designfloor.



QuietChoice

- Covers 100 sq. ft. per roll
- Achieve an IIC up to 72 when using QuietChoice and Karndean Designflooring luxury vinyl products (ASTM E492)
- Resists mold and mildew
- High shear strength



Designflooring Tool Kit

- Combi Scribe
- Miter Box Scissors
- Pressure Duo Roller
- Fastrimmer Top and Bottom Beveller
- Flex Steel Straightedge 6'
- Dolphin Knife



K-95HM

- Trowel Application
- Available in 1 gal. or 4 gal. pails
- Covers 220 to 260 sq. ft. per gallon and 2 hour open time
- May be used on substrates with moisture readings up to 95% RH
- High shear strength



Karndean DrySet

- Applied with 3/8" nap roller
- Available in 1 gal. or 4 gal. pails
- Covers 350-450 sq. ft. per gallon
- May be used on substrates with moisture readings up to 95% RH
- Dries in 10-15 minutes



Karndean K-Spray 98

- 22 oz. cans
- Covers 125 sq. ft. per can
- May be used on substrates with moisture readings up to 98% RH
- Dries in 10-20 minutes



Karndean K-Spray

- 22 oz. cans
- Covers 150-185 sq. ft. per can
- May be used on substrates with moisture readings up to 90% RH
- Dries in 10-20 minutes



2-Part Epoxy Resin

- Trowel Application
- Available in 1 gal. pails
- Covers 130 to 150 sq. ft. per gallon
- A two-part adhesive providing an extremely strong bond
- Recommended for areas subject to excessive temperature



Kovara™ 95

- Rolls are 5 ft. wide x 144 ft. long
- 720 sq. ft. per roll
- Suppresses moisture up to 95% RH
- Mold and fungus resistant
- Can eliminate days from normal project schedules
- Must use gray Kovara™ Seam Tape



Kovara™ MBX

- Rolls are 5 ft. wide x 144 ft. long
- 720 sq. ft. per roll
- Suppresses moisture up to 99.5% RH in concrete
- Mold and fungus resistant
- Can eliminate days from normal project schedules
- Must use black Kovara™ Seam Tape and White
- Double Sided Tape



Cleaning & maintenance

Cleaning guide

Karndean floors are very durable, but as with any flooring, they need to be looked after. There are many ways to protect your Karndean floor and prevent damage. We recommend following our Cleaning & Maintenance instructions and reading our Maintenance Advice for helpful hints and tips on how to care for your floor.

Maintaining your floor

The floor should be cleaned regularly, though the frequency will depend upon the level of traffic across the floor and the amount of dust and dirt transferred from the surrounding environment.

1. Remove loose dust and dirt from the floor using a soft brush or dust mop.
2. Dilute Karndean Clean in accordance with the label instructions.
3. Liberally apply the cleaning solution over the entire floor using a clean mop, then soak up the cleaning solution using a damp (not wet) mop and leave to dry.
4. Thoroughly clean the mop with cold running water.

Commercial Karndean Clean can be used with automatic cleaning appliances (e.g. scrubbing machines), especially for larger areas or for the removal of stubborn dirt.



Refreshing your floor

Over time, heavy traffic will wear at the surface of your Karndean floor. To restore your floor, we recommend the use of Karndean Remove and Karndean Refresh.

Before applying Karndean Remove:

1. Remove all free-standing objects from the floor.
2. Vacuum or clean any entrance matting or rugs and set aside.
3. Remove loose dust and dirt from the floor using a soft brush or dust mop.

Applying Karndean Remove using a mop and scrubbing pad:

1. Mix Karndean Remove in accordance with the label instructions.
2. Apply cleaning solution to the floor using a mop, working in an area no larger than 16' x 16' (5m x 5m) at a time.
3. Allow the solution to remain on the floor for approximately 10 minutes, but do not allow it to dry.
4. Scrub the floor using a white scrubbing pad fitted to an applicator.

Applying Karndean Remove using a rotary scrubber:

1. Mix Karndean Remove in accordance with the label instructions and pour into rotary scrubber machine.
2. Scrub the floor using the rotary scrubber fitted with a red scrubbing pad. For the edges of the floor and hard to reach areas, use a white scrubbing pad fitted to the end of an applicator.

NOTE: Rotary Scrubber should not exceed 175 rpm.

Removal of Karndean Remove:

1. Remove all residue with a wet vacuum or mop, and rinse the floor using clean water.
2. After the floor has dried, check to ensure that all residue has been removed.
3. Equipment should be cleaned in cold running water and stored safely.

Applying Karndean Refresh:

When using Karndean Refresh, avoid (where possible) strong sunlight and drafts and ensure all under floor heating is switched off before starting work.

1. Using a lint free mop, apply undiluted Karndean Refresh in a thin, even coat using overlapping strokes. Where possible, work parallel to the main light source (e.g. window).
2. Allow the floor to dry for approximately 30 minutes.
3. Apply a second coat of Karndean Refresh, working in the opposite direction to the first coat.
4. Allow the floor to dry for at least six hours, preferably overnight.
5. Thoroughly clean the mop with cold running water.





Washed Butternut **RKP8108**


Customer support

We pride ourselves on offering quick, easy and reliable support – because you have a job to do. We keep unparalleled stock levels across our three US distribution centers and are focused on stocking for customer needs, so you can rest assured that your order can be delivered in as little as a few days.

Your Karndean Commercial Business Manager (CBM) is your first point of contact, available to answer any questions and get you the materials you need to complete your projects on time, from technical datasheets to our EPD, and everything in between.

Our Customer Service department is available to assist you Monday through Friday from 8am to 8pm (ET). Contact Customer Service to check stock, place an order, request samples or literature, and to ask any additional questions. For installation questions or for assistance on the job, contact our Customer Service department and ask for our Technical Support team.



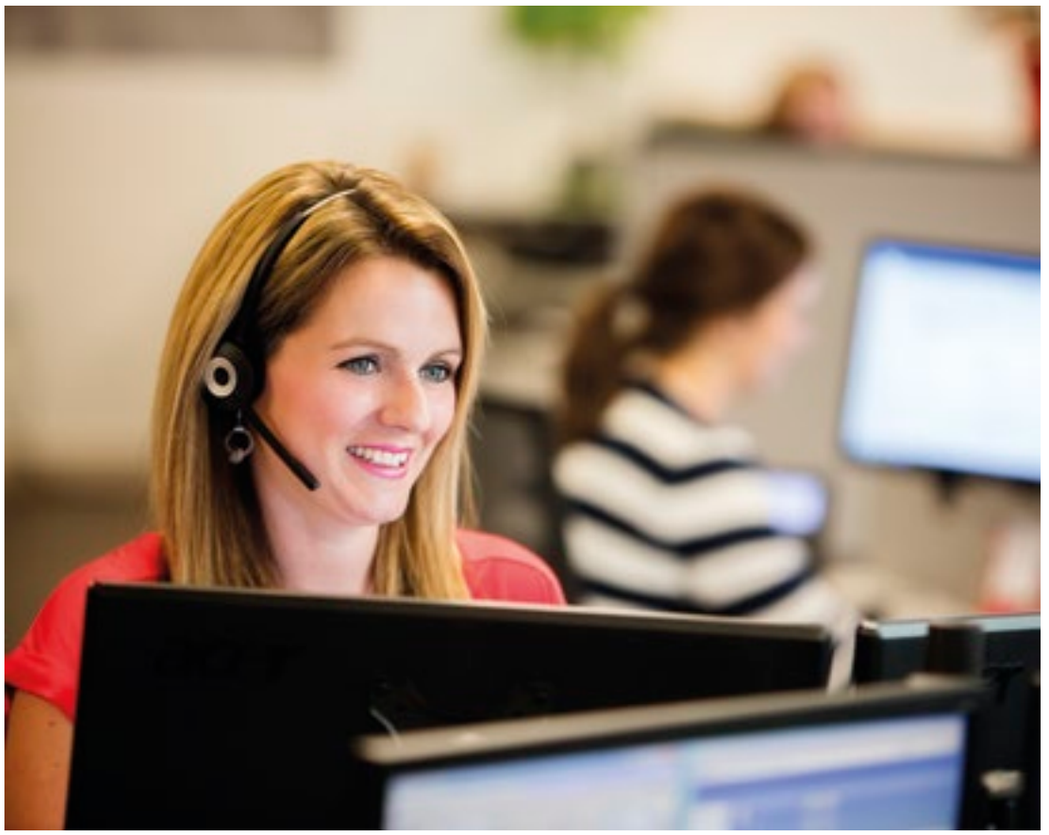

Not sure who to call? Give our Customer Service line a call at 888-266-4343 and we can point you in the right direction.

CEUs
Continuing Education Units

As a design-driven company, we look to the future to develop products that will complement industry trends, and having specialized in luxury vinyl for more than 45 years we know the ins and outs of luxury vinyl. Our Continuing Education Units (CEU) program offers a variety of courses to educate architects and designers on the latest innovations and useful information relevant to luxury vinyl and interior design.

To view our current list of CEU courses, visit www.karndean.com/CEU.




Sample service

Product samples are an integral part of putting together a proper proposal. We have both swatch and full size product samples available to order, so whether you're building a project moodboard or want to compare product sizes, we have the materials you need. Visit karndean.com to get started.

Do you specify Karndean Designflooring often? Ask your CBM about acquiring a full set of our architectural folders for your library.



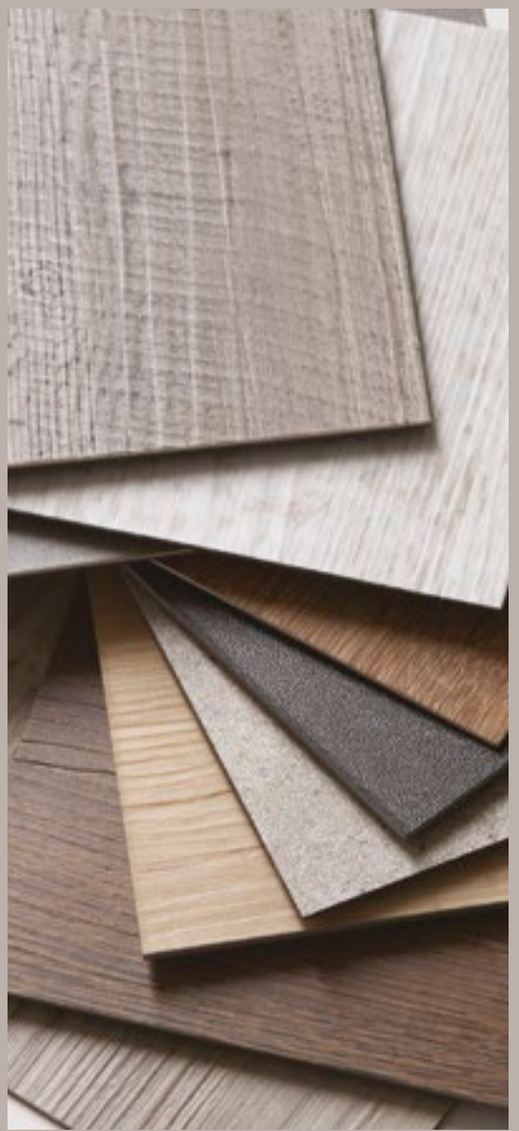

Warranty

Definitions

1. "Wear out" is defined as the removal of pattern from the product.
2. "Lifetime" is defined as 35 years.
3. "Commercial" installation is defined as one in which business is conducted.
4. "Residential" installation is defined as all areas within a home or apartment.

Scope

Used in Commercial premises, Karndean (hereinafter referred to as "the Company") offers a comprehensive product and installation warranty against product wear out and manufacturing defects.

- Art Select 20-year commercial heavy duty
- Da Vinci 20-year commercial heavy duty
- Van Gogh 15-year commercial heavy duty
- Opus 15-year commercial heavy duty
- Knight Tile 10-year commercial light duty
- Karndean LooseLay
  15-year commercial heavy duty
- Karndean LooseLay Longboard
  15-year commercial heavy duty
- Korlok Select 15-year commercial heavy duty
- Korlok Reserve 15-year commercial heavy duty

Used in Residential premises, the Company offers a lifetime product and installation warranty against product wear out and manufacturing defects.

Conditions

The warranty is conditional on the following having been met:

1. Gluedown product: The product has been fitted by a professional installer according to the current installation instructions at the time of installation. Loose lay product: The product has been fitted according to the current installation instructions at the time of installation.
2. The subfloor meets the building standards, current at the time of installation, and the adhesives recommended for the application were used.
3. The product used has been correctly specified for the use of room in which it was installed.
4. Maintenance is according to the Company's cleaning and maintenance instructions.

Exclusions

The following exclusions shall apply:

1. Defects caused by sub-standard installation.
2. Any accidental damage (fire, flood, lack of barrier matting at any external entrance, etc.).
3. Any claim resulting from a manufacturing defect, which is not notified to the Company within 6 months of installation.
4. Damage to products that are a result of poor maintenance.
5. Defects caused by poor subfloor preparation, including residual moisture in the subfloor.
6. Damage caused by stains, excessive heat, cuts and/or other abuses that the floor may be subjected to during use.
7. Fading.
8. Damage caused by indentation and abrasion: e.g. unprotected caster wheels, furniture legs, high and spiked heels.

Claims

1. All claims must be submitted to the Company in writing as soon as they become apparent.
2. The Company will require information on the claim, including a copy of the invoice, product detail, installation/subfloor information, samples removed from the installation, photographs and a report of the defect.
3. Once the claim is raised, the Company will carry out an investigation, and satisfying themselves that the problem is their responsibility, will replace any defective material at no charge with the same or similar product.

   The Company will also reimburse a proportionate cost towards labor, uplift and reinstallation, providing costs are agreed with the Company before work commences.

This warranty does not affect your statutory rights.

Product index by code

Wood

EW01 Hickory Paprika 57
EW02 Hickory Peppercorn 59
EW03 Hickory Nutmeg 58
EW11 Weathered Hickory 53
EW12 Vintage Hickory 55
EW13 Classic Hickory 52
EW21 Reclaimed Chestnut 54
EW22 Salvaged Chestnut 56
HC01 Dawn Oak 60
HC03 Dusk Oak 61
HC04 Sundown Oak 62
HC06 Midnight Oak 63
KP32 Sycamore 159
KP35 Cedar 160
KP36 Walnut 163
KP37 Elm 161
KP39 Warm Oak 162
KP67 Aran Oak 171
KP69 Larne Oak 173
KP70 Bray Oak 175
KP90 Honey Maple 158
KP93 Native Koa 174
KP94 Pale Limed Oak 164
KP96 Mid Limed Oak 169
KP97 Classic Limed Oak 170
KP98 Aged Oak 176
KP99 Lime Washed Oak 166
KP105 White Painted Pine 156
KP107 Sienna 172
KP131 Grey Scandi Pine 157
KP138 Grey Limed Oak 165
KP140 Nickel Spotted Gum 167
KP141 Urban Spotted Gum 168
LLP5-7 Burnt Ginger 281
LLP33 Copper Gum 269
LLP38 Tasmanian Wattle 277
LLP39 Antique Karri 276
LLP91 Merbau 283
LLP92 Country Oak 272
LLP93 Dover 280
LLP94 Newport 274
LLP95 Ashland 282
LLP96 Salem 270
LLP97 Winchester 265
LLP99 Hudson 265
LLP108 Providence 273
LLP109 Stamford 271
LLP110 Burlington 278
LLP111 Boston 264
LLP112 Hartford 266
LLP113 Cambridge 275
LLP301 Twilight Oak 279
LLP302 Raven Oak 281
LLP303 Antique Heart Pine 283
LLP304 Weathered Heart Pine 269
LLP305 Reclaimed Heart Pine 277
LLP306 Pearl Oak 267
LLP307 Neutral Oak 276
LLP308 French Grey Oak 272
LLP309 Taupe Oak 274
LLP310 Champagne Oak 268
LLP315 Character Walnut 282
LLP317 Lemon Spotted Gum 270
LLP330 Worn Fabric Oak 273
LLP331 Shadow Fabric Oak 271
LLP332 Urban Fabric Oak 278
LLP333 Vanilla Oak 266
LLP335 Weathered American Pine 275
LLP336 Distressed American Pine 280
RCP6531 Vintage Oregon Oak 362
RCP6532 Weathered Oak 359
RCP6533 North American Oak 360
RCP6534 Limed Coastal Oak 358
RCP6535 Aged Spanish Oak 363
RCP6536 Natural Oiled Oak 361
RCP6537 Tavern Oiled Oak 367
RCP6538 Limed Charcoal Oak 369
RCP6539 Charred Weathered Pine 365
RCP6540 Provincial Oiled Oak 366
RCP6541 Grey Oiled Oak 364
RCP6542 Texan Whiskey Walnut 368
RKP8101 Baltic Washed Oak 339
RKP8102 Washed Velvet Ash 354
RKP8103 Warm Ash 332
RKP8104 Washed Grey Ash 338
RKP8105 Texas White Ash 329
RKP8107 Smoked Butternut 341
RKP8108 Washed Butternut 330
RKP8109 Reclaimed French Oak 344
RKP8110 Antique French Oak 348
RKP8111 Baltic Limed Oak 333
RKP8114 Cathedral Oak 349
RKP8115 English Character Oak 335
RKP8116 Canadian Urban Oak 331
RKP8122 Natural Koa 347
RKP8124 Kilauea Koa 346
RKP8126 Smoked Koa 345
RKP8202 Oyster Oak 336
RKP8203 Shadow Oak 337
RKP8206 Barley Oak 340
RKP8208 Silver Barnwood 342
RKP8209 Salvaged Barnwood 350
RKP8211 Weathered Barnwood 352
RKP8215 Warm Brushed Oak 334
RKP8217 Ivory Brushed Oak 328
RL01 Spring Oak 67
RL02 Summer Oak 69
RL03 Autumn Oak 70
RL04 Winter Oak 71
RL05 Spanish Cherry 75
RL07 Santina Cherry 74
RL09 Coffee Maple 73
RL11 Toasted Maple 72
RL12 Storm Oak 68
RL21 Glacier Oak 64
RL23 Savannah Oak 66
RP41 Australian Walnut 91
RP61 Canadian Maple 78
RP73 Kenyan Tigerwood 82
RP91 Lorenzo Warm Oak 83
RP94 Scorched Oak 92
RP95 Blended Oak 89
RP96 Limed Silk Oak 85
RP97 Limed Jute Oak 84
RP98 Limed Linen Oak 79
RP99 Limed Cotton Oak 87
RP100 Coastal Driftwood 86
RP101 Beach Driftwood 90
RP102 Natural Oak 80
RP103 Harvest Oak 81
RP104 Single Smoked Acacia 88
RP105 Double Smoked Acacia 93
SCB39 Antique Karri 372
SCB42 Jatoba 373
SCB44 Lancewood 379
SCB53 Wellington Oak 380
SCB70 Smoked Oak 384
SCB71 Reclaimed Maple 375
SCB76 Vintage Pine 376
SCB81 Country Oak 377
SCB85 French Oak 374
SCB86 Classic Oak 381
SCB91 Tawny Oak 385
SCB93 Hessian Oak 382
SCB99 Reclaimed Redwood 383
SCB100 Aged Redwood 378
SM-RKP8208 Silver Barnwood 343
SM-RKP8209 Salvaged Barnwood 351
SM-RKP8211 Weathered Barnwood 353
SM-RL21 Glacier Oak 65
VG1-7 Bracken 116
VG5-7 Burnt Ginger 106
VGW33T Copper Gum 109
VGW39T Antique Karri 103
VGW40T Melbourne Larch 98
VGW41T Merbau 119
VGW42T Jatoba 104
VGW44T Lancewood 111
VGW49T Rimu 102
VGW50T Macrocapra 96
VGW51T Aged Kauri 117
VGW53T Wellington Oak 107
VGW54T Christchurch Oak 118
VGW70T Smoked Oak 114
VGW71T Reclaimed Maple 101
VGW76T Vintage Pine 108
VGW81T Country Oak 99
VGW85T French Oak 97
VGW86T Classic Oak 112
VGW89T Ebony 126
VGW91T Tawny Oak 123
VGW92T Burgundy Oak 110

Wood (cont.)

VGW93T Hessian Oak 113
VGW94T Honey Oak 105
VGW95T Lime Washed Cypress 120
VGW96T Burnished Cypress 121
VGW97T Burnished Beech 127
VGW98T Smoked Beech 125
VGW99T Reclaimed Redwood 115
VGW100T Aged Redwood 100
VGW101T Salvaged Redwood 122
VGW102T Charred Oak 124
WP311 Grano 131
WP312 Palleo 133
WP313 Ignea 141
WP315 Aurum 136
WP316 Rubra 147
WP317 Atra 153
WP318 Carbo 151
WP321 Luteus 142
WP322 Canitia 138
WP324 Tergo 152
WP325 Arrado 146
WP326 Natural Walnut 145
WP328 Washed Walnut 140
WP329 Bleached Grey Walnut 139
WP330 Tenebra Walnut 150
WP331 Textum 130
WP411 Niveus 132
WP413 Magna 137
WP414 Argen 148
WP415 Ordo 144
WP416 Linea 134
WP417 Sylva 149
WP511 Weathered Elm 135
WP513 Golden Teak 143

Stone

CC08 Oxide 207
CER11 Molten 208
CER12 Iron Ore 209
CER13 Eisen 206
CER14 Carbon 211
CER15 Dune 200
CER16 Sable 203
CER17 Drift 205
CER19 Burnet 204
CER20 Cambric 201
CER21 Sindon 210
LLT200 Arizona 311
LLT201 Colorado 307
LLT202 Indiana 306
LLT203 Montana 313
LLT204 Pennsylvania 310
LLT205 Nevada 312
LLT206 Georgia 308
LLT207 Texas 309
LM01 Jersey 193
LM02 Guernsey 194
LM03 Alderney 192
LM05 Melbourne 187
LM06 Canberra 189
LM07 Washburn 180
LM08 Caldera 184
LM09 Gallatin 182
LM15 Otono 191
LM16 Fiore 190
LM20 Herm 195
LM21 Oakeley 188
LM22 Corris 186
LM27 Washburn 181
LM28 Caldera 185
LM29 Gallatin 183
LST03 Piazza Limestone 198
LST04 Spirito Limestone 199
LST05 Santi Limestone 202
SP212 Terra 214
SP213 Urbus 218
SP215 Ferra 219
SP216 Fumo 216
SP711 Lapis 217
SP714 Clarus 215
SP715 Robigo 223
SP716 Aurego 221
SP717 Russus 222
SP718 Texo 220
ST5 Soapstone 228
ST12 Bath Stone 229
ST13 Portland Stone 231
ST14 Cumbrian Stone 235
ST16 Grey Riven Slate 232
ST17 Honed Oyster Slate 227
T74 Midnight Black 236
T84 Copper 234
T89 Andecite 233
T90 Carrara 226
T99 Rona 230

Product index by name

Wood

Aged Kauri **VGW51T** 117
Aged Oak **KP98** 176
Aged Redwood **VGW100T** 100
Aged Redwood **SCB100** 378
Aged Spanish Oak **RCP6535** 363
Antique French Oak **RKP8110** 348
Antique Heart Pine **LLP303** 283
Antique Karri **SCB39** 372
Antique Karri **VGW39T** 103
Antique Karri **LLP39** 276
Aran Oak **KP67** 171
Argen **WP414** 148
Arrado **WP325** 146
Ashland **LLP95** 282
Atra **WP317** 153
Aurum **WP315** 136
Australian Walnut **RP41** 91
Autumn Oak **RL03** 70
Baltic Limed Oak **RKP8111** 333
Baltic Washed Oak **RKP8101** 339
Barley Oak **RKP8206** 340
Beach Driftwood **RP101** 90
Bleached Grey Walnut **WP329** 139
Blended Oak **RP95** 89
Boston **LLP111** 264
Bracken **VG1-7** 116
Bray Oak **KP70** 175
Burgundy Oak **VGW92T** 110
Burlington **LLP110** 278
Burnished Beech **VGW97T** 127
Burnished Cypress **VGW96T** 121
Burnt Ginger **LLP5-7** 281
Burnt Ginger **VG5-7** 106
Cambridge **LLP113** 275
Canadian Maple **RP61** 78
Canadian Urban Oak **RKP8116** 331
Canitia **WP322** 138
Carbo **WP318** 151
Cathedral Oak **RKP8114** 349
Cedar **KP35** 160
Champagne Oak **LLP310** 268
Character Walnut **LLP315** 282
Charred Oak **VGW102T** 124
Charred Weathered Pine **RCP6539** 365
Christchurch Oak **VGW54T** 118
Classic Hickory **EW13** 52
Classic Limed Oak **KP97** 170
Classic Oak **VGW86T** 112
Classic Oak **SCB86** 381
Coastal Driftwood **RP100** 86
Coffee Maple **RL09** 73
Copper Gum **LLP33** 269
Copper Gum **VGW33T** 109
Country Oak **VGW81T** 99
Country Oak **SCB81** 377
Country Oak **LLP92** 272
Dawn Oak **HC01** 60
Distressed American Pine **LLP336** 280
Double Smoked Acacia **RP105** 93
Dover **LLP93** 280
Dusk Oak **HC03** 61
Ebony **VGW89T** 126
Elm **KP37** 161
English Character Oak **RKP8115** 335
French Grey Oak **LLP308** 272
French Oak **VGW85T** 97
French Oak **SCB85** 374
Glacier Oak **RL21** 64
Glacier Oak **SM-RL21** 65
Golden Teak **WP513** 143
Grano **WP311** 131
Grey Limed Oak **KP138** 165
Grey Oiled Oak **RCP6541** 364
Grey Scandi Pine **KP131** 157
Hartford **LLP112** 266
Harvest Oak **RP103** 81
Hessian Oak **SCB93** 382
Hessian Oak **VGW93T** 113
Hickory Nutmeg **EW03** 58
Hickory Paprika **EW01** 57
Hickory Peppercorn **EW02** 59
Honey Maple **KP90** 158
Honey Oak **VGW94T** 105
Hudson **LLP99** 265
Ignea **WP313** 141
Ivory Brushed Oak **RKP8217** 328
Jatoba **SCB42** 373
Jatoba **VGW42T** 104
Kenyan Tigerwood **RP73** 82
Kilauea Koa **RKP8124** 346
Lancewood **SCB44** 379
Lancewood **VGW44T** 111
Larne Oak **KP69** 173
Lemon Spotted Gum **LLP317** 270
Lime Washed Cypress **VGW95T** 120
Lime Washed Oak **KP99** 166
Limed Charcoal Oak **RCP6538** 369
Limed Coastal Oak **RCP6534** 358
Limed Cotton Oak **RP99** 87
Limed Jute Oak **RP97** 84
Limed Linen Oak **RP98** 79
Limed Silk Oak **RP96** 85
Linea **WP416** 134
Lorenzo Warm Oak **RP91** 83
Luteus **WP321** 142
Macrocapra **VGW50T** 96
Magna **WP413** 137
Melbourne Larch **VGW40T** 98
Merbau **LLP91** 283
Merbau **VGW41T** 119
Mid Limed Oak **KP96** 169
Midnight Oak **HC06** 63
Native Koa **KP93** 174
Natural Koa **RKP8122** 347
Natural Oak **RP102** 80
Natural Oiled Oak **RCP6536** 361
Natural Walnut **WP326** 145
Neutral Oak **LLP307** 276
Newport **LLP94** 274
Nickel Spotted Gum **KP140** 167
Niveus **WP411** 132
North American Oak **RCP6533** 360
Ordo **WP415** 144
Oyster Oak **RKP8202** 336
Pale Limed Oak **KP94** 164
Palleo **WP312** 133
Pearl Oak **LLP306** 267
Providence **LLP108** 273
Provincial Oiled Oak **RCP6540** 366
Raven Oak **LLP302** 281
Reclaimed Chestnut **EW21** 54
Reclaimed French Oak **RKP8109** 344
Reclaimed Heart Pine **LLP305** 277
Reclaimed Maple **VGW71T** 101
Reclaimed Maple **SCB71** 375
Reclaimed Redwood **SCB99** 383
Reclaimed Redwood **VGW99T** 115
Rimu **VGW49T** 102
Rubra **WP316** 147
Salem **LLP96** 270
Salvaged Barnwood **RKP8209** 350
Salvaged Barnwood **SM-RKP8209** 351
Salvaged Chestnut **EW22** 56
Salvaged Redwood **VGW101T** 122
Santina Cherry **RL07** 74
Savannah Oak **RL23** 66
Scorched Oak **RP94** 92
Shadow Fabric Oak **LLP331** 271
Shadow Oak **RKP8203** 337
Sienna **KP107** 172
Silver Barnwood **SM-RKP8208** 343
Silver Barnwood **RKP8208** 342
Single Smoked Acacia **RP104** 88
Smoked Beech **VGW98T** 125
Smoked Butternut **RKP8107** 341
Smoked Koa **RKP8126** 345
Smoked Oak **VGW70T** 114
Smoked Oak **SCB70** 384
Spanish Cherry **RL05** 75
Spring Oak **RL01** 67
Stamford **LLP109** 271
Storm Oak **RL12** 68
Summer Oak **RL02** 69
Sundown Oak **HC04** 62
Sycamore **KP32** 159
Sylva **WP417** 149
Tasmanian Wattle **LLP38** 277
Taupe Oak **LLP309** 274
Tavern Oiled Oak **RCP6537** 367
Tawny Oak **VGW91T** 123
Tawny Oak **SCB91** 385
Tenebra Walnut **WP330** 150

Wood (cont.)

Tergo **WP324** 152
Texan Whiskey Walnut **RCP6542** 368
Texas White Ash **RKP8105** 329
Textum **WP331** 130
Toasted Maple **RL11** 72
Twilight Oak **LLP301** 279
Urban Fabric Oak **LLP332** 278
Urban Spotted Gum **KP141** 168
Vanilla Oak **LLP333** 266
Vintage Hickory **EW12** 55
Vintage Oregon Oak **RCP6531** 362
Vintage Pine **VGW76T** 108
Vintage Pine **SCB76** 376
Walnut **KP36** 163
Warm Ash **RKP8103** 332
Warm Brushed Oak **RKP8215** 334
Warm Oak **KP39** 162
Washed Butternut **RKP8108** 330
Washed Grey Ash **RKP8104** 338
Washed Velvet Ash **RKP8102** 354
Washed Walnut **WP328** 140
Weathered American Pine **LLP335** 275
Weathered Barnwood **RKP8211** 352
Weathered Barnwood **SM-RKP8211** 353
Weathered Elm **WP511** 135
Weathered Heart Pine **LLP304** 269
Weathered Hickory **EW11** 53
Weathered Oak **RCP6532** 359
Wellington Oak **VGW53T** 107
Wellington Oak **SCB53** 380
White Painted Pine **KP105** 156
Winchester **LLP97** 265
Winter Oak **RL04** 71
Worn Fabric Oak **LLP330** 273

Stone

Alderney **LM03** 192
Andecite **T89** 233
Arizona **LLT200** 311
Aurego **SP716** 221
Bath Stone **ST12** 229
Burnet **CER19** 204
Caldera **LM08** 184
Caldera **LM28** 185
Cambric **CER20** 201
Canberra **LM06** 189
Carbon **CER14** 211
Carrara **T90** 226
Clarus **SP714** 215
Colorado **LLT201** 307
Copper **T84** 234
Corris **LM22** 186
Cumbrian Stone **ST14** 235
Drift **CER17** 205
Dune **CER15** 200
Eisen **CER13** 206
Ferra **SP215** 219
Fiore **LM16** 190
Fumo **SP216** 216
Gallatin **LM09** 182
Gallatin **LM29** 183
Georgia **LLT206** 308
Grey Riven Slate **ST16** 232
Guernsey **LM02** 194
Herm **LM20** 195
Honed Oyster Slate **ST17** 227
Indiana **LLT202** 306
Iron Ore **CER12** 209
Jersey **LM01** 193
Lapis **SP711** 217
Melbourne **LM05** 187
Midnight Black **T74** 236
Molten **CER11** 208
Montana **LLT203** 313
Nevada **LLT205** 312
Oakeley **LM21** 188
Otono **LM15** 191
Oxide **CC08** 207
Pennsylvania **LLT204** 310
Piazza Limestone **LST03** 198
Portland Stone **ST13** 231
Robigo **SP715** 223
Rona **T99** 230
Russus **SP717** 222
Sable **CER16** 203
Santi Limestone **LST05** 202
Sindon **CER21** 210
Soapstone **ST5** 228
Spirito Limestone **LST04** 199
Terra **SP212** 214
Texas **LLT207** 309
Texo **SP718** 220
Urbus **SP213** 218
Washburn **LM07** 180
Washburn **LM27** 181


Karndean
Designflooring