





Table Of Contents

Porcelain Collections

Atelier	4
Atlas	8
Belvedere	12
Bianca Carrara	14
Boise	18
Carrara Select	22
Country Wood	26
Dreaming	28
Ecocem	32
Elegante	36
Linea	40
Loft	44
Marmi Vista	46
Metallic	50
Metro 2.0	54
Metro 3.0	62
Piedra Norge	64
Runway	70
Trevi	74
Waterfall	76



Floor/Wall Tiles - In Stock




WIS12106 Black Honed 12"x24"



WIS12107 Gray Light Honed 12"x24"



WIS12109 Sand Honed 12"x24"

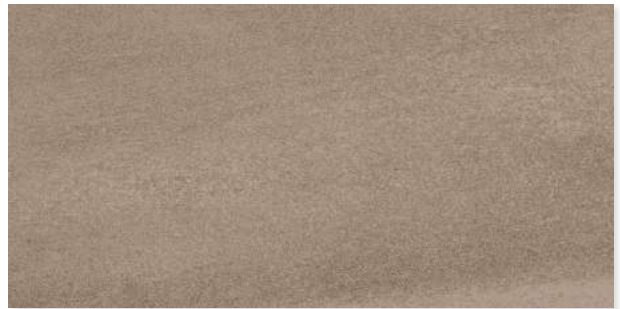


WIS12110 Toupe Honed 12"x24"



WIS12111 White Honed 12"x24"



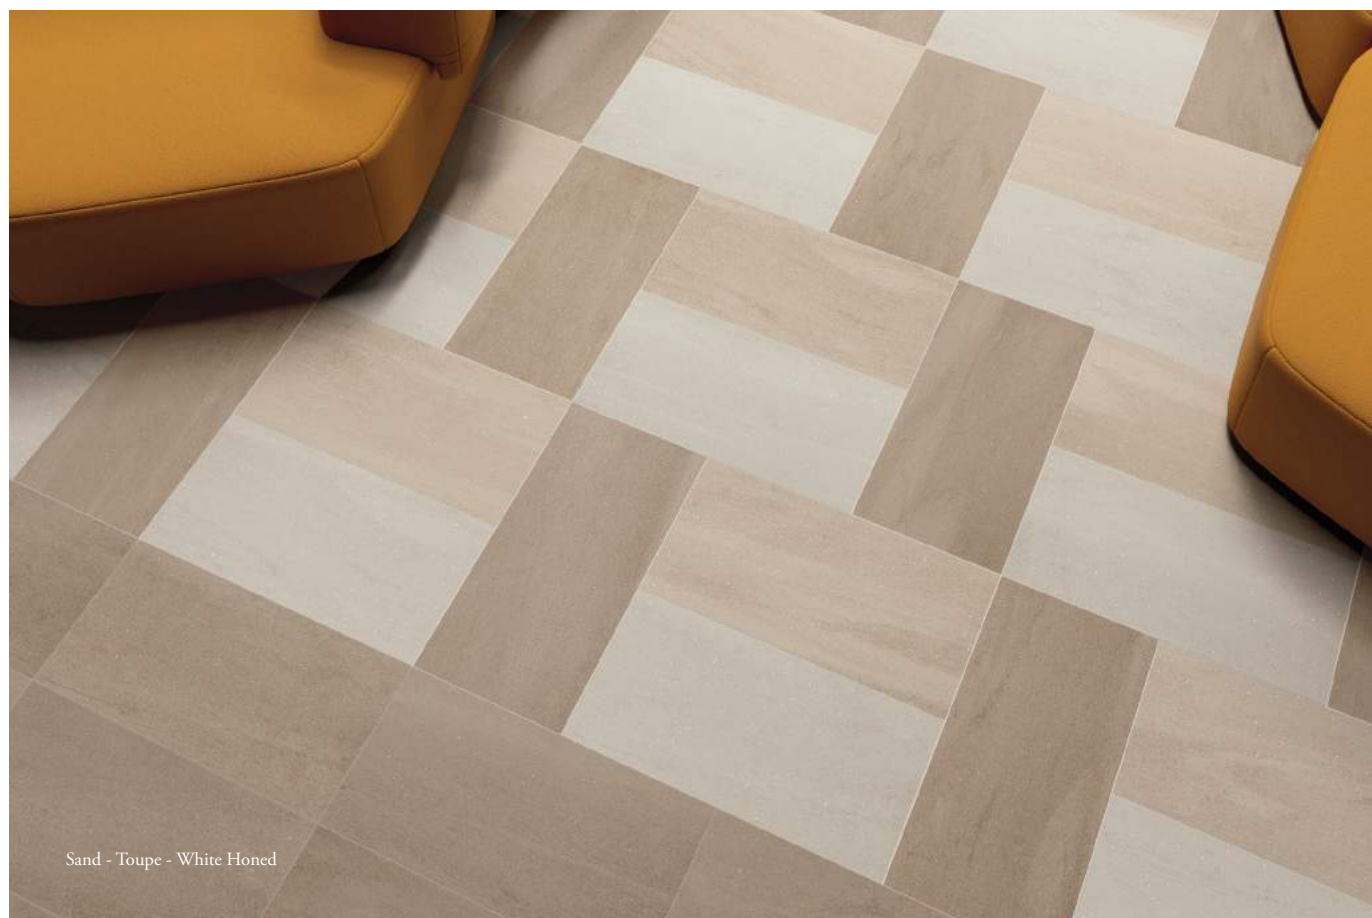

Sand - Toupe - White Honed


Physical Properties	ASTM Test	Industry Standards	Results
Water Absorption	C373	Impervious <0.5%	≤ 0.1%
Thickness Dimension	C499	Range ±0.04in Max	≤ ±0.04 In
Facial Dimension	C499	±0.25%	≤ ±0.25%
Warpage Average	C485	± 0.40% On Any Edge	≤ ± 0.40%
Warpage Average	C485	± 0.40% On Diagonal	≤ ± 0.40%
Warpage Average	C502	± 0.25%	≤ ± 0.25%
Bond Strength	C482	≥ 50 Psi	≥ 200 Psi
Breaking Strength	C648	≥ 250 Lbf	≥ 400 Lbf
Hardness (Mohs)	Scratch Test (No Regulated)	Range 0 - 10	≥ 7
Visible Abrasion Resistance For Glaze Tile	C1027	No Requirement Range 0 - 5	Class 4
Frost Resistance (Freeze/Thaw)	C1026	No Sample Must Show Alterations To Surface	No Evidence Of Damage
Chemical Resistance	C650	No Requirement Range E - A	Class A
Stain Resistance	C1378	No Requirement Range E - A	Class A*
Coefficient Of Friction (Dynamic)	Dcof Acutest SM (Wet)	≥ 0.42	≥ 0.42*
Aesthetic Classification	Visual Evaluation Shade & Texture	No Requirement Range V0 – V4	V2

*All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).



Sahara Sand Honed

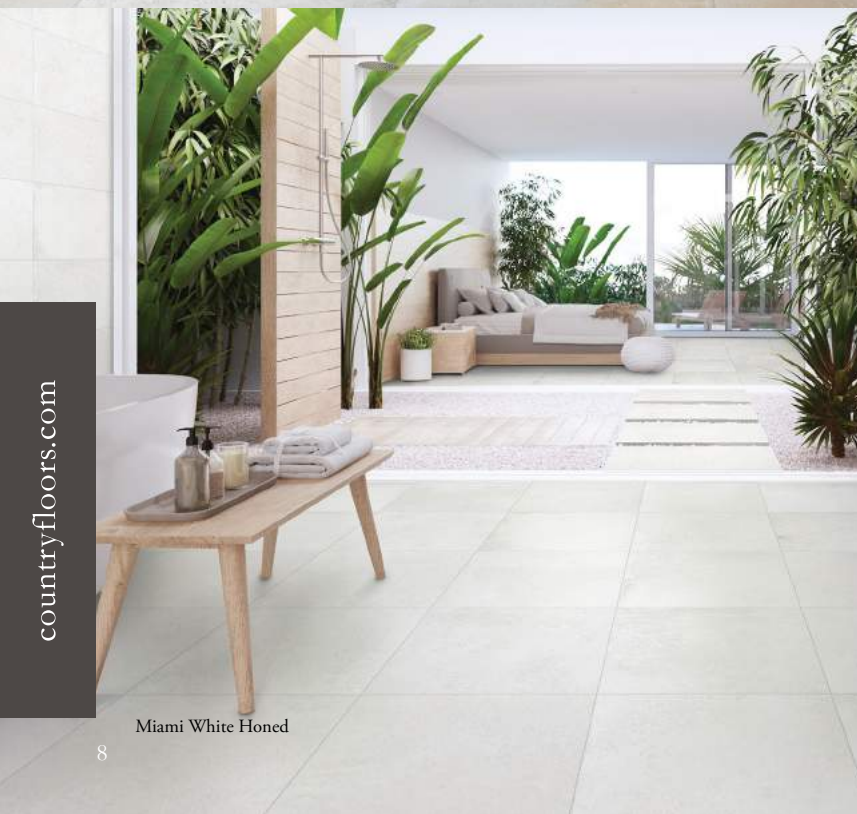

Miami White Honed



New York Light Gray Honed

Floor/Wall Tiles - In Stock



WIS13102 Miami White Honed 12"x24"



WIS13097 New York Light Gray Honed 12"x24"



WIS13100 Sahara Sand Honed 12"x24"



WIS13099 Stockholm Greige Honed 12"x24"



WIS13101 Berlin Toupe Honed 12"x24"



WIS13098 London Black Honed 12"x24"

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Physical - Visual Properties	Astm Test	Industry Standard	Iris Us Results
Water Absorption	C373	Impervious < 0.5%	≤ 0.1%
Thickness Dimension	C499	Range ± 0.04 Inc. Max.	≤± 0.04 Inc.
Facial Dimension	C499	± 0.25%	≤± 0.25%
Warpage Average Diagonal	C485	± 0.40%	≤± 0.40%
Warpage Average Edge	C485	± 0.40%	≤± 0.40%
Wedging	C502	± 0.25%	≤± 0.25%
Bond Strength	C482	≥ 50 psi	≥ 200 psi
Breaking Strength	C648	≥ 250 lbf	≥ 400 lbf
Hardness (Mohs)	Scratch Test (No Regulated)	Range 0 - 10	≥ 7
Visible Abrasion Resistance For Glaze Tiles	C1027	No Requirement, Range 0 - 5	Class 4
Frost Resistance	C1026	No Sample Must Show Alterations To Surface	No Evidence Of Damage
Chemical Resistance	C650	No Requirement, Range c - a	Class a
Stain Resistance	C1378	No Requirement, Range c - a	Class a*
DCOF - Honed	BOT 3000	≥ 0.42*	≥ 0.50
DCOF - Textured	BOT 3000	≥ 0.42*	≥ 0.65
Aesthetic Classification	Visual Evaluation Shade & Texture	No Requirement, Range v0 - v4	v2

*All values given for Matte or Honed material, etc.



Beach Matte 1"x1" Mosaic


Floor/Wall Tiles - In Stock



WSX10033 Beach Matte Rectified 12"x24"
WSX10041 Beach Matte Rectified 24"x24"



WSX10079 Beach Matte Bullnose
3 1/4"x24"

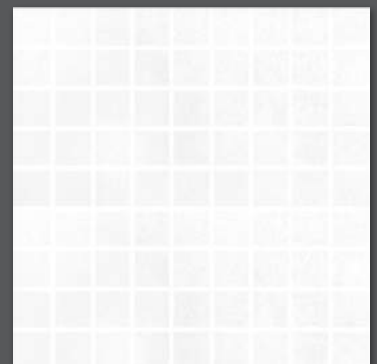

WSX10088 Beach Matte 1"x1" Mosaic


Belvedere Porcelain Collection




WSX10047 Mouse Matte 24"x24"
WSX10039 Mouse Matte 12"x24"



WSX10085 Mouse Matte Bullnose
3 1/4"x24"

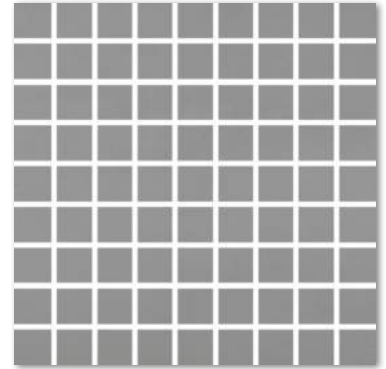


WSX10106 Mouse Matte
1"x1" Mosaic

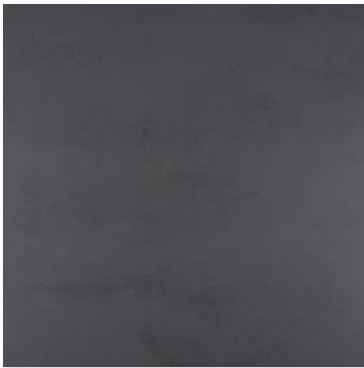


WSX10045 Elephant Matte Rectified 24"x24"
WSX10037 Elephant Matte Rectified 12"x24"




WSX10083 Elephant Matte Bullnose
3 1/4"x24"

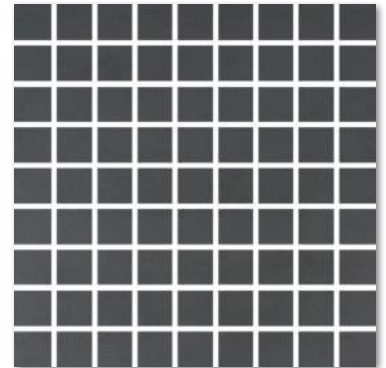


WSX10100 Elephant Matte
1"x1" Mosaic

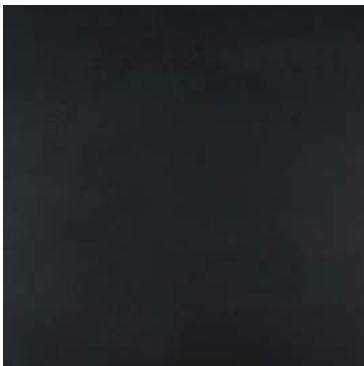

WSX10046 Graphite Matte 24"x24"
WSX10038 Graphite Matte 12"x24"



WSX10084 Graphite Matte Bullnose
3 1/4"x24"

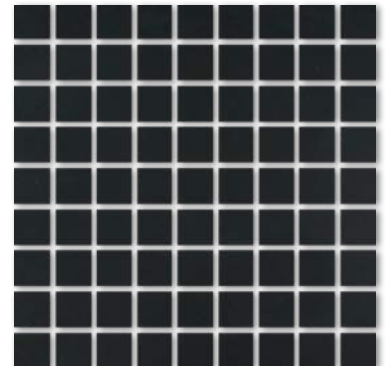

WSX10103 Graphite Matte
1"x1" Mosaic

Technical Characteristics	Norm	Required	Average Value
Water Absorption	ISO 10545-3	Max. 0.5%	<0.5%
Frost Resistance	ISO 10545-12	Required	Resistant
Breaking Strength	ISO 10545-4	>1100 N	>1300 N
Modulus Of Rupture	ISO 10545-2	Min. 35 N/Mm ²	>40 N/Mm ²
Abrasion Resistance	ISO 10545-7	Max. 175mm ³	<120mm ³
Linear Thermal Expansion	ISO 10545-8	Available	7-8x10-6/C-1
Thermal Shock Resistance	ISO 10545-9	Available	Resistant
Resistance To Household Chemicals	ISO 10545-13	Min. Ub	Uha (Max)
Slip Safety	Din 51130 Din 51097	—	R10 A+B

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Bianca Carrara Porcelain Collection

Floor/Wall Tiles - In Stock



WNB00337 Bianco Carrara Polished Rectified 12"x24"
WNB00351 Bianco Carrara Natural Rectified 12"x24"
WNB00338 Bianco Carrara Polished Rectified 3"x12"




WNB00342 Bianco Carrara 2x2 Polished
12"x12"x3/8"

WNB00356 Bianco Carrara 2x2 Natural
12"x12"x3/8"



WNB00341 Bianco Carrara Chevron Polished
10"x11"x3/8"

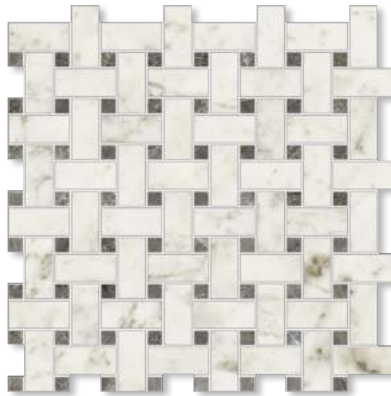

WNB00344 Bianco Carrara Trama Polished
12"x12"x3/8"



WNB00345 Bianco Carrara Zig-Zag Polished
12"x13"x3/8"



WNB00348 Bianco Carrara Battiscopa Polished
3"x24" Molding

WNB00362 Bianco Carrara Battiscopa Natural
3"x24" Molding

More sizes or finishes may be available through special order. Please contact your sales representative for more details.




Characteristics & Test Methods	Requirements Ansi A 137.1	Our General Values																																																																					
Determination of Water Absorption - (ASTM C 373)	Average Value $E_b \leq 0,5 \%$	Average Value $\leq 0,5\%$																																																																					
Classification	Definition § 3.0	Porcelain Tiles																																																																					
Physical Properties																																																																							
Breaking Strength - (ASTM C 648)	Average ≥ 250 Lbf (1.11 Kn)	Complies																																																																					
Visible Abrasion - (ASTM C 1027)	As Reported	–																																																																					
Thermal Shock Resistance (ASTM C 428)	Pass	Complies																																																																					
Crazing Resistance (ASTM C 424)	Pass	Complies																																																																					
Resistance To Freeze/Thaw Cycling (ASTM C 1026)	As Reported	Resistant																																																																					
Dcof Resistance (Ansi A 137.1 Section 9.6)	≥ 0.42 ⁽¹⁾	Dcof ≥ 0.42																																																																					
Bond Strength (ASTM C 482)	≥ 50 Psi (0.34 Mpa)	>1 Mpa																																																																					
Color Uniformity (ASTM C 609 and ANSI A 137.1 Section 9.3) ⁽²⁾	V0 – 3 Judds																																																																						
Chemical Properties																																																																							
Chemical Resistance (Astm C 650)	As Reported																																																																						
<u>Results</u>																																																																							
<table><tr><td>Pencil Test</td><td>Applicable</td><td>X</td><td></td><td>Not Applicable</td><td></td></tr></table>			Pencil Test	Applicable	X		Not Applicable																																																																
Pencil Test	Applicable	X		Not Applicable																																																																			
<table><tr><td colspan="2">Chemical Test Solution (Item 1.2 Of The Standard)</td><td>Visual Test</td><td>Pencil Test</td><td>N. Of Specimens Affected</td></tr><tr><td rowspan="10">Common Household And Cleaning</td><td>Acetic Acid 3% (V/V)</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Acetic Acid 10% (V/V)</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Ammonium Chloride 100 G/L</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Citric Acid 30 G/L</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Citric Acid 100 G/L</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Lactic Acid 5% (V/V)</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Phosphoric Acid 3% (V/V)</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Phosphoric Acid 10% (V/V)</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Sulfamic Acid 30 G/L</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Sulfamic Acid 100 G/L</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td>Swimming Pool</td><td>Sodium Hydrochlorite 20 Mg/L</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td rowspan="2">Acids:</td><td>Hydrochloric Acid 3% (V/V)</td><td>Affected</td><td>Affected</td><td>1</td></tr><tr><td>Hydrochloric Acid 18% (V/V)</td><td>Not Affected</td><td>Not Affected</td><td>0</td></tr><tr><td rowspan="2">Bases:</td><td>Potassium Hydroxide 30 G/L</td><td>Affected</td><td>Affected</td><td>1</td></tr><tr><td>Potassium Hydroxide 100 G/L</td><td>Affected</td><td>Affected</td><td>1</td></tr></table>			Chemical Test Solution (Item 1.2 Of The Standard)		Visual Test	Pencil Test	N. Of Specimens Affected	Common Household And Cleaning	Acetic Acid 3% (V/V)	Not Affected	Not Affected	0	Acetic Acid 10% (V/V)	Not Affected	Not Affected	0	Ammonium Chloride 100 G/L	Not Affected	Not Affected	0	Citric Acid 30 G/L	Not Affected	Not Affected	0	Citric Acid 100 G/L	Not Affected	Not Affected	0	Lactic Acid 5% (V/V)	Not Affected	Not Affected	0	Phosphoric Acid 3% (V/V)	Not Affected	Not Affected	0	Phosphoric Acid 10% (V/V)	Not Affected	Not Affected	0	Sulfamic Acid 30 G/L	Not Affected	Not Affected	0	Sulfamic Acid 100 G/L	Not Affected	Not Affected	0	Swimming Pool	Sodium Hydrochlorite 20 Mg/L	Not Affected	Not Affected	0	Acids:	Hydrochloric Acid 3% (V/V)	Affected	Affected	1	Hydrochloric Acid 18% (V/V)	Not Affected	Not Affected	0	Bases:	Potassium Hydroxide 30 G/L	Affected	Affected	1	Potassium Hydroxide 100 G/L	Affected	Affected	1
Chemical Test Solution (Item 1.2 Of The Standard)		Visual Test	Pencil Test	N. Of Specimens Affected																																																																			
Common Household And Cleaning	Acetic Acid 3% (V/V)	Not Affected	Not Affected	0																																																																			
	Acetic Acid 10% (V/V)	Not Affected	Not Affected	0																																																																			
	Ammonium Chloride 100 G/L	Not Affected	Not Affected	0																																																																			
	Citric Acid 30 G/L	Not Affected	Not Affected	0																																																																			
	Citric Acid 100 G/L	Not Affected	Not Affected	0																																																																			
	Lactic Acid 5% (V/V)	Not Affected	Not Affected	0																																																																			
	Phosphoric Acid 3% (V/V)	Not Affected	Not Affected	0																																																																			
	Phosphoric Acid 10% (V/V)	Not Affected	Not Affected	0																																																																			
	Sulfamic Acid 30 G/L	Not Affected	Not Affected	0																																																																			
	Sulfamic Acid 100 G/L	Not Affected	Not Affected	0																																																																			
Swimming Pool	Sodium Hydrochlorite 20 Mg/L	Not Affected	Not Affected	0																																																																			
Acids:	Hydrochloric Acid 3% (V/V)	Affected	Affected	1																																																																			
	Hydrochloric Acid 18% (V/V)	Not Affected	Not Affected	0																																																																			
Bases:	Potassium Hydroxide 30 G/L	Affected	Affected	1																																																																			
	Potassium Hydroxide 100 G/L	Affected	Affected	1																																																																			
Stain Resistance (Astm C 1378)	As Reported																																																																						
Dimensions - Calibrated Tiles																																																																							
Dimensions - (Astm C 499) - (Astm C 485) - (Astm C 502)	See Ansi A 137.1 - Tab. 10	Complies																																																																					
Dimensions - Rectified Tiles																																																																							
Dimensions - (Astm C 499) - (Astm C 485) - (Astm C 502)	See Ansi A 137.1 - Tab. 10	Complies																																																																					

(1) For level interior spaces expected to be walked upon when wet (2) For V0 tiles only



Tabac Natural Rectified

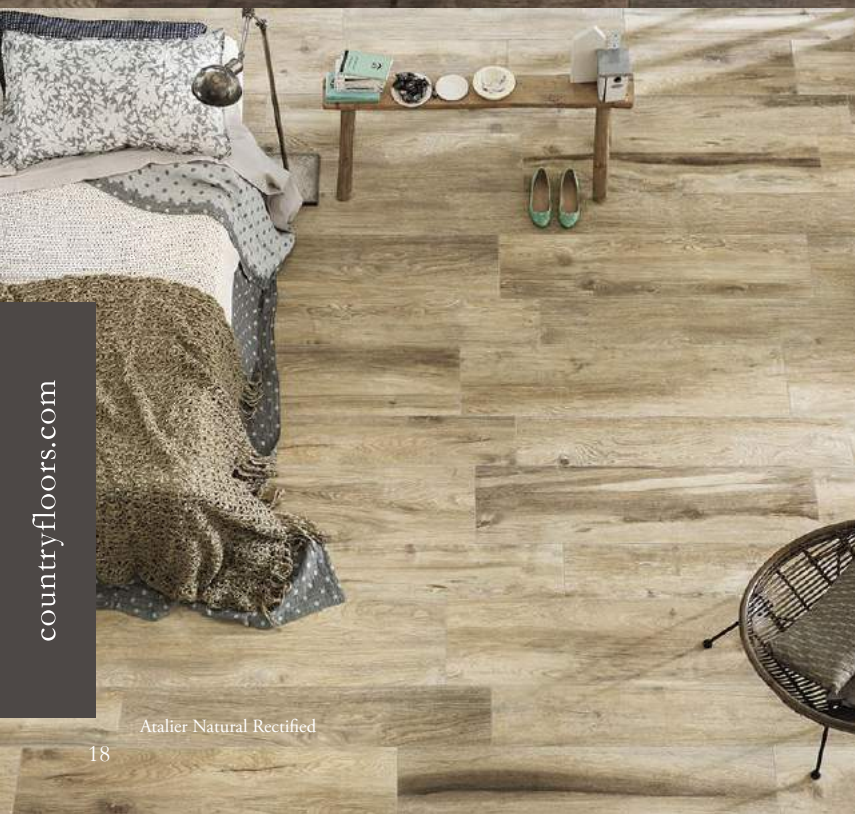

Atelier Natural Rectified



Bambouc Natural Rectified

Floor/Wall Tiles - In Stock



WNB00244 Bamboue Natural 8"x48" Rectified



WNB00223 Atalier Natural 8"x48" Rectified



WNB00251 Riz Natural 8"x48" Rectified



WNB00237 Nuage Natural 8"x48" Rectified



WNB00216 Cannelle Natural 8"x48" Rectified



WNB00230 Tabac Natural 8"x48" Rectified

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Technical Characteristics	ISO Test Method		Naturelle	Antislip	20mm
Fire Resistance			Classe A1	Classe A1	Classe A1
Lead & Cadmium Given Off by Glazed Tiles	ISO 10545/15:2000		Does Not Yield Pb & Cd	Does Not Yield Pb & Cd	Does Not Yield Pb & Cd
Radioactivity Level	UNI 10797:1999		Non-Radioactive	Non-Radioactive	Non-Radioactive
Determination of the Electrical Resistance	EN 1081		$> 2 \times 10^9$	$> 2 \times 10^9$	$> 2 \times 10^9$
Determination of Insulation Resistance of Floors & Walls	CEI 64-8/6 1998:01		Compliant	Compliant	Compliant
Dimensional Characteristics	ISO 10545-2:2000		Compliant	Compliant	Compliant
Water Absorption	ISO 10545-3:2000		$< 0,5\%$	$\leq 0,5\%$	$\leq 0,5\%$
Flexural Strength	ISO 10545-4:2012		$\geq 35\text{N/mm}^2$	$\geq 35\text{N/mm}^2$	$\geq 35\text{N/mm}^2$
Impact Resistance by Measurement of Coefficient of Restitution	ISO 10545-5:2000		$e > 0,80$	$e > 0,80$	$e > 0,80$
Linear Thermal Expansion	ISO 10545-8:2000		$\leq 7,1 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$	$\leq 7,1 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$	$\leq 7,1 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$
Thermal Shock Resistance	ISO 10545-9:2000		Resistant	Resistant	Resistant
Moisture Expansion	ISO 10545-10:2000		$< 0,06\%$	$\leq 0,06\%$	$\leq 0,06\%$
Crazing Resistance (Glazed Tiles)	ISO 10545-11:2000		Resistant	Resistant	Resistant
Frost Resistance	ISO 10545-12:2000		Resistant	Resistant	Resistant
Chemical Resistance (Acids & Alkalis at Low & High Concentrations)	ISO 10545-13:2000		GLA-GHA	GLA-GHA	GLA-GHA
Resistance to Household Chemicals & Swimming Pool Salt	ISO 10545-13:2000		GA	GA	GA
Stains Resistance	ISO 10545-14:2000	Class	≥ 4	≥ 4	≥ 4
Determination of Unpolished & Polished Slip/Skid Resistance Value	DIN 51130		R10	R11	R11
Determination of The Anti-Slip Properties - Wet Loaded Barefoot Areas	DIN 51097	Class	A+B	A+B+C	A+B+C
Determination of Static Coefficient of Friction	ASTM C1028	Dry Wet	≥ 0.65 ≥ 0.60	≥ 0.75 ≥ 0.70	≥ 0.70 ≥ 0.70
Determination of Dynamic Friction Coefficient	B.C.R.A	Leather/Dry Hard Shoe Heeling Rubber/Wet	≥ 0.74 ≥ 0.65	≥ 1 ≥ 0.80	≥ 0.90 ≥ 0.80
Determination of Slip/Skid Resistance Value	UNE ENV 12633	Class	1	2	2
Determination of Dynamic & Static	ANSI A 137,1	DCOF Wet	≥ 0.60	≥ 0.69	≥ 0.69



Floor/Wall Tiles - In Stock



WIS11960 Carrara Arabescato Rectified & Polished
12"x24"



WIS11963 Carrara Venato Rectified & Polished
12"x24"



WIS11961 carrara blu rectified & polished
12"x24"



WIS11962 Carrara Paonazzo Rectified & Polished
12"x24"





Carrara Paonazzo Rectified & Polished

Technical Characteristics	Astm	Required	Results
Water Absorption	C373	Max. 0.5%	≤0.1%
Thickness Dimension	C499	Range 0.04 Max	≤0.04
Facial Dimension	C499	± 0.25%	≤0.25%
Warpage Average	C485	± 0.40% On Any Edge	≤ ± .40%
Warpage Average	C485	± 0.40% On Diagonal	≤ ± .40%
Wedging Average	C502	± 0.25%	≤ ± 0.25%
Bond Strength	C482	50 Psi Or Greater	> 200 Psi
Deep Abrasion	C1243	≤175mm ³	<150mm ³
Hardness (Mohs)		No Requirement	≥ 7
Frost Resistance (Freeze/Thaw)	C1026	No Sample Must Show Alterations To Surface	No Cracking Or Spalling Occurred
Chemical Resistance	C650	No Requirement	Class A
Break Strength	C648	250 lbf Or Greater	≥ 350 lbf
Coefficient Of Friction (Static)	C1028	No Requirement	≥ 0.79 Dry ≥ 0.60 Wet
Coefficient Of Friction (Dynamic)	Dcof Acutest Sm (Wet)	≥ 0.42	≥ 0.42



Country Wood Porcelain Collection

Floor/Wall Tiles - In Stock



WIS11829 Larch Us Matte 8"x48"



WIS11827 Beech Us Matte 8"x48"



WIS11828 Elm Us Matte 8"x48"

Physical Properties	Test	Industry Standards		Results Colored Body	
Water Absorbtion Size Calibrated (Non Rectified)	ASTM C373	0.5% Maximum		≤ 0.1%	
Rectified	ASTM C499	• Range of Thickness (Inch)	0.040	≤ 0.040	acutest DCOF Wet ≥ 0.42
	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%	
	ASTM C485	• Warpage	± 75% on any edge	≤ ± 0.75%	
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.50%	
	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%	
	ASTM C499	• Range of Thickness (Inch)	0.040	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%	
	ASTM C485	• Warpage	± 0.40% on any edge	≤ 0.40%	
Bond Strength	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%	C1028 COF Dry ≥ 0.80 Wet ≥ 0.60
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%	
Deep Abrasion	ASTM C482	50 Psi Or Greater		> 200 psi	
Hardness (Mohs Scale)	ASTM C1243	< 175 Mm ³		< 150 mm ³	
Frost Resistance (Freeze/Thaw)	ASTM C1026	No Requirement		≥ 7	
Chemical Resistance	ASTM C650	No Sample Must Show		no cracking	
Breaking Strength	ASTM C648	Alterations To Surface		or spalling occurred	
Coefficient of Friction (Static)	ASTM C1028	No Requirement		class a	
		250 Lbf Or Greater		≥ 350 lbf	
		No Requirement		per collection	

More sizes or finishes may be available through special order. Please contact your sales representative for more details.





WLE00008 Bianco Statuario Lux Rectified 24"x24"



WLE00016 Bianco Statuario Lux Rectified 12"x24"

WLE00136 Bianco Statuario Velvet Rectified 12"x24"



WLE00035 Bianco Statuario Lux Rectified Bullnose 4"x24"

WLE00031 Bianco Statuario Velvet Bullnose 4"x24"



WLE00041 Bianco Statuario Lux 1"x1" Mosaic 12"x12"



WLE00129 Calacatta Shine Lux Rectified 24"x24"

WLE00130 Calacatta Shine Lux Rectified 29"x29"



WLE00128 Calacatta Shine Lux Rectified 12"x24"

WLE00133 Calacatta Shine Velvet Rectified 12"x24"




WLE00131 Calacatta Shine Lux Rectified Bullnose 4"x24"

WLE00132 Calacatta Shine Velvet Bullnose 4"x24"



WLE00127 Calacatta Shine Lux 1"x1" Mosaic 12"x12"



WLE00009 Crystal White Lux Rectified 24"x24"



WLE00017 Crystal White Lux Rectified 12"x24"

WLE00020 Crystal White Velvet Rectified 12"x24"



WLE00036 Crystal White Lux Rectified Bullnose 4"x24"

WLE00032 Crystal White Velvet Bullnose 4"x24"




WLE00042 Crystal White Lux 1"x1" Mosaic 12"x12"



WLE00920 Lasa Aurora Lux Polished 12"x24"


WLE00922 Lasa Aurora Velvet Matte 12"x24"

WLE00906 Lasa Aurora Lux Polished 24"x48"



WLE00913 Lasa Aurora Lux Polished Bullnose 4"x24"

WLE00914 Lasa Aurora Velvet Matte Bullnose 4"x24"



WLE00926 Lasa Aurora Lux Polished 1"x1" Mosaic 12"x12"

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Romance Safari Velvet Rectified



Lasa Aurora Lux Polished



Grey Stone Lux Rectified



WLE00011 Romance Safari
Lux Rectified 24"x24"

WLE00015 Romance Safari Velvet
Rectified 24"x24"



WLE00019 Romance Safari
Lux Rectified 12"x24"

WLE00022 Romance Safari Velvet
Rectified 12"x24"



WLE00038 Romance Safari
Lux Rectified Bullnose 4"x24"

WLE00034 Romance Safari
Velvet Bullnose 4"x24"



WLE00040 Romance Safari
Lux 1"x1" Mosaic
12"x12"



WLE00120 Gray Stone
Lux Rectified 24"x24"




WLE00119 Gray Stone
Lux Rectified 12"x24"

WLE00124 Gray Stone
Velvet Rectified 12"x24"



WLE00122 Gray Stone
Lux Rectified Bullnose 4"x24"

WLE00123 Gray Stone
Velvet Bullnose 4"x24"



WLE00118 Gray Stone
Lux 1"x1" mosaic
12"x12"

Technical Characteristics	Test Method	Required Values	Average Value
Water Absorption	ISO 10545-3 ASTM C373	≤0.5%	≤0.5%
Frost Resistance	ISO 10545-12 ASTM C1026	No Alteration As Indicated By Manufacturer	Resistant
Breaking Strength	ISO 10545-4 ASTM C1505	≥ 1300 N/mm ² ≥ 250 lbf	2500 N 10mm / 3000 N 11mm 600 lbf 10mm / 700 lbf 11mm
Modulus Of Rupture	ISO 10545-4	≥ 35 N/mm ²	50 N/mm ²
Resistance To Deep Abrasion	ISO 10545-6 ASTM C1243	≤ 175 mm ³	145 mm ³
Linear Thermal Expansion	ISO 10545-8 ASTM C372	No Provision	$\alpha \leq 7 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$ $\alpha \leq 4.4 \times 10^{-6} \text{ }^{\circ}\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
Stain Resistance	ISO 10545-14	Class 3 min.	5 resistant velvet ≥ 3 lux
	ASTM C1378	As Indicated By Manufacturer	A resistant velvet C lux
Chemical Resistance*	ISO 10545-13 ASTM C650	As Indicated By Manufacturer	LA - resistant A resistant
Frost Resistance	ISO 10545-12 ASTM C1026	As Indicated By Manufacturer	Resistant
	ANSI A326.3	DCOF ≥ 0.42	DCOF ≥ 0.42 velvet
Fire Reaction	EN 13823 EN 9239-1	CPR (UE) 305/2011, 2000/147/CE UNI EN 13501-1	class A1 (wall) class A1fl (floor)
Flame Spread	ASTM	No Provision	class A
Thermal Conductivity	EN 12524	-	$\lambda = 1.3 \text{ W/m}^{\circ}\text{K} / 0.7 \text{ BTU/ft h}^{\circ}\text{F}$
Recommended Minimum Joint**	RETT-RECT (indoor)	-	2mm
Shade Variation	ANSI A137.1	As Indicated By Manufacturer	Moderate Variation

*Excluding hydrofluoric acid and its derivatives.

**The width of grout joints must be established by the installation supervisor, unless grout widths are registered by national laying standards. The LUX finish is only recommended for residential and light commercial applications.

Bullnose pieces are recommended to be used in dry areas.


More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Floor/Wall Tiles - In Stock



WIS11839 Melted Ice Honed 12"x24"



WIS11898 Melted Ice Honed Bullnose 3"x24"



WIS11838 Aqua Honed 12"x24"



WIS11897 Aqua Honed Bullnose 3"x24"



WIS11840 Sage Honed 12"x24"



WIS11899 Sage Honed Bullnose 3"x24"



WIS11841 Weathered Black Honed 12"x24"



WIS11900 Weathered Black Honed Bullnose 3"x24"

Bullnose pieces are recommended to be used in dry areas.

Note special order sizes, 18"x36" & 6"x36", are rectified. More sizes or finishes may be available through special order. Please contact your sales representative for more details.





Sage Honed

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		RESULTS COLORED BODY	
Water Absorption Size Calibrated (non rectified)	ASTM C373	0.5% Maximum		≤ 0.1%	
Rectified	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%	
	ASTM C485	• Warpage	± 75% on any edge	≤ ± 0.75%	
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.50%	
	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%	
	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%	
	ASTM C485	• Warpage	± 0.40% on any edge	≤ 0.40%	
Bond Strength	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%	
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%	
	ASTM C482	50 psi or greater		> 200 psi	
Deep Abrasion	ASTM C1243	< 175 mm ³		< 150 mm ³	
Hardness (Mohs scale)		No requirement		≥ 7	
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred	
Chemical Resistance	ASTM C650	No requirement		Class A	
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf	
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection	



Floor/Wall Tiles - In Stock



WIS12565 Romano Greige Polished Rectified 12"x24"

WIS12550 Romano Greige Honed Rectified 12"x24"



WIS12566 Romano White Polished Rectified 12"x24"

WIS12551 Romano White Honed Rectified 12"x24"



WIS12563 Calacatta Renoire Polished Rectified 12"x24"

WIS12547 Calacatta Renoire Honed Rectified 12"x24"



WIS12564 Carrara Onyx Grey Polished Rectified 12"x24"

WIS12548 Carrara Onyx Grey Honed Rectified 12"x24"



WIS12562 Carrara Zebrino Polished Rectified 12"x24"

WIS12549 Carrara Zebrino Honed Rectified 12"x24"

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Physical Properties	Astm Test	Industry Standards	Results
Water Absorption	C373	Impervious < 0.5 %	≤ 0.1 %
Thickness Dimension	C499	Range ±0.04in Max.	≤ ±0.04 In
Facial Dimension	C499	±0.25 %	≤ ±0.25 %
Warpage Average	C485	≤ ±0.40 % On Any Edge	≤ ±0.40 %
Warpage Average	C485	≤ ±0.40 % On Diagonal	≤ ±0.40 %
Wedging Average	C502	±0.25 %	≤ ±0.25 %
Bond Strength	C482	≥ 50 Psi	≥ 200 Psi
Breaking Strength	C648	≥ 250 Lbf	≥ 400 Lbf
Hardness (Mohs)	Scratch Test (No Regulated)	Range 0 -10	≥ 7
Visible Abrasion Resistance For Glaze Tile	C1027	No Requirement Range 0 - 5	Class 4
Frost Resistance (Freeze/Thaw)	C1026	No Sample Must Show Alterations To Surface	No Evidence Of Damage
Chemical Resistance	C650	No Requirement Range E - A	Class A
Stain Resistance	C1378	No Requirement Range E - A	Class A*
Coefficient of Friction (Dynamic)	Dcof Acutest S ^m (Wet)	≥ 0.42	≥ 0.50*
Aesthetic Classification	Visual Evaluation Shade & Texture	No Requirement Range V0 - V4	V2

* All values given are for matte or honed material. No values are given for polished material. It is not recommended for polished surfaces to be in an area subjected to exposure from grease, oil or water.



Floor/Wall Tiles - In Stock



WIS11869 Universe Honed 12"x 24"



WIS11916 Universe Honed Bullnose 3"x 24"



WIS11868 Taupe Blend Honed 12"x 24"



WIS11915 Taupe Blend Honed Bullnose 3"x 24"



WIS11867 Classic Tan Honed 12"x 24"



WIS11914 Classic Tan Honed Bullnose 3"x 24"



WIS11865 Azul Honed 12"x 24"



WIS11912 Azul Honed Bullnose 3"x 24"



WIS11866 Bright Honed 12"x 24"



WIS11913 Bright Honed Bullnose 3"x 24"

Bullnose pieces are recommended to be used in dry areas. Note special order sizes, 18"x36" & 6"x36", are rectified. More sizes or finishes may be available through special order. Please contact your sales representative for more details.





Physical Properties	Test	Industry Standards	Results Colored Body	
Water Absorbtion Size Calibrated (Non Rectified)	ASTM C373	0.5% maximum	$\leq 0.1\%$	
Rectified	ASTM C499	• Range of Thickness (Inch)	≤ 0.040	Acutest DCOF wet > 0.42 —
	ASTM C499	• Average Facial Dimension	$\leq \pm 0.50\%$	
	ASTM C485	• Warpage	$\leq \pm 0.75\%$	
	ASTM C485	• Warpage	$\leq \pm 0.50\%$	
Bond Strength	ASTM C502	• Wedging	$\leq \pm 0.50\%$	C1028 COF dry > 0.80 wet > 0.60
	ASTM C499	• Range of Thickness (Inch)	≤ 0.040	
	ASTM C499	• Average Facial Dimension	$\leq 0.25\%$	
	ASTM C485	• Warpage	$\leq 0.40\%$	
Deep Abrasion	ASTM C485	• Warpage	$\leq 0.40\%$	
Hardness (Mohs Scale)	ASTM C502	• Wedging	$\leq 0.25\%$	
Frost Resistance (Freeze/Thaw)	ASTM C482	50 Psi or Greater	> 200 psi	
Chemical Resistance	ASTM C1243	< 175 Mm ³	< 150 mm ³	
Breaking Strength	ASTM C1026	No Requirement	≥ 7	
Coefficient of Friction (Static)	ASTM C1026	No Sample Must Show Alterations To Surface	No Cracking or Spalling Occurred	
	ASTM C650	No Requirement	Class A	
	ASTM C648	250 Lbf Or Greater	≥ 350 lbf	
	ASTM C1028	No Requirement	Per collection	



Floor/Wall Tiles - In Stock



WIS11988 Block Grey Rectified 12"x24" Lappato



WIS11976 Block White Matte 12"x24"



WIS11990 Block White Rectified 12"x24" Lappato

More sizes or finishes may be available through special order. Please contact your sales representative for more details.





Block White Matte

Technical Characteristics	Standard Test	Required Value	Average Value
Sizes	Calibrated		
	ASTM C499	• Range Of Thickness (Inch) 0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension ± 0.50%	≤ ± 0.50%
	ASTM C485	• Warpage ± 75% On Any Edge	≤ ± 0.75%
	ASTM C485	• Warpage ± 50% On Diagonal	≤ ± 0.50%
	ASTM C502	• Wedging ± 0.50%	≤ ± 0.50%
	rectified		
	ASTM C499	• Range Of Thickness (Inch) 0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension ± 0.25%	≤ ± 0.25%
	ASTM C485	• Warpage ± 0.40% On Any Edge	≤ ± 0.40%
	ASTM C485	• Warpage ± 0.40% On Diagonal	≤ ± 0.40%
	ASTM C502	• Wedging ± 0.25%	≤ ± 0.25%
Water Absorption	ASTM C373	$E \leq 0.5\%$	0.01%
Bending Strength	ASTM C482	50 psi or greater	> 200 psi
Resistance to Abrasion	ASTM C1243	According to manufacturer's data	< 150 mm ³
Coefficient of Linear Thermal Expansion	ASTM C1028	No Requirement	per collection
Resistance To Thermal Shock	-	Test Method Available	guaranteed
Frost Resistance	ASTM C1026	No Sample Must Show Alterations To Surface	no cracking or spalling occurred
Chemical Resistance	ASTM C650	No Requirement	Class A
Breaking Strength	ASTM C648	250 lbf or greater	≥ 350 lbf






WPM00042 Carrara Matte & Rectified 12"x24"

WPM00049 Carrara Matte & Rectified 4"x12"

WPM00038 Carrara Polished & Rectified 2"x24"

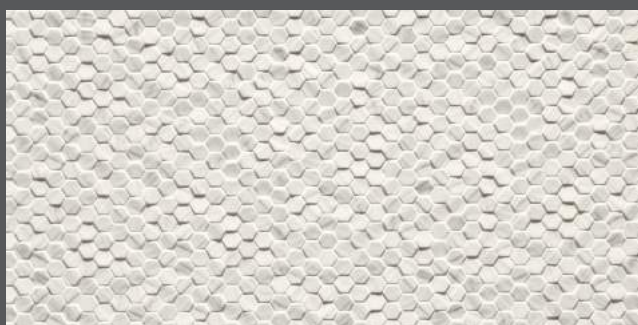

WPM00073 Carrara Esagonetta 3d Texture Matte & Rectified 12"x24"



WPM00053
Carrara Matte & Rectified Hexagon
6 1/2"x5 2/3"



WPM00065
Carrara Matte & Rectified
2"x2"



WPM00106 Carrara Polished & Rectified Bullnose
3"x24"

WPM00102 Carrara Matte & Rectified Bullnose
3"x24"



WPM00043 Statuario Gold Matte & Rectified 12"x24"

WPM00050 Statuario Gold Matte & Rectified 4"x12"


WPM00039 Statuario Gold Polished & Rectified 12"x24"



WPM00074 Statuario Gold Esagonetta 3d Texture Matte & Rectified 12"x24"



WPM00054
Statuario Gold Matte & Rectified Hexagon
6 1/2"x5 2/3"



WPM00066
Statuario Gold Matte & Rectified 2"x2"



WPM00103 Statuario Gold Bullnose Matte & Rectified 3"x24"

WPM00107 Statuario Gold Bullnose Polished & Rectified 3"x24"

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Grigio Bardiglio Matte & Rectified

Floor/Wall Tiles - In Stock



WPM00045 Grigio Bardiglio Matte & Rectified 12"x24"
 WPM00052 Grigio Bardiglio Matte & Rectified 4"x12"
 WPM00041 Grigio Bardiglio Polished & Rectified 12"x24"



WPM00075 Grigio Bardiglio Esagonetta 3d Texture Matte & Rectified 12"x24"



WPM00056 Grigio Bardiglio Matte & Rectified Hexagon
 6 1/2"x5 2/3"



WPM00068 Grigio Bardiglio Matte & Rectified 2"x2"



WPM00105 Grigio Bardiglio Bullnose Matte & Rectified 3"x24"
 WPM00109 Grigio Bardiglio Bullnose Polished & Rectified 3"x24"

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.

Technical Characteristics	Norm	Value Required	Mean Value		Tests
Length & Width	ISO 10545.2	±0.6% (±2.00mm)	In Accordance		ASTM C-499 ASTM C-485 ASTM-502
Thickness		±5% (±0.5mm)			
Warpages of Edges		±0.5% (±1.5mm)			
Wedging		±0.5% (±2.00mm)			
Flatness		±0.5% (±2.00mm)			
Water Absorption	ISO 10545.3		In Accordance		ASTM C-373
Bending Strength	ISO 10545.4	≥35N/mm2	In Accordance		ASTM C-648 250 LBS or greater
Linear Thermal Expansion Between 20° & 100° C	ISO 10545.8	According to Builder's Specifications	7x10-6 C-1		
Thermal Shock Resistance	ISO 10545.9	Request	Resistant		
Frost Resistance	ISO 10545.12	Request	Resistant		ASTM C-1026
Resistance To Chemical Attack	ISO 10545.13	According to Builder's Specifications	Resistant		ASTM C-650
Resistance To Light	DIN 51094	No Alteration	In Accordance		
Stain Resistance	ISO 10545.13	Test Method Available	In Accordance		
Slippage Resistance	DIN 51130	9≤R≤13	NAT		ASTM C-1028 COF ≥0.6 dry ≥0.6 wet
			SAT	D 0.63-W 0.62	
			LAP	D 0.62-W 0.61	
	DIN 51097	A,B,C	NAT		ANSI 137.1-2012 DCOF ≥0.42 wet
			SAT		
			LAP		
Pendulum Slip Test	BS EN 7976-2	> 36 Dry > 36 Wet	NAT		
			SAT		
			LAP		




Floor/Wall Tiles - In Stock



WCP0010 Carbonio 12" x 24"



WCP0134 Carbonio 3 1/2" x 24" Bullnose



WCP0155 Carbonio 2" x 2" Mosaic



WCP0014 Piombo 12" x 24"



WCP0138 Piombo 3 1/2" x 24" Bullnose



WCP0152 Piombo 2" x 2" Mosaic



WCP0013 Argento 12" x 24"



WCP0137 Argento 3 1/2" x 24" Bullnose



WCP0151 Argento 2" x 2" Mosaic

Bullnose pieces are recommended to be used in dry areas.
More sizes or finishes may be available through special order. Please contact your sales representative for more details.




Floor/Wall Tiles - In Stock



WCP0009 Platino 12"x 24"



WCP0133 Platino 3 1/2" x 24" Bullnose




WCP0156 Platino 2"x 2" Mosaic



WCP0012 Iridio 12"x 24"



WCP0136 Iridio 3 1/2" x 24" Bullnose



WCP0153 Iridio 2"x 2" Mosaic



WCP0016 Bronzo 12"x 24"



WCP0140 Bronzo 3 1/2" x 24" Bullnose



WCP0154 Bronzo 2"x 2" Mosaic



Argento

	Standards	Test Results (Approx Value)
Product Classification	Uni En 14411 Iso 13006	Group Bia Gl - Fully Vitrified
Dimensional And Surface Quality	Uni En Iso 10545-2	Very Low Tolerance
Water Absorption	Uni En Iso 10545-3	≤ 0.1%
Flexural Strength	Uni En Iso 10545-4	N/Mm2 50÷60
Frost Resistance	All Standards	Guaranteed
Resistance To Acids And Alkalis (With The Exception of Hydrofluoric Acid)	Uni En Iso 10545-13	Ua
Wear And Abrasion Resistance		High
Linear Thermal Expansion	Uni En Iso 10545-8	6x10-6
Light Fastness	Din 51094	No Change of Colours
Stain Resistance		Guaranteed
Slip Resistance	Din 51130	Rº A



Metro 2.0 Porcelain Collection

Floor/Wall Tiles - In Stock



WQA10054 Slate Stone Grey 12"x24" Matte



WQA10036 Milo Grey 12"x24" Matte



WQA10051 Slate Stone Cream 12"x24" Matte



WQA10044 Milo Silver 12"x24" Matte



WQA10048 Slate Stone Dark Grey 12"x24" Matte



WQA10040 Milo Black 12"x24" Matte




WQA10060 Basalt Black 12"x24" Matte Rectified



WQA10066 Statuario 12"x24" Matte Rectified
WQA10059 Statuario 12"x24" Polished Rectified
WQA10064 Statuario 24"x48" Polished Rectified

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



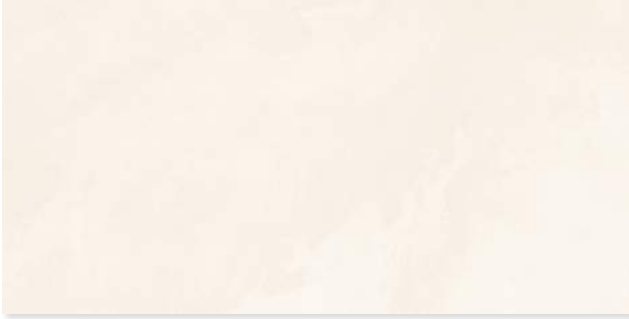

WQA10024 Blow Bianco 12"x24" Matte



WQA10028 Blow Grigio 12"x24" Matte



WQA10032 Blow Nero 12"x24" Matte




WQA10061 Pulpis Grey 12"x24" Polished Rectified



WQA10062 Pulpis Nero 12"x24" Polished Rectified



WQA10120 Ark Silver 12"x24" Matte Rectified

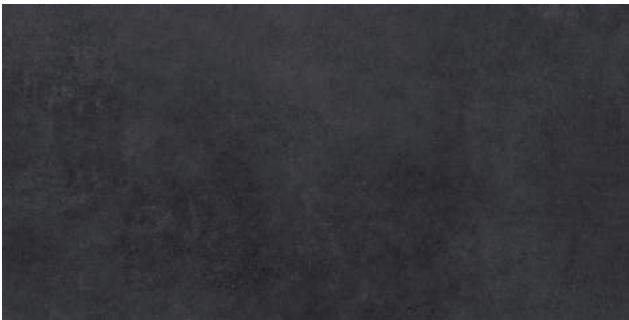

WQA10119 Ark Black 12"x24" Matte Rectified



WQA10075 Mood Ivory 12"x24" Polished Rectified



WQA10076 Mood Ivory 24"x24" Polished Rectified

WQA10033 Ark Ivory 12"x24" Matte Rectified


More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Floor/Wall Tiles - In Stock



WQA10001 Pearl Polished Rectified 12"x24"




WQA10004 Pearl Polished 2"x2" Mosaic



WQA10008 Pearl Polished
3"x6" Brick Staggered Mosaic




WQA10006 Pearl Polished
1"x2" Herringbone Mosaic

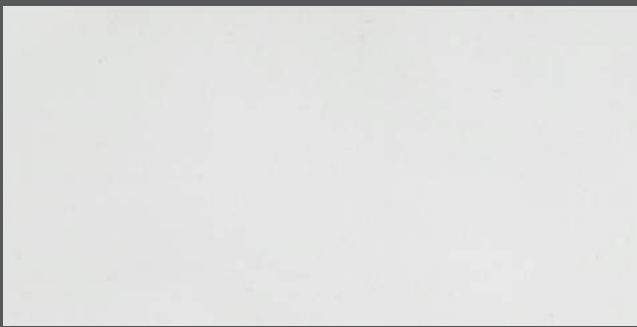

WQA10010 Marginal White Polished Rectified 12"x24"

WQA10012 Marginal White Polished Rectified 24"x48"

WQA10020 Marginal White Matte Rectified 12"x24"



WQA10014 Marginal White Polished 2"x2" Mosaic

WQA10022 Marginal White Matte 2"x2" Mosaic



WQA10018 Marginal White Polished
3"x6" Brick Staggered Mosaic



WQA10016 Marginal White Polished
1"x2" Herringbone Mosaic




Property	Standards	Tse En 14411 Annex-G Grup Bla (Eb ≤ % 0.5)	Test Method
Length & Width	±%0.2	±%0.6	TE EN ISO 10545/2
Thickness	±%5.0	±%5.0	TE EN ISO 10545/2
Side Straightness	±%0.2	±%0.5	TE EN ISO 10545/2
Rectangularity	±%0.2	±%0.5	TE EN ISO 10545/2
Center Curvature	±%0.2	±%0.5	TE EN ISO 10545/2
Edge Curvature	±%0.2	±%0.5	TE EN ISO 10545/2
Warpage	±%0.2	±%0.5	TE EN ISO 10545/2
Surface Quality	Defective	Defective	TE EN ISO 10545/2
Water Absorption	Max. %0.1	Max. %0.5	TE EN ISO 10545/3
Modulus Of Rupture	Min. 51 N/Mm ²	Min. 35 N/Mm ²	TE EN ISO 10545/4
Impact Resistance	Resistant	Resistant	TE EN ISO 10545/5
Surface Abrasion Class	Declared	As Declared	TE EN ISO 10545/7
Linear Thermal Expansion Coefficient	Max. 9x10 ⁻⁶ °K ⁻¹	As Declared	TE EN ISO 10545/8
Thermal Shock	Resistant	Resistant	TE EN ISO 10545/9
Cracking Resistance	Resistant	Resistant	TE EN ISO 10545/11
Frost Resistance	Resistant	Resistant	TE EN ISO 10545/12
Resistance To Staining	min. Class 3	min. Class 3	TE EN ISO 10545/14
Resistance To Acids	min. Class GLB - GHB	min. Class GLB - GHB	TE EN ISO 10545/13
Resistance To Household Chemical	min. Class GB	min. Class GB	TE EN ISO 10545/13

Name	Variation Degree	Pei	Finish
Pulpis	V3	-	Polished
Statuario	V2	-	Polished
Basalt	V3	3	Matte
Milo	V3	4	Matte
Slate Stone	V3	4	Matte
Blow	V2	3	Matte
Marginal White	V1	-	Polished
		3	Matte
Pearl	V2	-	Polished



Carrara White Polished Rectified

Floor/Wall Tiles - In Stock

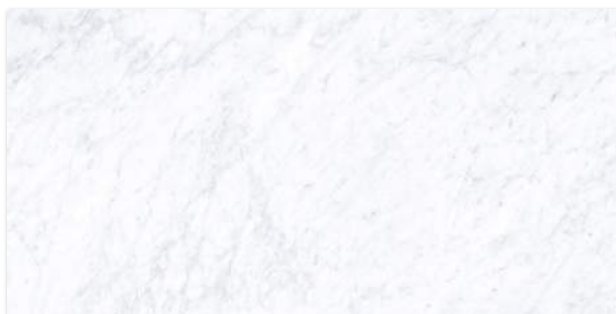

WVT00002 Carrara White 24"x48" Polished Rectified



WVT00004 Royal Ivory 24"x48" Polished Rectified

More sizes or finishes may be available through special order. Please contact your sales representative for more details.

Dimension & Surface Quality	Test Standards	Thickness $\geq 7.5\text{mm}$ Glazed	Tiles Product Value
Length & Width	EN ISO 10545-2	Max. $\pm 0.6\%$ And $\pm 2.0\text{mm}$	Max. $\pm 0.6\%$ And $\pm 2.0\text{mm}$
Thickness		Max. $\pm 5\%$ And $\pm 0.5\text{mm}$	Max. $\pm 5\%$ And $\pm 0.5\text{mm}$
Side Straightness		Max. $\pm 0.5\%$ And $\pm 1.5\text{mm}$	Max. $\pm 0.5\%$ And $\pm 1.5\text{mm}$
Rectangularity		Max. $\pm 0.5\%$ And $\pm 2.0\text{mm}$	Max. $\pm 0.5\%$ And $\pm 2.0\text{mm}$
Surface Flatness (Center & Edge)		Max. $\pm 0.5\%$ And $\pm 2.0\text{mm}$	Max. $\pm 0.5\%$ And $\pm 2.0\text{mm}$
Surface Flatness (Warpage)		Max. $\pm 0.5\%$ And $\pm 2.0\text{mm}$	Max. $\pm 0.5\%$ And $\pm 2.0\text{mm}$
Surface Quality		Min. 95 %	Min. 95 %
Physical Properties			
Water Absorption	EN ISO 10545-3	Avg. $\leq 0.5\%$	Avg. $\leq 0.5\%$
Breaking Strength	EN ISO 10545-4	$>1300\text{ N}$	$>1300\text{ N}$
Modulus Of Rupture		$>35\text{ N/Mm}^2$	$>35\text{ N/Mm}^2$
Deep Abrasion	EN ISO 10545-6	Not Applicable	Not Applicable
Surface Abrasion	EN ISO 10545-7	Report Abrasion Class & Cycles Passed	Pei 1-5
Linear Thermal Expansion	EN ISO 10545-8	Declared Value	Max. $8 \times 10^{-6}\text{ K}^{-1}$
Thermal Shock Resistance	EN ISO 10545-9	Pass	Pass
Crazing Resistance	EN ISO 10545-11	Pass	Pass
Frost Resistance	EN ISO 10545-12	Pass	Pass
Slipperiness	Declared Test Method	Declared Value	No Performance Determined (Din 51130) No Performance Determined (Din 51097)
Moisture Expansion	EN ISO 10545-10	Declared Value	No Performance Determined
Small Color Differences (For Plain Colors)	EN ISO 10545-16	Not Applicable	Not Applicable
Impact Resistance	EN ISO 10545-5	Declared Value	No Performance Determined
Bond Strength (Cementitious Adhesives)	EN 12004:2007	Declared Value	$\geq 0.5\text{ N/Mm}^2$ (Type C2)
Reaction To Fire	-	Class A1 Or A1fl	Class A1fl
Chemical Resistance			
Staining Resistance	EN ISO 10545-14	Min. Class 3	Min. Class 3
Resistance To Household Chemicals & Swimming Pool Salts	EN ISO 10545-13	Min. Class B	Class A
Resistance To Low Concentrations Of Acids & Alkalis		Declared Value	La - Lc
Resistance To High Concentrations Of Acids & Alkalis		Declared Value	Ha - Hc
Lead And Cadmium Release	EN ISO 10545-15	Declared Value	No Performance Determined






WNB00282 Taupe Natural Rectified
12"x24"



WNB00281 Taupe Struttura Cesello R11
12"x24"



WNB00487 Taupe 2x2 Natural
12"x12" Mosaic

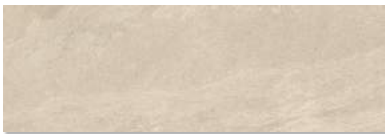

WNB00480 Taupe Rectified
4"x12"



WNB00479 Taupe Strut Cesello Rectified
4"x12"



WNB00332 Taupe Battiscopa Natural
2 3/4"x24"



WNB00284 Ivory Natural Rectified
12"x24"



WNB00283 Ivory Struttura Cesello R11
12"x24"



WNB00488 Ivory 2x2 Natural
12"x12" Mosaic



WNB00482 Ivory Rectified
4"x12"



WNB00481 Ivory Strut Cesello Rectified
4"x12"




WNB00333 Ivory Battiscopa Natural
2 3/4"x24"




Floor/Wall Tiles - In Stock




WNB00288 Slate Natural Rectified
12"x24"

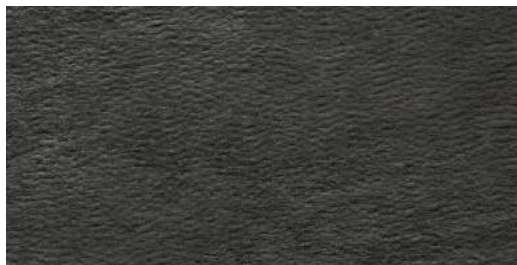


WNB00287 Slate Struttura Cesello R11
12"x24"



WNB00489 Slate 2x2 Natural
12"x12" Mosaic

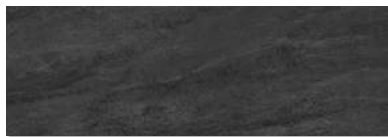

WNB00484 Slate Rectified
4"x12"

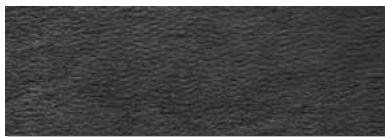


WNB00483 Slate Strut Cesello Rectified
4"x12"



WNB00334 Slate Battiscopa Natural
2 3/4"x24"



WNB00278 Dark Grey Natural Rectified
12"x24"

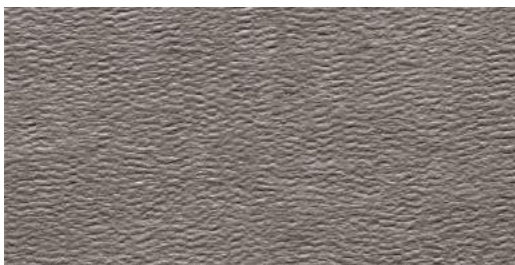


WNB00277 Dark Grey Struttura Cesello R11
12"x24"



WNB00486 Dark Grey 2x2 Natural
12"x12" Mosaic



WNB00478 Dark Grey Rectified
4"x12"

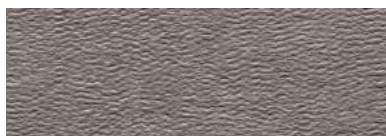

WNB00477 Dark Grey Strut Cesello Rectified
4"x12"



WNB00331 Dark Grey Battiscopa Natural
2 3/4"x24"

More sizes or finishes may be available through special order. Please contact your sales representative for more details.




Light Grey Natural Rectified

Floor/Wall Tiles - In Stock



WNB00274 Light Grey Natural Rectified
12"x24"

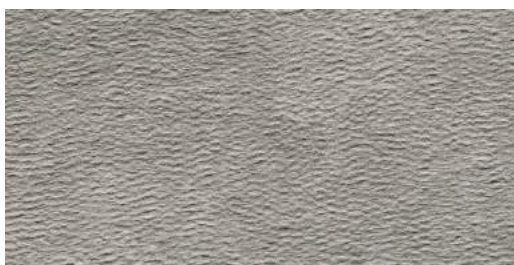


WNB00273 Light Grey Struttura Cesello R11
12"x24"



WNB00485 Light Grey 2x2 Natural
12"x12" Mosaic



WNB00476 Light Grey Rectified
4"x12"

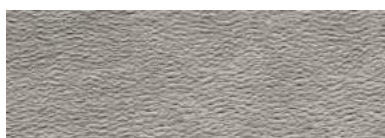

WNB00475 Light Grey Strut Cesello Rectified
4"x12"



WNB00330 Light Grey Battiscopa Natural
2 3/4"x24"



Characteristics & Test Methods	Requirements ANSI A 137.1	General Values
Determination Of Water Absorption (ASTM C 373)	Average Value $E_b \leq 0.5\%$	Average Value $\leq 0.06\%$
Classification	Definition § 3.0	Porcelain Properties
Physical Properties		
Breaking Strength - (ASTM C 373)	Average ≥ 250 lbf (1.11 kN) Individual ≥ 225 lbf (1.00 kN)	Complies
Visible Abrasion - (ASTM C 1027)	As Reported	Class 0 - 5
Recommended Use	Annex N - ISO 13006 / EN 14411	Class 4
Thermal Shock Resistance (ASTM C 428)	Pass	Complies
Crazing Resistance (ASTM C 1026)	Pass	Complies
Resistance to Freeze/Thaw Cycling (ASTM C 1026)	As Reported	Resistant
DCOF resistance (ANSI A 137.1)	$\geq 0.42^{(1)}$	Dcof ≥ 0.42
Bond Strength (ASTM C 482)	≥ 52 psi (0.34 MPa)	> 1 Mpa
Color Uniformity (ASTM C 609 & ANSI A 137.1 section 9.3) ⁽²⁾	V0 - 3 Judds	See The Specific Section
Chemical Properties		
Chemical Resistance (ASTM C 650)	As Reported	Resistant
Stain Resistance (ASTM C 1378)	As Reported	Resistant
Dimensions - Calibrated Tiles		
Dimensions (ASTM C 499) - (ASTM C 485) - (ASTM C 502)	ANSI A 137.1	Complies
Dimensions - Rectified Tiles		
Dimensions (ASTM C 499) - (ASTM C 485) - (ASTM C 502)	ANSI A 137.1	Complies
Scrath Hardens of Surface According to Mohs'	ex BS 6431-13 / ex EN 101	≥ 5

Name	PEI
Ivory	5
Taupe	5
Dark Grey	4
Light Grey	4
Slate	3



Floor/Wall Tiles - In Stock



WIS12084 Ash Honed 12"x24"



WIS12085 Blanc Honed 12"x24"




WIS12086 Delight Honed 12"x24"



WIS12087 Fog Honed 12"x24"

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



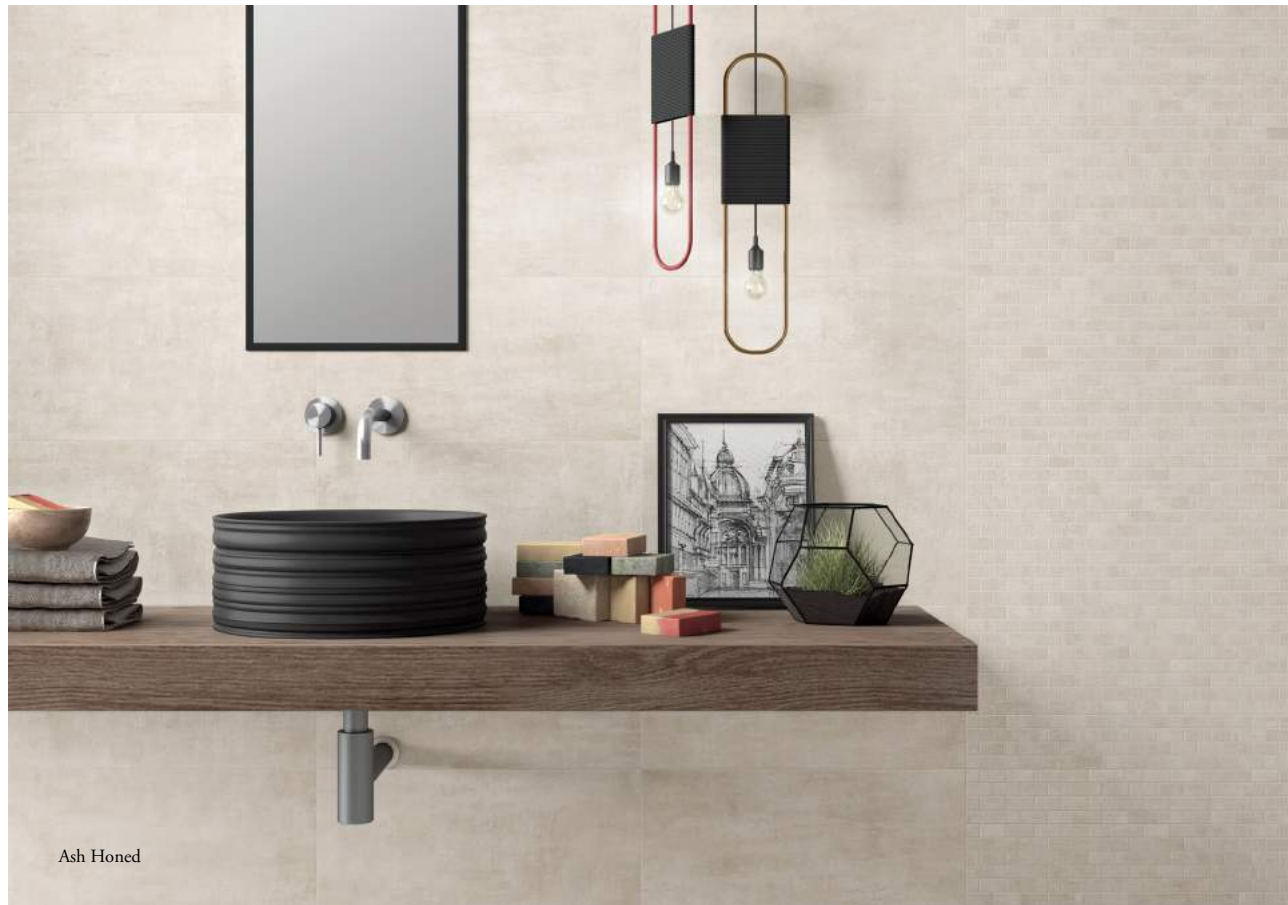

Physical Properties	Astm Test	Industry Standards	Results
Water Absorption	C373	Impervious <0.5%	$\leq 0.1\%$
Thickness Dimension	C499	Range ± 0.04 in Max	$\leq \pm 0.04$ In
Facial Dimension	C499	$\pm 0.25\%$	$\leq \pm 0.25\%$
Warpage Average	C485	$\pm 0.40\%$ On Any Edge	$\leq \pm 0.40\%$
Warpage Average	C485	$\pm 0.40\%$ On Diagonal	$\leq \pm 0.40\%$
Warpage Average	C502	$\pm 0.25\%$	$\leq \pm 0.25\%$
Bond Strength	C482	≥ 50 Psi	≥ 200 Psi
Breaking Strength	C648	≥ 250 Lbf	≥ 400 Lbf
Hardness (Mohs)	Scratch Test (No Regulated)	Range 0 - 10	≥ 7
Visible Abrasion Resistance For Glaze Tile	C1027	No Requirement Range 0 - 5	Class 4
Frost Resistance (Freeze/Thaw)	C1026	No Sample Must Show Alterations To Surface	No Evidence Of Damage
Chemical Resistance	C650	No Requirement Range E - A	Class A
Stain Resistance	C1378	No Requirement Range E - A	Class A*
Coefficient of Friction (Dynamic)	Dcof Acutest SM (Wet)	≥ 0.42	$\geq 0.42^*$
Aesthetic Classification	Visual Evaluation Shade & Texture	No Requirement Range V0 – V4	V2

*All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).



Floor/Wall Tiles - In Stock



WIS11885 Bianco Al Contro Matte 12"x 24"



WIS11922 Bianco Al Contro Matte 4"x 24" Bullnose



WIS11893 Argento Al Contro Matte 12"x 24"



WIS11924 Argento Al Contro Matte 4"x 24" Bullnose



WIS11889 Grigio Al Contro Rectified Matte 12"x24"



WIS11923 Grigio Al Contro Matte 4"x24" Bullnose

Physical Properties	Test	Industry Standards		Results Colored Body	
Water Absorbtion Size Calibrated (Non Rectified)	ASTM C373	0.5% Maximum		≤ 0.1%	Acutest DCOF Wet ≥ 0.42 C1028 COF Dry ≥ 0.80 Wet ≥ 0.60
	ASTM C499	• Range Of Thickness (Inch)	0.040	≤ 0.040	
Rectified	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%	
	ASTM C485	• Warpage	± 75% on Any Edge	≤ ± 0.75%	
	ASTM C485	• Warpage	± 50% on Diagonal	≤ ± 0.50%	
	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%	
	ASTM C499	• Range Of Thickness (Inch)	0.040	≤ 0.040	
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%	
	ASTM C485	• Warpage	± 0.40% on Any Edge	≤ 0.40%	
	ASTM C485	• Warpage	± 0.40% on Diagonal	≤ 0.40%	
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%	
	ASTM C482	50 Psi Or Greater		> 200 psi	
Bond Strength	ASTM C1243	< 175 mm ³		< 150 mm ³	
Deep Abrasion		No Requirement		≥ 7	
Hardness (Mohs Scale)		No Sample Must Show Alterations To Surface		No Cracking Or Spalling Occurred	
Frost Resistance (Freeze/Thaw)	ASTM C1026			class a	
Chemical Resistance	ASTM C650	No Requirement		≥ 350 lbf	
Breaking Strength	ASTM C648	250 Lbf Or Greater		Per Collection	
Coefficient Of Friction (Static)	ASTM C1028	No Requirement			

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



Floor/Wall Tiles - In Stock



WLE00450 Dark Flow Natural Rectified 12"x24"
WLE00458 Dark Flow Natural Rectified 18"x36"
WLE00478 Dark Flow Natural Rectified 24"x24"



WLE00543 Dark Flow Bullnose Natural Rectified 4"x24"



WLE00893 Dark Flow Natural Rectified 2"x2"
12"x12"



WLE00522 Dark Flow Brick Natural Rectified
2 3/4"x11 1/2"
12"x24"




WLE00530 Dark Flow Muretto Natural Rectified
12"x24"



WLE00490
Dark Flow Gamma 16 Natural Rectified DX
7 43/64"x3 13/16"



WLE00494
Dark Flow Gamma 16 Natural Rectified SX
7 43/64"x3 13/16"

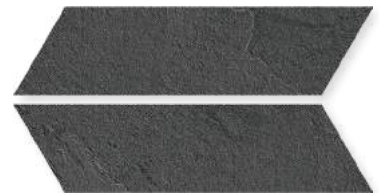

WLE00506 (2 pc set)
Dark Flow Gamma 72 Natural Rectified
19 39/64"x6 21/32"



WLE00502
Dark Flow Gamma 66 Natural Rectified SX
15 7/16"x7 43/64"



WLE00498
Dark Flow Gamma 66 Natural Rectified DX
15 7/16"x7 43/64"

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



COUNTRY FLOORS®

Floor/Wall Tiles - In Stock



WLE00453 Silver Flow Natural Rectified 12"x24"
WLE00461 Silver Flow Natural Rectified 18"x36"
WLE00481 Silver Flow Natural Rectified 24"x24"



WLE00549 Silver Flow Bullnose Natural Rectified 4"x24"



WLE00896 Silver Flow Natural Rectified 2"x2"
12"x12" Mosaic



WLE00525 Silver Flow Brick Natural Rectified
2 3/4"x11 1/2"
12"x24"



WLE00533 Silver Flow Muretto Natural Rectified
12"x24"



WLE00493
Silver Flow Gramma 16 Natural Rectified DX
7 43/64"x3 13/16"



WLE00497
Silver Flow Gramma 16 Natural Rectified SX
7 43/64"x3 13/16"



WLE00509 (2 pc set)
Silver Flow Gramma 72 Natural Rectified
19 39/64"x6 21/32"



WLE00505
Silver Flow Gramma 66 Natural Rectified SX
15 7/16"x7 43/64"



WLE00501
Silver Flow Gramma 66 Natural Rectified DX
15 7/16"x7 43/64"

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.

Waterfall Porcelain Collection

Floor/Wall Tiles - In Stock



WLE00451 Gray Flow Natural Rectified 12"x24"
WLE00459 Gray Flow Natural Rectified 18"x36"
WLE00479 Gray Flow Natural Rectified 24"x24"



WLE00545 Gray Flow Bullnose Natural Rectified 4"x24"



WLE00894 Gray Flow Natural Rectified 2"x2"
12"x12"



WLE00523 Gray Flow Brick Natural Rectified
2 3/4"x11 1/2"
12"x24"




WLE00531 Gray Flow Muretto Natural Rectified
12"x24"



WLE00491
Gray Flow Gramma 16 Natural Rectified DX
7 43/64"x3 13/16"



WLE00495
Gray Flow Gramma 16 Natural Rectified SX
7 43/64"x3 13/16"

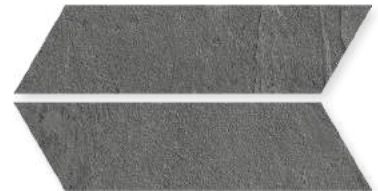

WLE00507 (2 pc set)
Gray Flow Gramma 72 Natural Rectified
19 39/64"x6 21/32"



WLE00503
Gray Flow Gramma 66 Natural Rectified SX
15 7/16"x7 43/64"



WLE00499
Gray Flow Gramma 66 Natural Rectified DX
15 7/16"x7 43/64"

Bullnose pieces are recommended to be used in dry areas.

More sizes or finishes may be available through special order. Please contact your sales representative for more details.



COUNTRY FLOORS®



Dark Flow






COUNTRY FLOORS®

Floor/Wall Tiles - In Stock



WLE00452 Ivory Flow Natural Rectified 12"x24"
WLE00460 Ivory Flow Natural Rectified 18"x36"
WLE00480 Ivory Flow Natural Rectified 24"x24"



WLE00547 Ivory Flow Bullnose Natural Rectified 4"x24"



WLE00895 Ivory Flow Natural Rectified 2"x2"
12"x12"



WLE00524 Ivory Flow Brick Natural Rectified
2 3/4"x11 1/2"
12"x24"



WLE00532 Ivory Flow Muretto Natural Rectified
12"x24"



WLE00492
Ivory Flow Gramma 16 Natural Rectified DX
7 43/64"x3 13/16"



WLE00496
Ivory Flow Gramma 16 Natural Rectified SX
7 43/64"x3 13/16"



WLE00508 (2 pc set)
Ivory Flow Gramma 72 Natural Rectified
19 39/64"x6 21/32"



WLE00504
Ivory Flow Gramma 66 Natural Rectified SX
15 7/16"x7 43/64"




WLE00500
Ivory Flow Gramma 66 Natural Rectified DX
15 7/16"x7 43/64"

Bullnose pieces are recommended to be used in dry areas.


More sizes or finishes may be available through special order. Please contact your sales representative for more details.

Technical Characteristics	Test Method	Required Values	Average Value
Water Absorption	ISO 10545-3 ASTM C373	≤0.5%	≤0.5%
Frost Resistance	ISO 10545-12 ASTM C1026	No Alteration As Indicated By Manufacturer	Resistant
Breaking Strength	ISO 10545-4 ASTM C1505	≥ 1300 N/Mm ² ≥ 250 Lbf	2500 N 10mm / 3000 N 11mm 600 Lbf 10mm / 700 Lbf 11mm
Modulus Of Rupture	ISO 10545-4	≥ 35 N/Mm ²	50 N/Mm ²
Resistance To Deep Abrasion	ISO 10545-6 ASTM C1243	≤ 175 Mm ³	145 Mm ³
Linear Thermal Expansion	ISO 10545-8 ASTM C372	No Provision	$A \leq 7 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$ $A \leq 4.4 \times 10^{-6} \text{ }^{\circ}\text{F}^{-1}$ / $A \leq 8 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
Stain Resistance	ISO 10545-14	Class 3 Min.	5 Resistant Velvet ≥ 3 Lux
	ASTM C1378	As Indicated By Manufacturer	A Resistant Velvet C Lux
Chemical Resistance*	ISO 10545-13 ASTM C650	As Indicated By Manufacturer	La - Resistant A Resistant
Frost Resistance	ISO 10545-12 ASTM C1026	As Indicated By Manufacturer	Resistant
	ANSI A326.3	Dcof ≥ 0.42	Dcof ≥ 0.42 Velvet
Fire Reaction	EN 13823 EN 9239-1	Cpr (Ue) 305/2011, 2000/147/Ce Uni En 13501-1	Class A1 (Wall) Class A1fl (Floor)
Flame Spread	ASTM	No Provision	Class A
Thermal Conductivity	EN 12524	-	$\Lambda = 1.3 \text{ W/M}^{\circ}\text{K} / 0.7 \text{ Btu/Ft H}^{\circ}\text{F}$
Recommended Minimum Joint**	Rett-Rect (Indoor)	-	2mm
Shade Variation	Ansi A137.1	As Indicated By Manufacturer	Moderate Variation


Gramma

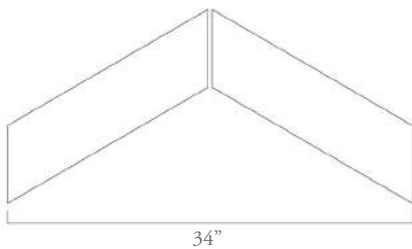

Gramma 72



Gramma 66



Gramma 16



COUNTRY FLOORS

a division of MARBLE SYSTEMS

countryfloors.com

COUNTRY FLOORS

New York

15 East 16th Street New York, NY 10003
Phone : 212 627 8300 Fax : 212 242 1604

Los Angeles

8735 Melrose Avenue Los Angeles, CA 90069
Phone : 310 657 0510 Fax : 310 657 2172

San Francisco

Two Henry Adams Street St. 100 San Francisco, CA 94103
Phone : 415 241 0500 Fax : 415 241 0600

MARBLE SYSTEMS

Mid-Atlantic & Mid-West Division

2737 Dorr Avenue Fairfax, VA 22031
Phone : 703 226 1590 Fax : 703 226 1591

Northeast Division

610 Washington Ave, Carlstadt, NJ 07072
Phone : 201 507 0111 Fax : 201 507 0888

West Coast Division

2111 E Howell Ave, Anaheim, CA 92806
Phone : 714 525 8910 Fax : 714 525 8911

Miami & Caribbean Division

2920 NW 79th Avenue Doral, FL 33122
phone : 305 463 9850 Fax : 305 463 9851

Southeast Division

2010 West Atlantic Blvd. Pompano Beach, FL 33069
Phone : 954 979 9530 Fax : 954 979 9531

Puerto Rico Division

279 José De Diego Ave. San Juan, PR 00920
Phone : 787 793 5642 Fax : 787 774 8238

Dominican Republic Division

Calle Dr Manuel Emilio Perdomo #33, local 3 Ensanche Naco Santo Domingo, República
Phone : 809 692 2391

COPYRIGHT © 1983 - 2020 COUNTRYFLOORS



CountryFloors



countryfloors1



countryfloors



country-floors



country_floors