

LUCIDA[®]

SURFACES

setting life's stage[™]



*Glue*CORE[™]



This: 327 Silkstone | Cover: 314 Slate Gray

A stage is as sound as its foundation, as strong as its core and as stylish as its surface.

EnCore™

EnCore™ Technology is a bespoke surface because a symphony is as memorable as its finish.

Urethane with Ceramic Bead Finish



4x UV coat plus ceramic bead finish for super-max strength and quality.

Abrasion and Stain Resistant



22 MIL hardened vinyl wear layer provides excellent resistance to abrasive scuffs and stains.

HD Decorative Film



High definition film prints create vivid, natural hardwood & stone looks.

Density: 3000kg/m³

CorePrit™

CorePrit™ Technology is a white limestone core essence that is the spine of our product

100% Virgin Dry-back LVT (Premium Luxury Vinyl Tile)



Approved for all all healthcare and educational facilities.

Heavy Duty



Heavy Duty. Commercial Grade Medical Facilities Approved.

Glue Down



The industry's strongest and most innovative glue-down floor.

Anti-microbial.



100% Waterproof
Rigid Core Performance



25 Year Warranty
10 Years Commercial



0.09"
Thickness 2.5 mm



22 mil
Wear Layer .55 mm



Glue Down System

Woodgrain Planks

W 7 5/16"
Width 185 mm



48"
Length 1220 mm



Woodgrain Texture

Stone-Look Tiles

W 12"
Width 305 mm



24"
Length 610 mm



Smooth Texture

GlueCORE™

Highly rated and approved for institutional flooring, GlueCore™ is the perfected merger of luxury and durability. Offered in a large selection of classic and popular prints, to suit every style and facility.

Wear Layer

1. Urethane with Ceramic Bead Finish
2. 4x UV coat for super-max strength and quality.
3. Wear Layer provides resistance to abrasive scuffs and stains.

Core

- HD Decorative Film for vivid, natural look
 - 100% Virgin Dry-back LVT
 - Offset LVT layers for 2x strength and stability.
- The industry's strongest and most innovative glue-down floor. Approved for all all healthcare and educational facilities.



Box		Pallet	
16	39	65	2,535
planks	sq ft	boxes	sq ft



Box		Pallet	
18	36	72	2,592
planks	sq ft	boxes	sq ft



The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



302 | Cashmere



Like that sweater, soft, luxurious, fashionable



303 | Silver Grey



Prestigious, mature, and sophisticated



305 | Coffee



To be enjoyed, shared, and inhaled

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



306 | Ash Grey



Like camping in a 5-star resort



309 | Ombre



Raw, real, ungarnished, you



310 | Lava



Smooth and liquid, if wood were glass

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



311 | Shadow



A secret lying beneath the surface



312 | Seal Gray



Boutique without trying



313 | Harbor Gray



The difference between an apartment and a loft

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



314 | Slate Gray



Downtown artist meets uptown wealth



315 | Thunder Sky



Like living in a brilliant, Oscar-winning film



316 | Whitewood



Regal nature, like a wild horse

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



317 | Angled Walnut



Chevron patterned beauty



318 | Woodmere



A pigment of your imagination



319 | Greywood



A conservative business suit with vim

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



320 | Fadewood



Soft and familiar, like your favorite jeans

^ Woodgrain 7 ⁵/₁₆" x 48" Planks

Stone-Look 12" x 24" Tiles ▼



321 | Blackrock



White-veined nighttime

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



322 | Whitestone




Classic strength, timeless elegance



323 | Greystone



Mystery married to resonance

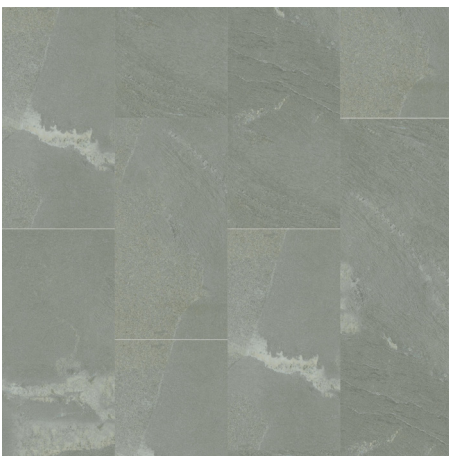

324 | Moonrock



Out of this world

The Soundtrack Collection

Every moving picture is elevated by a good soundtrack. The Soundtrack Collection lends music to your moving picture, aka: life.



325 | Riverrock




Flowingly lovely, rich and alive



326 | Satinstone



Just enough texture to make it interesting

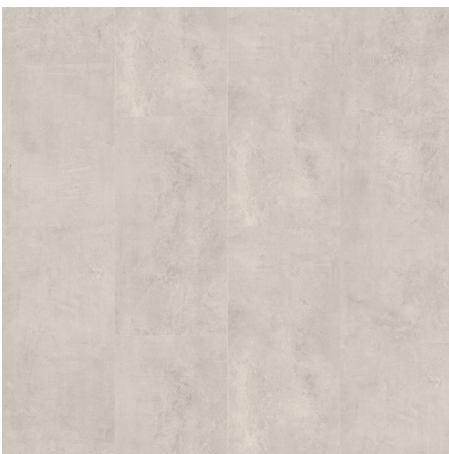

327 | Silkstone



Smooth and comforting, urban farmhouse

ITEM	SPECIFICATION
------	---------------

TECHNICAL SPECIFICATIONS

Dimensions	Width: 7 5/16" (185mm), Length: 48" (1,219 mm)
Thickness	Overall: 0.09" (2.5mm) Wear Layer: 0.55 mm (22mil)
Profile	Micro-Bevel Edges
Coverage	39 sq.ft (3.62 sq.m) per box, 2,535 sq.ft (235 sq.m) per pallet
Planks per Box	16 Planks
Boxes per Pallet	65 Boxes
Weight	35 lbs (15.9 kgs) per box, 2296 lbs (1041 kgs) per pallet
Type & Composition	100% Virgin Hardened Vinyl Core
Application	Residential & Commercial
Surface Treatment	4x UV Coating, anti-microbial embedded with Ceramic bead Finish
Visual Pattern Repeat	Approx. every 1,200mm (39.37in)
Print pattern repeat	Approx. 1 plank in every 10 boxes
Backing	Dry Back
Warranty	10 Year Limited Commercial 25 Year Limited Residential

PERFORMANCE

Dimensional Stability	.0038% inch/foot	ASTM F2199	Stain & Chemical Resistance	0: 95% Ethyl Alcohol, Cement Paste, 10% Ammonium hydroxide, Kerosene, Sesame Oil, Soy Sauce, Soy Bean Oil, Lubricant, Coffee, Tea, Ketchup. 1: Nitric Acid, Sulfuric Acid 95%. 2: Acetone, Nail Polish Remover, Methylene Chloride. KSM 3802—24 Hr. Exposure
Sound Absorbption	48/54	IIC RATING/STC RATING	Smoke Density - Flaming	280 (Corrected to Max Density) ASTM E662
Use with Underfloor Radiant Heating		Recommended	Smoke Density - Non-Flaming	417 (Corrected to Max Density) ASTM E662
Floorscore	Certified		Short Term Indentation 0.008"	ASTM F1914
Emmissions after 28 days		≤0.005 parts/million	Static Load 1,000 PSI	
Critical Radiant Flux	0.99 watts/cm2	ASTM E648-06	0.008" of Residual Indentation	ASTM F970
Pass		Mekol Burner Test	Static Coefficient of Friction	Dry: 0.60 ASTM D2047 Dry: 0.7144 ASTM C1028 Wet: 0.8900
Light Resistance	6.0	ASTM F1515	Rolling Chair	Negligable Disturbance ATSM F2753
Heat Stability	4.3	ASTM 1514		
Slip Resistance R=10 (Meets Commercial Standard)		AS 4586 (CSIRO)		
Walking Angle	16°			
ADA	Exceeds ADA Requirements			
Deflection	55.29 mm ASTM F1304			
Abrasion Resistance	0.003% @ 1,000 Cycles	ASTM D3884		



LUCIDA®
SURFACES
setting life's stage™

Lucida Surfaces USA

P.O. Box 327, Tallman, NY 10982

Warehouse:

525A South Avenue,
Plainfield, NJ 07060
+1 (845) 877-7008

Lucida Surfaces Canada

8620 Rue Pascal-Gagnon
Montreal QC H1P 1Z1
+ (514) 587-9926

LiveOnLucida.com