Volume 4

PRODUCT CATALOG



Core Values

WORK HARD AND WORK SMART "A dedication to do the job right, the first time".

"Go to the ant, O sluggard, Observe her ways and be wise, Which having no chief. Officer or ruler, Prepares her food in the summer And gathers her provision in the harvest". *Proverbs 6:6-8*

CARING FOR OUR CUSTOMERS "We believe our focus on the needs of our customers leads us to do the right thing, preserving and strengthening the relationship".

"A new commandment I give to you, that you love one another, even as I have loved you, that you also love on another. By this all men will know that you are My disciples, if you have love for one another". *John 13:34-35*

SERVING EACH OTHER "An unselfish attitude that puts others ahead of oneself, making us a stronger team".


"Do nothing from selfishness or empty conceit, but with humility of mind regard one another as more important than yourselves; do not merely look out for your own personal interests, but also for the interests of others". *Philippians 2:3-4*



Plank it!

Versatile designs. Swift ordering. Quick fulfillment. That's the Trinity Tile "Plank It" program! Trinity Tile products are now offered in a variety of plank sizes allowing you more design possibilities. Depending on the specific tile series, choose from multiple plank width and length options (custom field tile and bullnose sizes available upon request), all possible at a $500 minimum order requirement. Go ahead and "plank it!"

SIZES AVAILABLE

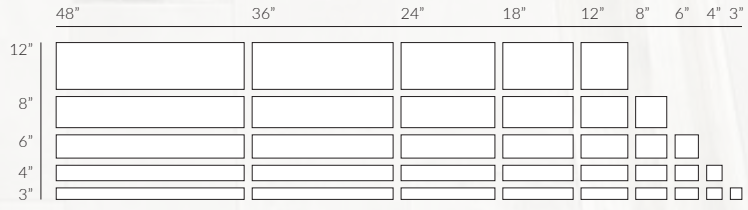

Concrete Effect.....04

alta.....06
axis.....08
centre.....10
color dimensions.....12
design lab.....14
design lab slabs.....16
dusk.....18
eventide.....20
gelso.....22
hudson square.....24
ironworks.....26
metropole.....28
nuvo.....30
palais.....32
paramount style.....34
reminisce.....36
selva.....38
siren.....40
splendid.....42
stardust.....44
veneziana.....46
virtue.....48

Stone Effect.....50

aragonite.....52
cascade.....54
chatham.....56
cosmic.....58
drift.....60
dune.....62
dynasty.....64
lenox.....66
moxie.....68
novara.....70
paramount marmi.....72
paramount divine.....74
paramount lust.....76
paramount luxe.....78
paramount slab.....80
pathways.....82
renaissance.....84
stoneland.....86
supreme.....88
troika.....90
troika xl.....92

Textile Effect.....94

corduroy.....96
eve.....98
moda.....100
muse.....102
rhythm.....104
social.....106

Wood Effect.....108

acadian.....110
bryce wood.....112
crescent falls.....114
crowne.....116
design lab wood.....118
estate wood.....120
glenridge.....122
kaen.....124
lexington.....126
oleander.....128
primo.....130
rolling mill.....132
sansa.....134
stardust wood.....136
vela.....138
wood dimensions.....140
woodstream.....142

Wall & Decorative.....144

adella.....146
ambient.....148
avery.....150
bantry.....152
blakely.....154
brick kiln.....156
burch.....158
centerville.....160
color code.....162
fermosa.....164
link.....166
malia.....168
marquee.....170
mecca.....172
mixed up.....174
mixt.....176
nexus.....178
pez.....180
santorini.....182
spectrum.....184
stockade.....186
terracolors.....188
tortugas.....190
umbra.....192
vitality.....194
wall tile collection.....196
watercolors.....198
west shore.....200
wonderlust.....202

Care & Conditions.....204

care & maintenance.....206
terms & conditions.....208



CONCRETE
effect



FLOOR: VENEZIANA SILVER

alta

thru body rectified porcelain tile, made in spain

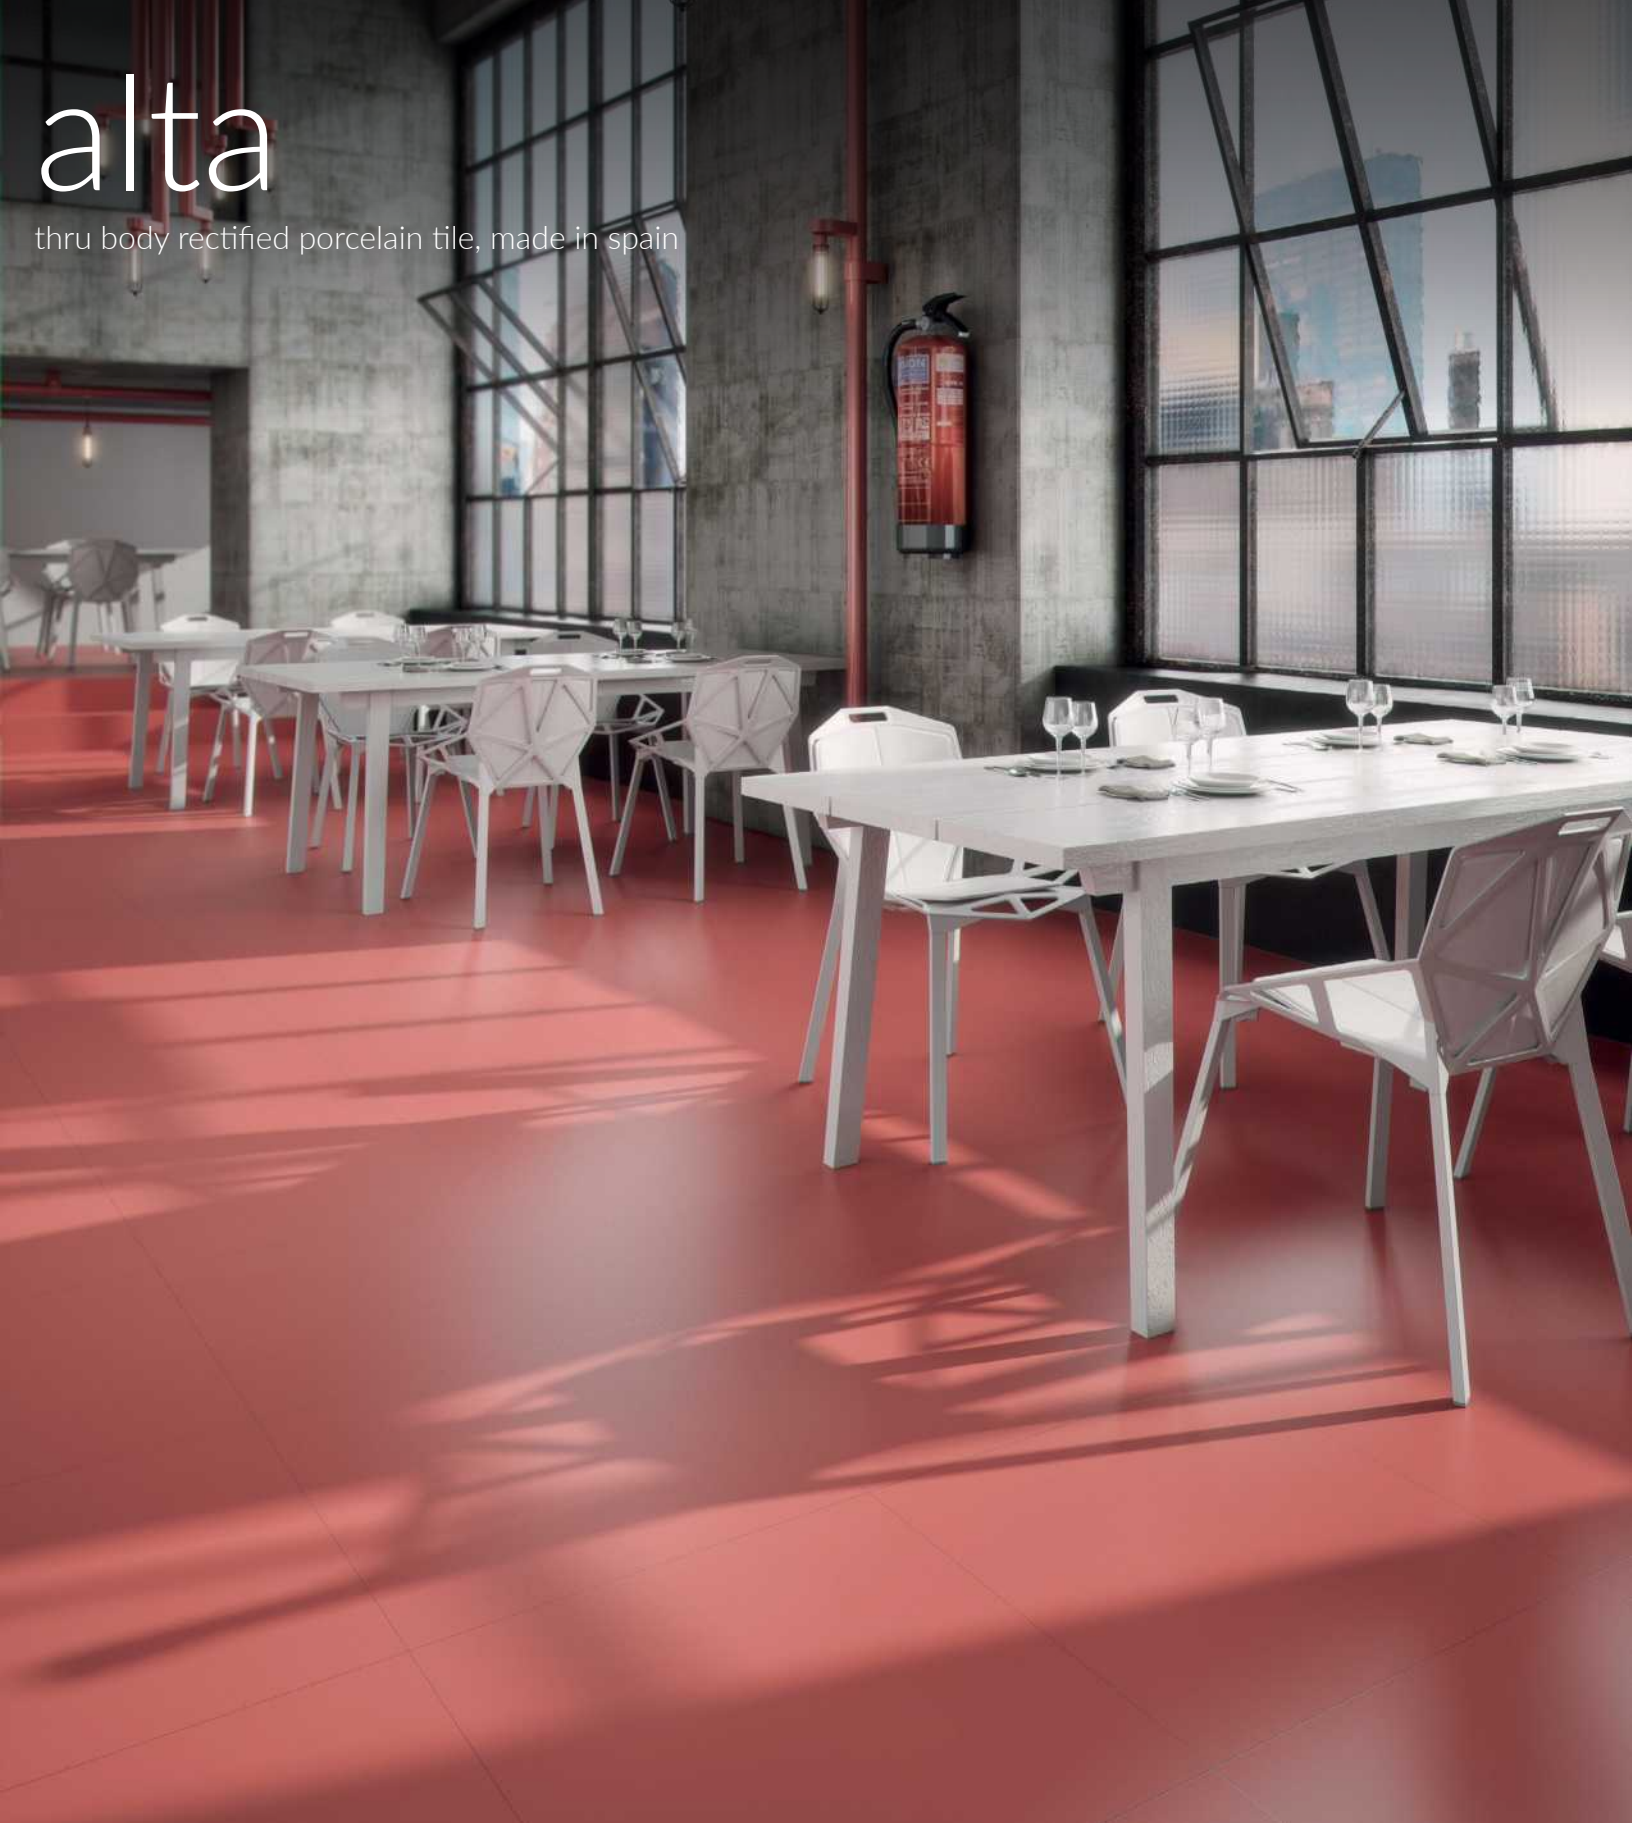


trinity tile
Inspiring Surface Design

alta

thru body rectified porcelain tile, made in spain

trinity tile

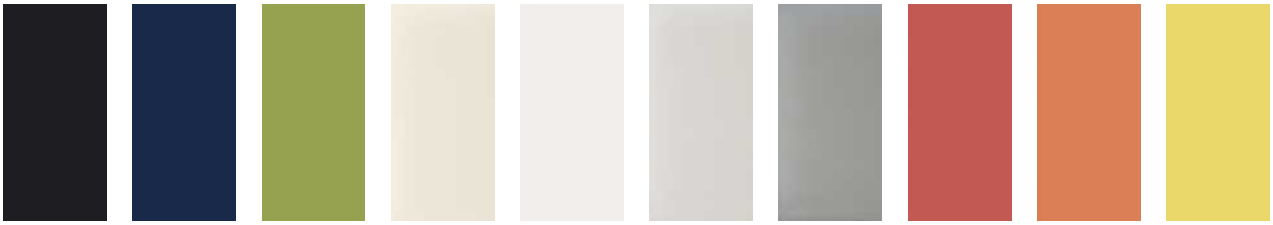


black blue green bone white pearl gray red orange yellow



brown silver salvia ocean nut mosto graphite beige almond

AVAILABLE SIZES

	32" x 32"	24" x 48"	24" x 24"	12" x 24"	6" x 24"	4" x 24"	2" x 2" mosaic
black	●▲	●▲	●▲	●▲	●▲	●▲	●▲
blue			●▲	●▲	●▲	●▲	●▲
green			●▲	●▲	●▲	●▲	●▲
bone	●▲	●▲	●▲	●▲	●▲	●▲	●▲
white	●▲	●▲	●▲	●▲	●▲	●▲	●▲
pearl	●▲	●▲	●▲	●▲	●▲	●▲	●▲
gray	●▲	●▲	●▲	●▲	●▲	●▲	●▲
red			●▲	●▲	●▲	●▲	●▲
orange			●▲	●▲	●▲	●▲	●▲
yellow			●▲	●▲	●▲	●▲	●▲
brown			●▲	●▲	●▲	●▲	●▲
silver			●▲	●▲	●▲	●▲	●▲
salvia			●▲	●▲	●▲	●▲	●▲
ocean			●▲	●▲	●▲	●▲	●▲
nut			●▲	●▲	●▲	●▲	●▲
mosto			●▲	●▲	●▲	●▲	●▲
graphite			●▲	●▲	●▲	●▲	●▲
beige	●▲	●▲	●▲	●▲	●▲	●▲	●▲
almond			●▲	●▲	●▲	●▲	●▲



warm 2"x2"



rainbow 2"x2"



cold 2"x2"



warm tears



rainbow tears



cold tears

● MATTE
▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	face count	water absorption	frost resistance	scratch resistance	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	N/A	ISO 10545-3	ISO 10545-12	MOHS	ISO 10545-2	ANSI A 137.1
Results	10mm	V2	mono	≤ 0.1%	Resistant	8	≥ 2600 lbs	matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

axis

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

axis

thru color rectified porcelain tile, made in italy

trinity tile



ice




bianco




beige



gray

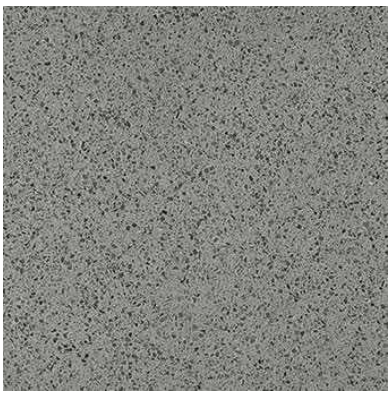

dark grey

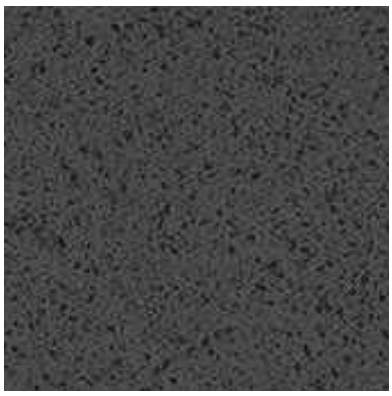

charcoal

AVAILABLE SIZES

	47 1/16" x 47 1/16"	23 5/8" x 23 5/8"	11 13/16" x 23 5/8"	2 3/8" x 23 5/8"	2 3/8" x 2 3/8"	bullnose 2 13/16" x 23 5/8"	23 5/8" x 23 5/8" 20mm paver	step tread 13" x 23 5/8"	step tread corner 13"x13"
ice	●	● ▲	● ▲	● ▲	● ▲	● ▲		●	●
bianco		● ▲	● ▲	● ▲	● ▲	● ▲	■	●	●
beige	●	● ▲	● ▲	● ▲	● ▲	● ▲	■	●	●
grey		● ▲	● ▲	● ▲	● ▲	● ▲		●	●
dark grey	●	● ▲	● ▲	● ▲	● ▲	● ▲	■	●	●
charcoal	●	● ▲	● ▲	● ▲	● ▲	● ▲		●	●

● MATTE ▲ POLISHED ■ GRIP

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	breaking strength	chemical resistance	impact resistance	deep scratch resistance	dynamic coefficient of friction
Test	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-4	ISO 10545-13	ISO 10545-5	ISO 10545-6	ANSI A 137.1
Results	9mm	Resistant	≤ 0.1%	S ≥ 1300 N	Resistant	≥ 0,80	≤ 145 mm3	matte/grip ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

centre

thru color rectified porcelain, made in usa



trinity tile
Inspiring Surface Design

centre

thru color rectified porcelain, made in usa

trinity tile



salted 40%



sanded 40%



smoked 40%



smoldered 40%



sabled 40%



salted parquet mosaic




sanded parquet mosaic



smoked parquet mosaic



smoldered parquet mosaic



sabled parquet mosaic

AVAILABLE SIZES

	24"x48"	24"x24"	12"x24"	cube mosaic 12"x12"	parquet mosaic 12"x12"	design 6 mosaic 12"x24"	3"x24" bullnose	6"x12" cove base
salted	●	●	●	●	●	●	●	●
sanded	●	●	●	●	●	●	●	●
smoked	●	●	●	●	●	●	●	●
smoldered	●	●	●	●	●	●	●	●
sabled	●	●	●	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	visible abrasion resistance	shade variation	breaking strength	hardness	dynamic coefficient of friction
Test	N/A	ASTM C373	ASTM C650	ASTM C1027	N/A	ASTM C648	Mohs	BOT 3000
Results	8mm	≤0.1%	Class A	Class 4	V3	≥ 400 lb.	≥ 7	Matte ≥0.55, SP ≥0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

color dimensions

porcelain tile, made in spain



trinity tile
Inspiring Surface Design

color dimensions

porcelain tile, made in spain

trinity tile

hexagon white


hexagon gris

hexagon crema


hexagon marrone



hexagon negro

left chevron white


left chevron gris

left chevron crema


left chevron marrone


left chevron negro


right chevron white



right chevron gris


right chevron crema



right chevron marrone



right chevron negro



Pattern 1
Hexagon 25%
Chevron Left 75%



Pattern 2
Hexagon 100%


Pattern 3
Hexagon 6%
Chevron Left 47%
Chevron Right 47%



Pattern 4
Chevron Left 100%


Pattern 5
Chevron Left 50%
Chevron Right 50%


Pattern 6
Chevron Left 50%
Chevron Right 50%


Pattern 7
Chevron Left 50%
Chevron Right 50%

AVAILABLE SIZES





	7"x8" hexagon	3½"x8" chevron left	3½"x8" chevron right
white	●	●	●
gris	●	●	●
crema	●	●	●
marrone	●	●	●
negro	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nomial thickness	frost resistance	water absorbtion	chemical resistance	dynamic coefficient of friction	breaking strength
Test	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-13	ANSI 137.1	ISO 10545-4
Results	9.5mm & 10.5mm	resistant	≤ .5%	resistant	matte ≥ 0.68, grip ≥ 0.84	1300 N

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

design lab

thru body rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

design lab

thru body rectified porcelain tile, made in italy

trinity tile

bianco



sabbia



taupe



fango



grigio chario



grigio scuro



antracite



nero

FINISHES



matte



semi-polished



textured

AVAILABLE SIZES

	24"x48"	24"x24"	12"x24"	4"x24"	6"x24" 3D Mosaic	4"x24" Bullnose	26"x6"x2" Stair Tread	12"x24" Stair Tread
bianco	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
sabbia	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
taupe	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
fango	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
grigio chario	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
grigio scuro	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
antracite	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■
nero	● ▲ ■	● ▲ ■	● ▲ ■	● ▲ ■	●	● ▲ ■	●	● ▲ ■

● MATTE ▲ SEMI-POLISHED ■ TEXTURED

TECHNICAL SPECIFICATIONS


	nominal thickness	shade variation	frost resistance	water absorption	chemical resistance	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-13	ISO 10545-4	BOT3000
Results	10mm (Polished 9mm)	V2	resistant	≤ 0.5%	resistant	1300 N	Matte, Textured ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

design lab slabs

thru body rectified large format porcelain tile, made in italy

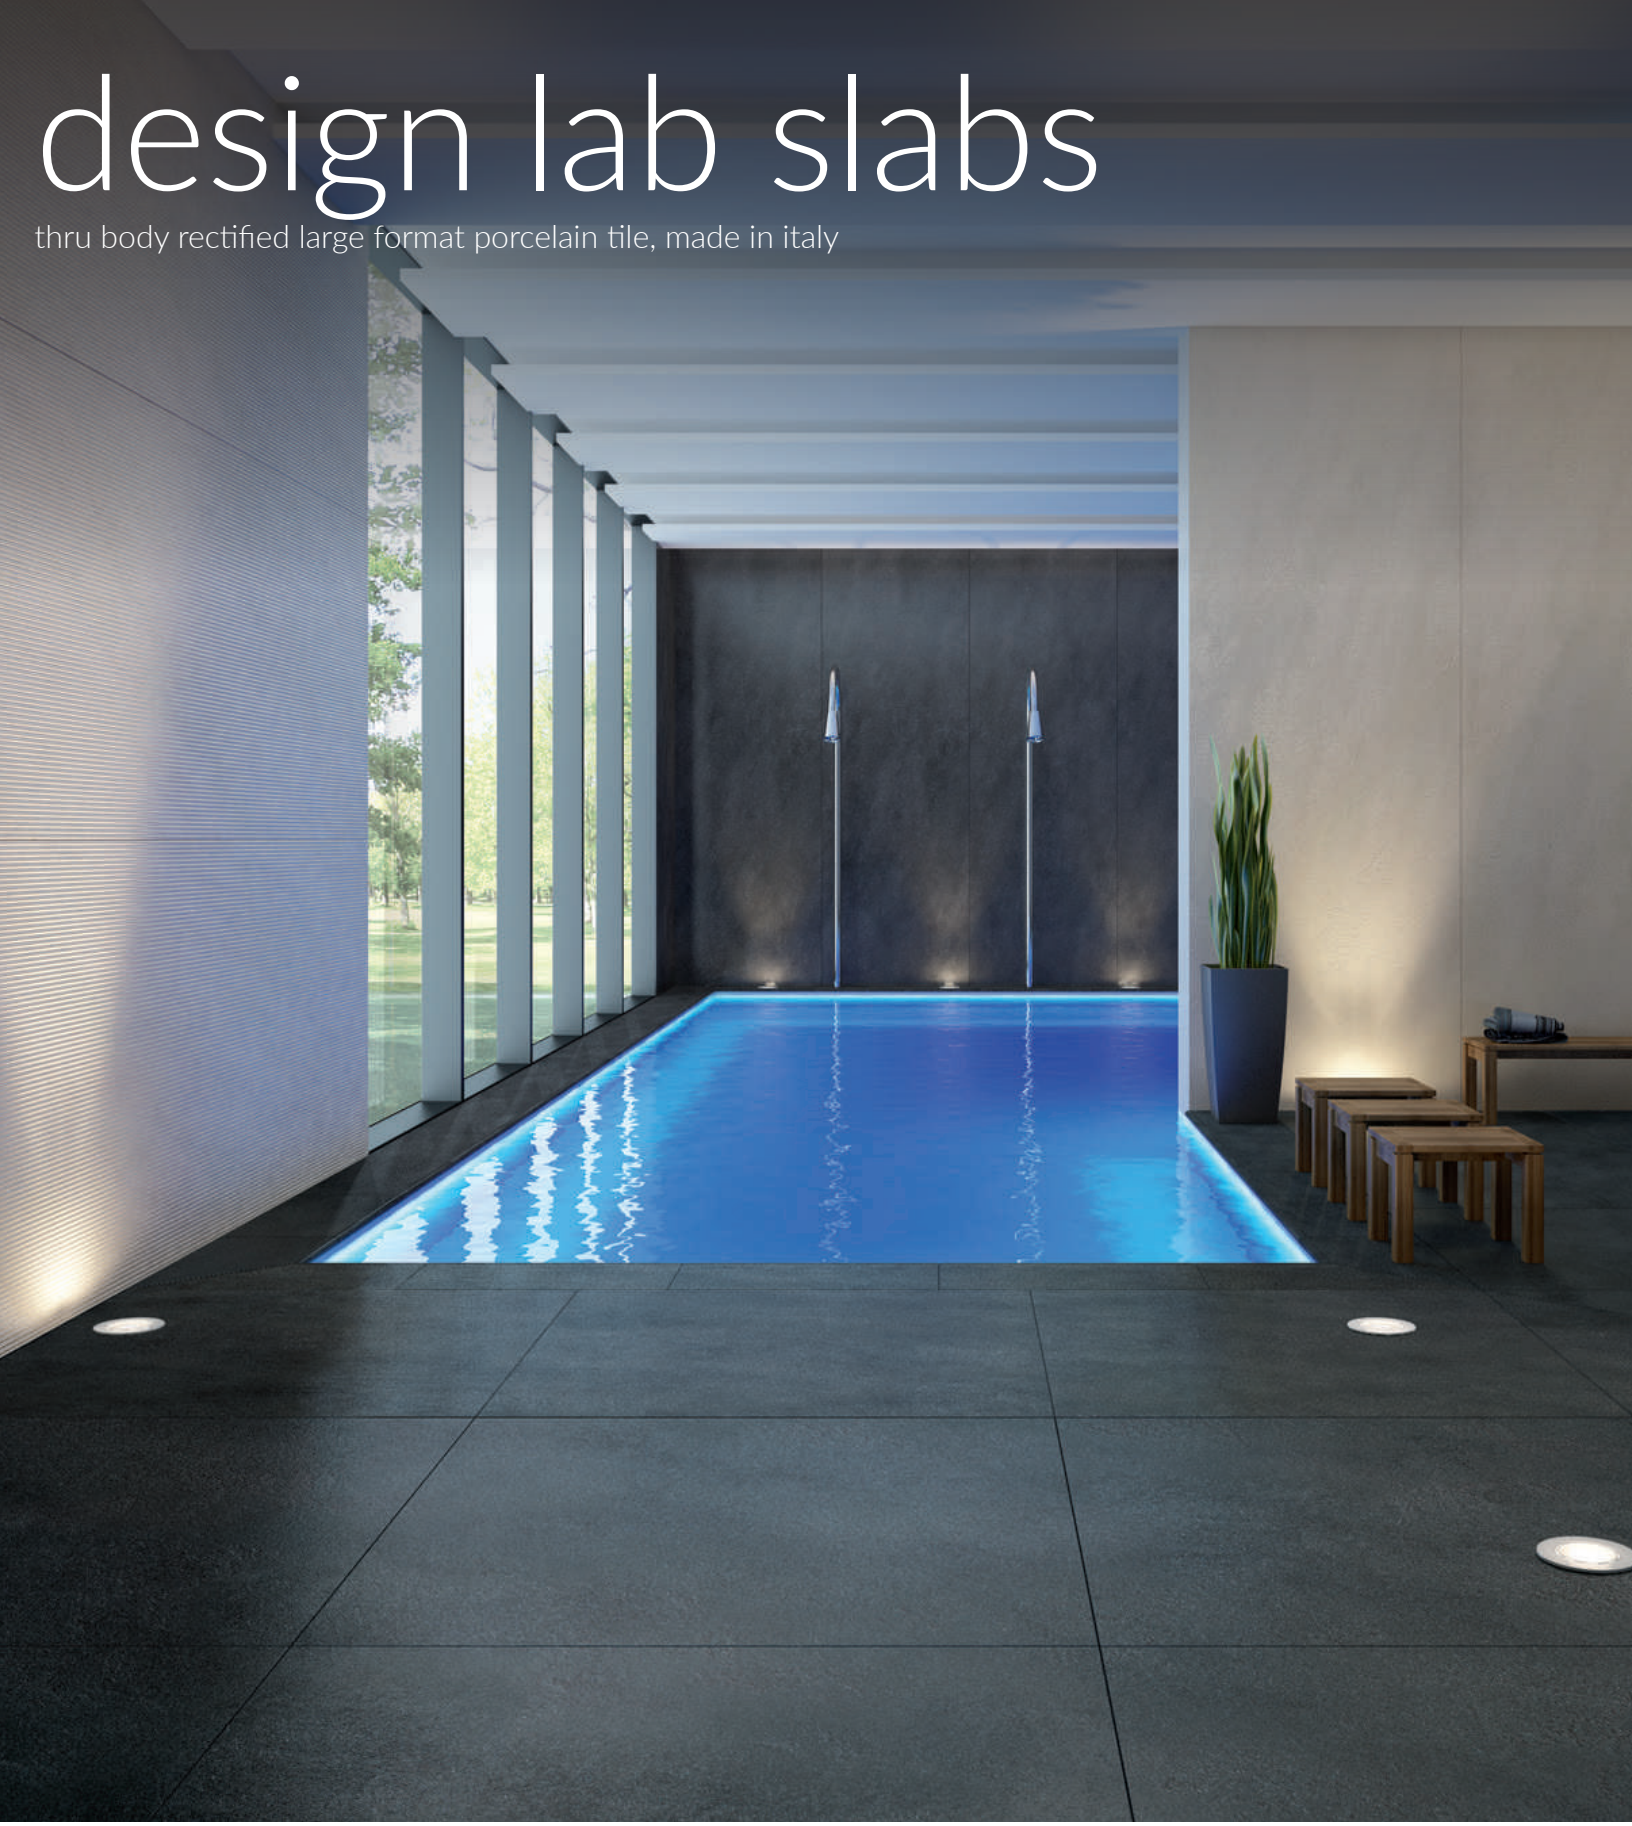

trinity tile
Inspiring Surface Design

design lab slabs

thru body rectified large format porcelain tile, made in italy

trinity tile


nero


antracite


grigio scuro


grigio chario


bianco



sabbia


taupe


fango

FINISHES



matte

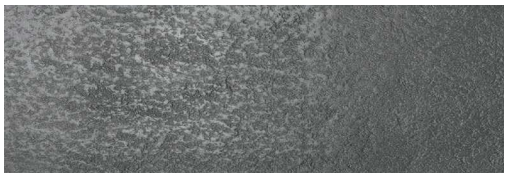
semi-polished


textured

AVAILABLE SIZES


40”x120”


40”x40”


20”x60”

	40”x120”	40”x40”	20”x60”
bianco	● ▲ ■	● ▲ ■	● ▲ ■
sabbia	● ▲ ■	● ▲ ■	● ▲ ■
taupe	● ▲ ■	● ▲ ■	● ▲ ■
fango	● ▲ ■	● ▲ ■	● ▲ ■
grigio chario	● ▲ ■	● ▲ ■	● ▲ ■
grigio scuro	● ▲ ■	● ▲ ■	● ▲ ■
antracite	● ▲ ■	● ▲ ■	● ▲ ■
nero	● ▲ ■	● ▲ ■	● ▲ ■

● MATTE
▲ SEMI-POLISHED
■ TEXTURED

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	frost resistance	water absorption	chemical resistance	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-13	ISO 10545-4	BOT3000
Results	5.6mm	V2	resistant	≤ 0.5%	resistant	1300 N	Matte, Textured ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

dusk

porcelain tile, made in south america




trinity tile
Inspiring Surface Design

dusk

porcelain tile, made in south america

trinity tile

nordic

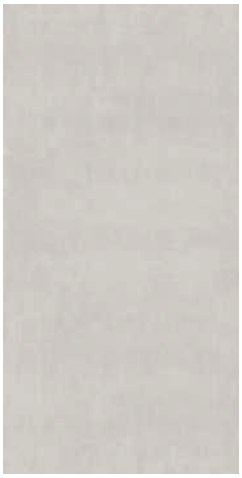
arena


sabbia


steel


graphite


coffee

AVAILABLE SIZES

	12"x24"	2"x2" mosaic	3"x12" bullnose
nordic	●	●	●
arena	●	●	●
sabbia	●	●	●
steel	●	●	●
graphite	●	●	●
coffee	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	scratch hardness	dynamic coefficient of friction
Test	N/A	ASTM C373	MOHS	ANSI 137.1
Results	8.5mm	≤ 0.5%	8	≥ 0.6

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

eventide

rectified thru color porcelain tile, made in italy




trinity tile
Inspiring Surface Design

eventide

rectified thru color porcelain tile, made in italy

trinity tile

fabric pure white

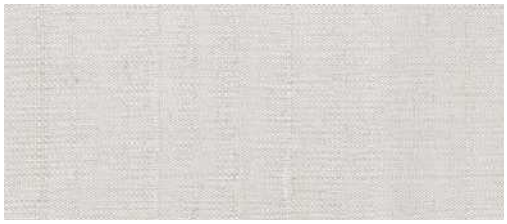

fabric pearl



fabric grey

leather pure white

leather pearl



leather grey

wood pure white

wood pearl



wood grey

AVAILABLE SIZES

	48"x48"	24"x48"	12"x24"	4"x12"	10"x71"	8"x48"	11.5"x10" hex mosaic	12"x12" mosaic	2.75"x24" bullnose	13x48x1 2/3 step tread	16x48x1 2/3 step tread	13x48x1 2/3 step tread angle	16x48x1 2/3 step tread angle
fabric pure white	●	●	●	●			●	●	●	●		●	
fabric pearl	●	●	●	●			●	●	●	●		●	
fabric grey	●	●	●	●			●	●	●	●		●	
leather pure white	●	●	●	●			●	●	●	●		●	
leather pearl	●	●	●	●			●	●	●	●		●	
leather grey	●	●	●	●			●	●	●	●		●	
wood pure white	●				●	●	●	●	●		●		●
wood pearl	●				●	●	●	●	●		●		●
wood grey	●				●	●	●	●	●		●		●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	stain resistant	dcof
test	N/A	ISO 10454-4	ISO 10545-13	ISO 10545-3	N/A	ISO 10545-14	A137.1
results	9.5mm	meets or exceeds	B MIN	≤ 0.5%	v2	pass	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

gelso

thru color rectified porcelain tile



trinity tile
Inspiring Surface Design

gelso

thru color rectified porcelain tile

trinity tile

blanco



gris



grafito



antracita



blanco bold



gris bold




grafito bold




antracita bold

AVAILABLE SIZES




18"x36"



12"x24"



2"x2" mosaic
12"x12"
mosaic sheet



3"X12" bullnose



6"x12" cove base

	18"x36"	12"x24"	2"x2" mosaic 12"x12" mosaic sheet	3"X12" bullnose	6"x12" cove base
blanco	●	●	●	●	●
gris	●	●	●	●	●
grafito	●	●	●	●	●
antracita	●	●	●	●	●
blanco bold	●	●			
gris bold	●	●			
grafito bold	●	●			
antracita bold	●	●			

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	face count	chemical resistance	water absorption	shade variation	frost resistance	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	ASTM C-650	ASTM C-373	N/A	ASTM C-1026	ASTM C-648	BOT 3000
Results	8.7mm	1	Unaffected	≤ 0.1%	V3	Resistant	≥ 350 lbs	≥ 0.50

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

hudson square

rectified porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

hudson square

rectifed porcelain tile, made in the usa

trinity tile



graphite 65%



gray 65%



mocha 65%



taupe 65%

AVAILABLE SIZES

	18"x36"	Mosaic 2"x2"	Mosaic 12"x24"	Bullnose 4"x36"
graphite	●	●	●	●
gray	●	●	●	●
mocha	●	●	●	●
taupe	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	visual abrasion resistance	stain resistance	scratch hardness	breaking strength	nominal thickness	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-1027	ASTM C-1378	Mohs	ASTM C-648	N/A	ANSI 137.1
Results	< 0.07%	4	Class A	7	403 lbs	8mm	> 0.60

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

ironworks

rectified porcelain, made in spain



trinity tile
Inspiring Surface Design

ironworks

rectified porcelain, made in spain

trinity tile


white


oxidum


black


gold (wall only)


silver (wall only)

AVAILABLE SIZES

	24"x48"	12"x48"	24"x24"	12"x24"	3"x24"	Mosaic 1"x1" on 12"x12" Sheets	Bullnose 3"x24"	Inside 12"x48"	Decor Ramp 12"x24"	Star 24"x24"
white	●	●	●	●	●	●	●	●	●	●
oxidum	●	●	●	●	●	●	●	●	●	●
black	●	●	●	●	●	●	●	●	●	●
gold				●						
silver				●						

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	nominal thickness	deep abrasion resistance	linear thermal expansion	thermal shock resistance	frost resistance	chemical resistance	stain resistance	dynamic coefficient of friction
Test	ISO 10545-3	N/A	ISO 10545-6	ISO 10545-8	ISO 10545-9	ISO 10545-12	10545-13	10545-14	ANSI 137.1
Standards	< 0.5%	N/A	Declared Value	Declared Value	Required	Required	≥ Class B	≥ Class 3	≥ 0.42
Results	< 0.1%	11mm	≤ 131 mm^3	6.1-6.9x10^{-6} ($°C^{-1}$)	Resistant	Resistant	≥ Class B	≥ Class 3	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

metropole

thru body recified porcelain tile, made in italy




trinity tile
Inspiring Surface Design

metropole

thru body rectified porcelain tile, made in italy

trinity tile


midnight matte



shadow matte


pearl matte

chalk matte


dune matte


clay matte


umber matte


midnight semi-polished


shadow semi-polished


pearl semi-polished

chalk semi-polished


dune semi-polished


clay semi-polished


umber semi-polished


midnight textured


shadow textured


pearl textured

chalk textured


dune textured


clay textured


umber textured

AVAILABLE SIZES

	24”x48”	8”x48”	40”x40”	24”x24”	12”x24”	6”x24”	8”x9” hexagon	4”x12” left & right chevron	12”x24” step tread	4”x24” bullnose
chalk	●▲■	●▲■	●	●▲■	●▲■	●▲■	●▲■	●▲■	●	●
dune	●▲■	●▲■	●	●▲■	●▲■	●▲■	●▲■	●▲■	●	●
clay	●▲■	●▲■		●▲■	●▲■	●▲■	●▲■	●▲■	●	●
pearl	●▲■	●▲■		●▲■	●▲■	●▲■	●▲■	●▲■	●	●
umber	●▲■	●▲■	●	●▲■	●▲■	●▲■	●▲■	●▲■	●	●
shadow	●▲■	●▲■	●	●▲■	●▲■	●▲■	●▲■	●▲■	●	●
midnight	●▲■	●▲■		●▲■	●▲■	●▲■	●▲■	●▲■	●	●

TECHNICAL SPECIFICATIONS

■TEXTURE ●MATTE ▲SEMI-POLISHED

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	ISO 10545-4	ISO 10545-13	ISO 10545-3	N/A	ISO 1055-12	A137.1
results	6mm	≥49N	compliant	< 0.5%	v2	resistant	matte & textured ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

nuvo

rectified thru color porcelain tile, made in usa



trinity tile
Inspiring Surface Design

nuvo

rectified thru color porcelain tile, made in usa

trinity tile

chalk



greige



mud



ash



plumb



coal



canvas white



canvas moka

AVAILABLE SIZES

	24”x48”	8”x48”	24”x24”	12”x24”	12”x12” cube deco	12”x12” sphere deco	12”x12” mosaic	3”x24” bullnose
chalk	●▲	●▲	●▲	●▲	●	●	●▲	●▲
greige	●▲	●▲	●▲	●▲	●	●	●▲	●▲
mud	●▲	●▲	●▲	●▲	●	●	●▲	●▲
ash	●▲	●▲	●▲	●▲	●	●	●▲	●▲
plumb	●▲	●▲	●▲	●▲	●	●	●▲	●▲
coal	●▲	●▲	●▲	●▲	●	●	●▲	●▲
canvas white		●▲		●▲				
canvas moka		●▲		●▲				

TECHNICAL SPECIFICATIONS

● MATTE ▲ POLISHED

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	freeze resistance	dcof
test	N/A	ASTM C648	ASTM C650	ASTM C373	N/A	ASTM C1026	A137.1
results	10mm	≥400	not affected	≤ 0.5%	v2 | canvas v5	resistant	≥ 0.66

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

palais

thru color rectified porcelain tile made in the usa & wall tile made in italy



trinity tile
Inspiring Surface Design

palais

thru color rectified porcelain tile, made in the usa & wall tile, made in italy


bronzage 38%


cafe 38%


fume 38%

lumiere 38%


sombre 38%


bronzage wall


cafe wall


fume wall



lumiere wall


glace wall


automne wall


sombre wall

AVAILABLE SIZES



	24"x24"	12"x24"	4"x12" Wall Tile	Mosaic 3"x6" on 12"x12" Sheets	Cove Base 6"x12"	Bullnose 3"x24"	Wall Tile Bullnose 4"x12"
bronzage	●	● ▲	■	● ▲	●	● ▲	■
cafe	●	● ▲	■	● ▲	●	● ▲	■
fume	●	● ▲	■	● ▲	●	● ▲	■
lumiere	●	● ▲	■	● ▲	●	● ▲	■
sombre	●	● ▲	■	● ▲	●	● ▲	■
glace			■				■
autonme			■				■

● MATTE ▲ POLISHED ■ GLOSSY

TECHNICAL SPECIFICATIONS

	water absorption	nominal thickness	surface abrasion	hardness	frost resistance	chemical resistance	stain resistance	breaking strength	coefficient of friction	dynamic coefficient of friction
Test	ASTM C-373	N/A	ASTM C-1027	Mohs	ASTM C-1026	ASTM C-650	ASTM C-1378	ASTM C-648	ASTM C-1028	Acutest
Results	≤ 0.1%	8mm	Class 4	> 7	No cracking or spalling	Class A	Class A	> 400 lbf	Dry ≥ 0.75, Wet ≥ 0.6	Wet ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount style

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

paramount style

thru color rectified porcelain tile, made in italy

trinity tile



pepper
*coordinating color available paramount slab

ice
*coordinating color available paramount slab

mega white



venus



white resin



mega greige



mega grey



cinder resin



mercury



grey resin



mega brown



dark resin



mega black
*coordinating color available paramount slab



moon

AVAILABLE SIZES

	120"x60"	120"x40"	60"x60"	60"x40"	60"x30"	40"x40"	30"x30"	30"x15"
uni ice	●▲	●▲	●▲	●▲	●▲	●	●▲	●▲
pepper	●▲	●▲	●▲	●▲	●▲	●	●▲	●▲
mega white		●▲		●		●▲		
venus		●		●		●		
white resin		●▲		●		●▲		
mega greige		●▲		●		●▲		
mega grey		●▲		●		●▲		
cinder resin		●▲		●		●▲		
mercury		●		●		●		
gray resin		●▲		●▲		●		
mega brown		●▲		●▲		●		
dark resin		●▲		●▲		●		
mega black		●▲		●▲		●		
moon		●		●		●		

● HONED ▲ POLISHED

TECHNICAL SPECIFICATIONS

	water absorption	nominal thickness	thermal expansion coefficient	thermal shock resistance	frost resistance	chemical resistance	breaking strength	dynamic coefficient of friction
Test	ISO 10545-3	N/A	ISO 10545-8	ISO 10545-9	ISO 10545-12	ISO 10545-13	ASTM C-648	ANSI 137.1
Standards	≤ 0.5%	N/A	Testing method available	Testing method available	No alterations to surface	No visible signs of attack	250 lbf	≥ 0.42
Results	honed 0.3% ÷ 0.6%, polished 0.5% ÷ 0.8%	6mm	6 MK^{-1}	Resistant	Frostproof	Unaffected	253 lbf	Honed ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

reminisce

thru color porcelain tile, made in italy




trinity tile
Inspiring Surface Design


reminisce


thru color porcelain tile, made in italy

trinity tile


vanilla 19%


corda 19%


polvere 20%


peltro 26%


tabacco 26%


vanilla brick 13%


corda brick 13%


polvere brick 13%


peltro brick 13%


tabacco brick 13%


vanilla hex


corda hex



polvere hex


peltro hex



tabacco hex


deco corda**


deco vanilla**


deco cementine

AVAILABLE SIZES

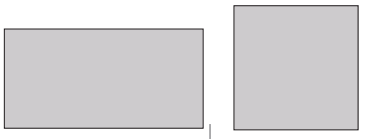

	24”x48”x10mm rectified**	30”x30”x10mm rectified**	24”x24”x10mm rectified	12”x24”x10mm rectified	3”x11”x9mm brick	8”x7”x9.5mm hexagon	3”x24” bullnose	3”x7”x4” brick corner
vanilla	●	●	●	●	●	●	●	●
corda	●	●	●	●	●	●	●	●
polvere	●	●	●	●	●	●	●	●
peltro		●	●	●	●	●	●	●
tabacco		●	●	●	●	●	●	●

*Rectified and non-rectified material can not be used together in a pattern | **Special order 8 weeks

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	breaking strength	scratch resistance	frost resistance	abrasion resistance	chemical resistance	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-648	Mohs	ASTM C-1026	ASTM C-1027	ASTM C-650	Acutest
Standard	≤ 0.5%	≥ 250 lbf	Mohs 1-10	As Reported	Class 0 - Class V	Resistant	≥ 0.42
Results	≤ 0.5%	≥ 450 lbf	8	Resistant	Class IV	Resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

selva

porcelain tile, made in spain



trinity tile
Inspiring Surface Design

selva

porcelain tile, made in spain


white plume


beige gobi


rose breeze


savasana


deep red


canyon


simply grey


bahia blue


glassy blue


evergreen


viridian green


black city

AVAILABLE SIZES

	3.5"x14.5
white plume	●
beige gobi	●
rose breeze	●
savasana	●
deep red	●
canyon	●
simply grey	●
bahia blue	●
glassy blue	●
evergreen	●
viridian green	●
black city	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	EN ISO 10545-4	EN ISO 10545-13	EN ISO 10545-3	N/A	EN ISO 10545-12	A137.1
results		>1300	GA	< 0.5%	v2	pass	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

siren

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

siren

thru color rectified porcelain tile, made in italy

trinity tile

cera


cognac


crema


petrolio


asfalto


marsala



deco
crema & cognac



deco
cera & petrolio



deco
asfalto & petrolio





deco
marsala & asfalto




deco
marsala & petrolio


cognac mosaic


petrolio mosaic


asfalto mosaic*


marsala mosaic*

AVAILABLE SIZES

	30"x60"*	30"x30"*	deco 30"x30"*	24"x24"	12"x24"	mosaic 15"x15"	3"x24" bullnose
cera	●	●	●	●	●		●
cognac	●	●	●	●	●	●	●
crema	●	●	●	●	●		●
petrolio	●	●	●	●	●	●	●
asfalto*	●	●	●	●	●	●	●
marsala*	●	●	●	●	●	●	●

*special order 8 weeks

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	water absorption	chemical resistance	scratch hardness	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	ASTM C373	ASTM C650	MOH'S	ASTM C648	ANSI 137.1:2012
Results	10mm	V2 - medium	≤ 0.5%	Resistant	8.0 (4.0 mosaic)	> 275 lbs	Matte > 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

splendid

thru color porcelain, made in usa



trinity tile
Inspiring Surface Design

splendid

thru color porcelain, made in usa

trinity tile



cotto 32%



graphite 32%



grey 66%

12”x12” bloom deco



cotto graphite grey

12”x12” dynasty deco



cotto graphite grey

12”x12” florentina deco




cotto graphite grey

12”x12” villa deco



cotto graphite grey

AVAILABLE SIZES

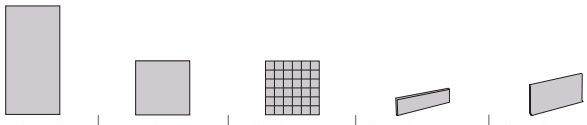

	12”x24”	12”x12”	2”x2”mosaic	3”x12” bullnose	6”x12” cove base
cotto	●	●	●	●	●
grey	●	●	●	●	●
graphite	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	scratch resistance	shade variation	breaking strength	dynamic coefficient of friction
Test	N/A	ASTM C373	ASTM C650	MOHS	N/A	ASTM C648	BOT 3000
Results	8mm	≤ 0.1%	Unaffected	7	V2	> 350 lbf	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

stardust

thru color rectified porcelain tile, made in italy




trinity tile
Inspiring Surface Design


stardust

thru color rectified porcelain tile, made in italy

trinity tile


plate

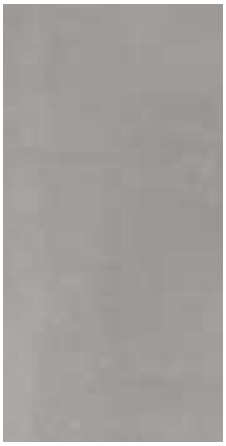
steel

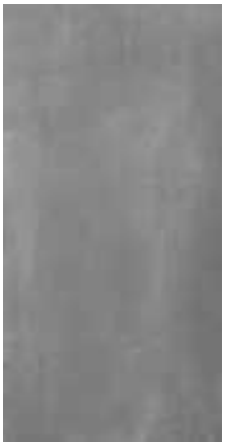
zinc


iron


corten


plate melt


steel melt


zinc melt


iron melt


corten melt

AVAILABLE SIZES

	32"x63" 9.5mm	8"x63" 9.5mm	47"x47" 9.5mm	23"x47" 9.5mm	8"x47" 9.5mm	32"x32" 9.5mm	24"x24" 9.5mm	12"x24" 9.5mm	12"x24" 9.5mm*	8"x24" 9.5mm	4"x24" 9.5mm	32"x32" 20mm	24"x24" 20mm	mosaic 2"x2"	thorn 12"x14" 9.5mm	muretto 12"x24" 9.5mm	step 47"x13" 9.5mm	bullnose 3"x24"
plate	▲●	▲●	●	▲●	▲●	●	●	●	■	●	●	■	■	●	●	●	●	●
steel	▲●	▲●	●	▲●	▲●	●	●	●	■	●	●			●	●	●	●	●
zinc	▲●	▲●	●	▲●	▲●	●	●	●	■	●	●	■	■	●	●	●	●	●
iron	▲●	▲●	●	▲●	▲●	●	●	●	■	●	●	■	■	●	●	●	●	●
corten	▲●	▲●	●	▲●	▲●	●	●	●	■	●	●	■	■	●	●	●	●	●

*non-rectified

NOTE: rectified & non-rectified cannot be used together in a pattern

▲ MELT ● MATTE ■ GRIP

TECHNICAL SPECIFICATIONS

	nominal thickness	scratch hardness	breaking strength	water absorption	chemical resistance	frost resistance	dcof
Test	n/a	EN ISO 10545-6	ISO 10545-4	ISO 10545-3	ISO 10545-13	ISO 10545-12	ANSI A 137.1-2012
Results	9.5mm | 20mm	175 mm3 max	35 N/mm	≤ 0.5%	pass	pass	≥ 0.42 wet

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

veneziana

thru color porcelain tile, made in italy



trinity tile
Inspiring Surface Design


veneziana


thru color porcelain tile, made in italy


trinity tile


white



zinc

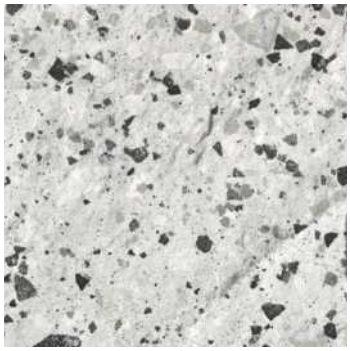

silver

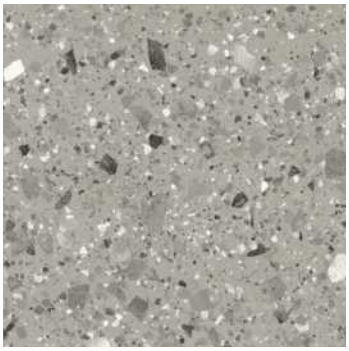
grey

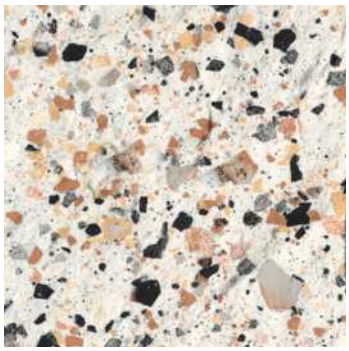
ivory


earth

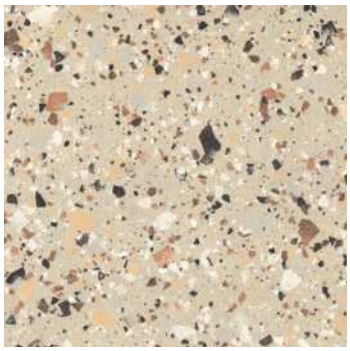
beige

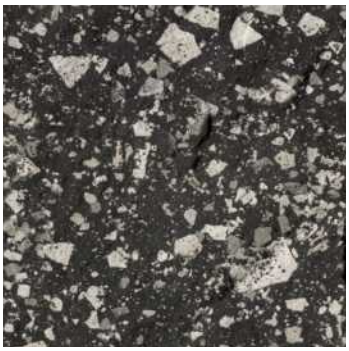
graphite

AVAILABLE SIZES

	48”x24”	24”x24”	24”x12”	8”x8”	step 24”x12”	bullnose 2 3/4”x24”
white	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
zinc	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
silver	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
grey	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
ivory	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
earth	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
beige	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲
graphite	● ▲ ■	● ▲ ■	● ▲ ■	▲	●	● ▲

TECHNICAL SPECIFICATIONS

● MATTE ▲ POLISHED ■ TEXTURED

	nominal thickness	scratch hardness	breaking strength	water absorption	chemical resistance	frost resistance	dcof
Test	n/a	EN ISO 10545-6	ISO 10545-4	ISO 10545-3	ISO 10545-13	ISO 10545-12	ANSI A 137.1-2012
Results	10mm	142 mm3	≥ 700n	≤ 0.6%	compliant	pass	compliant

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

virtue

thru color porcelain tile, made in usa



trinity tile
Inspiring Surface Design

virtue

thru color porcelain tile, made in usa

trinity tile

fair 40%



stained 40%



solid 40%



infused 40%

light stripes 40%



dark stripes 40%

AVAILABLE SIZES

	24”x24” rectified*	24”x24”	12”x24”	3”x”3 mosaic 12”x12” sheet	3”x12” bullnose
fair	●	●	●	●	●
stained	●	●	●	●	●
solid	●	●	●	●	●
infused	●	●	●	●	●
light stripes			●		
dark stripes			●		

● MATTE

*Rectified and Non-Rectified tile cannot be used together in a pattern.

TECHNICALSPECIFICATIONS

	nominal thickness	water absorption	breaking strength	frost resistance	shade rating	chemical resistance	dynamic coefficient of friction
Test	N/A	ASTM C-373	ASTM C-648	ASTM C-1026	N/A	ASTM C-650	BOT 3000
Standard	N/A	≤ 0.5%	≥ 250 lbf	As Reported	N/A	Resistant	≥ 0.42
Results	12”x24” 9mm | 24”x24” 10mm	Conforms	425 lbf 10mm	Resistant	V2	A Resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390



FLOOR & WALL: MOXIE BLACK


STONE
effect

aragonite

thru color porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

aragonite

thru color porcelain tile, made in the usa

trinity tile



bone



grey



amber



blue



earth



green

AVAILABLE SIZES

	12"x24"	Mosaic 12"x12"	Bullnose 3"x12"	Cove Base 6"x12"
bone	●	●	●	●
grey	●	●	●	●
amber	●	●	●	●
blue	●	●	●	●
earth	●	●	●	●
green	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	breaking strength	deep abrasion resistance	frost resistance	chemical resistance	hardness	coefficient of friction	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-648	ASTM C-1243	ASTM C-1026	ASTM C-650	Mohs	ASTM C-1028	Acu/Test
Results	≤ 0.1%	≥ 350	< 150mm^3	No cracking occurred	Class A	≥ 7	matte dry ≥ 075 wet ≥ 0.6	matte wet ≥0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

cascade

thru color porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

cascade

thru color porcelain tile, made in the usa

trinity tile



crystal 20%



mist 20%



spray 20%



ice 20%



storm 20%

AVAILABLE SIZES

	12"x24"	11"x23" Rectified*	6"x24"	12"x12"	Mosaic 2"x2" on 12" Sheets	Bullnose 3"x12"	Cove Base 6"x12"
crystal	●	▲	●	●	●	●	●
spray	●	▲	●	●	●	●	●
mist	●	▲	●	●	●	●	●
ice	●	▲	●	●	●	●	●
storm	●	▲	●	●	●	●	●

*Rectified and non-rectified material can not be used together in a pattern

● MATTE ▲ SEMI-POLISHED

TECHNICAL SPECIFICATIONS

	water absorption	surface abrasion	stain resistance	breaking stength	frost resistance	scratch hardness	coefficient of friction	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-1027	ASTM C-1378	ASTM C-648	ASTM C-1026	Mohs	ASTM C-1028	ANSI A 137.1
Matte	≤ 0.5%	IV	Not Affected	≥ 400 (9mm), ≥ 300 (8mm)	Resistant	≥ 7	Dry ≥ 0.8, Wet ≥ 0.6	≥ 0.42
Semi-Polsihed	≤ 0.5%	IV	Not Affected	≥ 400 (9mm), ≥ 300 (8mm)	Resistant	≥ 7	Dry ≥ 0.6, Wet ≥ 0.55	≥ 0.35

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

chatham

thru color porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

chatham

thru color porcelain tile, made in the usa

trinity tile



bianco



beige



gray



nero



moka

AVAILABLE SIZES

	16"x32"	Paver 24"x24"x20mm	12"x24"	12"x12"	3/4"x4" mosaic 12"x12"	12"x24" muretto mosaic	Bullnose 3"x24	Cove base 6"x12	Inside/Outside corner
bianco	●	■	●	●	●	●	●	●	●
beige	●	■	●	●	●	●	●	●	●
gray	●	■	●	●	●	●	●	●	●
nero	●		●	●	●	●	●	●	●
moka	●		●	●	●	●	●	●	●

■ TEXTURED ● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	water absorption	frost resistance	chemical resistance	dcof
Test	n/a	n/a	ASTM C 373	ASTM C 1026	ASTM C 650/C 1378	ANSI 137.1
Results	8.5mm	v3- moderate	< 0.1%	resistant	class a	≥ .60

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

cosmic

thru color porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

cosmic

thru color porcelain tile, made in the usa



beige 20%



grigio 20%



silver 20%



nero 40%

AVAILABLE SIZES

	12"x24" x9mm	2"x2"x9mm mosaic on 12"x12" Sheets	Bullnose 3"x12"x9mm
beige	●	●	●
grigio	●	●	●
silver	●	●	●
nero	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	surface abrasion	chemical resistance	stain resistance	breaking strength	frost resistance	coefficient of friction	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-1027	ASTM C-650	ASTM C-1378	ASTM C-648	ASTM C-1026	ASTM C-1028	ANSI 137.1
Matte	≤ 0.5%	IV (Nutmeg, Nero-III)	Class A	Class A	≥ 400 (9mm), ≥ 300 (8mm)	Resistant	Wet ≥ 0.6, Dry > 0.85	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

drift

thru color porcelain tile, made in usa



trinity tile
Inspiring Surface Design

drift

thru color porcelain tile, made in usa

PROTECTION THAT LIVES ON MICROBAN

trinity tile


ice


ivory


desert


natural


grey


ice mosaic


ivory mosaic


desert mosaic


natural mosaic


grey mosaic

AVAILABLE SIZES

	12"x24"	mosaic 12"x28"	mosaic 12"x12"	bullnose 4"x24"	cove base 6"x12"
ice	●	●	●	●	●
ivory	●	●	●	●	●
desert	●	●	●	●	●
natural	●	●	●	●	●
grey	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	surface abrasion resistance	chemical resistance	breaking strength	shade variation	dynamic coefficient of friction
Test	N/A	ASTM C1026	ASTM C373	ASTM C1027	ASTM C650	ASTM C648	ANSI A137.1	ANSI A 326.3
Results	9mm	Resistant	≤ 0.05%	Class 4/5	Resistant	≥ 250 lbf	V2	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

dune

porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

dune

porcelain tile, made in the usa

trinity tile


beige

bianco


gray



noce







AVAILABLE SIZES

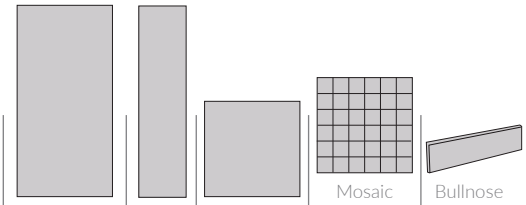

	12"x24"	6"x24"	12"x12"	Mosaic 12"x12"	Bullnose 3"x12"
beige	●	●	●	●	●
bianco	●	●	●	●	●
gray	●	●	●	●	●
noce	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	nominal thickness	scratch resistance	slip resistance	slip resistance	dynamic coefficient of friction
Test	ISO 10545-3	N/A	MOHS	DIN 51130	DIN 51097	ANSI A 137.1
Results	< 0.1%	9.5mm	8	Dry R9	Wet A + B	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

dynasty

rectified thru color porcelain tile, made in usa



trinity tile
Inspiring Surface Design

dynasty

rectified thru color porcelain tile, made in usa

trinity tile



white



ivory



beige



light grey



dark grey

AVAILABLE SIZES

	24”x48”	24”x24”	12”x24”	12”x12” brick mosaic	12”x12” mosaic	3”x24” bullnose
white	●▲	●▲	●▲	●▲	●▲	●▲
ivory	●▲	●▲	●▲	●▲	●▲	●▲
beige	●▲	●▲	●▲	●▲	●▲	●▲
light grey	●▲	●▲	●▲	●▲	●▲	●▲
dark grey	●▲	●▲	●▲	●▲	●▲	●▲

●MATTE ▲POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	ASTM C648	ASTM C650	ASTM C373	N/A	ASTM C1026	A137.1
results	10mm	≥400	not affected	≥ 0.5%	v3	resistant	matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

lenox

thru color rectified porcelain tile, made in usa



trinity tile
Inspiring Surface Design

lenox

thru color rectified porcelain tile, made in usa

trinity tile



michelangelo 71%



calacatta 71%



classico 71%



bluette 71%



blossom night
bluette & classico
11”x11”



blossom day
calacatta & michelangelo
11”x11”



palace
calacatta, classico & bluette
12”x15”



soco
calacatta, michelangelo & classico
10”x12”

AVAILABLE SIZES

	12”x24”	2”x2” mosaic	1”x2” mosaic	9”x15” chelsea	4”x24” bullnose	6”x12” cove base
michelangelo	● ▲	●	●	●	● ▲	●
calacatta	● ▲	●	●	●	● ▲	●
classico	● ▲	●	●	●	● ▲	●
bluette	● ▲	●	●	●	● ▲	●

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	scratch resistance	frost resistance	shade rating	chemical resistance	dynamic coefficient of friction
Test	N/A	ASTM C-373	Mohs	ASTM C-1026	N/A	ASTM C-650	BOT 3000
Standard	N/A	≤ 0.5%	Mohs 1-10	As Reported	N/A	Resistant	≥ 0.42
Results	8mm	≤ 0.1%	7	Resistant	V2	Unaffected	≥ 0.66

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

moxie

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

moxie

thru color rectified porcelain tile, made in italy

trinity tile



ivory



silver



sand



grey



black


ivory
bookmatch
4piece set




silver
bookmatch
4 piece set



sand
bookmatch
4 piece set



grey
bookmatch
4 piece set



black
bookmatch
4 piece set

AVAILABLE SIZES

	24”x48”	24”x48” bookmatch	24”x24”	12”x24”	12”x12” fascia mosaic	12”x12” inverso mosaic	12”x12” mosaic	12”x48” step tread	3”x24” bullnose
white	●▲■	▲	●▲■	●▲	⬣	⬣	●▲	●▲	●▲
ivory	●▲■	▲	●▲■	●▲	⬣	⬣	●▲	●▲	●▲
beige	●▲■	▲	●▲■	●▲	⬣	⬣	●▲	●▲	●▲
light grey	●▲■	▲	●▲■	●▲	⬣	⬣	●▲	●▲	●▲
dark grey	●▲■	▲	●▲■	●▲	⬣	⬣	●▲	●▲	●▲

TECHNICAL SPECIFICATIONS

⬣ MATTE & POLISHED MIX ■ GRIP ● MATTE ▲ POLISHED

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	ISO 10545-04	ISO 10545-13	ISO 10545-03	N/A	ISO 10545-12	A137.1
results	10mm	>1300	not affected	≤ .5%	v4	resistant	matte .69 | grip .85

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

novara

porcelain tile



trinity tile
Inspiring Surface Design

novara

porcelain tile

trinity tile



beige



soft gris



pewter



black

AVAILABLE SIZES

	12”x24”	2”x2” mosaic	3”x12bullnose
beige	●	●	●
soft gris	●	●	●
pewter	●	●	●
black	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	scratch resistance	DCOF
test	N/A	ASTM C373	MOHS	ANSI 137.1
results	8.5mm	≤ 0.5%	8	≥ 0.6

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount marmi

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

paramount marmi

thru color rectified porcelain tile, made in italy

trinity tile

taxos


calacatta statuario
*coordinating color available paramount slab

premium white
*coordinating color available paramount slab

bright onyx


calacatta


calacatta light


calacatta elite


imperial white


gold onyx


royal marfil


travertino


quarzo greige


glam bronze


pietra grey
*coordinating color available paramount slab

AVAILABLE SIZES

	120”x60”	120”x40”	60”x60”	60”x40”	60”x30”	40”x40”	30”x30”	30”x15”
taxos	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲
calacatta statuario	● ▲		● ▲		● ▲		● ▲	● ▲
premium white	● ▲		● ▲		● ▲		● ▲	● ▲
bright onyx	● ▲		● ▲		● ▲		● ▲	● ▲
calacatta	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲
calacatta light	● ▲		● ▲		● ▲		● ▲	● ▲
calacatta elite	● ▲		● ▲		● ▲		● ▲	● ▲
imperial white	● ▲		● ▲		● ▲		● ▲	● ▲
gold onyx	● ▲		● ▲		● ▲		● ▲	● ▲
royal marfil	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲
travertino	● ▲		● ▲		● ▲		● ▲	● ▲
quarzo greige	● ▲		● ▲		● ▲		● ▲	● ▲
glam bronze	▲		▲		▲		▲	▲
pietra grey	● ▲		● ▲		● ▲		● ▲	● ▲

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	dynamic coeffiicient of friction	modulus of rupture	resistance to deep abrasion	chemical resistance	thermal shock resistance	stain resistance
Test	N/A	ISO 10454-12	ISO 10545-3	BOT 3000	ISO10545-4	ISO 10545-6	ISO 10545-13	ISO 10545-9	ISO 10545-14
Results	6mm	resistant	≤ 0.5%	≥ 0.60	≥ 35N/mm²	≤175 mm³	not affected	resistant	resistant to stain

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount divine

thru color large format porcelain, made in italy



trinity tile
Inspiring Surface Design

paramount divine

thru color large format porcelain, made in italy

trinity tile




optimum white



essential grey

white wood

AVAILABLE SIZES



	60”x120”	60”x60”	30”x60”	30”x30”
optimum white	● ▲	● ▲	● ▲	● ▲
essential grey	● ▲	● ▲	● ▲	● ▲
white wood	● ▲	● ▲	● ▲	● ▲

▲ POLISHED
● HONED

TECHNICAL SPECIFICATIONS

	available thicknesses	water absorption	scratch hardness	chemical resistance	breaking strength	DCOF
test	N/A	ASTM C373	MOHS	ASTM 650	ASTM 648	BOT 3000
results	6mm	≤ 0.1%	≥ 7	class a	≥ 250 lbf	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount lust

thru color rectified porcelain slab & tile, made in italy



trinity tile
Inspiring Surface Design

paramount lust

thru color rectified porcelain slab & tile, made in italy

trinity tile

bright


gold


cloud


wood grey


wood brown

mod white


mod silver


mod copper


mod black


arabescato


dark


michelangelo


bluette

crystal

white sand

AVAILABLE SIZES

	120”x60”	60”x60”	60”x30”	30”x30”	30”x15”
bright	▲	▲	▲	▲	▲
gold	▲	▲	▲	▲	▲
cloud	▲	▲	▲	▲	▲
wood grey	▲	▲	▲	▲	▲
wood brown	▲	▲	▲	▲	▲
mod white	● ▲	● ▲	● ▲	● ▲	● ▲
mod silver	● ▲	● ▲	● ▲	● ▲	● ▲
mod copper	●	●	●	●	●
mod black	● ▲	● ▲	● ▲	● ▲	● ▲
arabescato	▲	▲	▲	▲	▲
dark	▲	▲	▲	▲	▲
michelangelo	▲	▲	▲	▲	▲
bluette	▲	▲	▲	▲	▲
crystal	▲	▲	▲	▲	▲
white sand	●	●	●	●	●

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	dynamic coeffiicient of friction	hardness	resistance to deep abrasion	chemical resistance	breaking strength	stain resistance
Test	N/A	C1026	C373	BOT 3000	Mohs	C1243	C650	C648	C1378
Results	6mm	resistant	≤ 0.5%	matte ≥ 0.60	≥ 7	≤175 mm³	class A	≥ 350 lbs.	class A

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount luxe

thru color rectified porcelain slab & tile, made in usa



trinity tile
Inspiring Surface Design

paramount luxe

thru color rectified porcelain slab & tile, made in usa

trinity tile



statuarietto



calacatta oro
*coordinating color available
paramount slab



bianco carrara
*coordinating color available
paramount slab



bardiglietto

AVAILABLE SIZES

	120”x60”	60”x60”	60”x30”
statuarietto	● ▲	● ▲	● ▲
calcatta oro	● ▲	● ▲	● ▲
bianco carrara	● ▲	● ▲	● ▲
bardiglietto	● ▲	● ▲	● ▲

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	dynamic coeffiicient of friction	hardness	resistance to deep abrasion	chemical resistance	breaking strength	stain resistance
Test	N/A	C1026	C373	BOT 3000	Mohs	C1243	C650	C648	C1378
Results	6mm	resistant	≤ 0.1%	matte ≥ 0.42	≥ 7	≤175 mm^3	class A	≥ 200 lbs.	class A

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount slab

2cm thru color porcelain slab, made in usa



trinity tile
Inspiring Surface Design

paramount slab

2cm thru color porcelain slab, made in usa

trinity tile

true white
*coordinates with paramount style ice

bianco calacatta bookmatch a & b





lincoln bookmatch a & b





statuario white bookmatch a & b
*coordinates with paramount marmi calcatta statuario

calcatta oro
*coordinates with paramount luxe calacatta oro

carrara
*coordinates with paramount luxe bianco carrara

premium white
*coordinates with paramount marmi premium white



statuarietto



taj mahal



concrete



pietra grey
*coordinates with paramount marmi pietra grey



basalto
*coordinates with paramount style mega black



nero marquina



true black
*coordinates with paramount style pepper

AVAILABLE SIZES

	127"x60"
true white	● ▲
bianco calacatta	● ▲
calacatta oro	● ▲
carrara	● ▲
lincoln	● ▲
statuarietto	● ▲
premium white	● ▲
statuario white	● ▲
taj mahal	● ▲
concrete	●
pietra grey	▲
basalto	●
nero marquina	▲
true black	● ▲

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	pei rating	scratch resistance	breaking strength	chemical resistance
Test	N/A	ASTM C1026	ASTM C373	ASTM C1027	MOHS	ASTM C648	ISO 10545-13
Results	20mm	resistant	≤ 0.1%	class 4	≥7	≥ 300 lbf	class a

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

pathways

thru color rectified porcelain, made in the usa



trinity tile
Inspiring Surface Design

pathways

thru color rectified porcelain, made in the usa

trinity tile



white 10%



sand 10%



light grey 10%



dark grey 10%



nut 10%

AVAILABLE SIZES

	24"x48"	18"x36"	24"x24"	12"x24"	6"x24"	12"x12"	2"x2" Mosaic on 12"x12" Sheets	3"x12" Bullnose	6"x12" Cove Base
white	●	●	●	●	●	● ▲	●	●	●
sand	●	●	●	●	●	● ▲	●	●	●
light grey	●	●	●	●	●	● ▲	●	●	●
dark grey	●	●	●	●	●	● ▲	●	●	●
nut	●	●	●	●	●	● ▲	●	●	●

● MATTE ▲ GRIP

TECHNICAL SPECIFICATION

	water absorption	scratch hardness	breaking strength	surface abrasion	frost resistance	stain resistance	chemical resistance	dynamic coefficient of friction
Test	ASTM C-373	Mohs	ASTM C-648	ASTM C-1027	ASTM C-1026	ASTM C-1378	ASTM C-650	ANSI 137.1
Results	≤0.5%	≥ 7	≥400	PEI IV	Resistant	Not Affected	Not Affected	≥ 0.50 Grip; ≥ 0.42 Matte

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

renaissance

thru color porcelain tile, made in italy



trinity tile
Inspiring Surface Design

renaissance

thru color porcelain tile, made in italy


trinity tile

pietrasanta


calacatta


marfil


crux taupe


crux grey



infinity
*special order


staturario
*special order


arabescato
*special order



delicato
*special order



augustus
*special order



grafite
*special order



emperador
*special order


AVAILABLE SIZES


29½"x59" x10.5mm*


28 ⅓"x57" x10.5mm*


29½"x 29½" x10.5mm*


28⅓"x28⅓" x10.5mm*


23⅔"x23⅔" x9.5mm


22⅘"x22⅘" x10mm


11⅝"x23⅔" x9.5mm


8"x7" x9.5mm hexagon

3"x11" 9mm brick


3"x24" bullnose


11⅘"x 11⅘"x10mm mosaic

	29½"x59" x10.5mm*	28 ⅓"x57" x10.5mm*	29½"x 29½" x10.5mm*	28⅓"x28⅓" x10.5mm*	23⅔"x23⅔" x9.5mm	22⅘"x22⅘" x10mm	11⅝"x23⅔" x9.5mm	8"x7" x9.5mm hexagon	3"x11" 9mm brick	3"x24" bullnose	11⅘"x 11⅘"x10mm mosaic
pietrasanta	●	▲	●	▲	●	▲	●	●	●	● ▲	●
calacatta	●	▲	●	▲	●	▲	●	●	●	● ▲	●
marfil	●	▲	●	▲	●	▲	●	●	●	● ▲	●
crux taupe	●	▲	●	▲	●	▲	●	●	●	● ▲	●
crux grey	●	▲	●	▲	●	▲	●	●	●	● ▲	●
infinity*	●	▲	●	▲	●	▲	●	●	●	● ▲	●
staturario*	●	▲	●	▲	●	▲	●			● ▲	●
arabescato*	●	▲	●	▲	●	▲	●			● ▲	●
delicato*	●	▲	●	▲	●	▲	●			● ▲	
augustus*	●	▲	●	▲	●	▲	●			● ▲	
grafite*	●	▲	●	▲	●	▲	●			● ▲	● ▲
emperador*		▲		▲		▲				▲	▲

*special order 8 weeks

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	frost resistance	water absorption	DCOF	thermal shock resistance	resistance to deep abrasion	chemical resistance	resistance to bending	breaking strength
test	ISO 10545-12	ISO 10545-3	ANSI 137.1	ISO 10545-9	ISO 1045-6	ISO 10545-13	ISO 10545-4	ISO 10545-4
results	resistant	≤ 0.5%	> 0.42	resistant	≤ 175	resistant	> 35	≥1300N

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

stoneland

thru color rectified porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

stoneland

thru color rectified porcelain tile, made in the usa

trinity tile



white 40%



beige 40%



cocoa 40%



greige 40%



dark greige 40%



black 40%

AVAILABLE SIZES

	12" x 24" non rectified*	4" x 24" Bullnose	6" x 12" Cove Base	12" x 12" Mosaic	Herringbone 12" x 12" Mosaic
white	●	●	●	●	●
beige	●	●	●	●	●
cocoa	●	●	●	●	●
greige	●	●	●	●	●
dark greige	●	●	●	●	●
black	●	●	●	●	●

● MATTE

*Rectified and non rectified cannot be used together in a pattern

TECHNICAL SPECIFICATIONS

	nominal thickness	face count	chemical resistance	water absorption	shade variation	frost resistance	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	ASTM C-650	ASTM C-373	N/A	ASTM C-1026	ASTM C-648	BOT 3000
Results	8mm	20	Unaffected	≤ 0.1%	V2	Resistant	≥ 350 lbs	Matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

supreme

rectified porcelain tile, made in usa



trinity tile
Inspiring Surface Design


supreme

rectified porcelain tile, made in usa



ink

AVAILABLE SIZES

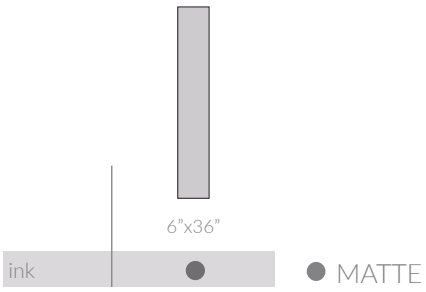

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	visable abrasion	breaking strength	water absorption	stain resistance	mohs	dcof
Test	n/a	ASTM C1027	ASTM C648	ASTM C373	ASTM C650	n/a	BOT 3000
Results	8 mm	4	> 250 lbf	0.10%	class a	7	> .42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

troika

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

troika

thru color rectified porcelain tile, made in italy

PROTECTION THAT LIVES ON MICROBAN

trinity tile



calacatta white 40%

onix light 40%



moon beige 40%



sandy grey 40%



sky smoke 40%



calacatta 3 3/4"x21 1/4"
chevron left & right

onix light 3 3/4"x21 1/4"
chevron left & right

moon beige 3 3/4"x21 1/4"
chevron left & right



sandy grey 3 3/4"x21 1/4"
chevron left & right



sky smoke 3 3/4"x21 1/4"
chevron left & right


calacatta white
12" x 13 3/4"
freccia mosaic

onix light
12" x 13 3/4"
freccia mosaic

moon beige
12" x 13 3/4"
freccia mosaic




sandy grey
12" x 13 3/4"
freccia mosaic



sky smoke
12" x 13 3/4"
freccia mosaic

AVAILABLE SIZES

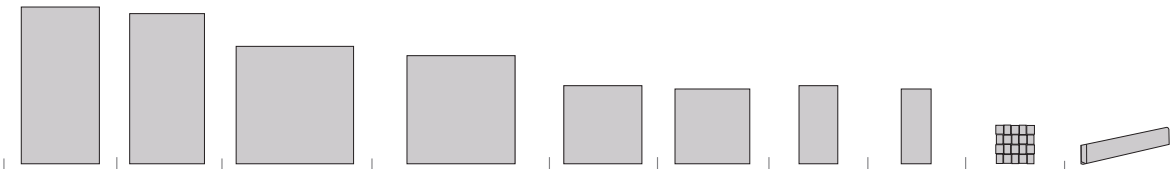

	24" x 48"	23" x 46"	36" x 36"	34 5/8" x 34 5/8"	24" x 24"	23" x 23"	12" x 24"	11.5" x 23"	12" x 12" mosaico 36	4" x 24" bullnose
calacatta white	●	▲	●	▲	●	▲	●	▲	●	● ▲
onix light	●	▲			●	▲	●	▲	●	● ▲
moon beige	●	▲	●	▲	●	▲	●	▲	●	● ▲
sandy grey	●	▲	●	▲	●	▲	●	▲	●	● ▲
sky smoke	●	▲			●	▲	●	▲	●	● ▲

●MATTE ▲POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	deep abrasion resistance	chemical resistance	breaking strength	shade variation	dynamic coefficient of friction
Test	N/A	ASTM C1026	ASTM C373	ASTM C1243	ASTM C650	ASTM C648	ANSI A137.1	ANSI A 137.1
Results	10 mm/36x36 11mm	Resistant	≤ 0.05%	≤ 145 mm3	Resistant	600 lbf	V2	matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

troika xl

laminated porcelain floor & wall tile, made in italy



trinity tile
Inspiring Surface Design

troika xl

laminated porcelain floor & wall, made in italy


calacatta white


onix light


moon beige


sandy grey


sky smoke

AVAILABLE SIZES



	39" x 118"	39" x 39"	19" x 39"
calacatta white	● ▲	● ▲	● ▲
onix light	● ▲	● ▲	● ▲
moon beige	● ▲	● ▲	● ▲
sandy grey	● ▲	● ▲	● ▲
sky smoke	● ▲	● ▲	● ▲

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	deep abrasion resistance	chemical resistance	breaking strength	shade variation	dynamic coefficient of friction
Test	N/A	ASTM C1026	ASTM C373	ASTM C1243	ASTM C650	ASTM C1505	ANSI A137.1	ANSI A 137.1
Results	5.5 mm	Resistant	≤ 0.1%	≤ 175 mm3	Resistant	≥6000 PSI, ≥175 lbf	V2	matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

TEXTILE

effect



FLOOR: CORDUROY QUILT

corduroy

thru color rectified porcelain tile, made in usa



trinity tile
Inspiring Surface Design

corduroy

thru color rectified porcelain tile, made in usa

cotton



yarn



rope



wool



quilt

AVAILABLE SIZES

	24”x24”	12”x24”	8”x24”	2”x2” basket weave mosaic	10”x24” herringbone	3”x12” bullnose
cotton	●	●	●	●	●	●
yarn	●	●	●	●	●	●
rope	●	●	●	●	●	●
wool	●	●	●	●	●	●
quilt	●	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	breaking strength	frost resistance	shade rating	chemical resistance	dynamic coefficient of friction
Test	N/A	ASTM C-373	ASTM C-648	ASTM C-1026	N/A	ASTM C-650	BOT 3000
Standard	N/A	≤ 0.5%	≥ 250 lbf	As Reported	N/A	Resistant	≥ 0.42
Results	10mm	Conforms	425 lbf	Resistant	V2	A Resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

eve

porcelain tile, made in usa & ceramic wall tile, made in italy




trinity tile
Inspiring Surface Design

eve

porcelain tile, made in usa & ceramic wall tile, made in italy

trinity tile


linen 40%

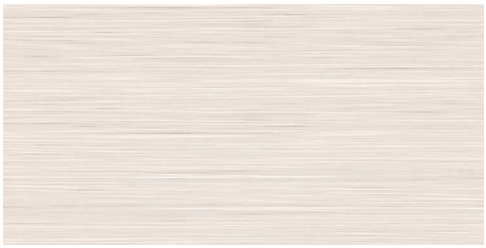


cotton 40%




wool 40%

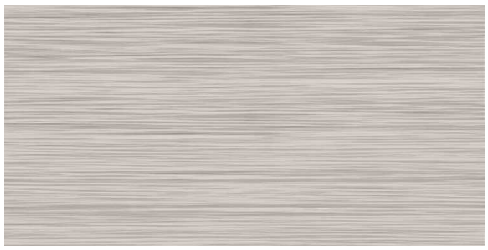

silk 40%

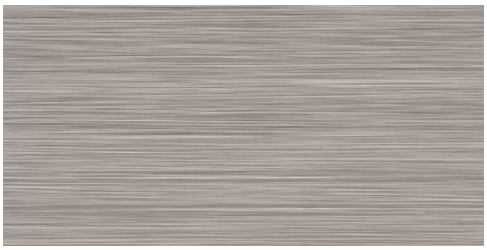

suede 40%

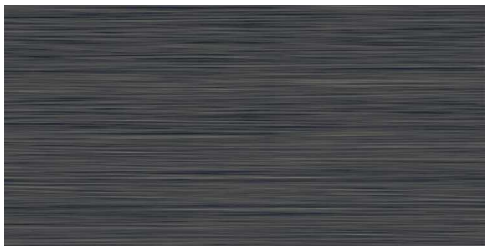

velvet 40%

linen wall



cotton wall



wool wall



silk wall



suede wall






velvet wall



denim wall

AVAILABLE SIZES

	 12" x 24"	 4" x 12" wall	 2" x 2" mosaic 12" x 12" sheet	 3" x 24" bullnose
linen	●	▲	●	●
cotton	●	▲	●	●
wool	●	▲	●	●
silk	●	▲	●	●
suede	●	▲	●	●
velvet	●	▲	●	●
denim		▲		

● MATTE ▲ GLOSSY

TECHNICAL SPECIFICATIONS


	nominal thickness	frost resistance	water absorption	breaking strength	chemical resistance	visible abrasion resistance	hardness	dynamic coefficient of friction
Test	N/A	ASTM C1026	ASTM C373	ASTM C648	ASTM C650	ASTM C1027	MOHS	ANSI A 137.1
Results	floor 8mm	Resistant	≤ 0.1%	≥401 lbf	Class A	4	≥7	≥ 0.52

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

moda

thru color rectified porcelain tile

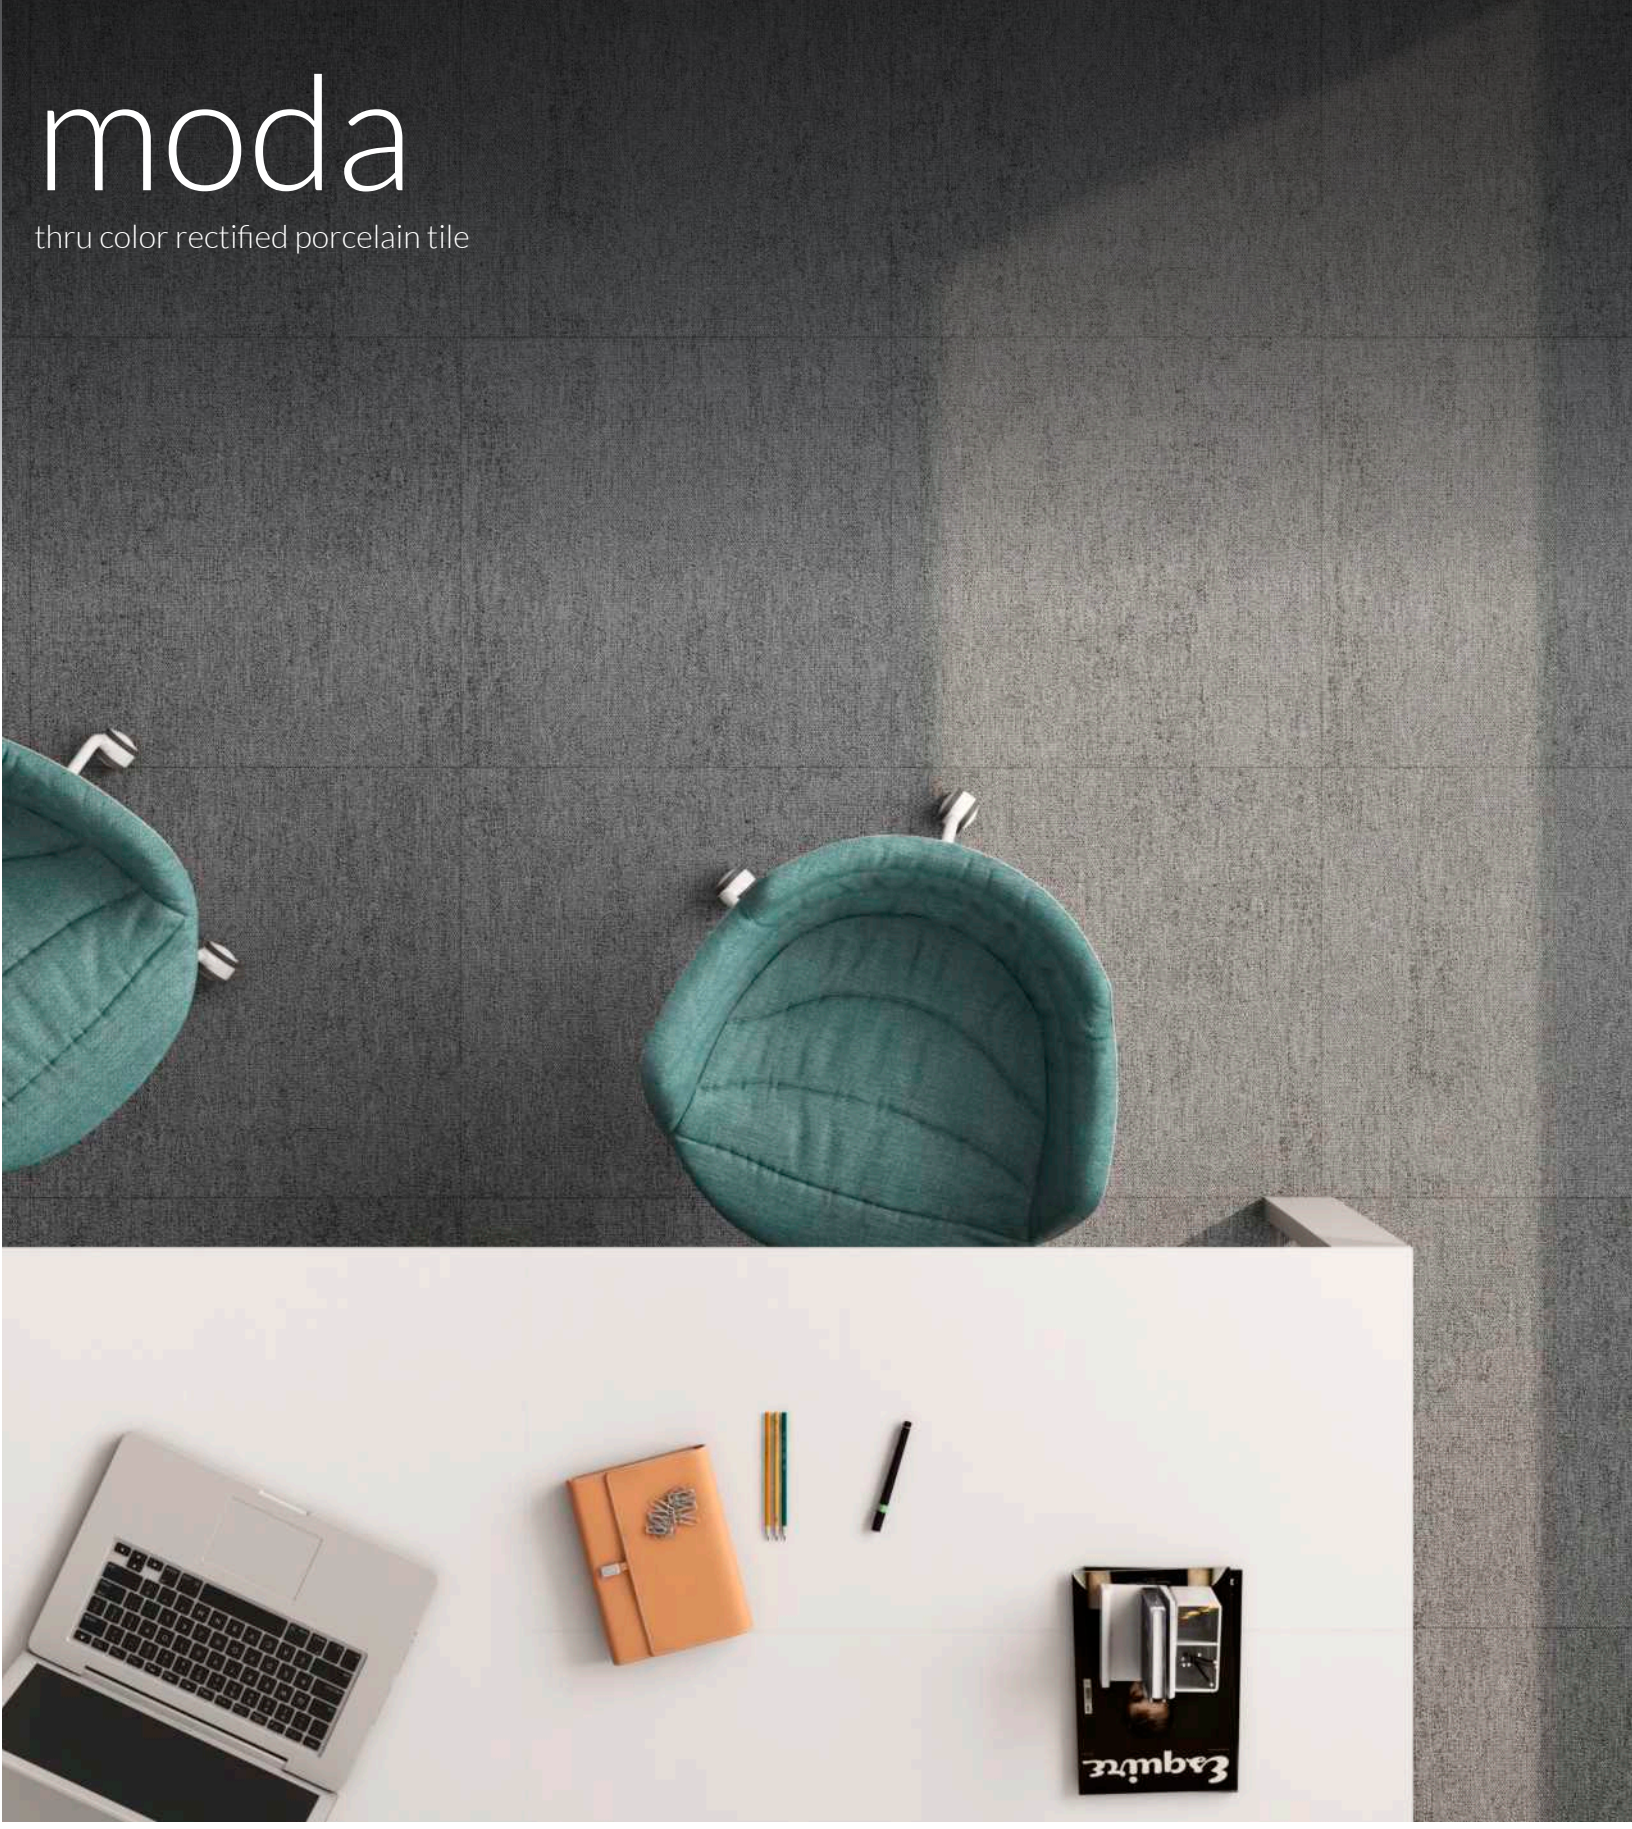

trinity tile
Inspiring Surface Design

moda

thru color rectified porcelain tile

trinity tile

blanco



arena


gris



grafito

blanco deco



arena deco

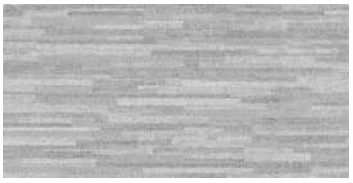

gris deco


grafito deco



blanco mosaic 12” x 10”


arena mosaic 12” x 10”


gris mosaic 12” x 10”


grafito mosaic 12” x 10”

AVAILABLE SIZES

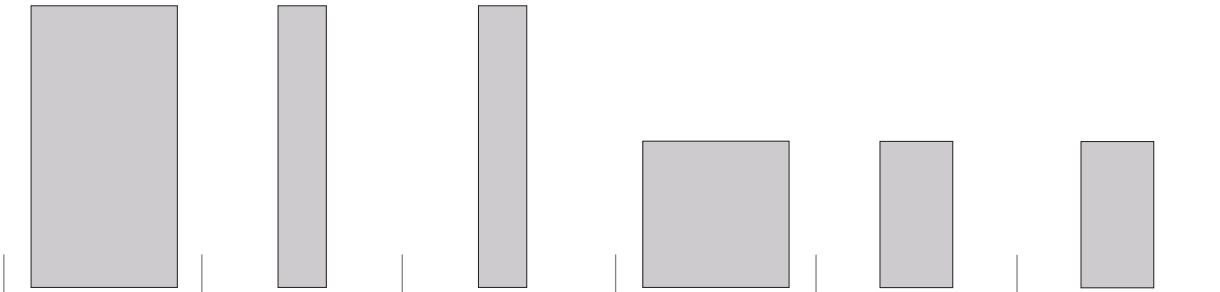

	24” x 48” x 10 mm	8” x 48” x 10 mm	8” x 48” x 10 mm Deco	24” x 24” x 10 mm	12” x 24” x 8.7 mm	12” x 24” x 8.7 mm Deco
blanco	●	●	●	●	●	●
arena	●	●	●	●	●	●
gris	●	●	●	●	●	●
grafito	●	●	●	●	●	●

● MATTE

TECHNICALSPECIFICATIONS

	nominal thickness	frost resistance	water absorption	minimum bond strength	shade variation	PEI	chemical resistance	scratch hardness	DCOF
test	N/A	ASTM C1026	ASTM C373	ASTM C482	N/A	N/A	ASTM 650	MOHS	ANSI 137.1
results	10mm / 8.7mm	resistant	≤ 0.5%	175 psi	V3	4	not affected	5	≥ 0.47

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

muse

thru color rectified porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

muse

thru color rectified porcelain tile, made in the usa

trinity tile



melody 65%



motion 65%

pitch 65%



tune 65%



whisper 65%

AVAILABLE SIZES

	12"x24"	3"x12" brick	Bullnose 3"x12"
melody	●	●	●
motion	●	●	●
pitch	●	●	●
tune	●	●	●
whisper	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	visual abrasion resistance	chemical resistance	nominal thickness	breaking strength	coefficient of friction	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-1027	ASTM C-650	N/A	ASTM C-648	ASTM C-1028	BOT 3000
Results	0.05%	4	Class A	8mm	502 lbf	Dry 0.83, Wet 0.63	0.58

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

rhythm

thru color rectified porcelain tile, made in usa



trinity tile
Inspiring Surface Design

rhythm

thru color rectified porcelain tile, made in usa


trinity tile




morning mist linen



sunrise linen

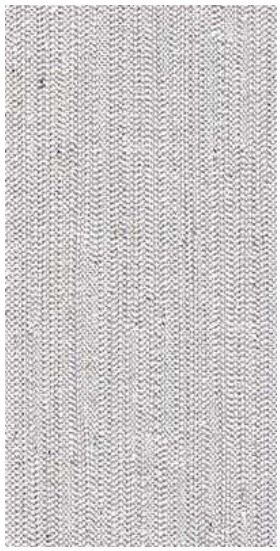

moon glow linen

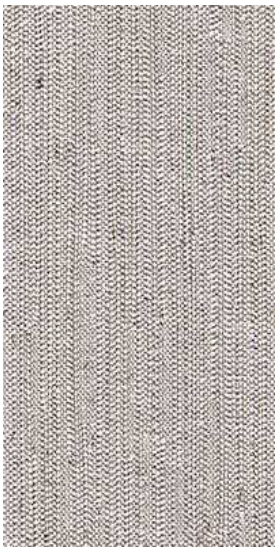

starry night linen



café linen

AVAILABLE SIZES

	12”x24”x8mm	3”x12”x8mm	2”x2”x8mm mosaic	3”x24” bullnose
morning mist linen	●	●	●	●
sunrise linen	●	●	●	●
moon glow linen	●	●	●	●
starry night linen	●	●	●	●
café linen		●		

● MATTE

TECHNICALSPECIFICATIONS

	visible abrasion resistance	dynamic coefficient of friction	chemical resistance	water absorption	shade variation	scratch hardness	breaking strength
test	ASTM C1027	BOT 3000	ASTM C650	ASTM C373	N/A	MOHS	ASTM C648
results	4	0.58	class a	.10%	v1	7	486 lbf

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

social

thru color rectified porcelain floor tile, made in the usa



trinity tile
Inspiring Surface Design

social

thru color rectified porcelain floor tile, made in the usa

trinity tile

white shades



natural



gray lake



essence



bamboo



balance gray

AVAILABLE SIZES

	24"x48"	12"x48"	8"x48"	12"x24"	Mosaic 2"x2" on 12"x12" Sheets	Bullnose 4"x24"	Cove Base 6"x12"
white shades	●	●	●	●	●	●	●
natural	●	●	●	●	●	●	●
gray lake	●	●	●	●	●	●	●
essence	●	●	●	●	●	●	●
bamboo	●	●	●	●	●	●	●
balance gray	●	●	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	chemical resistance	visible abrasion resistance	coefficient of friction	deep abrasion resistance	scratch hardness	dynamic coefficient of friction
Test	N/A	ASTM C-650	ASTM C-1027	ASTM C-1028	ASTM C-1243	MOHS	ANSI 137.1
Results	8mm	No affect	Class 4	Wet 0.64, Dry 0.81	35.9 mm^3	7	≥ 0.55

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390



FLOOR: DESIGN LAB WOOD MIXED


WOOD
effect

acadian

porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

acadian

porcelain tile, made in the usa

trinity tile





bianco





gray






taupe





dark brown

AVAILABLE SIZES

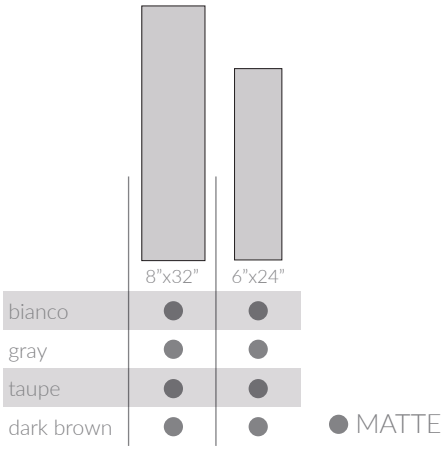

TECHNICAL SPECIFICATIONS

	water absorption	frost resistance	chemical resistance	scratch hardness	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-1026	ASTM C-650	MOHS	ANSI 137.1
Results	≤ 0.1%	Resistant	Class A	8	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

bryce wood

thru color porcelain, made in the usa



trinity tile
Inspiring Surface Design

bryce wood

thru color porcelain, made in the usa

trinity tile



bianco



grigio



nero

AVAILABLE SIZES

	8”x48”
bianco	●
grigio	●
nero	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	water absorption	frost resistance	chemical resistance	dcof
Test	n/a	n/a	ASTM C 373	ASTM C 1026	ASTM C 650/C 1378	ANSI 137.1
Results	8.5mm	v3- moderate	< 0.1%	Resistant	class a	≥ .42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

crescent falls

rectified porcelain tile, made in the usa



trinity tile
Inspiring Surface Design

crescent falls

rectified porcelain tile, made in the usa

trinity tile



white water



river rush



niagara crush

AVAILABLE SIZES



	24”x48”	12”x48”	8”x48”	12”x24”	4”x12” wall	2”x2” mosaic	bullnose 3”x24”
white water	●	●	●	●	●	●	●
river rush	●	●	●	●	●	●	●
niagara crush	●	●	●	●	●	●	●

TECHNICAL SPECIFICATIONS

● MATTE

	nominal thickness	visible abrasion resistance	shade variation	water absorption	staining resistance	breaking strength	dcof
Test	n/a	ASTM C1027	n/a	ASTM C373	ASTM C650	ASTM C648	BOT 3000
Results	8mm	4	v3- moderate	.40%	class a	448 lbf	.52

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

crowne

porcelain tile, made in usa




trinity tile
Inspiring Surface Design

crowne

porcelain tile, made in usa

trinity tile

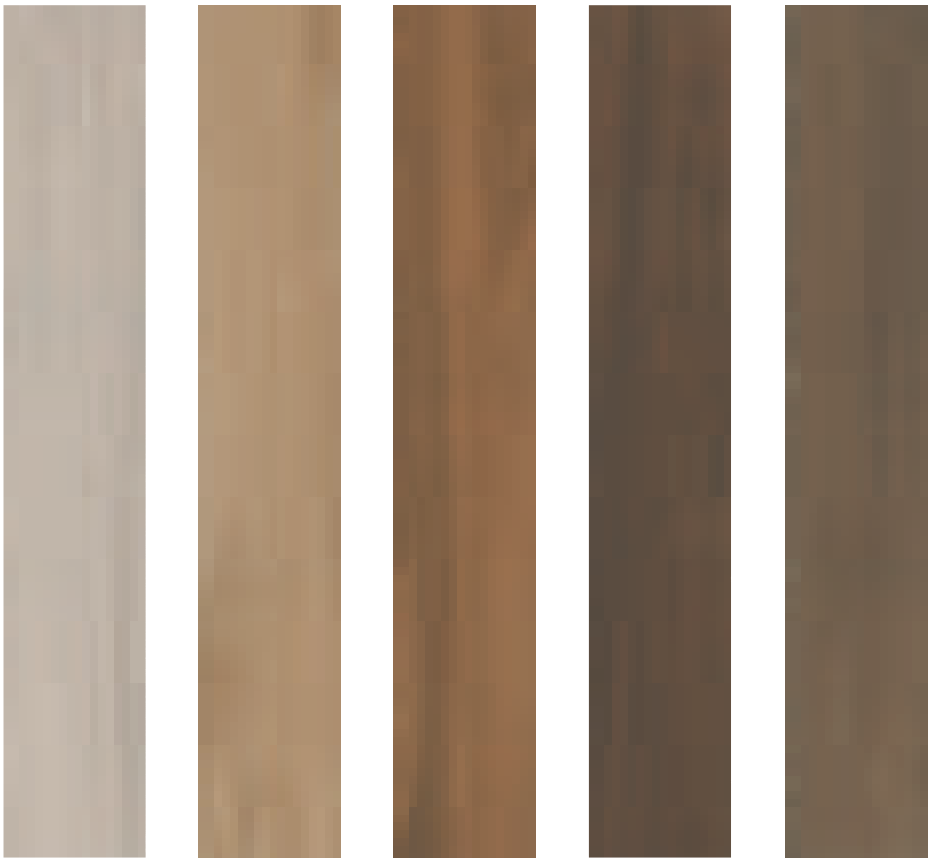

gray natural gunstock walnut pecan

AVAILABLE SIZES

	6"x36"
gray	●
natural	●
gunstock	●
walnut	●
pecan	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	water absorption	breaking strength	scratch hardness	chemical resistance	abrasion resistance	dynamic coefficient of friction
test	N/A	N/A	C373	C648	MOHS	C650	C1027	ANSI A 137.1
results	5/16"	V3	0.5%	> 275 lbs	8.0	resistant	III	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

design lab wood

thru body rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

design lab wood

thru body rectified porcelain tile, made in italy

trinity tile



bianco



grigio chario



sabbia



grigio scuro



taupe



antracite



fango





nero

AVAILABLE SIZES









	8”x48”	2¾”x40” Bullnose	16”x48”x1⅔”x1³⁄₁₆” Large Step	16”x48”x1⅔”x1³⁄₁₆” Angled Large Step
bianco	●	●	●	●
sabbia	●	●	●	●
taupe	●	●	●	●
fango	●	●	●	●
grigio chario	●	●	●	●
grigio scuro	●	●	●	●
antracite	●	●	●	●
nero	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	shade variation	frost resistance	water absorption	chemical resistance	breaking strength	dynamic coefficient of friction
Test	N/A	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-13	ISO 10545-4	BOT3000
Results	9.5mm	V2	resistant	≤ 0.5%	resistant	1300 N	Matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

estate wood

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

estate wood

thru color rectified porcelain tile, made in italy

trinity tile




arcade



court



hall

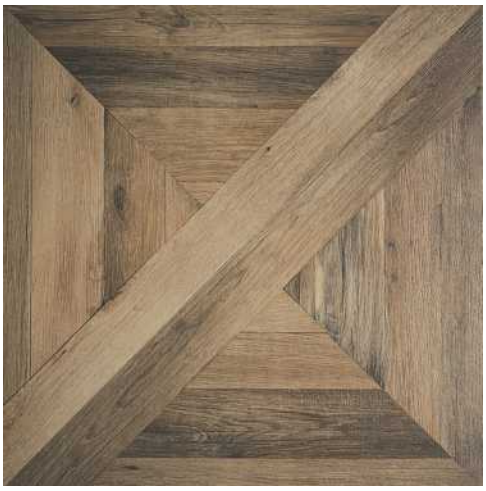


library



lounge

AVAILABLE SIZES



30”x30”

arcade	●
court	●
hall	●
library	●
lounge	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	nominal thickness	deep abrasion resistance	thermal shock resistance	frost resistance	chemical resistance	stain resistance	shade variation	dynamic coefficient of friction
Test	ISO 10545-3	N/A	ISO 10545-6	ISO 10545-9	ISO 10545-12	ISO 10545-13	ISO 10545-14	n/a	METODO BRCA
Standard	≤ 0.5%	N/A	≤ 175mm^3	No visible defects	Resistant	–	Methods available	n/a	≥ 0.42
Results	0.2%	11mm	Conforms	Resistant	Frostproof	Resistant	Resistant	v4	> 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

glenridge

thru color rectified porcelain tile, made in usa



trinity tile
Inspiring Surface Design

glenridge

thru color rectified porcelain tile, made in usa

trinity tile



ivory 24" x 24"



smoke 24" x 24"



multicolor 24" x 24"

40%



ivory




smoke



multicolor

40%

AVAILABLE SIZES

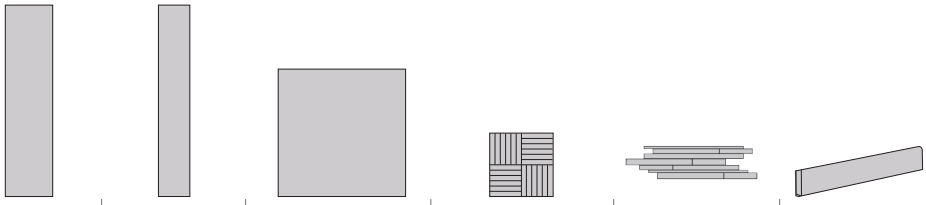

	9" x 36"	6" x 36"	24" x 24"	mosaic strips 12" x 12"	linear mosaic 6" x 15"	bullnose 3" x 36"
ivory	●	●	●	●	●	●
smoke	●	●	●	●	●	●
multicolor	●	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	stain resistance	chemical resistance	breaking strength	surface abrasion	dynamic coefficient of friction
Test	N/A	ASTM C1026	ASTM C373	ASTM C1378	ASTM C650	ASTM C1505	ASTM C1027	ANSI A 137.1
Results	10 mm	Resistant	≤ 0.5%	Not Affected	Not Affected	≥ 400	PEI IV-V	m≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

kaen

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

kaen

thru color rectified porcelain tile, made in italy

trinity tile

carta



carta koi deco



fumo



fumo koi deco



notte




notte koi deco



carta kintsugi deco



fumo kintsugi deco

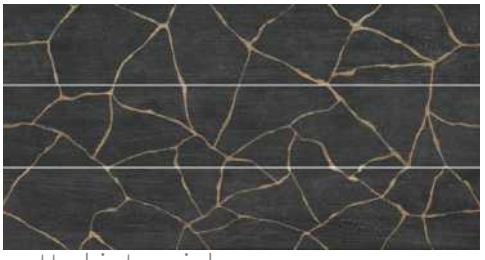

notte kintsugi deco

AVAILABLE SIZES

	10" x 60"	10" x 60" koi deco (random mix)	10" x 60" kintsugi deco (3 piece set)
carta	●	●	●
fumo	●	●	●
notte	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	stain resistance	chemical resistance	frost reistance	breaking strength	deep abraision resistance	dynamic coefficient of friction
Test	ISO 10545-3	ISO 10545-14	ISO 10545-13	ISO 10545-9	ISO 10545-4	ISO 10545-6	ANSI 137.1
Results	< 0.2%	Resistant - UGL	Resistant - ULA - UHA	Resistant	≥ 35 N/mm2	≤ 175 mm3	> 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

lexington

thru color porcelain tile, made in italy



trinity tile
Inspiring Surface Design

lexington

thru color porcelain tile, made in italy

trinity tile


pearl white


blonde ash


dove gray


ash


charcoal


reddish brown

AVAILABLE SIZES

	10”x72”	8”x72”	8”x48”	6”x48”	7⅛”x48” 3D listone	11¼”x 11¼” 3D mosaico	12”x12” mosaico	2¾”x48” bullnose
pearl white	●	●	●	●	●	●	●	●
blonde ash	●	●	●	●	●	●	●	●
dove gray	●	●	●	●	●	●	●	●
ash	●	●	●	●	●	●	●	●
charcoal	●	●	●	●	●	●	●	●
reddish brown	●	●	●	●	●	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorbtion	chemical resistance	dynamic coefficient of friction	breaking strength
Test	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-13	ANSI 137.1	ISO 10545-4
Results	10.5mm	resistant	≤ 0.5%	resistant	≥ 0.43	1300 N

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

oleander

porcelain tile, made in south america



trinity tile
Inspiring Surface Design

oleander

porcelain tile, made in south america

trinity tile

maddock

palmo


regent


bloom


bradley



laurie


gulfstream


banyon


kenlyn

AVAILABLE SIZES



	13"x13"
maddock	●
palmo	●
regent	●
bloom	●
bradley	●
laurie	●
gulfstream	●
banyon	●
kenlyn	●

● MATTE

TECHNICALSPECIFICATIONS

	nominal thickness	chemical resistance	water absorption	frost resistance	scratch hardness	shade variation	PEI	dcof
test	N/A	ASTM C650	ASTM C373	ASTM C1026	mohs	N/A	N/A	ASTM A137.1
results	7.8 mm	unaffected	< .5%	resistant	5	v3	4	≥ 0.58

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

primo

rectified porcelain tile, made in usa



trinity tile
Inspiring Surface Design


primo

rectified porcelain tile, made in usa



primo

AVAILABLE SIZES

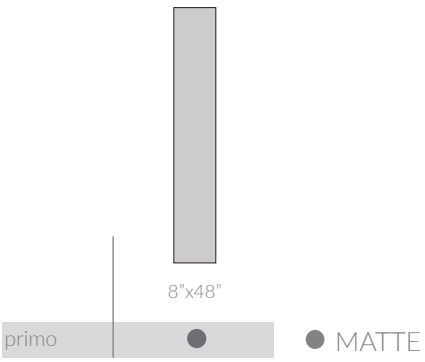

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	visable abrasion	breaking strength	water absorption	stain resistance	mohs	dcof
Test	n/a	ASTM C1027	ASTM C648	ASTM C373	ASTM C650	n/a	BOT 3000
Results	8 mm	4	> 250 lbf	0.10%	class a	7	> .42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

rolling mill

rectified porcelain tile, made in the usa



trinity tile
Inspiring Surface Design


rolling mill

rectified porcelain tile, made in the usa

trinity tile




titanium

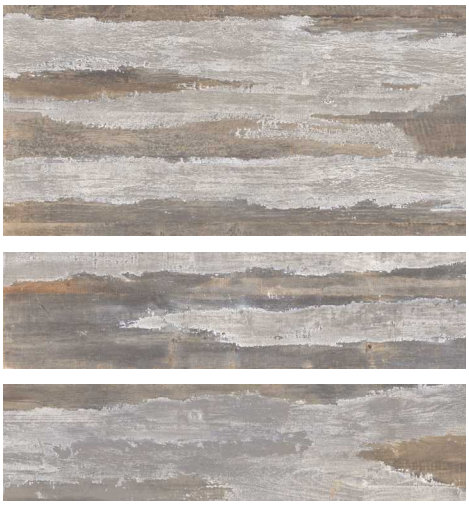


steel



iron

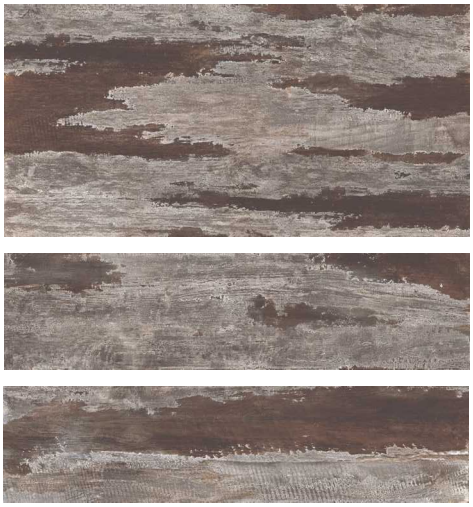

cooper

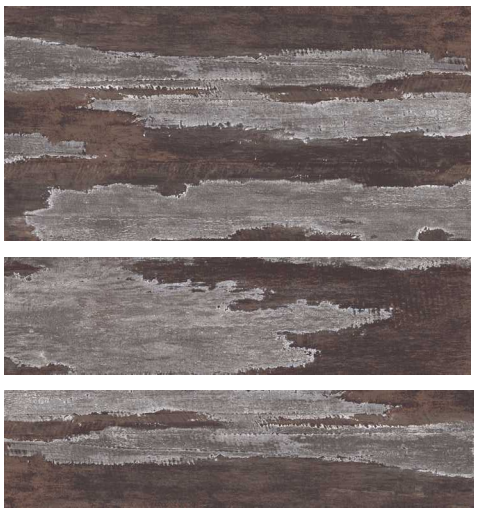

lithium

AVAILABLE SIZES

	12”x48”
titanium	●
steel	●
iron	●
cooper	●
lithium	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	visible abrasion resistance	shade variation	water absorption	staining resistance	breaking strength	dcof
Test	n/a	ASTM C1027	n/a	ASTM C373	ASTM C650	ASTM C648	BOT 3000
Results	8mm	4	v3- moderate	.10%	class a	458 lbf	.55

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

sansa

porcelain tile, made in italy




trinity tile
Inspiring Surface Design


sansa

porcelain tile, made in italy


trinity tile

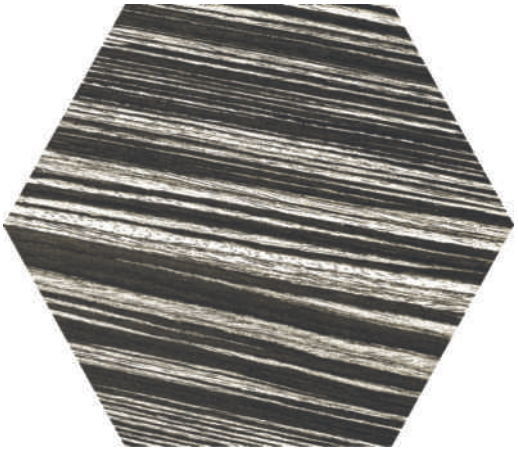

acero

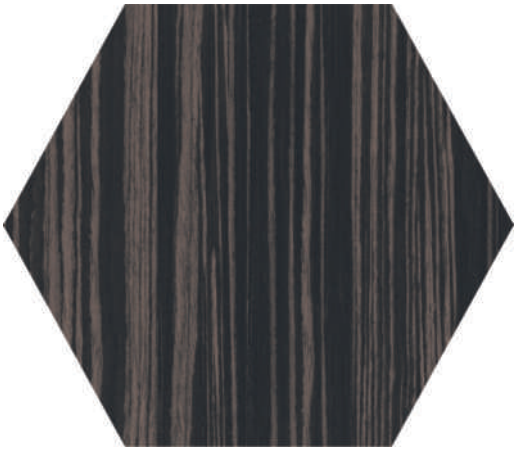


noce

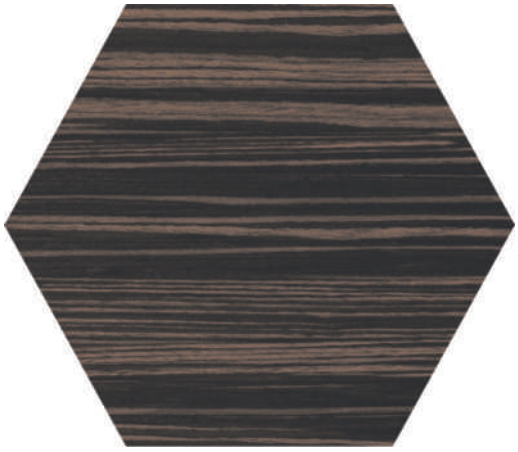

palissandro

AVAILABLE SIZES



	16" hexagon
acero	●
noce	●
palissandro	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorbtion	breaking strength	deep abrasion	frost resistance	chemical resistance	dynamic coefficient of friction
Test	N/A	ISO 10545-3	ISO 10545-4	ISO 10545-7	ISO 10545-12	ISO 10545-13	ANSI 137.1
Results	10 mm	≤ 0.1%	≥ 28 N/mm2	PEI III	Resistant	Resistant	≥ 0.6

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

stardust wood

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

stardust wood

thru color rectified porcelain tile, made in italy

trinity tile



chalk



cotton



plaster




lava



leather

AVAILABLE SIZES

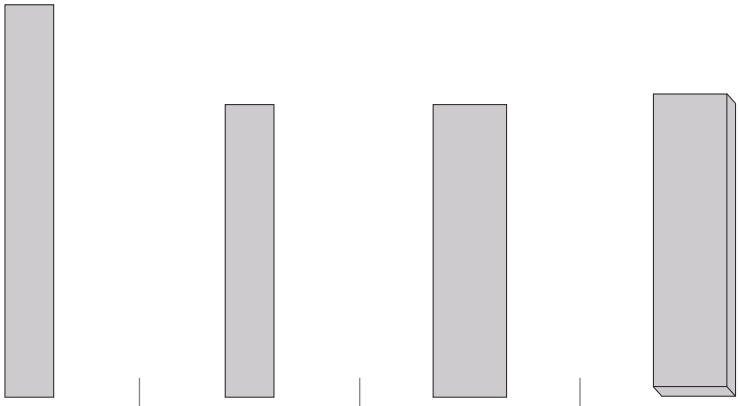

	8”x63”x9.5mm	8”x47”x9.5mm	12”x47”x9.5mm	12”x47”x20mm
chalk	●	●	●	■
cotton	●	● ■	●	■
plaster	●	●	●	
lava	●	● ■	●	
leather	●	● ■	●	■

● MATTE
■ GRIP

TECHNICAL SPECIFICATIONS

	nominal thickness	scratch hardness	breaking strength	water absorption	chemical resistance	frost resistance	dcof
Test	n/a	EN ISO 10545-6	ISO 10545-4	ISO 10545-3	ISO 10545-13	ISO 10545-12	ANSI A 137.1-2012
Results	9.5mm | 20mm	175 mm3 max	35 N/mm	≤ 0.5%	pass	pass	≥ 0.42 wet

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

vela

thru color rectified porcelain tile, made in italy



trinity tile
Inspiring Surface Design

vela

thru color rectified porcelain tile, made in italy



awanui decor



catlins decor



flordland decor



awanui



catlins



flordland



tasman decor



victoria decor




tasman



victoria

AVAILABLE SIZES

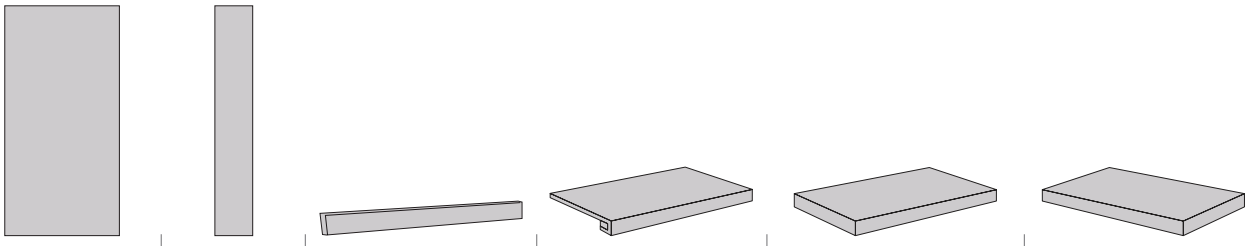

	24”x48” decor	8”x48”	2 1/2”x48” bullnose	13”x48” step tread	13”x48” step tread angolo sx	13”x48” step tread angolo dx
awanui	▲	● ▲	● ▲	●	●	●
catlins	▲	● ▲	● ▲	●	●	●
fordland	▲	● ▲	● ▲	●	●	●
tasman	▲	● ▲	● ▲	●	●	●
victoria	▲	● ▲	● ▲	●	●	●

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	breaking strength	chemical resistance	shade variation	deep scratch resistance	dynamic coefficient of friction
Test	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-4	ISO 10545-13	N/A	ISO 10545-6	ANSI A 137.1
Results	3/8”	Resistant	≤ 0.02%	S ≥ 1300 N	Resistant	V3 - High	≤ 175 mm³	matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

wood dimensions

porcelain tile, made in spain



trinity tile
Inspiring Surface Design

wood dimensions

porcelain tile, made in spain

trinity tile

hexawood white


hexawood grey


hexawood natural


hexawood tan


hexawood old


chevron white left


chevron grey left


chevron natural left


chevron tan left


chevron old left



chevron white right



chevron grey right



chevron natural right



chevron tan right



chevron old right



Pattern 1
Hexagon 33%
Chevron Left 66%



Pattern 2
Hexagon 100%


Pattern 3
Hexagon 10%
Chevron Left 45%
Chevron Right 45%


Pattern 4
Chevron Left 100%


Pattern 5
Chevron Left 50%
Chevron Right 50%


Pattern 6
Chevron Left 50%
Chevron Right 50%


Pattern 7
Chevron Left 50%
Chevron Right 50%

AVAILABLE SIZES

	7”x8” Hexagon	3½”x8” Chevron Left	3½”x8” Chevron Right
white	●	●	●
grey	●	●	●
natural	●	●	●
tan	●	●	●
old	●	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	water absorption	breaking of rupture	resistance to surface abrasion	nominal thickness	resistance to thermal shock	crazing resistance	frost resistance	dynamic coefficient of friction
Test	ISO 10545-3	ISO 10545-4	ISO 10545-7	N/A	ISO 10545-9	ISO 10545-11	ISO 10545-12	BOT 3000
Results	< 0.5% (BI_a)	> 1300N	3	8.5mm	Resistant	Resistant	Resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

woodstream

rectified porcelain, made in usa



trinity tile
Inspiring Surface Design

woodstream

rectified porcelain, made in usa

trinity tile



country oak



leather saddle



kentucky bourbon

AVAILABLE SIZES



	6"x36"
country oak	●
leather saddle	●
kentucky bourbon	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	visible abrasion resistance	shade variation	water absorption	staining resistance	breaking strength	dcof
Test	n/a	ASTM C1027	n/a	ASTM C373	ASTM C650	ASTM C648	BOT 3000
Results	8mm	4	v3- moderate	.40%	class a	476 lbf	.50

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390



WALL & DECORATIVE

effect



WALL & FLOOR: MECCA AQUAMARINA

adella


ceramic wall tile, made in spain



trinity tile
Inspiring Surface Design


adella

ceramic wall tile, made in spain

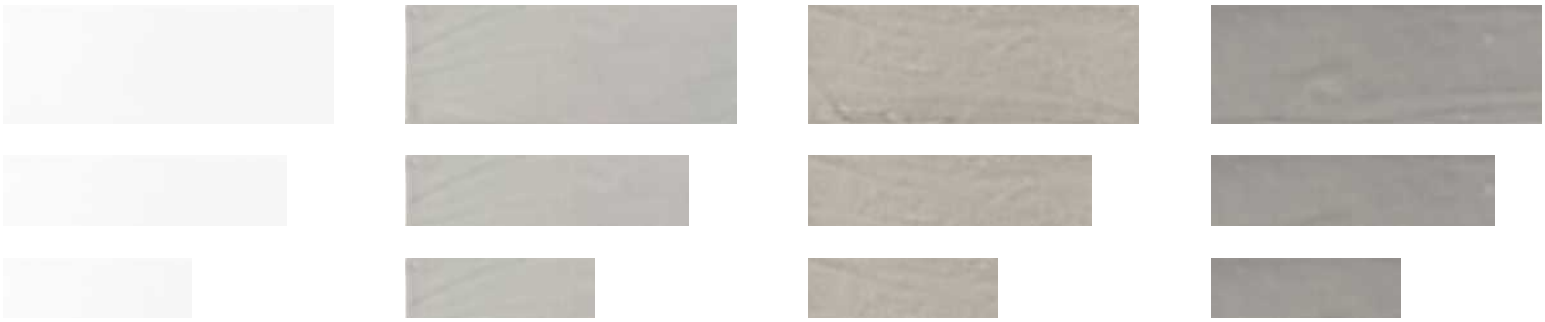

coto bianco | cloud | fossil | pewter

AVAILABLE SIZES

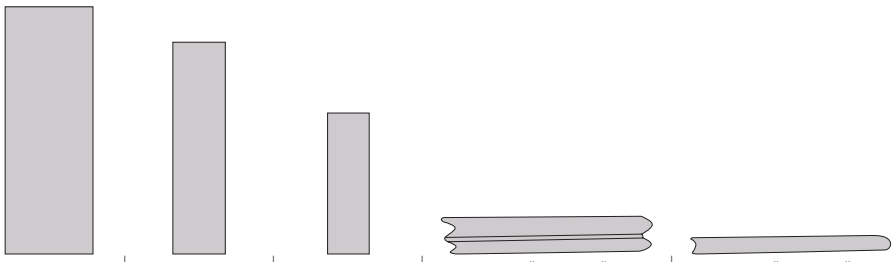

	5”x14”	3”x12”	2.5”x8”	1.97”x11.81” chair rail	0.79”x11.81” pencil
cotto bianco	▲	▲	▲	▲	▲
cloud	▲	▲	▲	▲	▲
fossil	▲	▲	▲	▲	▲
pewter	▲	▲	▲	▲	▲

▲GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	application	use	shade variation
test	N/A	n/a	n/a	N/A
results	8mm	residental | commercial	interior wall	v2

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

ambient

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

ambient

ceramic wall tile, made in italy

trinity tile



cool



shell



moss



breeze



spice




slate



jet

AVAILABLE SIZES



	4"x12"	4"x12" bullnose
cool	● ▲	● ▲
shell	● ▲	● ▲
moss	● ▲	● ▲
breeze	● ▲	● ▲
spice	● ▲	● ▲
slate	● ▲	● ▲
jet	● ▲	● ▲

● MATTE
▲ GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	scratch resistance	water absorbtion	chemical resistance	shade variation	breaking strength
Test	N/A	MOHS	ASTM C373	ASTM C650	N/A	ASTM C648
Results	7mm	7	≤ 0.1%	Unaffected	V2	350 lbf

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

avery

ceramic wall tile



trinity tile
Inspiring Surface Design

avery


ceramic wall tile

trinity tile

white



tender gray

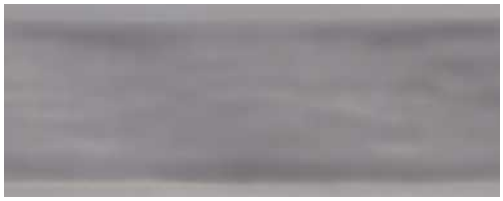


lavender




velvet pink



atoll blue

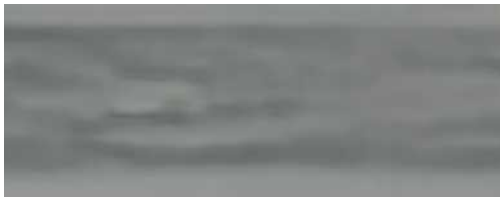

dark gray

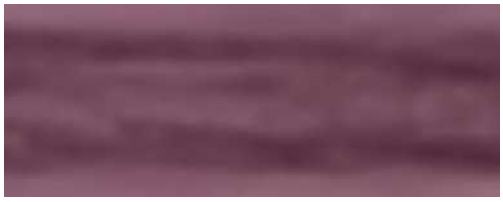

burgundy



peacock green



cosmic sapphire

AVAILABLE SIZES

	3”x12”
white	▲
tender gray	▲
lavender	▲
velvet pink	▲
atoll blue	▲
dark gray	▲
burgundy	▲
peacock green	▲
cosmic sapphire	▲

▲ GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	breaking strength	shade variation
Test	N/A	C373	C650	C648	n/a
Results	7.3mm	≥ 10%	GA/GLB	≥ 600 n	v2- slight

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

bantry

ceramic wall tile, made in south america



trinity tile
Inspiring Surface Design

bantry

ceramic wall tile, made in south america

trinity tile



blanco



gris



bronce



coral




azul




verde

AVAILABLE SIZES







	5"x5"	2.5"x5"	5"x5" bullnose
blanco	▲	▲	▲
gris	▲	▲	
bronce	▲	▲	
coral	▲	▲	
azul	▲	▲	
verde	▲	▲	

▲ GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	warpage	wedging
test	N/A	ASTM C648	ASTM C650	ASTM C373	N/A	ASTM C485	ASTM C502
results	8.5mm	meets	unaffected	> 10%	v2	pass	pass

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

blakely

ceramic wall tile, made in spain



trinity tile
Inspiring Surface Design

blakely

ceramic wall tile, made in spain



manhattan cloud




manhattan dove



manhattan haze



sisal cloud

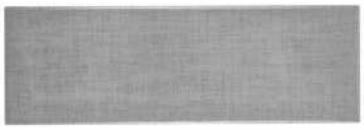

sisal dove



sisal haze



skyline cloud




skyline dove



skyline haze

AVAILABLE SIZES

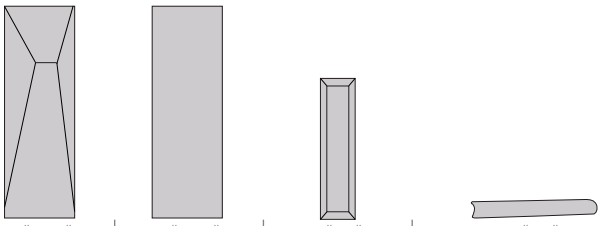

	4”x12” manhattan	4”x12” sisal	2”x8” skyine	1”x8” pencil
cloud	▲	▲	▲	▲
dove	▲	▲	▲	▲
haze	▲	▲	▲	▲

▲GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	application	usa	shade variation
test	N/A	n/a	n/a	N/A
results	9mm	residential | commercial	interior wall	v2

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

brick kiln

ceramic wall tile, made in south america




trinity tile
Inspiring Surface Design


brick kiln


ceramic wall tile, made in south america

trinity tile

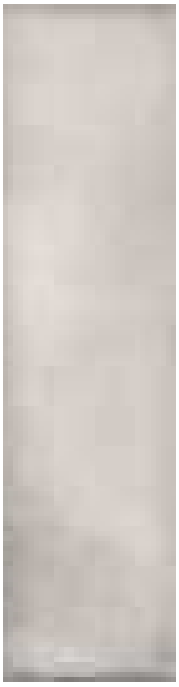
blanco


gris

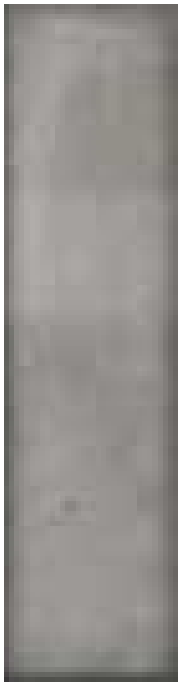
taupe

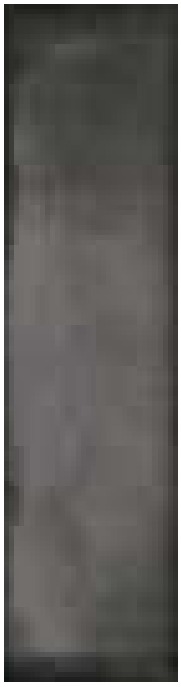
antracita



	3”x12”
blanco	●
gris	●
taupe	●
antracita	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	breaking strength	shade variation
Test	N/A	C373	C650	C648	n/a
Results	7.3mm	≥ 10%	unaffected	exceeds	v3

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

burch

ceramic tile, made in south america



trinity tile
Inspiring Surface Design

burch

ceramic tile, made in south america



ivory diamond



ivory lines




petrol blue diamond



petrol blue lines

AVAILABLE SIZES



	8"x8"
ivory diamond	●
ivory lines	●
petrol blue diamond	●
petrol blue lines	●

● MATTE

TECHNICAL SPECIFICATIONS


	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	ASTM C648	ASTM C650	ASTM C373	N/A	ASTM C1026	ASTM A137.1
results	8.2mm	min. 250	unaffected	< 3%	v1	resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

centerville

porcelain wall tile, made in italy

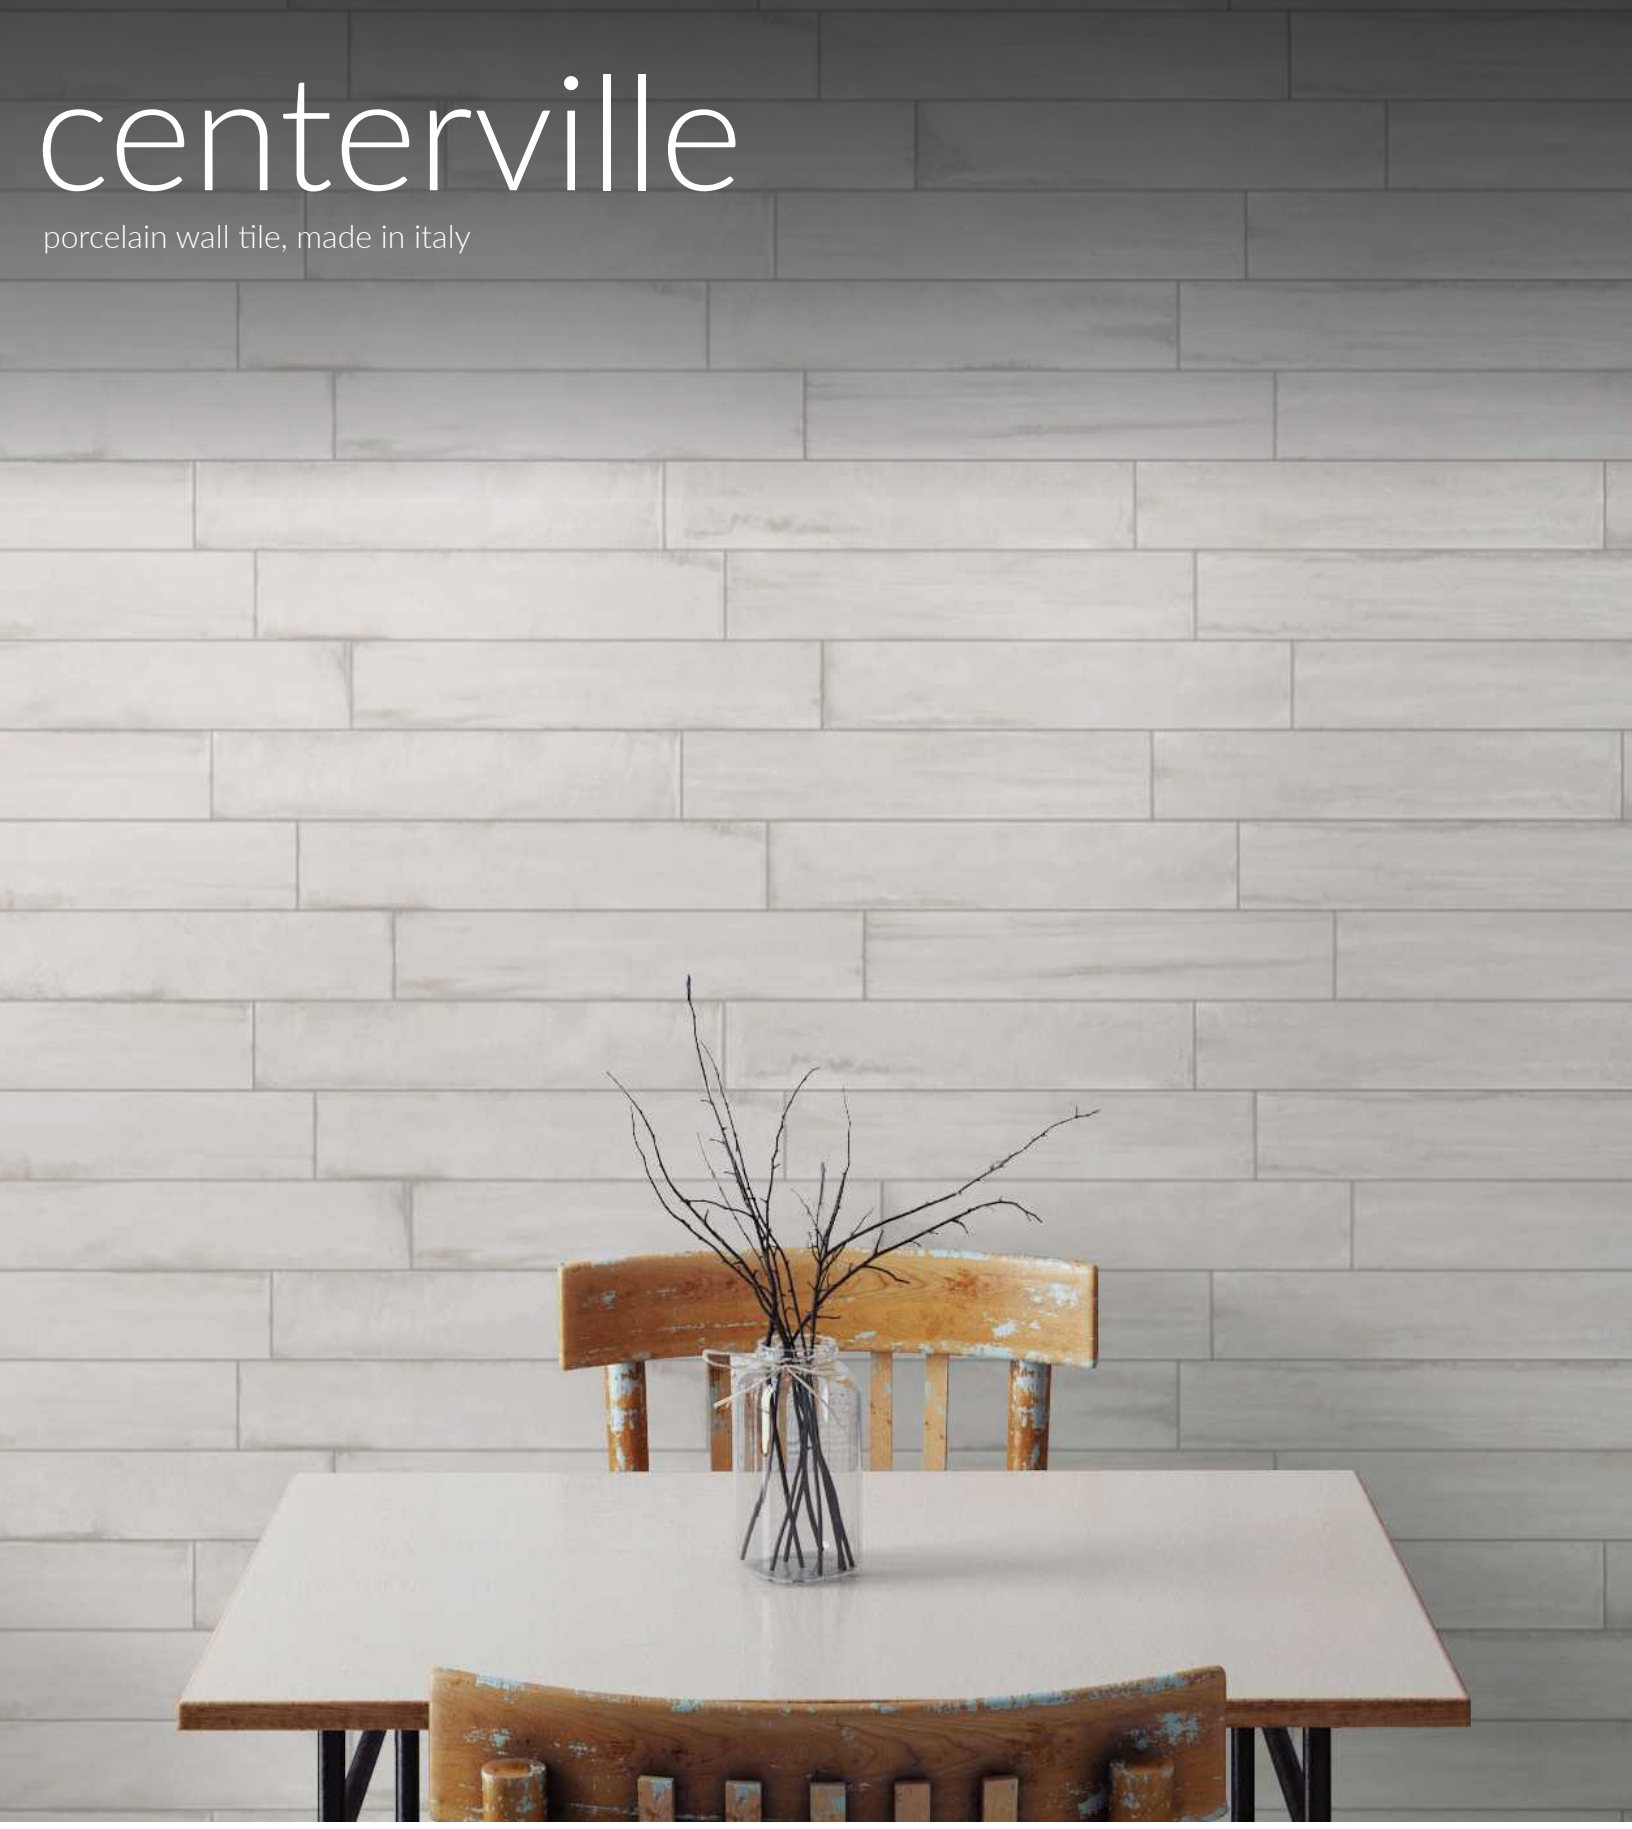

trinity tile
Inspiring Surface Design

centerville

porcelain wall tile, made in italy


trinity tile



bianco



beige

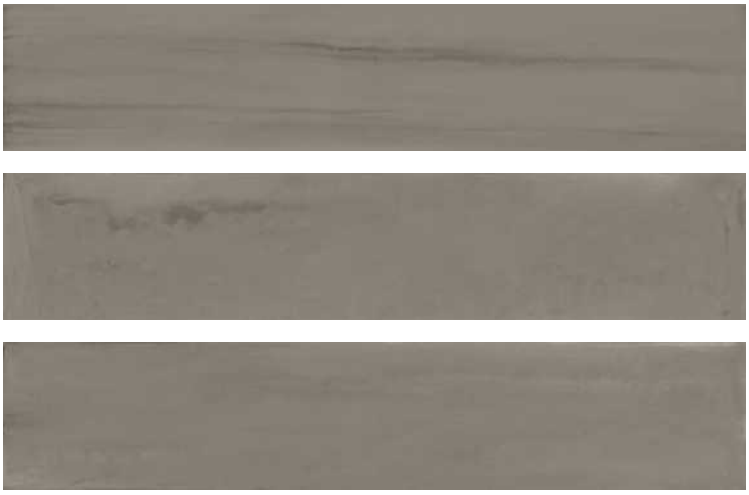

nero

AVAILABLE SIZES

	3”x16”
bianco	▲
beige	▲
nero	▲

▲ GLOSSY

TECHNICAL SPECIFICATIONS


	nominal thickness	shade variation	water absorption	frost resistance	chemical resistance	chemical resistance
Test	n/a	n/a	ASTM C 373	ASTM C 1026	ASTM C 650	ASTM C 1378
Results	8.5mm	v3- moderate	< 0.1%	Resistant	class a	class a

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

color code

ceramic wall tile, made in south america

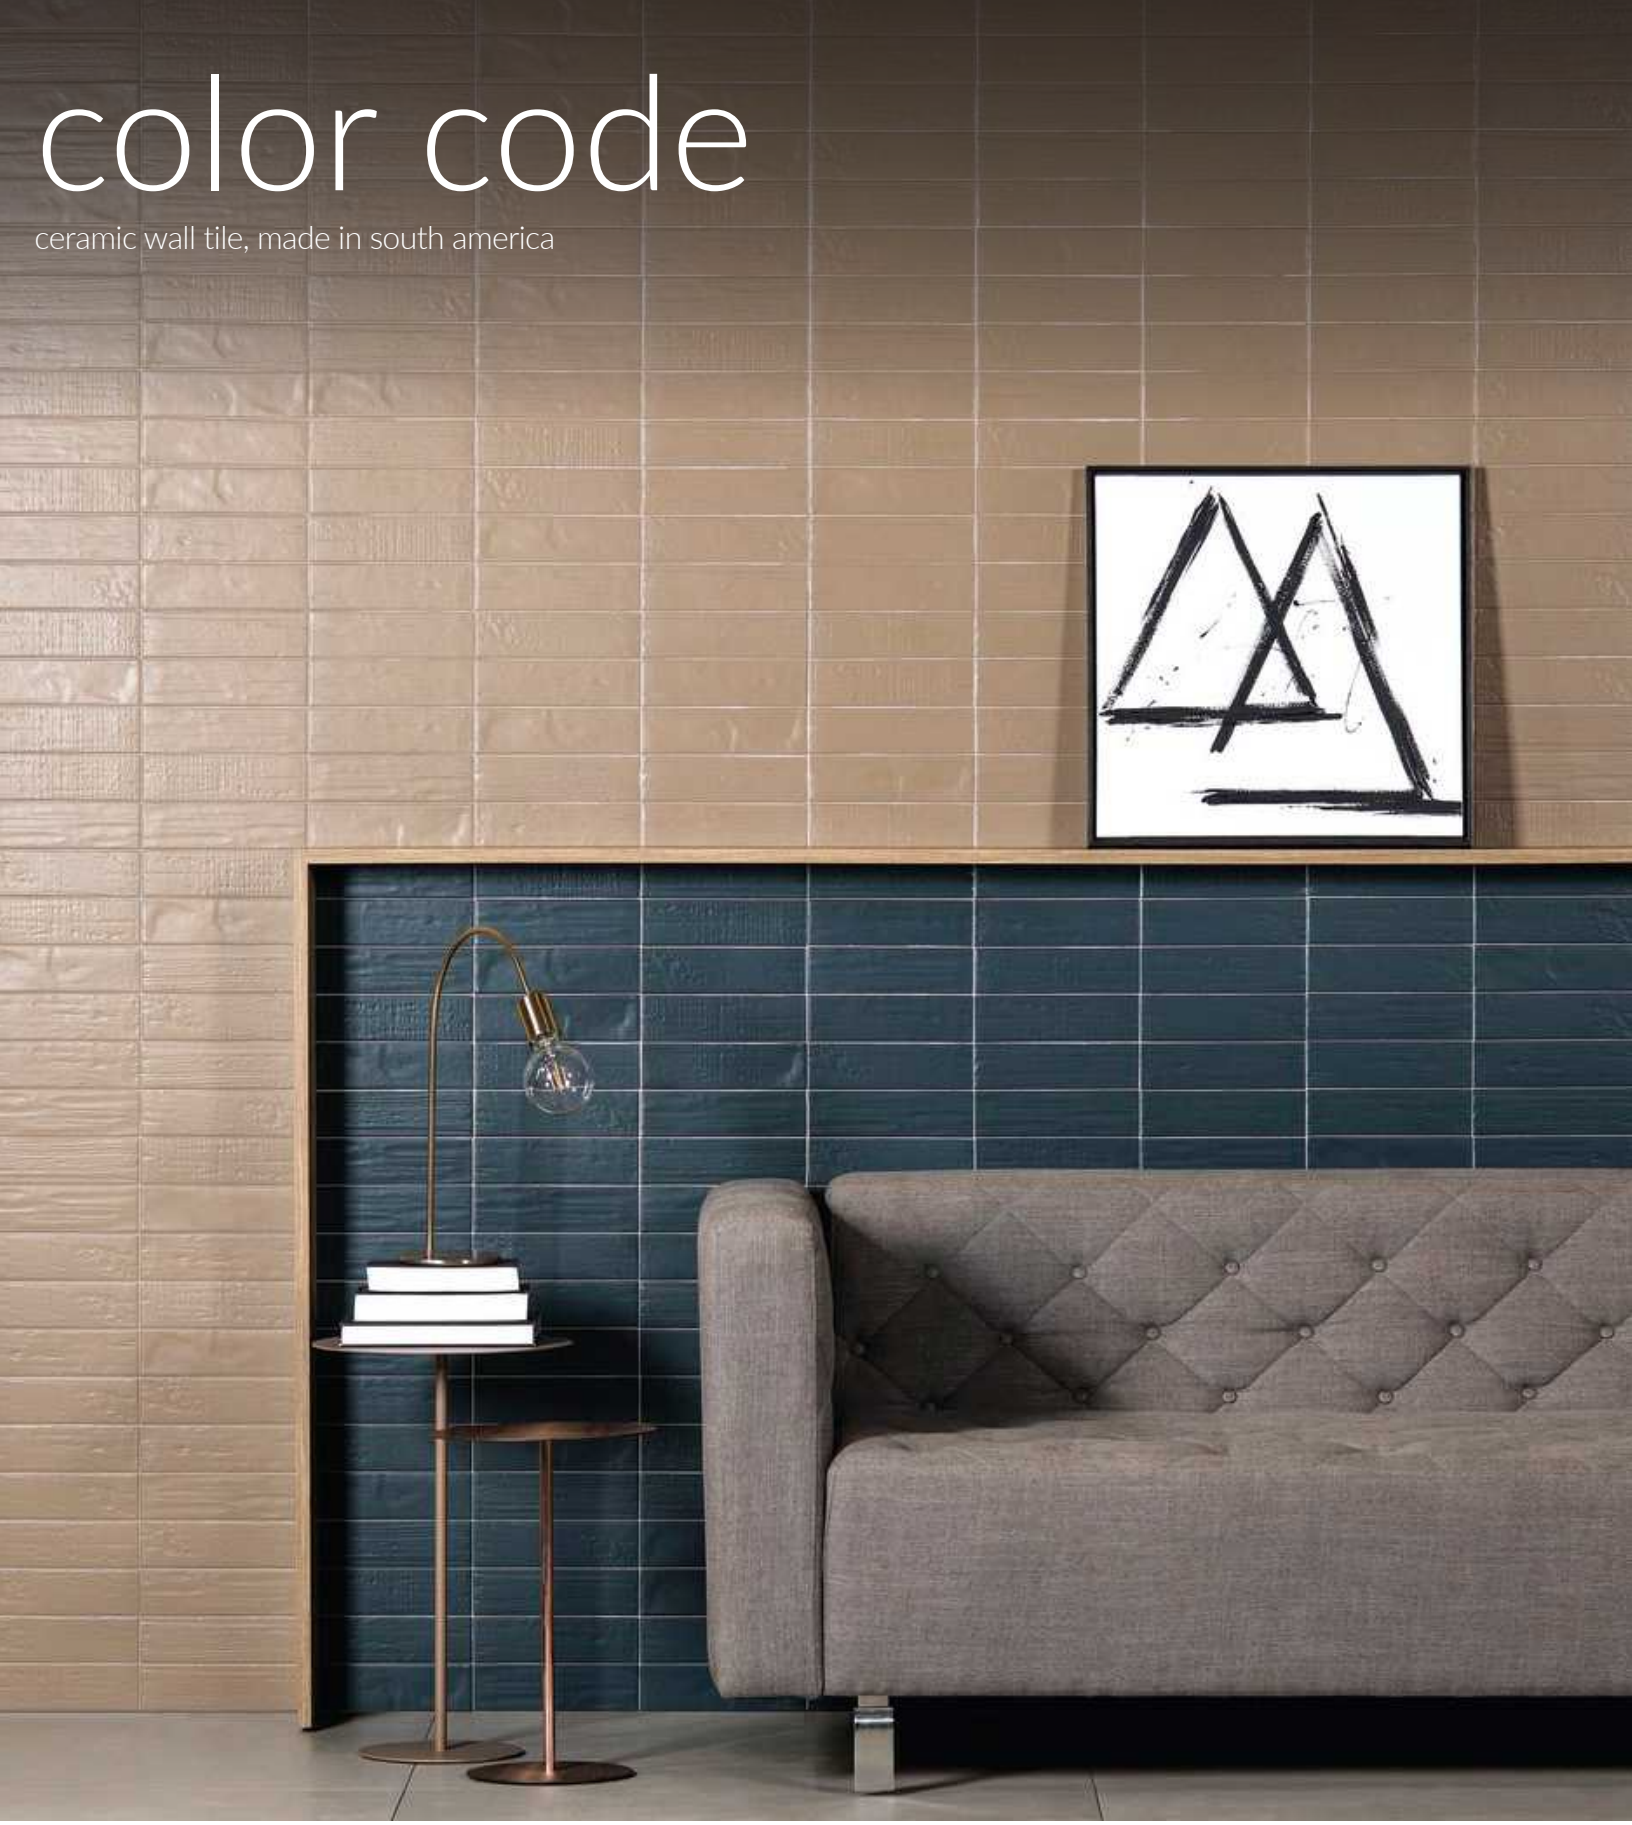

trinity tile
Inspiring Surface Design


color code

ceramic wall tile, made in south america

trinity tile



AVAILABLE SIZES

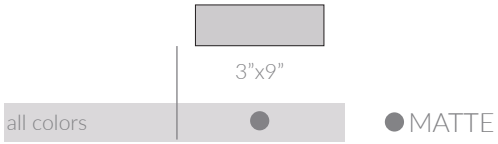

TECHNICAL SPECIFICATIONS

	nominal thickness	hardness	chemical resistance	water absorption	shade variation	stain resistance	mohs
test	N/A	MOHS	ASTM C650	ASTM C373	N/A	ASTM C1378	ASTM C1895
results	7.2mm	5	resistant	3%	v1	resistant	5

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

fermosa

ceramic tile, made in south america



trinity tile
Inspiring Surface Design

fermosa

ceramic tile, made in south america

trinity tile


breeze


heritage


spice


market


aqua


fond



terrazzo fun white



terrazzo fun grey


squares



trails

solid white


solid grey


solid black

AVAILABLE SIZES



8"x8"

all colors ● ● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	ASTM C648	ASTM C650	ASTM C373	N/A	ASTM C1026	ASTM A137.1
results	8.2mm	min. 250	unaffected	< 3%	v1	resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

link

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design


link

ceramic wall tile, made in italy


trinity tile



white


grey

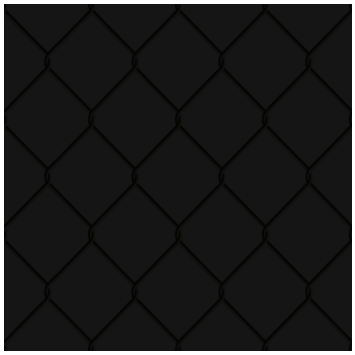

black


decoro

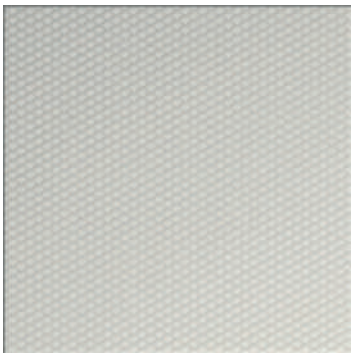

micro white

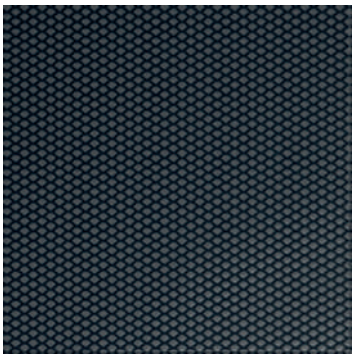
micro grey


micro black

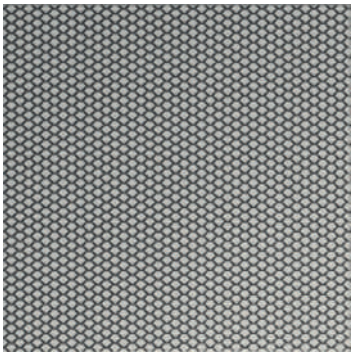
micro decoro

AVAILABLE SIZES

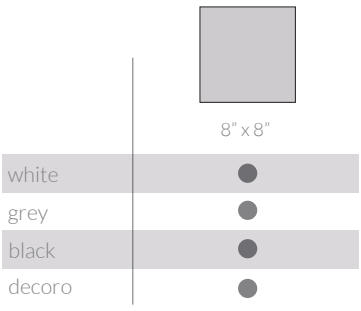

● GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	flexion resistance	water absorption	crazing resistance	thermal shock resistance	stain resistance	linear thermal expansion
Test	N/A	ASTM C1026	ISO 10545.3	ISO 10545.11	ISO 10545.9	ISO 10545.14	ISO 10545.8
Results	8mm	22 Nimm'	16%	Resistant	Conforms	Class V	$8x10^{-6}\,0C^{-1}$

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

malia

ceramic tile, made in south america



trinity tile
Inspiring Surface Design

malia

ceramic tile, made in south america


trinity tile



white & pink shell



pink & white shell

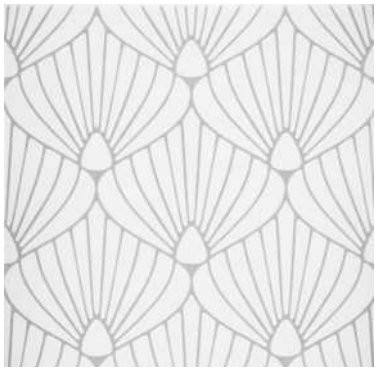

white & lavender shell



lavender & white shell



gray & taupe oval



taupe & gray oval




green & white oval



navy & blue oval

AVAILABLE SIZES



	8"x8"
white & pink shell	●
pink & white shell	●
white & lavender shell	●
lavender & white shell	●
gray & taupe oval	●
taupe & gray oval	●
green & white oval	●
navy & blue oval	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	ASTM C648	ASTM C650	ASTM C373	N/A	ASTM C1026	ASTM A137.1
results	8.2mm	min. 250	unaffected	< 3%	v1	resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

marquee

wall tile, made in italy



trinity tile
Inspiring Surface Design

marquee

wall tile, made in italy

trinity tile

albus



arantia




ater



azura



flavus

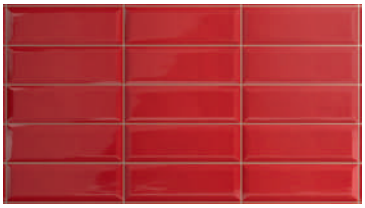

ruber



salavia



semper



virdis

AVAILABLE SIZES



	4"x12"
albus	●
arantia	●
ater	●
azura	●
flavus	●
ruber	●
salvia	●
semper	●
viridis	●

● GLOSSY

TECHNICAL SPECIFICATIONS

	water absorption	frost thaw recycling	scratch hardness	chemical resistance	breaking strength	glazed wear	nominal thickness
Test	ASTM C-373	ASTM C-1026	Mohs	ASTM C-650	ASTM C-648	ASTM C-1027	N/A
Standards	Impervious < 0.5%	No Requirement	No Requirement	No Requirement	> 250 lbf	No Requirement	N/A
Results	≤ 0.1%	No evidence of damage	7	Unaffected	> 350 lbf	Class 4	8.5mm

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

mecca

porcelain tile, made in spain



trinity tile
Inspiring Surface Design

mecca


porcelain tile, made in spain

trinity tile


gris base


aquamarina base


azul base


mostaza base


rosa base


verde base



negro base



gris


aquamarina


azul



mostaza



rosa



verde



negro



gris lines



aquamarina lines



azul lines


mostaza lines



rosa lines


verde lines


negro lines


blanco base

AVAILABLE SIZES



	7.7"x8.9"
all colors	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	hardness	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	N/A	MOHS	ASTM C650	ASTM C373	N/A	ASTM C1026	A137.1
results	9.5mm	5	minimum	≤ 10%	v1	n/a	n/a

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

mixed up

ceramic wall tile, made in spain



trinity tile
Inspiring Surface Design


mixed up

ceramic wall tile, made in spain

trinity tile


calacatta stripe


calacatta mix


linen stripe


linen mix


denim stripe


denim mix


teak stripe


teak mix


bamboo stripe


bamboo mix



oak stripe


oak mix


glacier stripe

glacier mix




mercury stripe


mercury mix


copper stripe


copper mix

AVAILABLE SIZES

	 9.8"x9.8" stripe	 9.8"x9.8" random mix of 3 faces
calcatta	●	●
linen	●	●
denim	●	●
teak	●	●
bamboo	●	●
oak	●	●
glacier	●	●
mercury	●	●
copper	●	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	hardness	chemical resistance	water absorption	shade variation	stain resistance
test	N/A	MOHS	ISO 10545-13	ISO 10545-3	N/A	ISO 10545-14
results	10mm	4	GLA	>10%	v2	5

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

mixt

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

mixt

ceramic wall tile, made in italy

trinity tile




burnish



grey



rusty

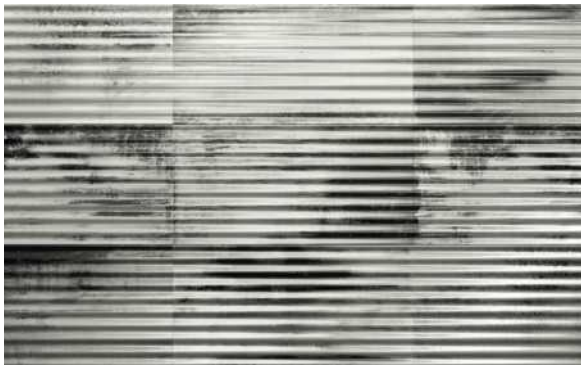

white

AVAILABLE SIZES



	4" x 8"
burnish	●
grey	●
rusty	●
white	●

● METALLIC

TECHNICAL SPECIFICATIONS

	nominal thickness	flexion resistance	water absorption	crazing resistance	thermal shock resistance	stain resistance	linear thermal expansion
Test	N/A	ASTM C1026	ISO 10545.3	ISO 10545.11	ISO 10545.9	ISO 10545.14	ISO 10545.8
Results	8mm	22 Nimm'	16%	Resistant	Conforms	Class V	$8x10^{-6}\,0C^{-1}$

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

nexus

ceramic wall tile, made in south america



trinity tile
Inspiring Surface Design

nexus

ceramic wall tile, made in south america

trinity tile

white gloss

white matte

biscuit gloss


biscuit matte



grey gloss

grey matte

AVAILABLE SIZES

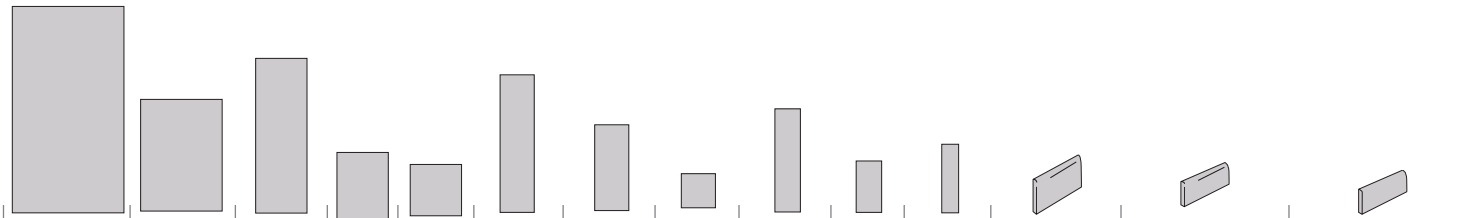

	13”x24”	9.5”x13”	6”x18”	6”x8”	6”x6”	4”x16”	4”x10”	4”x4”	3”x12”	3”x6”	2”x8”	4”x16” bullnose	3”x6”-6” side bullnose	3”x6”-3” side bullnose
white	▲	▲	● ▲	▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲
biscuit			▲	▲	● ▲	● ▲	● ▲	● ▲		● ▲	▲	● ▲	● ▲	● ▲
grey			▲	▲	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲	▲	● ▲	● ▲	● ▲

TECHNICAL SPECIFICATIONS

● MATTE ▲ GLOSS

	nominal thickness	scratch hardness	breaking strength	water absorption	chemical resistance	warpage	wedging
Test	n/a	MOHs	ISO 10545-4	ISO 10545-3	ISO 10545-13	ISO 10545-2	ISO 10545-2
Results	4x16 8mm | 3x6 7mm	3	pass	> 10%	unaffected	pass	pass

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

pez

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

pez

ceramic wall tile, made in italy

trinity tile

white glossy



oldrose glossy



rose matte




grey glossy



sage glossy




forest matte

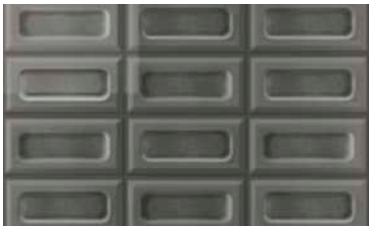

misty glossy



anthracite matte

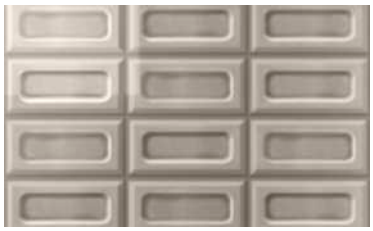


taupe glossy



coffee matte

AVAILABLE SIZES



	4”x8”
white	▲
oldrose	▲
rose	●
grey	▲
sage	▲
forest	●
misty	▲
anthracite	●
taupe	▲
coffee	●

▲ GLOSSY ● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	stain resistance	breaking strength	water absorption	chemical resistance	thermal shock	crazing resistance
Test	n/a	ISO 10545-14	ISO 10545-4	ISO 10545-3	ISO 10545-13	ISO 10545-9	ISO 10545-11
Results	8.5mm	class 5	22 N/mm2	~16%	compliant	pass	pass

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

santorini

ceramic floor & ceramic wall tile, made in south america



trinity tile
Inspiring Surface Design

santorini

ceramic floor & ceramic wall tile, made in south america

trinity tile


aqua

biscuit

blanco


blue steel


taupe


tender grey


aqua


biscuit


blanco


blue steel


taupe


tender grey


aqua deco


biscuit deco


blanco deco


tender grey deco


aqua floor

biscuit floor

blanco floor


blue steel floor


taupe floor


tender grey floor



aqua crackled


biscuit crackled


blanco crackled


blue steel crackled


taupe crackled


tender grey crackled

AVAILABLE SIZES

	8"x8" floor	3" x 6"	4" x 10"	4" x 10" deco	3" x 12" crackled	7" x 8" hexagon	1/2" x 10" pencil	2" x 10" chair rail	2 3/4" x 10" cornice	3" x 6" bullnose	3" x 10" bullnose	3" x 12" bullnose
aqua	▲	●	●▲	●	●	●	●	●	●	●	●	●
biscuit	▲	●	●▲	●	●	●	●	●	●	●	●	●
blanco	▲	●	●▲	●	●	●	●	●	●	●	●	●
blue steel	▲	●	●▲		●	●				●	●	●
taupe	▲	●	●▲		●	●				●	●	●
tender grey	▲	●	●▲	●	●	●	●	●	●	●	●	●

TECHNICAL SPECIFICATIONS

● GLOSSY ▲ MATTE

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	warpage	dcof
test	N/A	ASTM 648	ASTM C650	ASTM C373	N/A	C485	A137.1
results	wall 7-8mm floor 7.3mm	meets or exceeds	resistant	> 10%	v1	pass	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

spectrum

glass wall tile



trinity tile
Inspiring Surface Design

spectrum

glass wall tile


trinity tile



celestial white



supernova silver



moonlight gold




bronze halo



blue moon



black eclipse



orion blue



celestial white



supernova silver



moonlight gold



bronze halo



blue moon





black eclipse



orion blue

AVAILABLE SIZES





	12"x15"x8mm	12"x13"x4mm
celestial white	●	▲
supernova silver	●	▲
moonlight gold	●	▲
bronze halo	●	▲
blue moon	●	▲
black eclipse	●	▲
orion blue	●	▲

● GLOSS

▲ GLOSS & FROSTED

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

stockade

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

stockade

ceramic wall tile, made in italy

trinity tile



ash wall



ash



black wall




black



taupe wall

AVAILABLE SIZES

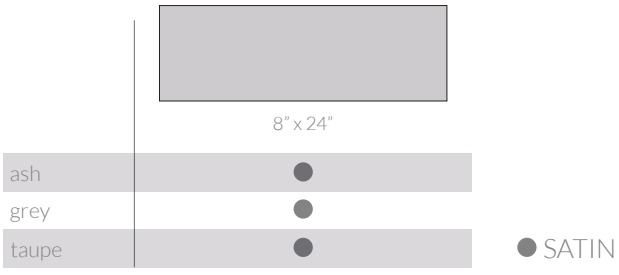

TECHNICAL SPECIFICATIONS

	nominal thickness	flexion resistance	water absorption	crazing resistance	thermal shock resistance	stain resistance	linear thermal expansion
Test	N/A	ASTM C1026	ISO 10545.3	ISO 10545.11	ISO 10545.9	ISO 10545.14	ISO 10545.8
Results	8mm	22 Nimm'	16%	Resistant	Conforms	Class V	$8x10^{-6}\,0C^{-1}$

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

terracolors

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

terracolors

ceramic wall tile, made in italy

trinity tile


white


beige


grey


graphite


azure


fern


olive



brown


amber


red


bordeaux


AVAILABLE SIZES




	4"x8"
white	●
beige	●
grey	●
graphite	●
azure	●
fern	●
olive	●
brown	●
amber	●
red	●
bordeaux	●

● MATTE


graphite deco
4"x8" random packaging

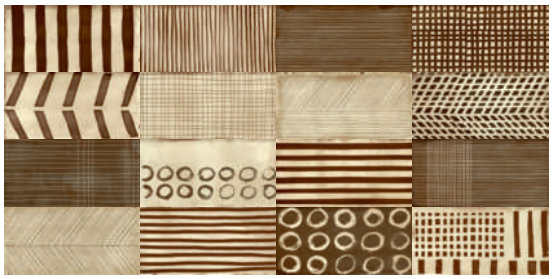
brown deco
4"x8" random packaging


amber deco
4"x8" random packaging

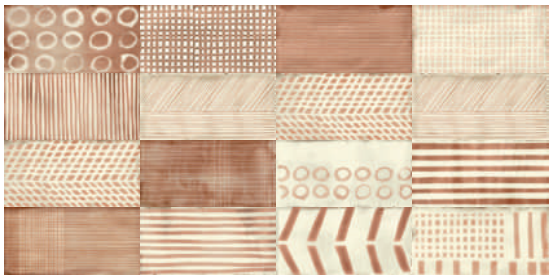
red deco
4"x8" random packaging

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	resistance to thermal shock	crazing resistance	stain resistance	bending strength
Test	N/A	ISO 10545-3	ISO 10545-13	ISO 10545-9	ISO 10545-11	ISO 10545-14	ISO 10545-4
Results	7mm	16%	Resistant	Guaranteed	Guaranteed	Class 5	22 N/mm²

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

tortugas

porcelain tile, made in italy



trinity tile
Inspiring Surface Design

tortugas

porcelain tile, made in italy

trinity tile



banyan



key west



brickell



gables



banyan pattern view



key west pattern view




brickell pattern view



gables pattern view

AVAILABLE SIZES

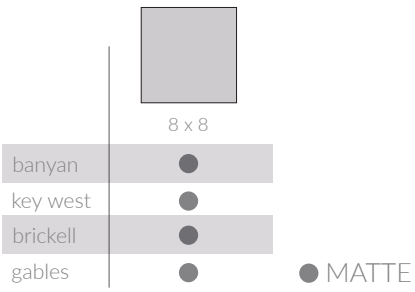

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	chemical resistance	water absorption	shade variation	stain resistance	dynamic coefficient of friction
Test	N/A	ASTM C1026	ASTM C650	ASTM C 373	N/A	ASTM C 1378	ANSI A 137.1
Results	8.5mm	Resistant	Class A	≤ 0.1%	V4	Class A	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

umbra

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

umbra

ceramic wall tile, made in italy


trinity tile




white



pink

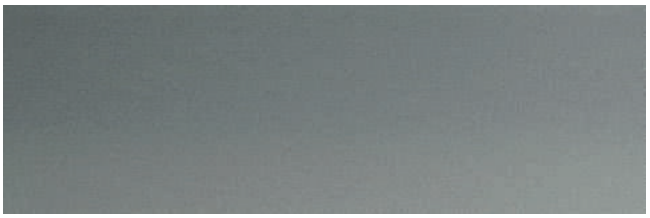


grey

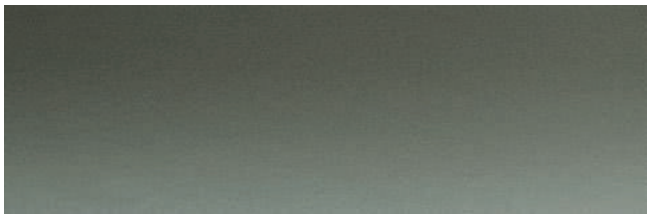

green



black

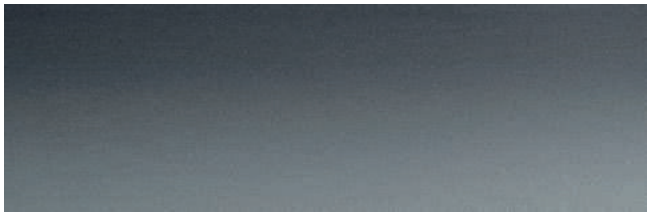

blue

AVAILABLE SIZES



	4" x 12"
white	●
pink	●
grey	●
green	●
black	●
blue	●

● SATIN

TECHNICAL SPECIFICATIONS

	nominal thickness	flexion resistance	water absorption	crazing resistance	thermal shock resistance	stain resistance	linear thermal expansion
Test	N/A	ASTM C1026	ISO 10545.3	ISO 10545.11	ISO 10545.9	ISO 10545.14	ISO 10545.8
Results	8mm	22 Nimm'	16%	Resistant	Conforms	Class V	$8x10^{-6}0C^{-1}$

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

vitality

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

vitality

ceramic wall tile, made in italy

trinity tile



white



ivory



grey



nat




dark



brown

AVAILABLE SIZES



	4"x12"
white	●
ivory	●
grey	●
nat	●
dark	●
brown	●

● MATTE

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	resistance to thermal shock	crazing resistance	stain resistance	bending strength
Test	N/A	ISO 10545-3	ISO 10545-13	ISO 10545-9	ISO 10545-11	ISO 10545-14	ISO 10545-4
Results	7mm	16%	Resistant	Guaranteed	Guaranteed	Class 5	22 N/mm²

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

wall tile collection

ceramic wall tile



trinity tile
Inspiring Surface Design

wall tile collection

ceramic wall tile

trinity tile

GROUP 1

tender gray
2x8*, 3x6, 3x12, 4x4, 6x6, 6x8*, 4x10, 4x16, 6x18*

white ice
2x8, 3x6, 3x12, 4x4, 4x10 6x6, 6x8*, 9x13*, 4x16, 6x18, 13x24*

biscuit
2x8*, 3x6, 4x4, 6x6, 6x8*, 4x10, 4x16, 6x18*

bone*
3x6, 4x10

snow white*
3x6, 4x10

black*
3x6, 4x4

GROUP 2

camel*
4x4, 6x6, 3x6

khaki*
4x4, 6x6, 3x6

cocoa
4x4, 4x10, 6x18*, 6x6, 3x6

fawn
4x4, 4x10, 6x18*, 6x6, 3x6,

spring green*
4x4, 6x6, 3x6

taupe
3x6, 6x6, 4x4, 4x10, 4x16 6x18*

wedgewood*
4x4, 6x6, 3x6

GROUP 3

mustard*
4x4, 6x6, 3x6

yellow*
4x4, 6x6, 3x6

tangerine *
4x4, 6x6, 3x6

chartreuse*
4x4, 6x6, 3x6

terra cotta*
4x4, 6x6, 3x6

kelly*
4x4, 6x6, 3x6

GROUP 4

red pepper*
4x4, 4x10, 6x6, 3x6


cobalt*
4x4, 6x6, 3x6

denim*
4x4, 6x6, 3x6


dark gray*
3x6, 4x4

TRIM AVAILABLE


Group 1 Matte & Glossy

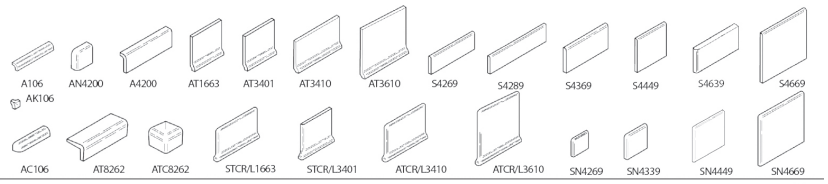


Group 2 Matte & Glossy

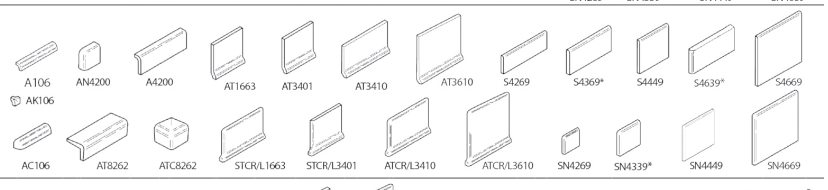

Group 3 Matte & Glossy



Group 4 Glossy



*only available in glossy

TECHNICAL SPECIFICATION

	water absorption	breaking strength	chemical resistance	shade and texture rating	warpage	wedging	group
Test	ASTM C-373	ASTM C-648	ASTM C-650	ASTM CDTA "V"	ASTM C-485	ASTM C-502	ASTM C-1027
Standards	≤ 20 %	≥ 250 lbs	Unaffected	–	0.75%	1.0% Max	–
Results	Meets or exceeds standards	Meets or exceeds standards	Unaffected	V1	Pass	Pass	1

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

watercolors

ceramic wall tile, made in italy



trinity tile
Inspiring Surface Design

watercolors

ceramic wall tile, made in italy

trinity tile



white



acquamarine



grey



yellow



red



blue




yellow deco
4”x8” random packaging



acquamarine deco
4”x8” random packaging

AVAILABLE SIZES



	4”x8”
white	●
acquamarine	●
grey	●
yellow	●
red	●
blue	●

● GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	chemical resistance	resistance to thermal shock	crazing resistance	stain resistance	bending strength
Test	N/A	ISO 10545-3	ISO 10545-13	ISO 10545-9	ISO 10545-11	ISO 10545-14	ISO 10545-4
Results	7mm	16%	Resistant	Resistant	Resistamt	Class 5	22 N/mm²

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

west shore

glazed ceramic wall tile, made in italy




trinity tile
Inspiring Surface Design

west shore

glazed ceramic wall tile, made in italy


trinity tile

white

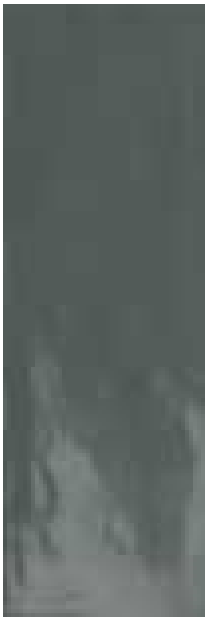
blue

beige



black

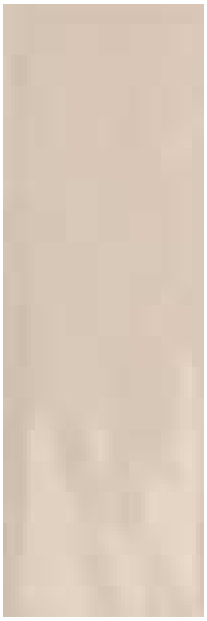
grey



anthracite*


purple*


deco blend grey*


deco blend beige*


deco blend purple*


deco blend anthracite*

AVAILABLE SIZES

	4"x12"	deco blend 4"x12"*	Bullnose 4"x12"
white	●		●
beige	●	●	●
grey	●	●	●
blue	●		●
black	●		●
anthracite*	●	●	●
purple*	●	●	●

● GLOSSY

*special order 8 weeks

TECHNICAL SPECIFICATIONS

	water absorption	chemical resistance	abrasion resistance	breaking resistance	scratch hardness
Test	ASTM C-373	ASTM C-650	ASTM C-1243	ASTM C-648	MOHS
Results	< 20%	Resistant	N/A	120-230 lbs	4-6

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

wonderlust

ceramic wall tile



trinity tile
Inspiring Surface Design

wonderlust

ceramic wall tile

trinity tile

white



tender gray



lavender



velvet pink



atoll blue



dary gray




burgundy




peacock green

AVAILABLE SIZES







	4”x10”	3”x10” bullnose	3/4”x10” pencil
white	▲	▲	▲
tender gray	▲	▲	▲
lavender	▲	▲	▲
velvet pink	▲	▲	▲
atoll blue	▲	▲	▲
dark gray	▲	▲	▲
burgundy	▲	▲	▲
peacock green	▲	▲	▲

▲ GLOSSY

TECHNICAL SPECIFICATIONS

	nominal thickness	warpage	water absorption	wedging	scratch hardness	chemical resistance	breaking strength	shade variation
Test	N/A	C485	C373	C502	Mohs	C650	C648	n/a
Results	7mm	pass	> 10%	pass	n/a	unaffected	≥ 250 lbs.	v2- slight

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8”. When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16” grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

CARE & MAINTENANCE OF PORCELAIN TILE

Initial Cleaning During Installation

As with any flooring material, the most important step in the care and maintenance of your porcelain floor is the initial cleaning. The single most important step in caring for your Trinity tile porcelain floor is the complete removal of setting material, grout residue and/or any construction residue form the surface of the tiles before they have a chance to dry. In most cases, porcelain tiles can be cleaned successfully by scrubbing the installation with a neutral detergent cleaner followed by a thorough rinsing. If grout residue still remains, rinse further, cleaning the tile several times with clean water to insure you have removed all traces of grout residue from the surface of the tiles. Grout manufacturers have printed detailed instructions for the proper cleaning of grout residues available and should be consulted if there are specific project needs. Grout films are the number one leading issue when we find there are ongoing maintenance issues. Proper removal is essential to a successful on going maintenance program. Many companies and installers will immediately recommend an acidic cleaner when cement based grout hazes are present. Use extreme caution when this is proposed. There are some very good acidic based cleaners on the market when properly used that offer very good solutions to remove grout and restore older floors. It is imperative proper installation instructions be used, a small area tested to determine compatibility before proceeding.

Once the initial cleaning process has been completed, Trinity Tile porcelain tiles just need to be swept or vacuumed and damp mopped with a "neutral detergent cleaner" followed by a thorough rinsing.

Special Grouting Precautions

It is recommended that a test patch be done prior to grouting the installation to determine if contaminations of grout pigment will occur on the tile. Especially when using light colored tiles or polished tiles that are too grouted with a dark contrasting colored grout or when dark colored tiles are to be grouted with a light color grout. If discoloration does not occur on the surface of the tile, then proceed with grouting. If discoloration does occur, it is recommended to request from the grout manufacturer a proper procedure for the protection of the surface, many times using a "grout release". There are several on the market but it is always is wise to use one that is recommended by the grout manufacturer.

Proper Care During the Construction Phase

Like any other finished material, Trinity Tile porcelain tiles are viewed as a finish flooring material. We strongly recommend that a protective cover such as cardboard, construction paper, plywood and/or other covering which will protect the porcelain tile during the initial construction phase be used. The use of a plastic as a cover is not recommended, since plastic becomes slippery when construction residue comes in contact with the plastic. In addition, plastic has a tendency to delay the natural curing process of the thin-set and/or grout.

Glaze, Matte, Honed and Textured Tiles

Trinity Tile porcelain products do not require the use of sealers, surface coating or waxes on the glazed, matte, honed and textured tiles. In fact, the surface of the matte series is so smooth, and non-absorbing, the stain test results state that the Trinity porcelain tiles are virtually stain resistant. Applying a sealer or surface coating to matte finish porcelain tiles will only add unnecessary steps to the overall maintenance program without enhancing the overall appearance of the tile. The use of sealers on impervious porcelain paver tiles can turn a low-maintenance tile into labor intensive high maintenance tile and in most cases; these applied surfaces sealers on matte porcelain tiles change and/or diminish the slip resistance of the tile.

Polished Tiles

In the event a polished finish is used in an area prone to excessive spills or dirt, it may be advisable to treat the tile with a penetrating-type sealer. During the polishing process, microscopic pores are sometimes exposed. Although the pores are shallow, spills can fill them making standard cleaning procedures inadequate. By using a penetrating type sealer, these pores are filled preventing stains from setting in. A penetrating type sealer is designed only to fill pores, not coat the surface. You will not alter the polished tiles appearance, provided a recommended sealer is used and applied according to manufacturer's instructions.

Daily Maintenance

As with any flooring material, general maintenance and cleaning varies depending on the surface texture of the tile and surface contaminate. Generally, neutral cleaners are more than sufficient to clean and maintain porcelain tiles. It's important that the cleaner used is a non-oil, non-soap, and non-animal fat based product. These cleaners have a tendency to act like a magnet and attract dirt and dust due to the residue build-up left behind during the clean up. Generally, water and a soft sponge will remove most contaminants from your porcelain tile. If a cleaning product other than water used for general cleaning, only a neutral Ph cleaner (with the characteristics described above) should be used. These neutral Ph cleaners are available from most sealer manufacturers and can be supplied by most tile

distributors. If using other than a neutral Ph cleaner, always test a small area first. As always, follow the instructions including proper dilution ratios, mop and rinsing procedures. The most common problem is over use of cleaner, not rinsing properly and not changing dirty mop water.

Heavy Duty Maintenance

If contaminants occur due to more than daily routine activities, then the use of a stronger cleaner may be needed. Use caution in selecting the product for heavy duty cleaner as many chemicals can damage items of the installation or near the installation as well as discolor and/or stain certain types of tiles. Porcelain tiles are the most durable tiles available, however, we do not test every chemical manufactured, and therefore a test area is needed to confirm that the product selected is suitable for the removal of the contaminant in question. Please refer to the stain removal guide for information about particular stains and manufacturer recommendations. For more specific information, please contact one of the manufacturers listed. Always follow the directions from the manufacturer of the cleaning product you intend to use. Also, heavy duty cleaning may need to incorporate using a floor machine to agitate the surface of the tile in conjunction with a heavy duty cleaner. In this case, make sure the cleaner is properly rinsed and all residues removed. This is best done with wet vac machine. Most advanced cleaning machines today have a wet vac built into the scrubber.

The following are some suggestions of products we have seen successfully used on our products. Each individual job is different.

	Manufacturer	Product
Daily Maintenance	Miracle	Tile & Stone Cleaner Concentrate
Initial Construction Clean up	Miracle	Residue Remover
	Miracle	Heavy Duty Cleaner
	Miracle	Heavy Duty Acid Cleaner
Cement Based Grout Haze Removal	Miracle	Residue Remover
Epoxy Based Grout Haze Removal	Miracle	Epoxy Grout Film Remover
Stain Removal Guide		
Coffee, wine, grape juice, tea, mustard, catsup, soda, other foods	Fila	PS87 or SR95
	Miracle	Tile & Stone Cleaner
	Miracle	Heavy Duty Acidic Cleaner
Animal fats, vegetable fats, cooking Oil, wax, rubber, lipstick	Fila	PS87
	Miracle	Tile & Stone Cleaner
	Miracle	Heavy Duty Acidic Cleaner
Ink, Felt Marker, Crayon	Fila	PS87 or SR95
Pencil	Fila	PS87
Cement	Fila	Deterdek

TERMS &CONDITIONS OF SALE

In these Terms and Conditions of Sale, Trinity Tile Group, Inc., is referred to as "*Trinity*", any third-party manufacturer of flooring or other products sold hereunder is referred to as "Manufacturer" and the customer or person or entity purchasing Trinity's or Manufacturer's products (the "Goods") from Trinity is referred to as the "Buyer". For purposes of these Terms and Conditions of Sale, order confirmation and pro-forma invoice shall be interchangeable.

These Terms and Conditions of Sale, and Trinity's order confirmation (usually in the form of a pro-forma invoice) constitute the complete and exclusive agreement and understanding governing the sale of Goods by Trinity to Buyer (the "Agreement") and supersede all prior agreements, understandings or representations, whether written or oral, among the parties with respect to such matters. Provided, however, that if any term, provision or condition of Trinity's order confirmation should conflict or be inconsistent with any term of these Terms and Conditions, then the terms of Trinity's order confirmation shall prevail and control over such conflicting and/or inconsistent terms.

BY ACCEPTING TRINITY'S ORDER CONFIRMATION, PRO FORMA INVOICE AND/OR INSTRUCTING TRINITY TO SHIP GOODS (EITHER VERBALLY, BY FACSIMILE OR E-MAIL COMMUNICATION), BUYER DOES MANIFEST ITS ACKNOWLEDG-MENT, ACCEPTANCE AND AGREEMENT TO THESE TERMS AND CONDITIONS.

Trinity reserves the right to refuse any order, in its sole discretion. No order is accepted by Trinity until: (i) Trinity provides Buyer with a written order confirmation, and (ii) Buyer duly signs the order confirmation in acknowledgement, acceptance and agreement, and returns the signed order confirmation to Trinity.

1. PRICES: All prices for Goods, including, but not limited to, those specified in Trinity's price list or schedule, website or written quotation, are subject to change without notice. Such prices shall be automatically adjusted to reflect Trinity's prices for Goods as in effect at the time of the requested shipment date, and each shipment will be invoiced at such adjusted prices. Unless otherwise expressly agreed by Trinity in writing, all prices are EX WORKS (which shall have the same meaning as in the Incoterms 2000 published by the International Chamber of Commerce), exclusive of any applicable taxes, duties, sales taxes, transportation and insurance costs or charges (collectively "Charges"), which Charges are to be borne exclusively by Buyer.

2. TERMS OF PAYMENT: Unless otherwise expressly agreed by Trinity in writing in Trinity's order confirmation, the purchase price for all orders shall be paid in full in advance of shipment.

All payments must be made in U.S. currency. In the event Buyer fails to make any payment when due, Trinity shall have the right, in addition to all other remedies available to Trinity either at law or in equity, to either terminate this Agreement immediately, without notice, or to suspend further performance under this Agreement. Buyer shall be liable for all expenses, including reasonable attorneys' fees, relating to the collection of past due amounts. If any payment owed to Trinity is not paid when due, it shall accrue interest at the rate of the lesser of 15% per annum, or the maximum amount permitted by applicable law, from the date on which such past due amount is due until the past due amount is paid in full. Should Buyer's financial responsibility become unsatisfactory to Trinity, cash payments or security satisfactory to Trinity may be required by Trinity for future deliveries and for the Goods theretofore delivered. If such cash payment or security is not provided, in addition to Trinity's other rights and remedies, Trinity may discontinue deliveries.

3. SHIPMENT AND DELIVERY: Unless otherwise expressly agreed in writing by Trinity, shipments are made EX WORKS (which shall have the same meaning as in the Incoterms 2000 published by the International Chamber of Commerce). Risk of loss or damage and responsibility shall pass from Trinity to Buyer upon delivery of the Goods to carrier. Any claims for shortages or damages suffered in transit are the responsibility of Buyer and shall be submitted by Buyer directly to the carrier. Shortages or damages must be acknowledged and signed for at the time of delivery. While Trinity will use all reasonable commercial efforts to maintain the delivery date(s) acknowledged or quoted by Trinity, all shipping dates are approximate and not guaranteed. Trinity reserves the right to make partial shipments. Trinity, at its option, shall not be bound to tender delivery of any Goods for which Buyer has not provided accurate shipping instructions. If the shipment of the Goods is postponed or delayed by Buyer for any reason, including but not limited to, Buyer providing Trinity with inaccurate shipping instructions, then Buyer agrees to reimburse Trinity for any and all transport and/or storage costs and other additional and incidental expenses resulting therefrom.

4. LIMITED WARRANTY: Trinity warrants that all ceramic tile sold by it to Buyer under this Agreement will meet current American National Standards Institute ("ANSI") specifications for the specific ceramic tile applications specified in ANSI 137.1. Subject to the limitations set forth in Section 5 below, Trinity and Manufacturer warrant that Goods sold by Trinity as "first choice goods" are manufactured in accordance with Manufacturer's published technical standards. This limited warranty is valid for a period of one (1) year from the date of shipment of the Goods by Trinity, or (ii) the date Buyer picks up the Goods, whichever is applicable. This limited warranty applies only to "first choice goods" sold by Trinity. ALL GOODS SOLD BY TRINITY OTHER THAN "FIRST CHOICE GOODS" ARE SOLD AS IS. THIS IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY TRINITY AND THE MANUFACTURER WITH RESPECT TO THE GOODS AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO TRINITY OR MANUFACTURER, AND WHETHER OR NOT TRINITY'S OR MANUFACTURER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY TRINITY AND/OR MANUFACTURER FOR BUYER'S (OR ANY SUBSEQUENT TRANSFEREE'S, AS DEFINED BELOW) USE OR PURPOSE.

OTHER THAN REPRESENTATIONS OR WARRANTIES MADE BY TRINITY OR MANUFACTURER IN THEIR RESPECTIVE LITERATURE AND/OR PACKAGING, NO REPRESENTATION OR WARRANTY OF ANY KIND REGARDING THE GOODS MADE BY ANY PERSON OR ENTITY INCLUDING, BUT NOT LIMITED TO, INDEPENDENT DISTRIBUTORS AND SALES REPRESENTATIVES SHALL BE BINDING UPON TRINITY OR MANUFACTURER.

IF YOU ARE A CONSUMER, AND SHOULD ANY APPLICABLE LAW

PROHIBIT THE DISCLAIMER OF IMPLIED WARRANTIES SET FORTH ABOVE, THEN ANY IMPLIED WARRANTIES FOUND TO EXIST WILL BE STRICTLY LIMITED TO THE DURATION OF THE LIMITED WARRANTY SET FORTH ABOVE.

Notwithstanding the foregoing, this limited warranty does not extend to any losses or damages due to misuse, accident, abuse, neglect, normal wear and tear, negligence (other than Trinity's or Manufacturer's), unauthorized modification or alteration, use beyond rate capacity, improper installation, maintenance or application. To the extent that Buyer or its agents have supplied specifications, information, representation of operating conditions or other data to Trinity or Manufacturer in the selection or design of the Goods and the preparation of Trinity's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer, any warranties or other provisions contained herein which are affected by such conditions shall be null and void.

Buyers must notify Trinity of any defects in the Goods in writing, via certified mail to Trinity Tile Group, Inc., at 4337 Dardanelle Drive, Orlando, Florida, 32808 and via fax to Trinity Tile Group, Inc., at (407) 521 - 1985, within thirty (30) days of Buyer's receipt of the Goods. Upon receiving Buyer's notice of defect, Trinity shall, at its option, repair, correct or replace the Goods EX WORKS (which shall have the same meaning as in the Incoterms 2000 published by the International Chamber of Commerce), or refund the purchase price for that portion of the Goods found by Trinity to be defective. Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. Goods repaired or replaced during the warranty period shall be covered by the foregoing warranty for the remainder of the original warranty period or ninety (90) days from the date of shipment, whichever is longer. Notwithstanding the provisions contained in the preceding sentences of this paragraph, Buyer shall be deemed to have accepted the Goods and absolutely and unconditionally waived its rights to claim for any defects: (i) where either the Buyer or its installer detected a defect in the Goods but nonetheless commenced installation or attempted installation of the Goods, or (ii) if the Goods are otherwise modified or altered in any way.

Buyer assumes all other responsibility for any loss, damage, or injury to persons or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.

This Section 4 also applies in the event that any entity or person (other than Buyer) buys, acquires or uses the Goods, including, but not limited to, any entity or person who obtains the Goods from Buyer (any of them a "Subsequent Transferee"). Buyer hereby covenants and agrees to provide such Subsequent Transferee with conspicuous written notice of the provisions set forth in Sections 4 and 5 of these Terms and Conditions of Sale, by providing each such Subsequent Transferee with a copy of the notice attached hereto as Exhibit "A". Buyer, furthermore, covenants and agrees that it shall not make any representation or warranty whatsoever regarding the Goods to any third party (either on behalf of Trinity or Manufacturer or on its own account), other than the limited warranty of Trinity and Manufacturer set forth in this Section 4. BUYER HEREBY COVENANTS AND AGREES THAT, SHOULD IT FAIL TO COMPLY WITH THE PROVISIONS OF THIS LAST PARAGRAPH OF SECTION 4, BUYER SHALL DEFEND, INDEMNIFY, AND HOLD TRINITY AND/OR MANUFACTURER, ITS OFFICERS, EMPLOYEES, AND AGENTS HARMLESS FROM AND AGAINST ANY AND ALL LIABILITY, LOSS, EXPENSE (INCLUDING REASONABLE ATTORNEYS' FEES), OR CLAIMS FOR INJURY OR DAMAGES (INCLUDING, BUT NOT LIMITED TO GENERAL, CONSEQUENTIAL, INCIDENTAL AND PUNITIVE DAMAGES) ARISING OUT OF OR IN CONNECTION WITH BUYER'S OR BUYER'S EMPLOYEES', AGENTS', REPRESENTATIVES' AND/OR INDEPENDENT CONTRACTORS' BREACH OF THESE TERMS AND CONDITIONS OF SALE.

5. LIMITATION OF REMEDY AND LIABILITY: THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY HEREUNDER SHALL BE LIMITED TO REPAIR, CORRECTION OR REPLACEMENT, OR REFUND OF THE PURCHASE PRICE IN ACCORDANCE WITH SECTION 4 ABOVE.

NEITHER TRINITY NOR MANUFACTURER SHALL BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL TRINITY'S OR MANUFACTURER'S LIABILITY TO BUYER AND/OR ANY SUBSEQUENT TRANSFEREES EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS PROVIDED BY TRINITY OR MANUFACTURER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AND ANY SUBSEQUENT TRANSFEREE AGREES THAT IN NO EVENT SHALL TRINITY'S OR MANUFACTURER'S LIABILITY TO BUYER AND/OR ANY SUBSEQUENT TRANSFEREES EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include, but not be limited to, loss of anticipated profits, loss of business opportunity, business interruption, loss of use or revenue, cost of capital or loss or damage to property or equipment.

It is expressly understood that any technical advice furnished by Trinity or Manufacturer with respect to the use of the Goods is given without charge, and Trinity and Manufacturer assume no obligation or liability whatsoever for the advice given, or results obtained, all such advice being given and accepted at Buyer's own risk.

6. EXCUSE OF PERFORMANCE: Neither Trinity nor Manufacturer shall be liable for delays in performance or for non-performance due to acts of God; acts of Buyer; war; fire; flood; weather; sabotage; strikes or labor disputes; civil disturbances or riots; governmental requests, restrictions, allocations, laws, regulations, orders or actions; unavailability of or delays in transportation; default of suppliers; material fluctuations in the exchange rate between the U.S. Dollar and Euro; or unforeseen circumstances or any events or causes beyond Trinity's or Manufacturer's reasonable control. Deliveries or other performance may be suspended for an appropriate period of time or canceled by Trinity upon notice to Buyer in the event of any of the foregoing, but the balance of the Agreement shall otherwise remain unaffected as a result of the foregoing.

If Trinity determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Trinity may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or material) among its purchasers on such basis as Trinity determines to be equitable without liability for any failure of performance which may result therefrom.

7. CANCELLATION: Buyer may cancel orders only upon reasonable advance written notice and upon payment to Trinity of Trinity's cancellation charges which include, among other things, all costs and expenses incurred, and to cover commitments made by Trinity or Manufacturer and a reasonable profit thereon. Trinity's determination of such cancellation charges shall be conclusive. PROVIDED, HOWEVER, THAT ANY CANCELLATION MUST BE MADE BEFORE THE GOODS HAVE BEEN SHIPPED.

8. CHANGES: Buyer may request changes or additions to the Goods consistent with Trinity's specifications and criteria. In the event such changes or additions are accepted by Trinity, Trinity may revise the price and dates of delivery accordingly. Trinity reserves the right to change designs and specifications for the Goods without prior notice to Buyer, except with respect to Goods being made-to-order for Buyer.

9. INDEMNIFICATION: Buyer hereby covenants and agrees to defend, indemnify and hold harmless Trinity, Manufacturer, their officers, directors, employees, agents, advisers, representatives and affiliates (collectively, the "Indemnitees") from and against, and pay or reimburse the Indemnitees for any and all claims, liabilities, obligations, losses, fines, costs, royalties, proceedings, deficiencies or damages (whether absolute, accrued, conditional or otherwise and whether or not resulting from third party claims), including out-of-pocket expenses and reasonable attorneys' and accountants' fees incurred in the investigation or defense of any of the same or in asserting any of their respective rights hereunder (collectively, "Losses"), resulting from or arising out of: (i) Buyer's breach of any provision or covenant set forth in this Agreement, and/or (ii) Buyer's making of any representation to any third party regarding the Goods other than the limited warranty set forth in Section 4 above.

10. ASSIGNMENT: Buyer shall not assign its rights or delegate its duties hereunder or any interest herein without the prior written consent of Trinity, and any such assignment, without such consent, shall be void.

11. GENERAL PROVISIONS: No change, modification, rescission, discharge, abandonment, or waiver of these Terms and Conditions of Sale shall be binding upon Trinity or Manufacturer unless made in writing and signed on its behalf by a duly authorized representative of Trinity or Manufacturer. No conditions, usage of trade, course of dealing or performance, understanding or agreement purporting to modify, vary, explain, or supplement these Terms and Conditions of Sale shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification or additional terms shall be applicable to this Agreement by Trinity's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. No waiver by either party with respect to any breach or default or of any right or remedy, and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Trinity in any quotation, acknowledgment or publication are subject to correction.

12. SEVERABILITY: If any provision of this Agreement shall be held invalid or unenforceable by competent authority, such provision shall be construed so as to be limited or reduced to be enforceable to the maximum extent compatible with the law as it shall then appear. The total invalidity or unenforceability of any particular provision of this Agreement shall not affect the other provisions hereof and this Agreement shall be construed in all respects as if such invalid or unenforceable provision were omitted.

13. GOVERNING LAW AND JURISDICTION: This Agreement shall be governed by and construed in accordance with the laws of the State of Florida without reference to its conflicts of laws principles. Buyer, Trinity and Manufacturer agree to submit all disputes arising out of or in connection with this Agreement to the exclusive jurisdiction of the State and Federal courts of the State of Florida, located in Orange County. EACH PARTY TO THIS AGREEMENT ACKNOWLEDGES AND AGREES THAT ANY CONTROVERSY WHICH MAY ARISE UNDER THIS AGREEMENT IS LIKELY TO INVOLVE COMPLICATED AND DIFFICULT ISSUES, AND, THEREFORE, EACH SUCH PARTY HEREBY IRREVOCABLY AND UNCONDITIONALLY WAIVES ANY RIGHT SUCH PARTY MAY HAVE TO A TRIAL BY JURY IN RESPECT OF ANY LITIGATION DIRECTLY OR INDIRECTLY ARISING OUT OF OR RELATING TO THIS AGREEMENT, OR THE BREACH, TERMINATION OR VALIDITY OF THIS AGREEMENT, OR THE TRANSACTIONS CONTEMPLATED BY THIS AGREEMENT. EACH SUCH PARTY CERTIFIES THAT THEY HAVE NOT RELIED UPON ANY REPRESENTATION OR INDUCEMENT OF THE OTHER PARTY IN AGREEING TO THIS PROVISION AND THAT THEY FREELY, KNOWINGLY AND VOLUNTARILY WAIVE THEIR RIGHT TO A JURY TRIAL. The Convention for the International Sale of Goods shall not apply to this Agreement.

14. U.S. EXPORT CONTROL REGULATIONS: All Goods sold to Buyer are subject to the export control laws of the United States and Buyer agrees not to re-sell or divert any Goods contrary to such laws.

15. RETURNED GOODS: Except as otherwise provided in the fourth paragraph of Section 4 above with respect to warranty defects, no Goods may be returned to Trinity.

16. NO THIRD PARTY RIGHTS: These Terms and Conditions of Sale create no third party rights between Trinity, Manufacturer and any person other than Buyer, including but not limited to any Subsequent Transferee. It is understood and agreed that the parties do not intend that any third party be a beneficiary of these Terms and Conditions of Sale.



want more?

FIND ADDITIONAL PRODUCTS AT TRINITYTILE.COM
P: 866.774.3390 E: INFO@TRINITYTILE.COM

trinity tile