



MIPOLAM SYMBIOZ™

gerflorusa.com



Gerflor®
theflooringgroup

A modern office interior featuring glass partitions, wood-grain laminate walls, and green office chairs. The space is bright and open, with a white ceiling and a large white pendant light. The glass partitions are framed with dark wood, and the walls are covered in a wood-grain laminate. The floor is a light-colored, polished material. The overall design is clean, minimalist, and eco-friendly.

MIPOLAM SYMBIOZ: **31 colors**

**Eco-Friendly and
Designed with Style**

6008 Calico
6057 Musk
6067 Kaki





PATENTED GERFLOR TECHNOLOGY

STAIN SHIELD SURFACE BARRIER THAT REPELS THE TOUGHEST STAINS




The **EVERCARE™** water-repellent effect prevents staining products from penetrating the materials (alcohol-based Iodine and Betadine, hand sanitizer, etc.), remaining on the surface.



Other products on the market let staining product penetrate the floor covering.



PER ASTM F925

Marker / Iodine / Betadine
↓ ↓ ↓



NO WAX REQUIRED
= SAVES WATER AND DETERGENT
AND PROVIDES BETTER INDOOR
AIR QUALITY

10x less cleaning products to maintain Gerflor floor coverings compared with a non-treated flooring.

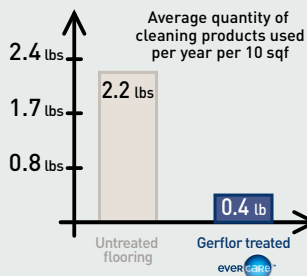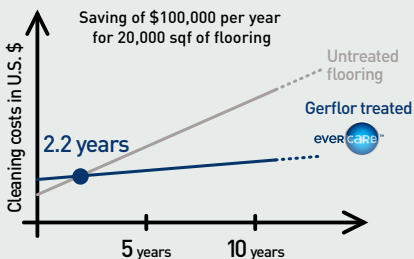

MATTE EFFECT FOR A MODERN LOOK

Non-glaring, ideal for Healthcare applications

MIPOLAM SYMBIOZ™



MIPOLAM SYMBIOZ™



Evercare™

ASTM F1913

FloorScore®



6032 Sunshine

WR: 2510 / LRV: 55.4



NEW

6025 Tangelo

WR: 2733 / LRV: 35.8



NEW

6065 Segesta

WR: 2808 / LRV: 18.7



NEW

6075 Cardinal

WR: 2734 / LRV: 14.6

WR: Welding rod - LRV: Light Reflective Value





NEW

6047 Sauge

WR: 2735 / LRV: 53.0



NEW

6057 Musk

WR: 2804 / LRV: 40.0



NEW

6067 Kaki

WR: 2732 / LRV: 22.3



6027 Acacia

WR: 2507 / LRV: 48.2

MIPOLAM SYMBIOZ™



Evercare™

ASTM F1913

FloorScore®



6006 Blue Sky

WR: 2501 / LRV: 52.7



6018 Ushuaia

WR: 2809 / LRV: 30.9



6058 Vermiglio

WR: 2803 / LRV: 13.5



6037 Lagoon

WR: 2259 / LRV: 32.1



6036 Oceania

WR: 2740 / LRV: 13.7



6056 Tulum

WR: 2741 / LRV: 8.4

WR: Welding rod - LRV: Light Reflective Value





NEW

6050 Hurricane
WR: 2738 / LRV: 20.2



6008 Calico
WR: 2503 / LRV: 66.8



NEW

6030 Stonehenge
WR: 2739 / LRV: 36.0



6009 Grey Stone
WR: 2504 / LRV: 52.4



6059 Black Diamond
WR: 2516 / LRV: 5.8



6029 Cloud
WR: 2508 / LRV: 35.7

MIPOLAM SYMBIOZ™



Evercare™

ASTM F1913

Floorscore®



6010 Mist

WR: 0626 / LRV: 47.8



6039 Pebble

WR: 2513 / LRV: 34.8



6044 Sea Storm

WR: 0135 / LRV: 15.7




6041 Clay

WR: 0582 / LRV: 41.8



6043 Wood

WR: 2258 / LRV: 24.3



6045 Chocolate

WR: 2918 / LRV: 9.3

WR: Welding rod - LRV: Light Reflective Value





6001 Cotton
WR: 0696 / LRV: 72.0




6002 Lipica
WR: 2737 / LRV: 67.8



6031 Breeze
WR: 2509 / LRV: 48.5

6005 Ghibli
WR: 2736 / LRV: 52.2

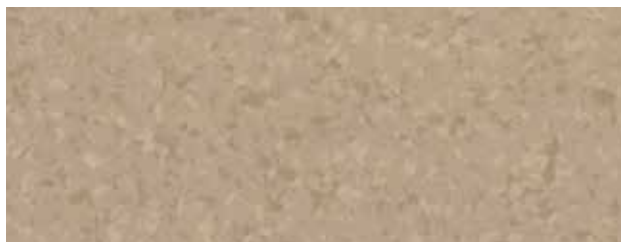

6034 Mole
WR: 2511 / LRV: 33.5

NEW

NEW



GERFLOR USA
877-437-3567
samples@gerflorusa.com
orders@gerflorusa.com

gerflorusa.com

	STANDARDS	REQUIREMENTS	MIPOLAM SYMBIOZ™
PRODUCT DESCRIPTION			Homogeneous resilient sheet flooring made with a 100% bio-based plasticizer featuring a tone on tone non directional design
Reference Specification	ASTM F1913	-	Meets Requirements
Surface Treatment/Maintenance	-	-	Patented Evercare™ Stain Shield Surface Treatment
Gauge Total Thickness	ASTM F386	≥ 0.075"	0.08" (2.0 mm)
Roll Width	-	-	6'6" (2.0 m)
Roll Length	-	-	66' (20 lm)
Coverage/Roll	-	-	430.56 ft² (40 m²)
Weight	-	-	0.53 lb/ft² (2.6 kg/m²)
PERFORMANCE			
Static Load Resistance	ASTM F970	≤ 0.005"	-0.002" Meets Requirements
Abrasion	ASTM F510	-	≤ -0.08" (≤ -2mm)
Indentation - Residual	ASTM 1914	≤ -0.007"	-0.005" (0.13mm) Meets Requirements
Flexibility	ASTM F137	> 1.5"	Meets Requirements
Chemical & Stain Resistance	ASTM F925	-	No residual stains, Excellent results ; Meets Requirements
Resistance to Heat	ASTM F 1514	ΔE ≤ 8	Meets Requirements
Resistance to Light	ASTM F 1515	ΔE ≤ 8	Meets Requirements
Coefficient of Friction	ASTM D2047	-	0.56 (Dry)
Impact Insulation (IIC)	ASTM E989 (ASTM E492)	-	42 dB
Fire rating	ASTM E648	Class 1	Meets Requirements
	CAN/ULC S102.2	-	Meets Requirements
ENVIRONMENTAL HEALTH & SAFETY			
Naturally bacteriostatic; Combats MRSA, E. Coli and S. aureus*	ISO 22196	-	Inhibits spread of infections at 99%
Plant certifications	-	-	ISO 9001 ISO 14001 OHSAS 18001
Production waste	-	-	100% Manufacturing Waste Recycled
End of life	-	-	100% Recyclable
MATERIALS & RESOURCES (MR): BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BPDO)			LEED CONTRIBUTIONS
Environmental Product Declarations (EPD)	LEED v4 MR BPDO	1 product	Product Specific Type III
Health Product Declaration (HPD v2.1)	LEED v4 MR BPDO	1 product	Self-Declared
Sourcing of Raw Materials: Recycled Content	LEED v3 MR c4 & LEED v4 MR BPDO	Contributes	25% pre-consumer content
Sourcing of Raw Materials: Regional Material	LEED v3 MR c5 & LEED v4 MR BPDO	Contributes	Manufactured in City, Troisdorf, Germany
Sourcing of Raw Materials: Bio-based Materials	LEED v4 MR BPDO	Contributes	Bio-based plasticizer
Sourcing of Raw Materials: Restriction Use of Harmful Chemicals	LEED v4 MR BPDO	Contributes in inter-national projects	100% REACH compliant
INDOOR ENVIRONMENTAL QUALITY (IEQ)			
Low Emitting Materials	LEED v3 IEQ c4.3 & LEED v4 IEQ	Contributes	FloorScore™ Certified
TVOC after 28 days	ISO 16000-6	-	< 10 µg/m³
Warranty	-	-	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions on www.gerflorusa.com

* The best defense against the spread of infections is the implementation of an effective cleaning method



GERFLOR: ACTIONS SPEAK LOUDER THAN WORDS



LCA

EPD Product Specific Type III
Durable > 20 years life expectancy



**INDOOR
AIR QUALITY**

100 times lower than industry requirements
(TVOC < 10 µg/m³ after 28 days)



RAW MATERIALS

Sourced within 250 miles
75% Sustainable and renewable resources



WELLNESS

ISO 22196
Naturally Bacteriostatic



**RECYCLED
CONTENT**

25%

Gerflor
theflooringgroup