


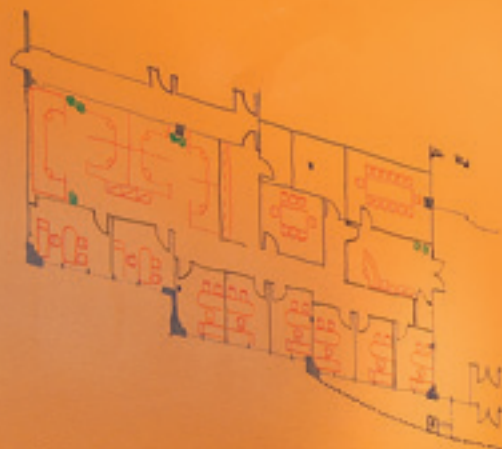

New Landscaping

REBRANDING

NEW S.G. PANELS

RICOH

EXISTING
PARKING TO
REMAIN

New Entry



RHJ ASSOCIATES P.C.
ARCHITECTS • PLANNERS • DESIGNERS
OVER 35 YEARS



Wink.

Wolf Gordon 

Wink. Clear Dry-Erase Coating

About Wink.

Wink is a low VOC, clear finish that transforms any paintable surface into a write-and-erase canvas.

Wink can be used on:

- Painted drywall
- Smooth wallcovering
- Sealed wood
- Metal
- Other sealed, non-porous surfaces

Wink is a superior dry-erase coating:


- Wolf-Gordon introduced Wink as the first clear, waterbased finish on the market, allowing your color, pattern and material to be the focus.
- Wink is versatile, turning any wall, door or column into a dry-erase surface.
- Wink is virtually odorless—the installation area need not be cordoned off due to fumes or foul odor.
- Wink is convenient—it can be installed while people are working.
- Wink costs significantly less per square foot than competitive dry-erase finishes and whiteboards.
- Wink has a lower VOC content than competitive formulas, making it the environmentally safest product in its class.
- Wink has proven its superior performance in thousands of square feet of installations in high-profile organizations.
- Beyond the workplace, Wink enhances wall functionality in restaurants, recreational facilities, healthcare environments, schools and universities, and homes.

Wink comes in 3 convenient kit sizes:

- Coverage up to 50 square feet
- Coverage up to 100 square feet
- Coverage up to 200 square feet

Wink on White.

With an application of Wink, your white wall becomes a place to brainstorm, strategize and solve problems in a collaborative environment.

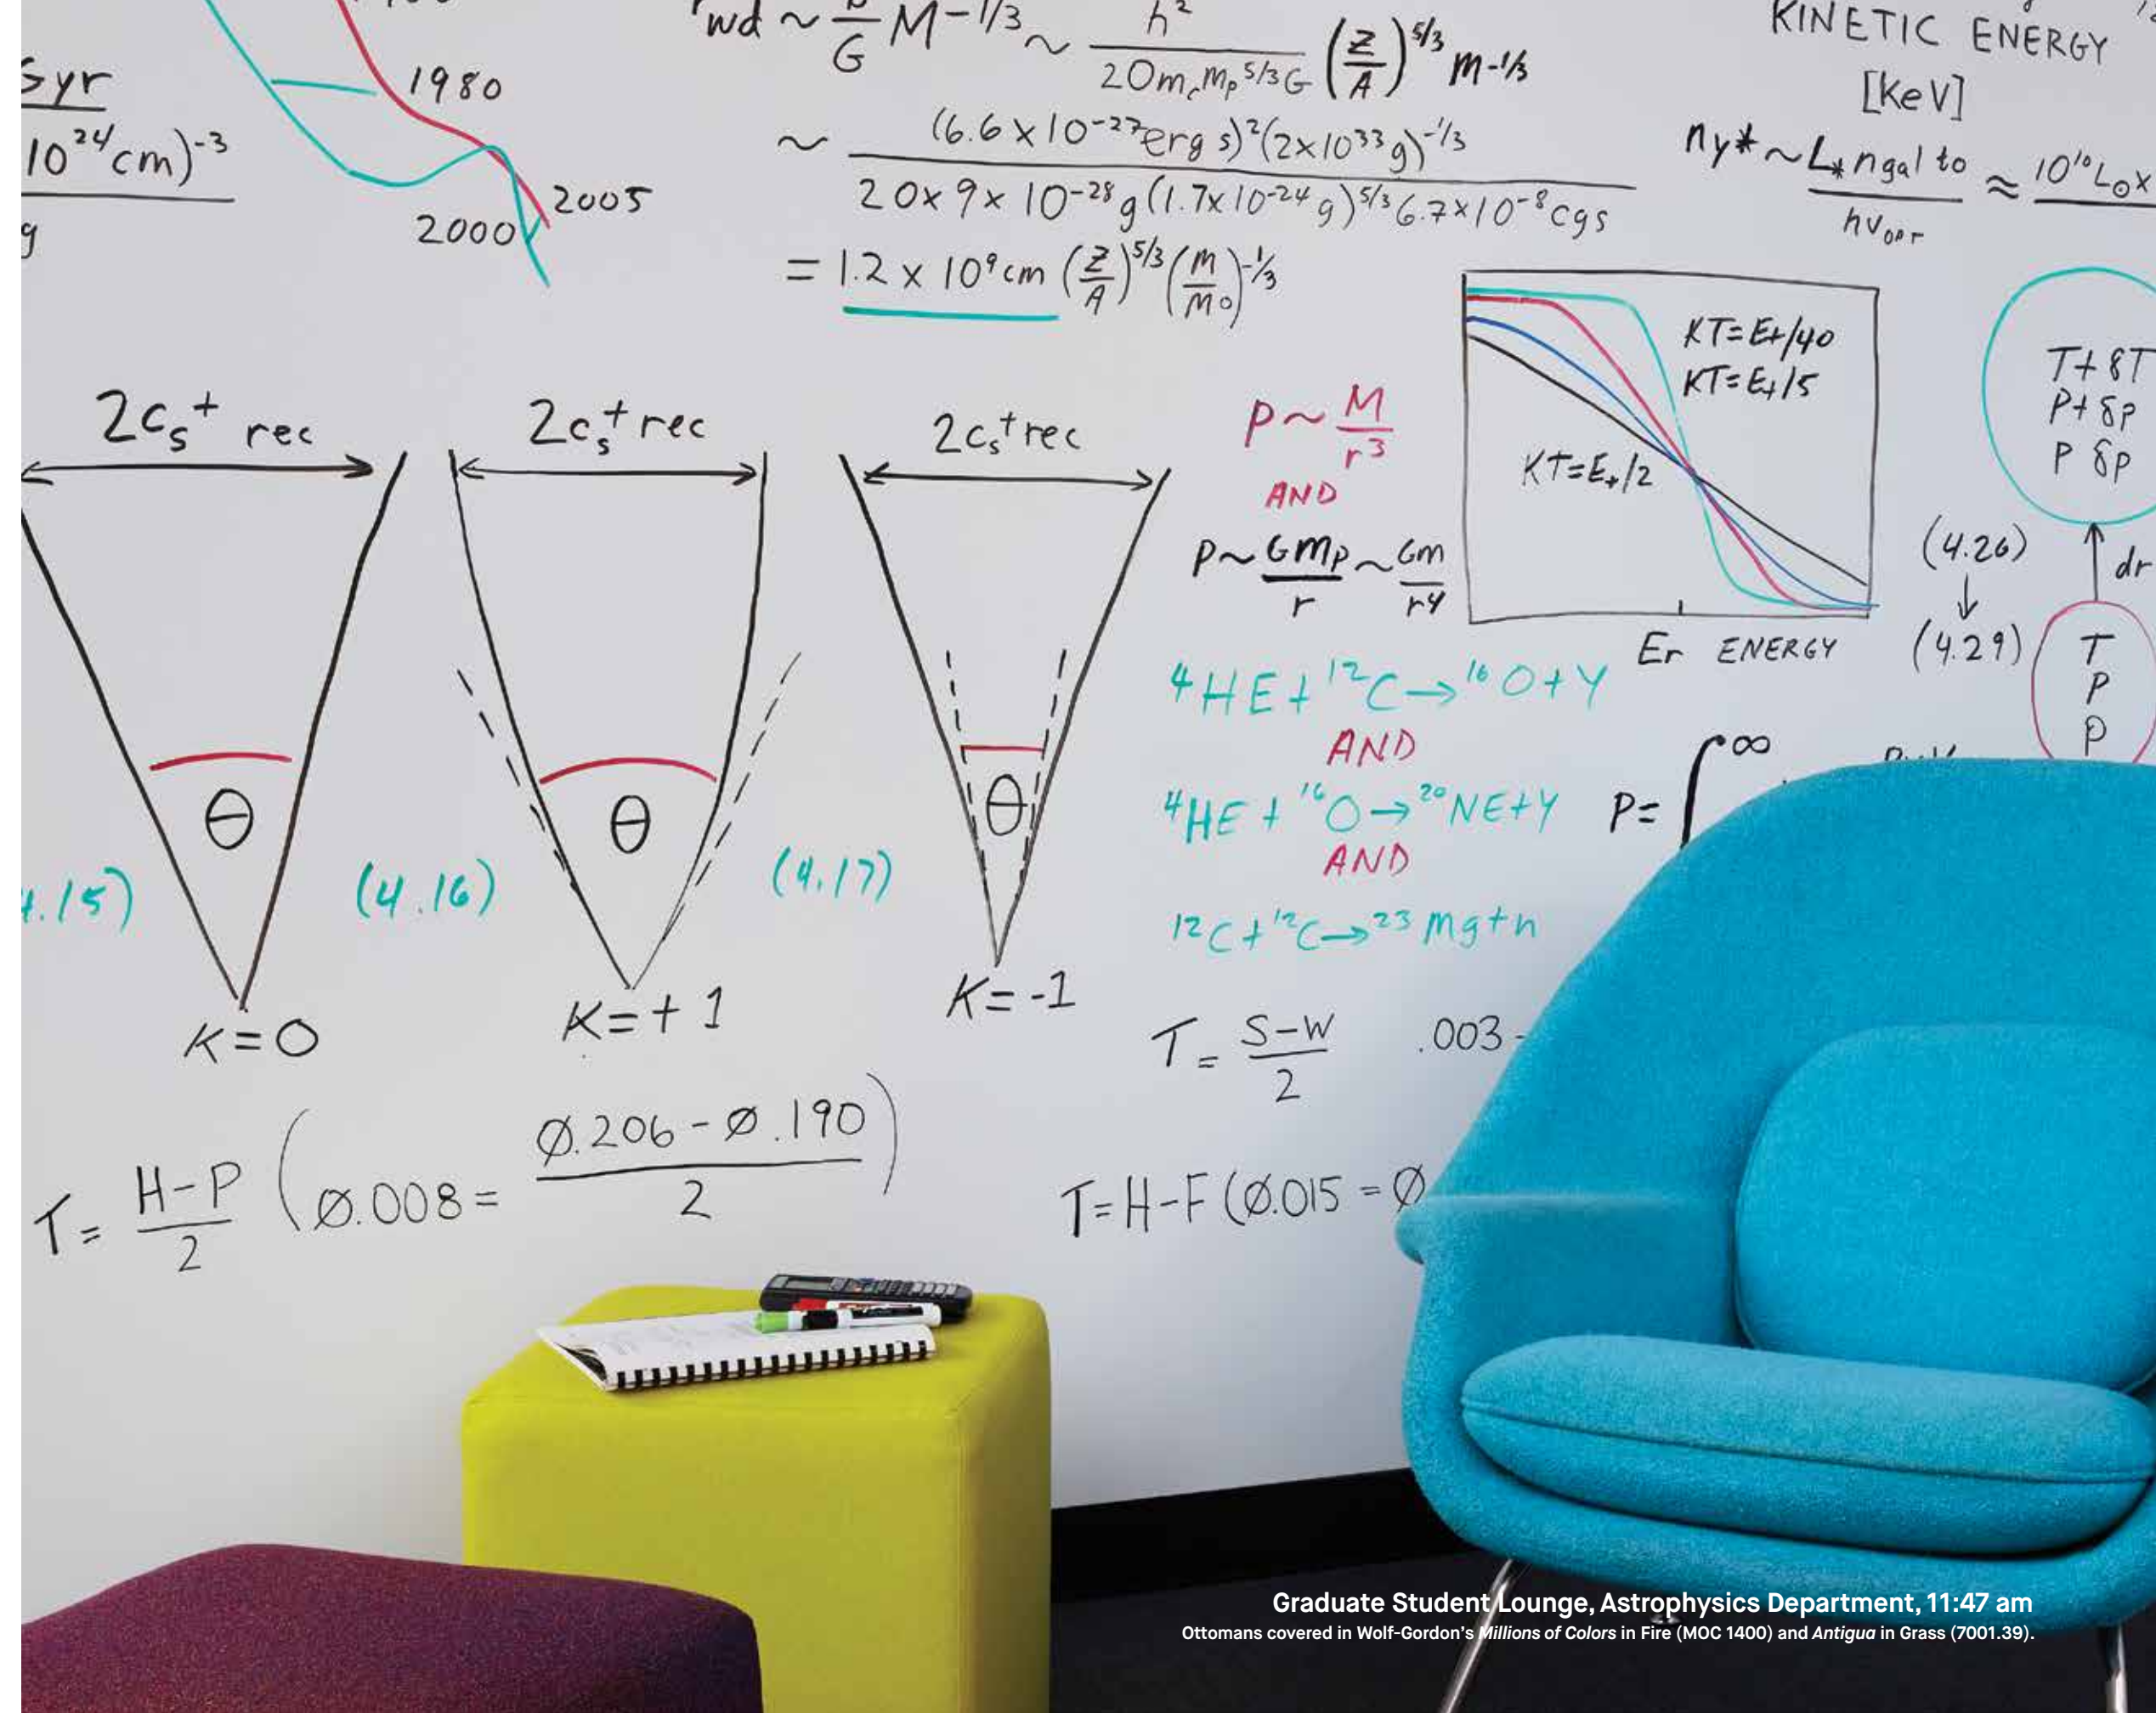



Add illustrations, graphs, tables or other graphics to structure and complement your writing on Wink.

1. Paint your wall white.
2. Paint graphics onto your wall.
3. Wink your wall.
4. Write, erase and enjoy!



< Chalmers School of Excellence, Chicago, IL. Design: Gensler

Friedrich Air Conditioning Headquarters, San Antonio, TX




Combine Wink with three-dimensional objects to add character and functionality to your walls.

Wink Tip #1.

Make sure your surface is repaired, smooth and clean before application, since existing marks, scuffs and dings will show through after Winking.

Wink on Color.

Let the true color—or colors—of your wall show through. Wink is formulated to turn any painted wall into a dry-erase surface while maintaining the color and graphics of your interior.

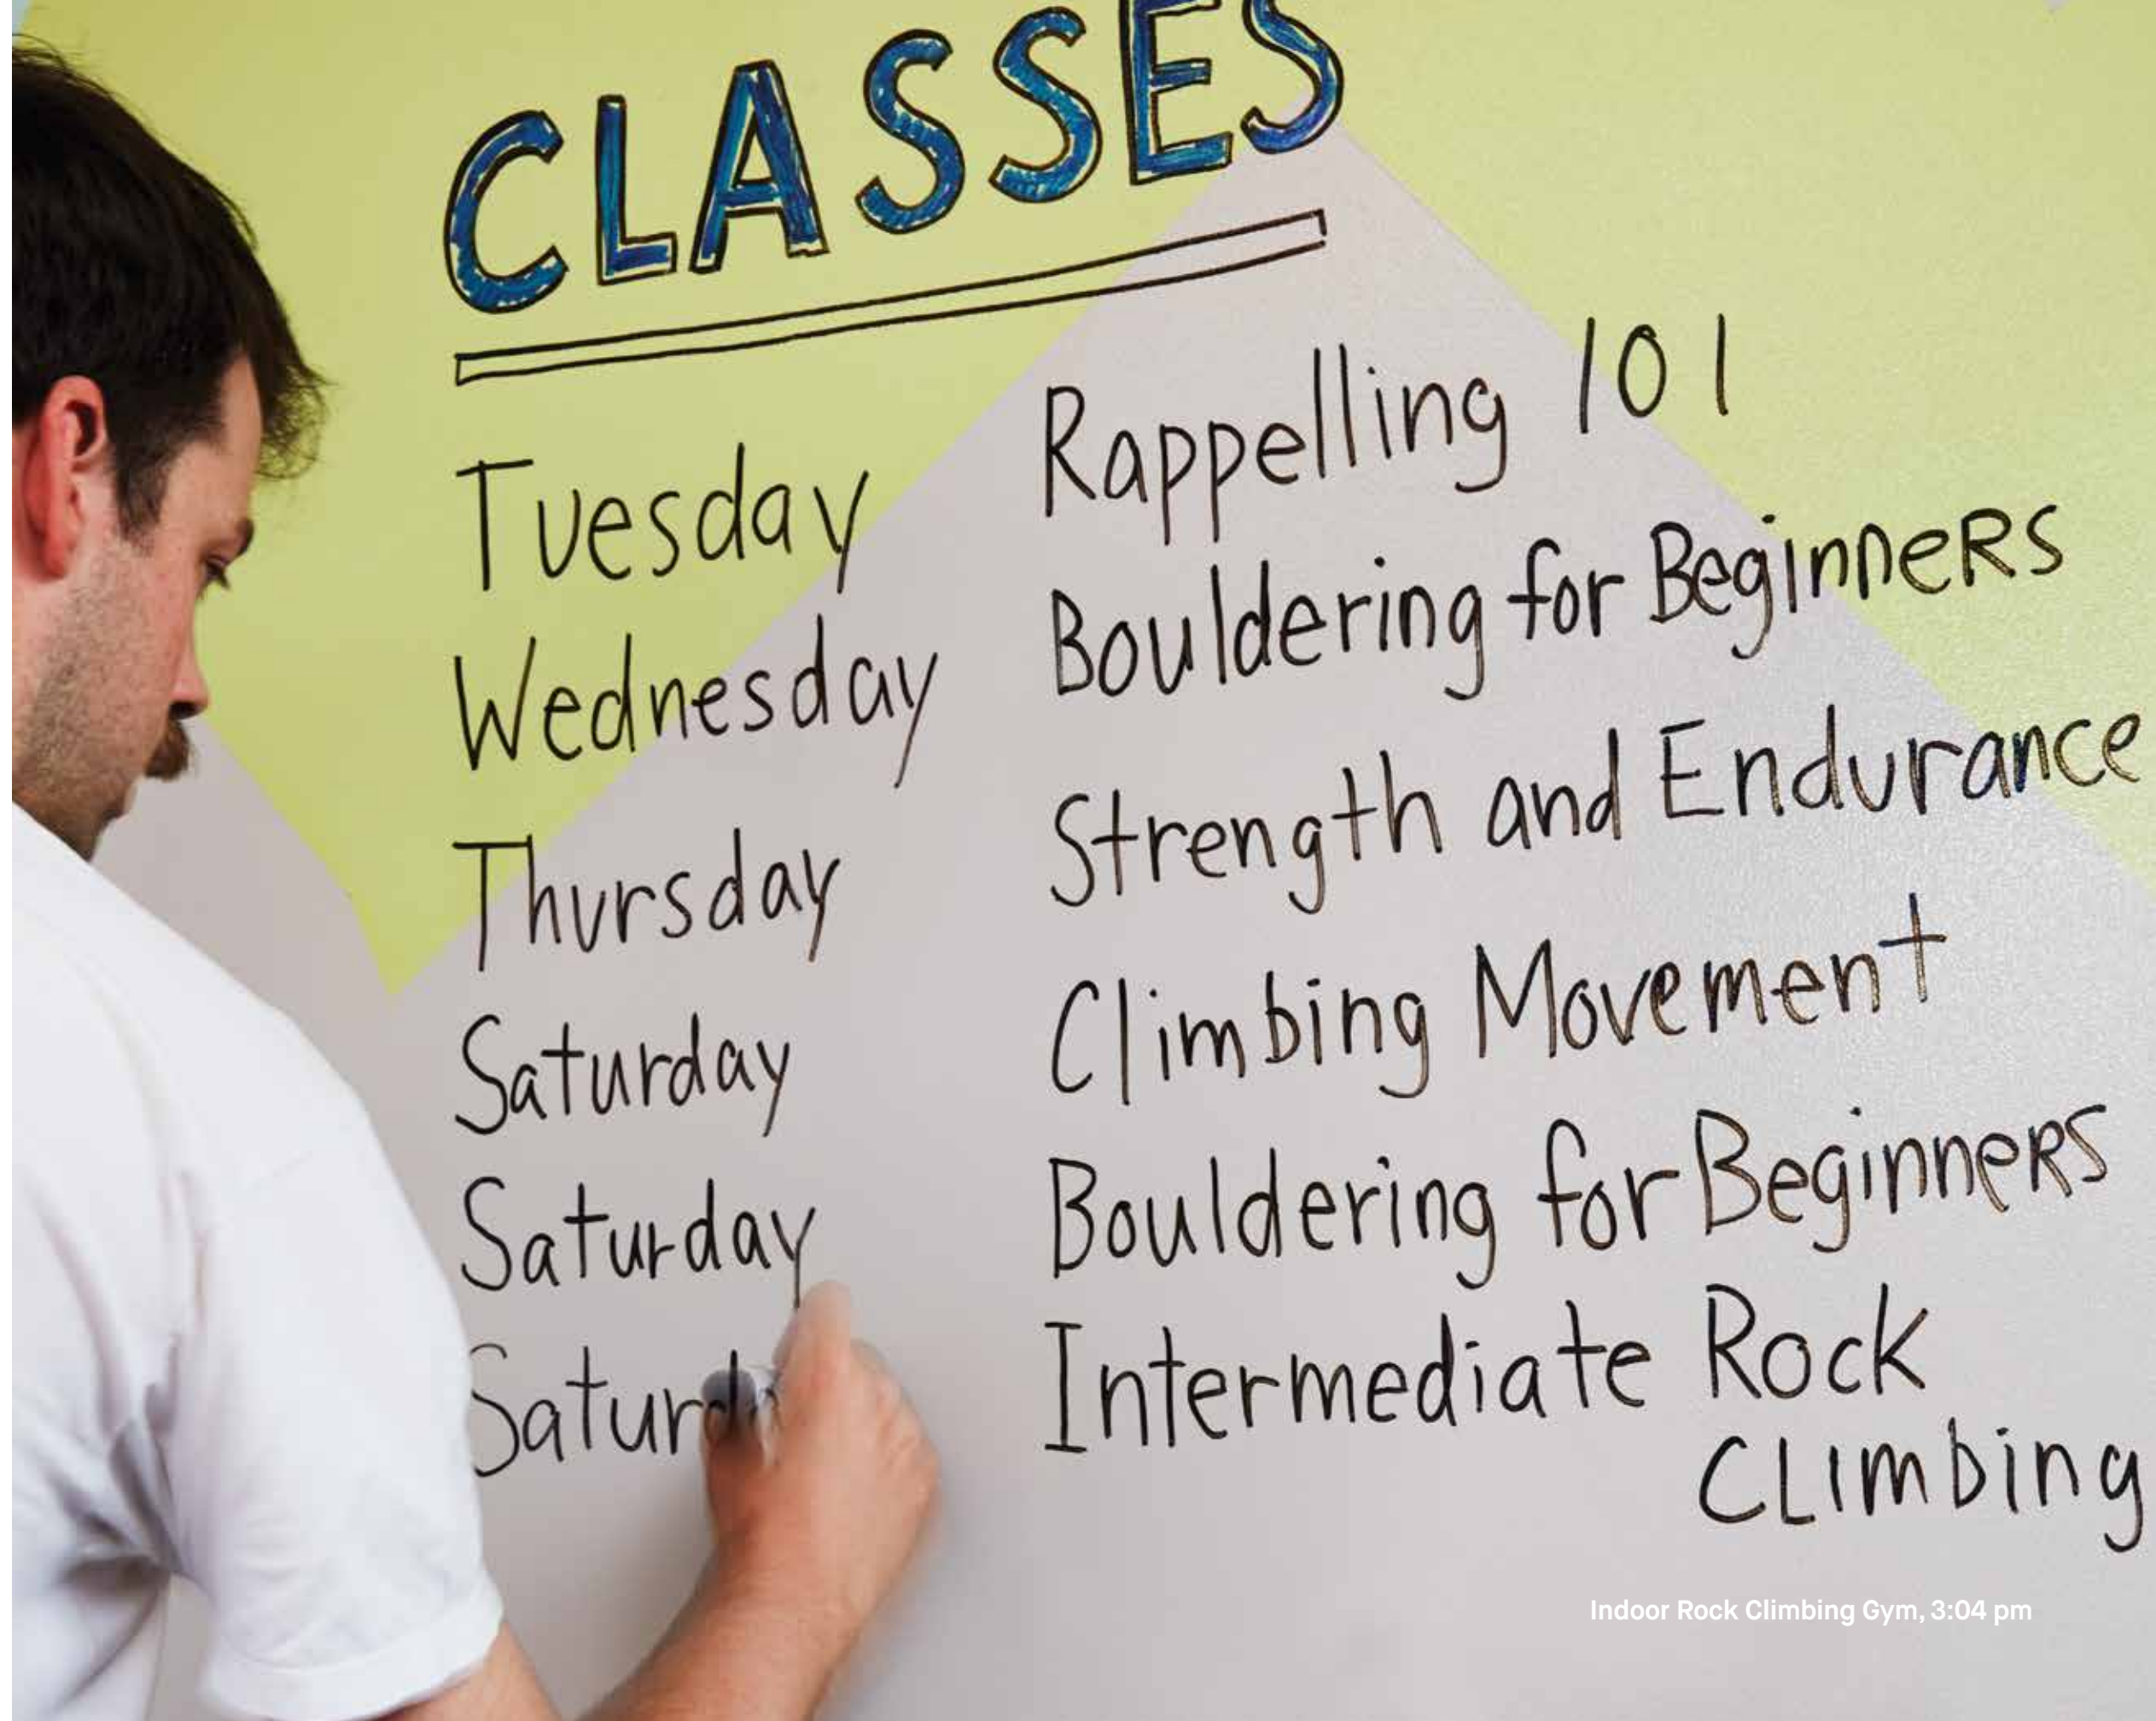




Walls can start out as a single color or multiple painted colors. Designing the wall surface with painted graphics will enhance the functionality—and fun—of Wink dry-erase coating!

1. Paint your wall one or multiple colors.
2. Wink your wall.
3. Write, erase and enjoy!



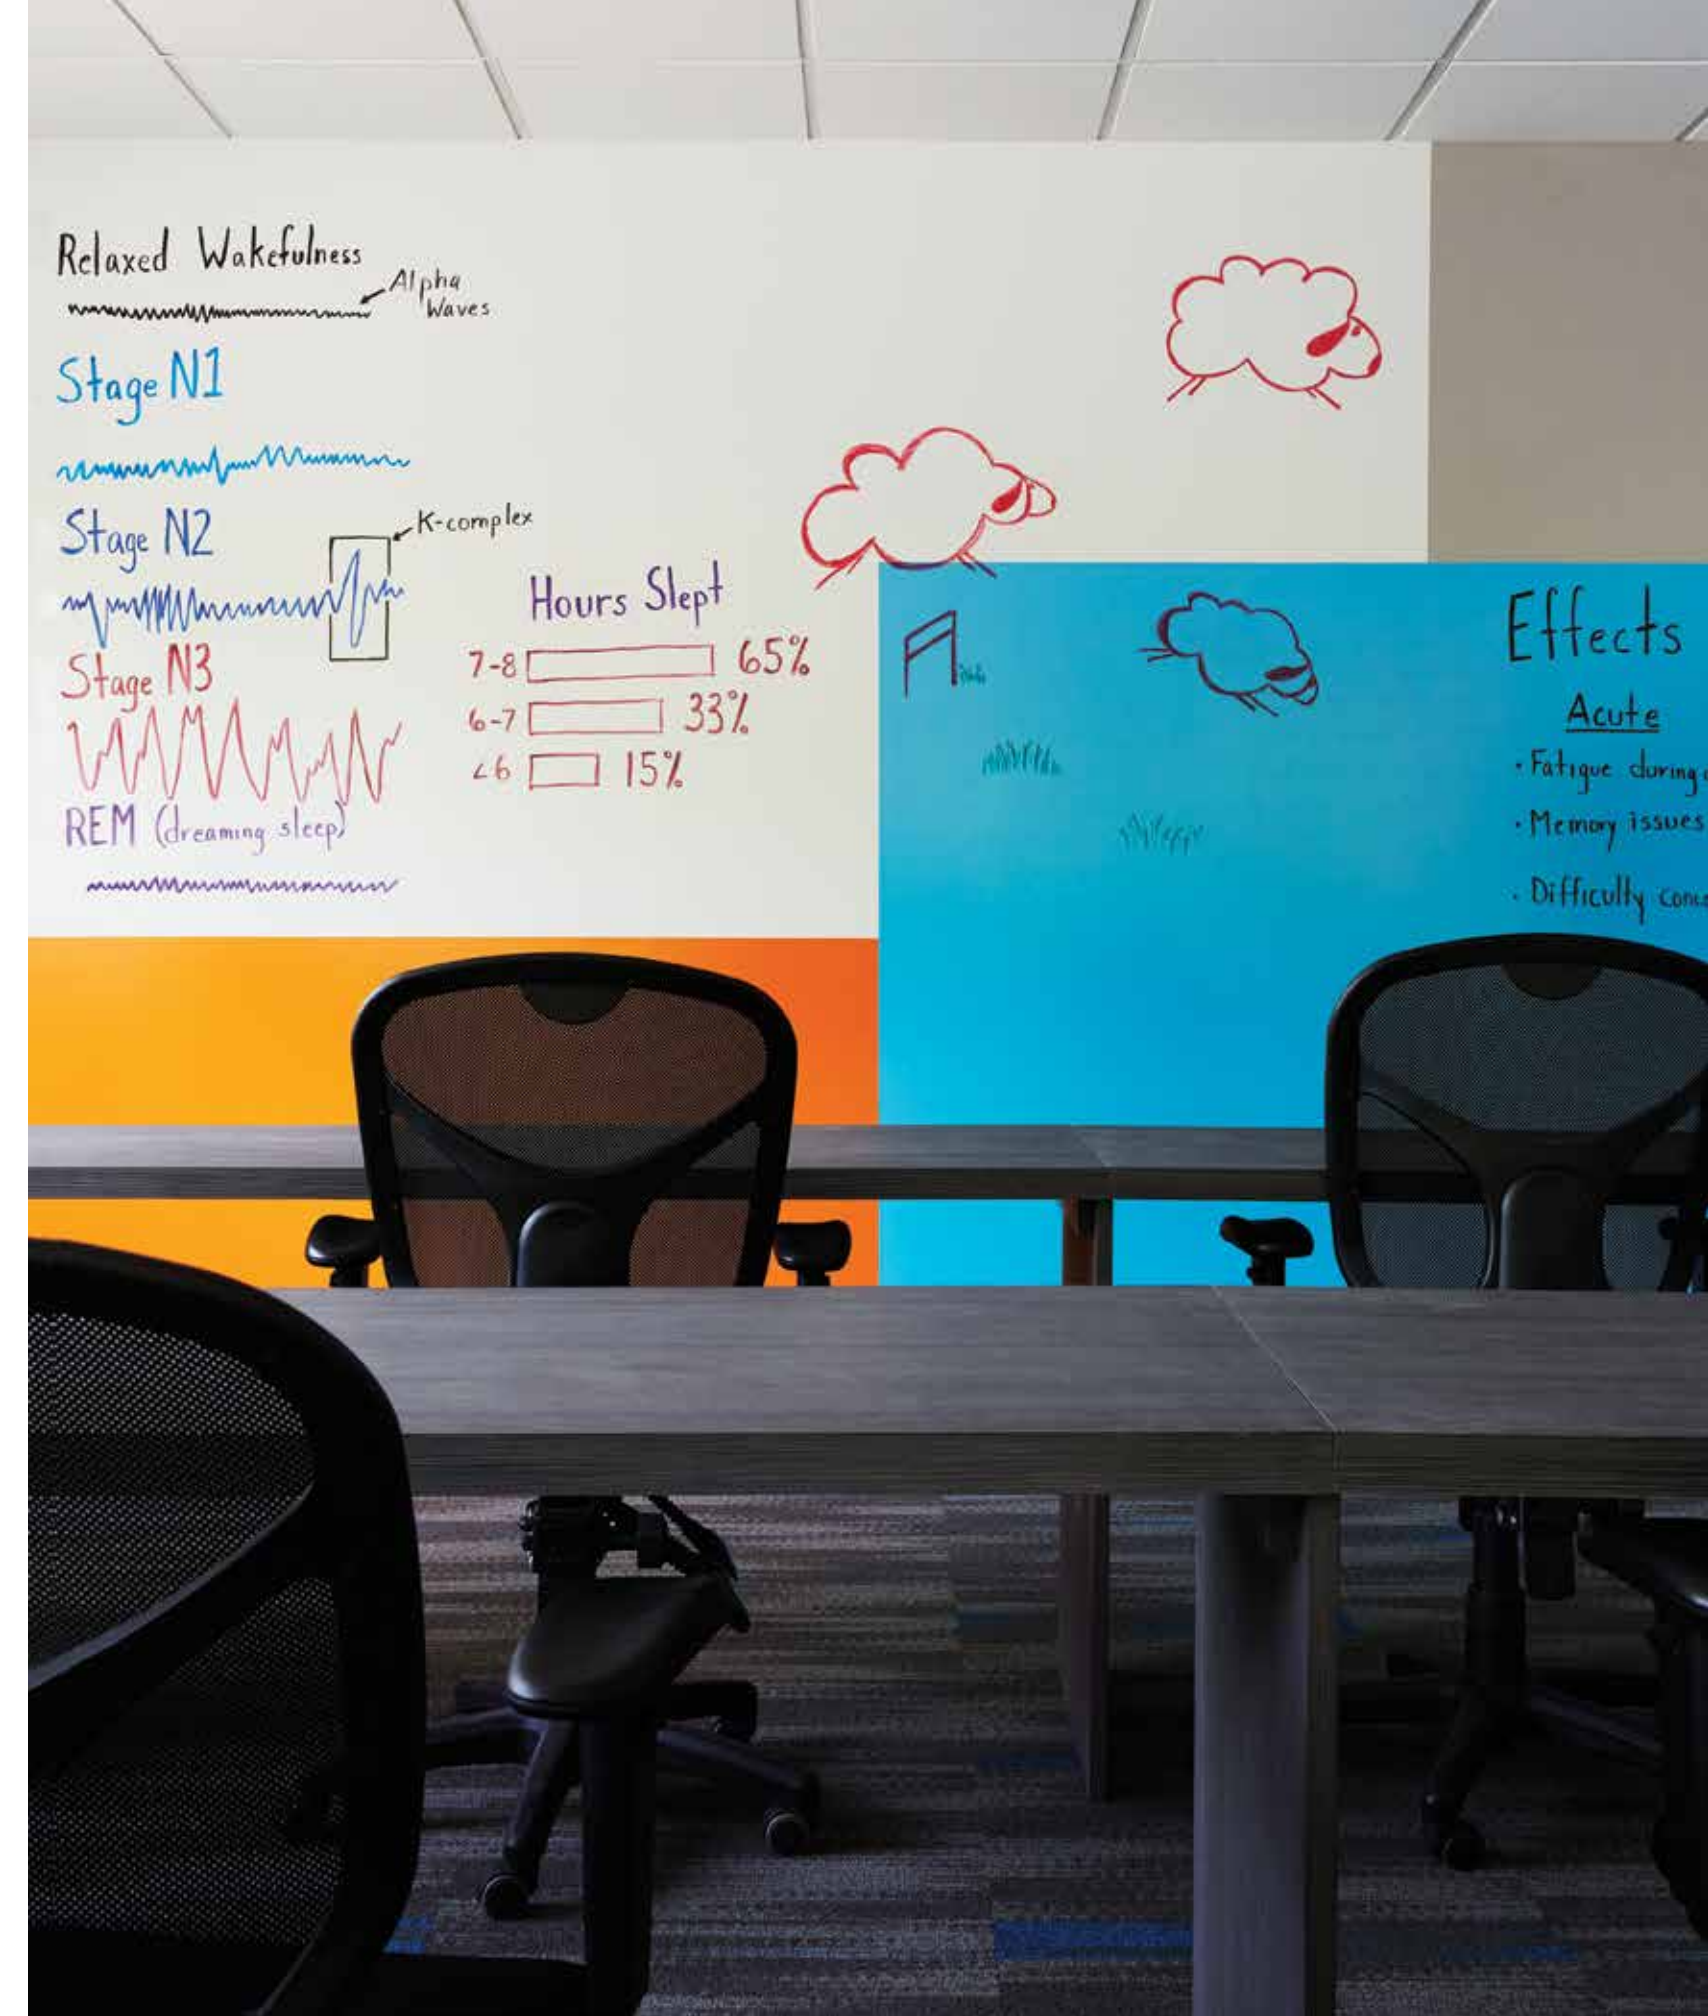


Wink Tips #2 and #3.

For painted walls, Wink works best over an eggshell finish.


Even dark or black walls can be Winked, thanks to dry-erase markers in neon colors!


Wink on Wallcovering.

Wink extends dry-erase capabilities beyond painted walls, and can be applied over the wallcovering of your choice.

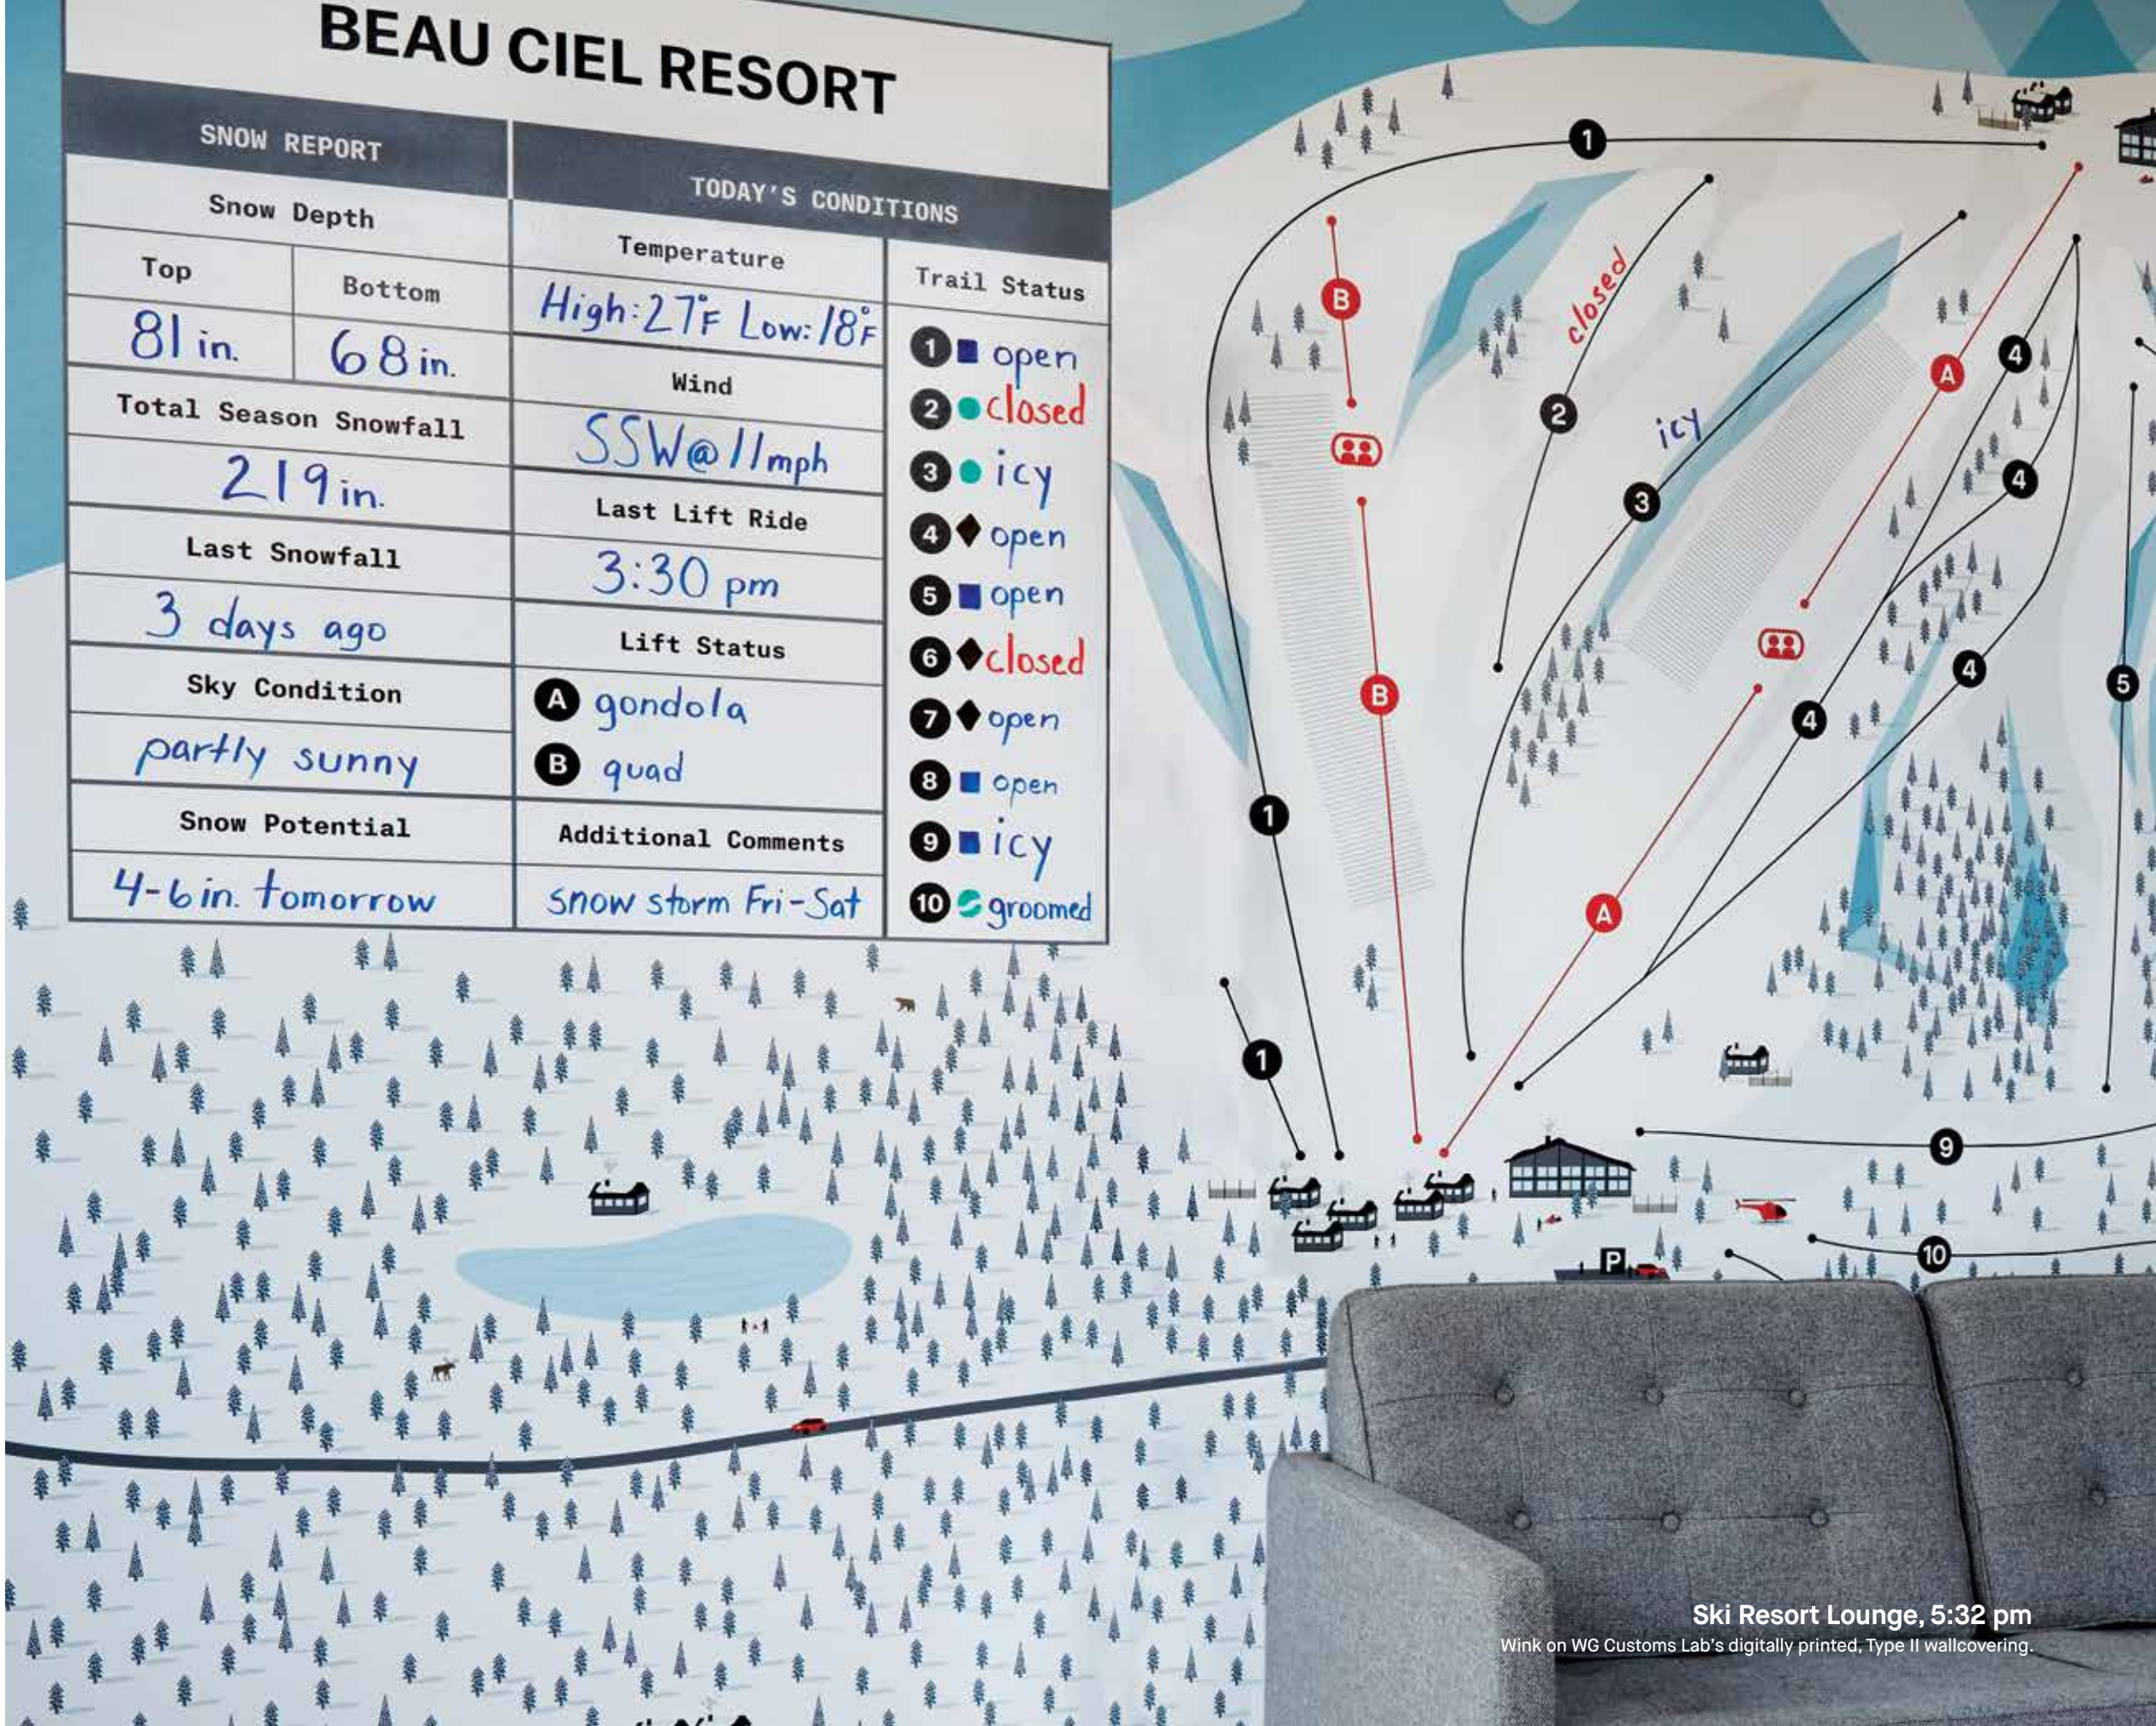

BEAU CIEL RESORT			
SNOW REPORT		TODAY'S CONDITIONS	
Snow Depth		Temperature	Trail Status
Top	Bottom	High: 27°F Low: 18°F	Trail Status
81 in.	68 in.		
Total Season Snowfall		Wind	Trail Status
219 in.		SSW @ 11 mph	
Last Snowfall		Last Lift Ride	Trail Status
3 days ago		3:30 pm	
Sky Condition		Lift Status	Trail Status
partly sunny		A gondola B quad	
Snow Potential		Additional Comments	Trail Status
4-6 in. tomorrow		snow storm Fri-Sat	

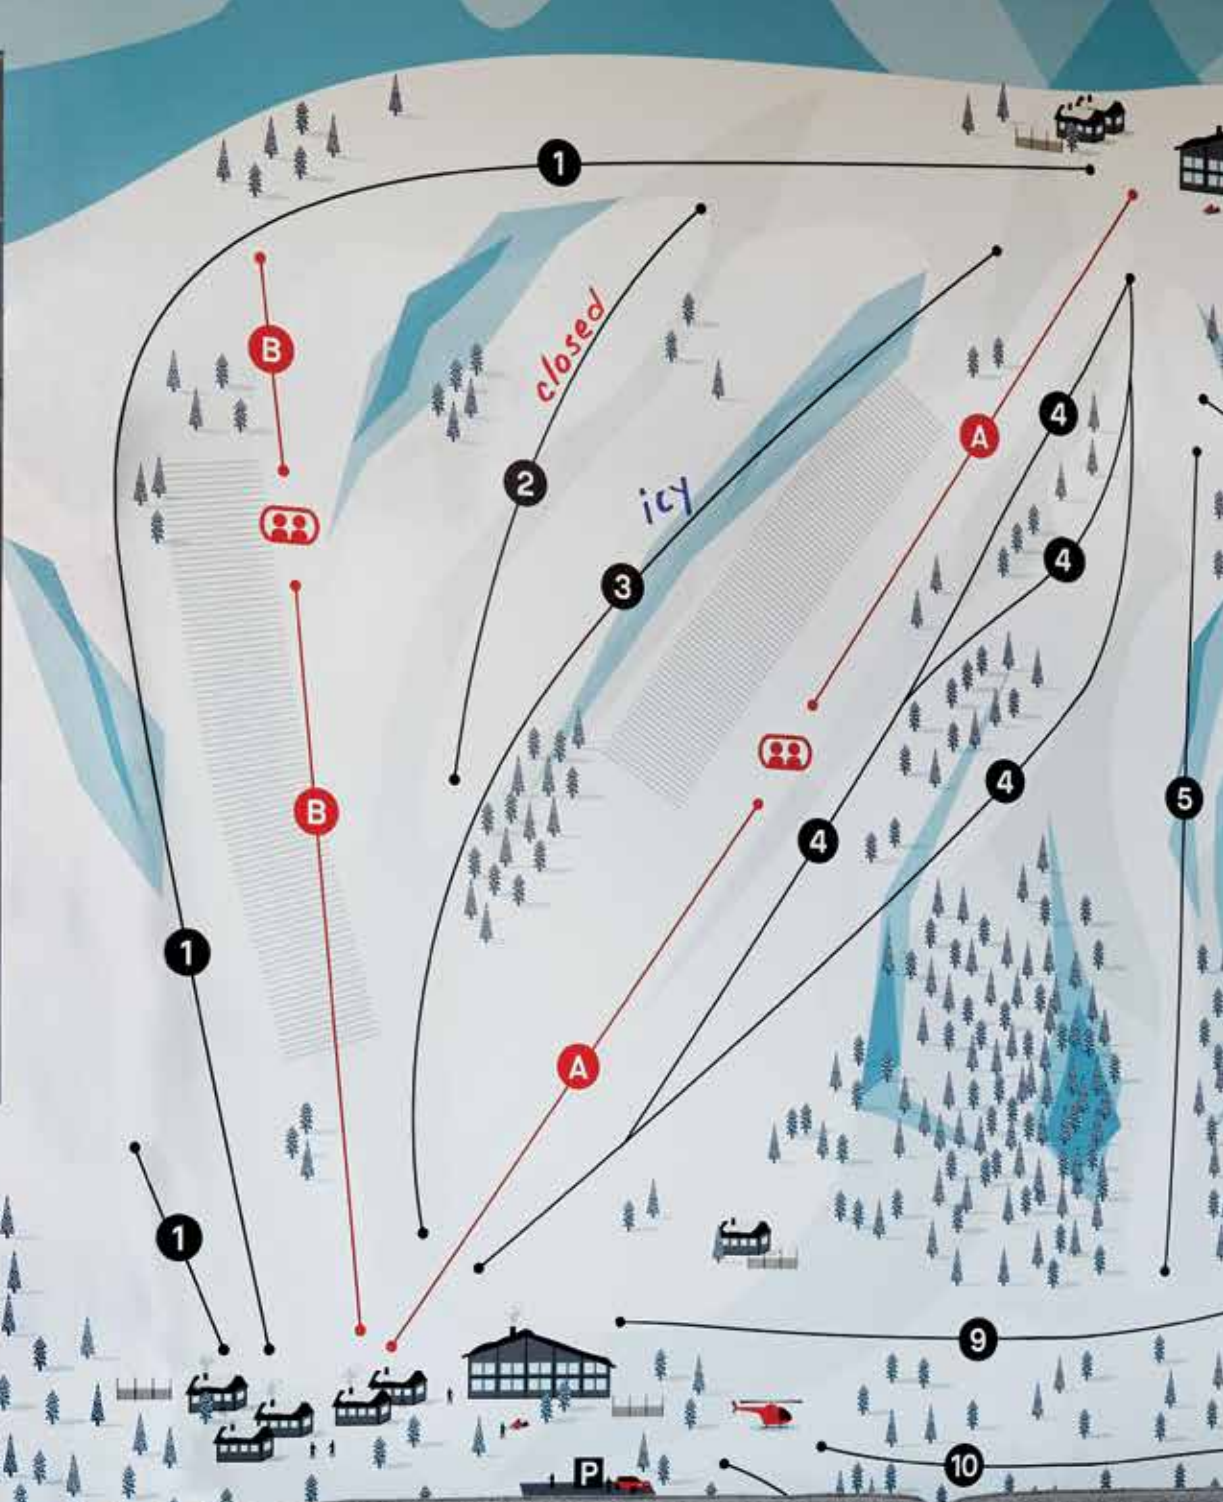

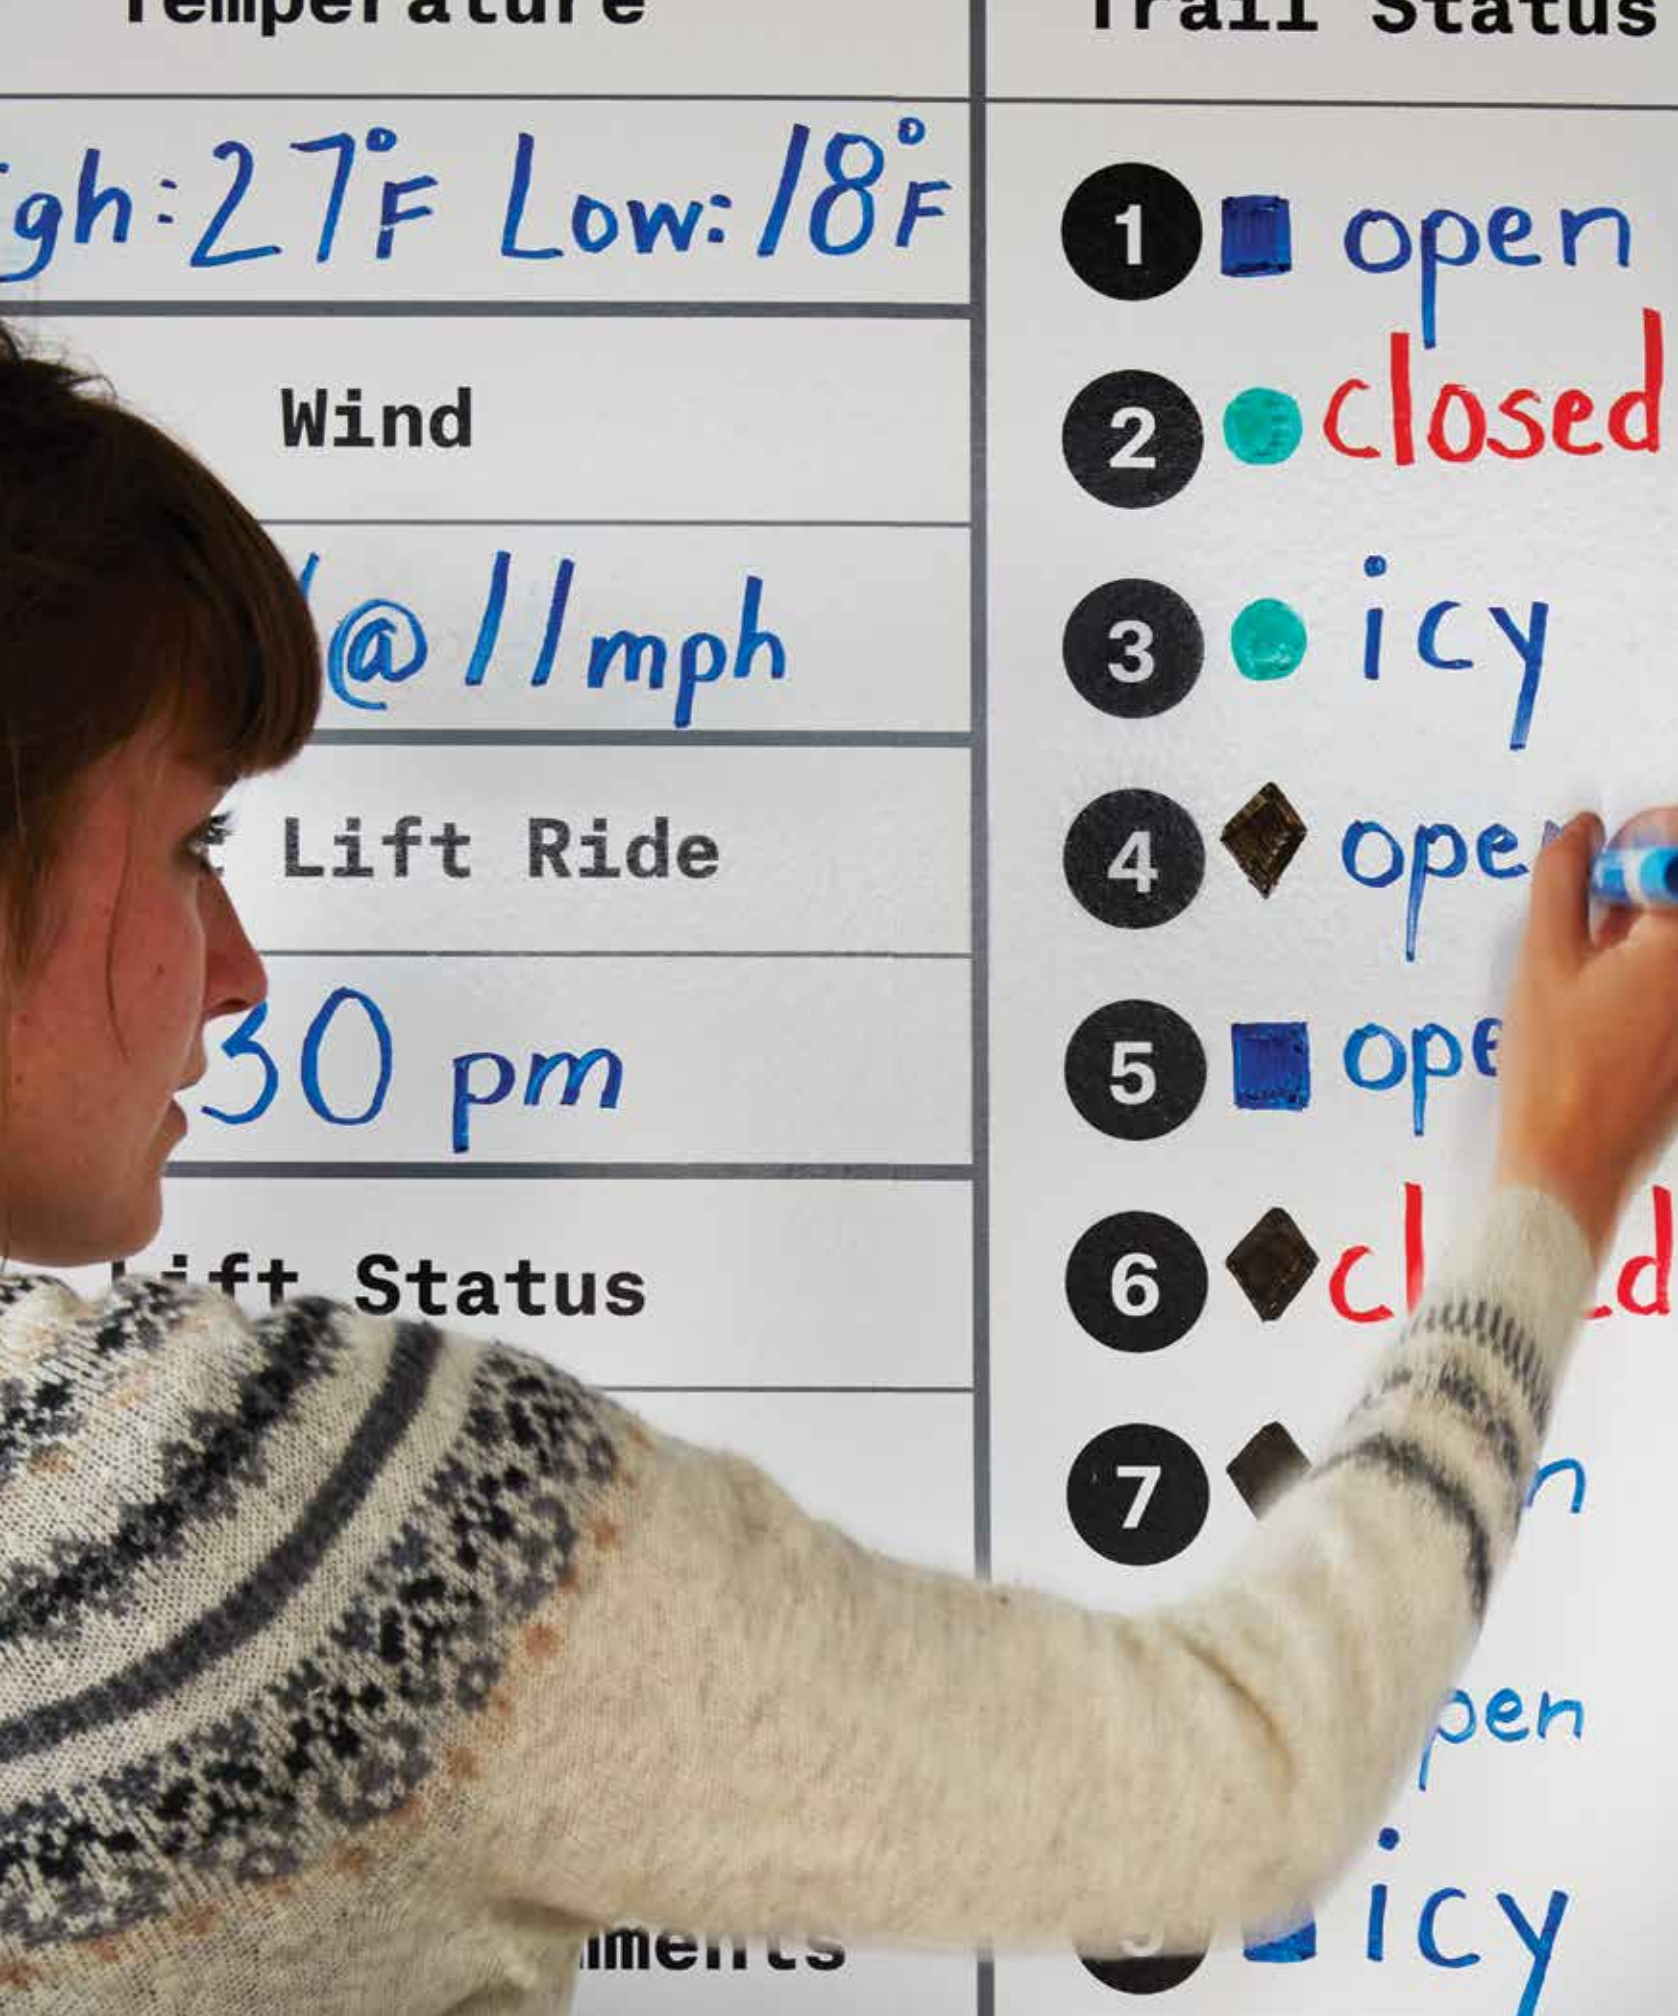

Silver Leaf Partners, LLC, New York, NY. Wallcovering is *Aerial View* in White House (Y46691AV).



With Wink you can add a dry-erase area to an existing wallcovering, or a custom wallcovering designed specifically for writing and drawing. Instead of paint, consider producing more complex graphics as a digitally printed wallcovering by WG Customs Lab.

1. Install Wolf-Gordon standard line wallcovering or digital print wallcovering tailored to your needs by WG Customs Lab.
2. Wink your wall.
3. Write, erase and enjoy!



Wink Tip #4.

Wink works best on Type II wallcovering that has a relatively smooth texture, so that writing is easy.

Wink on Wood.

Transform Wolf-Gordon's Wood Veneer or WonderWood into dry-erase surfaces by applying a few coats of sanding sealer before Winking.





When using sanding sealer on wood surfaces, make sure your installer follows the label's instructions for recoating and drying times. Sealer takes approximately five minutes to dry, and since sanding sealer tends to raise the grain, it is likely the surface will require sanding with 220 grit sandpaper. Use a painter's tack cloth to remove sanding dust prior to Wink application.

Wink Tip #5.

Watch out for pinholes! If you see pinholes when applying Wink, it means the coverage is too thin. Dried pinholes can trap ink on your Winked surface.

Wink on Metal.

Wink creates dry-erase surfaces in unexpected places, such as commercial kitchens and industrial environments.



TODAY BY 10AM:

- ☒ SLICED BANANAS
- ☒ TOASTED COCONUT
- ☐ WARM MAPLE SYRUP
+ CRÈME FRAÎCHE
FOR SERVING
- ☒ LUKEWARM WHOLE MILK
- ☐ SALTED BUTTER, MELTED

Astorino, Pittsburgh, PA. Design: Astorino



There's no need to apply varnish to stainless steel or aluminum before applying Wink. Simply wipe down the metal with denatured alcohol or acetone, using a tack cloth, to ensure the surface is lint-free.

Wink Tip #6.

Wink has been tested with over 150 different types of markers from manufacturers around the world. Avoid off-brand markers for the best Wink experience.

PRODUCT SPECIFICATIONS

KIT CONTENTS

Part A: Milky white, non-pigmented liquid emulsion
Part B: Pale yellow polymer hardener
Wink Surface Conditioner

COVERAGE

Kit sizes are available for coverage of approximately 50, 100 or 200 square feet of surface area, in a single coat.

CHARACTERISTICS

- Clear, dry-erase finish for application over a variety of non-porous surfaces
- Fast drying, high-gloss waterbased formula covers in one coat without need for primer
- Low Volatile Organic Compound (VOC) content of less than 50 grams per liter
- Durable, long-lasting surface with 10,000+ scrub cycles and excellent stain removal
- Class A rated for fire safety in accordance with ASTM E-84; classified as insignificant flammability hazard by the Hazardous Material Identification System

APPLICATION

Wink is applied with a paint roller over smooth surfaces such as painted drywall, marker board, chalkboard, metal, and wood, as well as smooth vinyl wallcovering. Opening, mixing, and installing Wink should be done by a professional installer, in accordance with the Application Instructions included with each kit.

PREPARATION

Surface should be dry, prepared to Level 5 smoothness, and free of grease, mildew, and any imperfections. Spray application of primers/sealers and base coat of paint preferred. Scuff sanding recommended for high gloss surfaces.

SHELF LIFE/CURE TIME

Wink containers have a one-hour open time and six-month shelf life, providing they are not opened and are properly stored. The Wink surface is writable after five days.

SUSTAINABLE ATTRIBUTES

- Free of formaldehyde, harmful carcinogens, chromium, lead, and mercury
- Low VOC content of <50 g/L, meets Green Seal™ standards for paints and coatings
- Qualifies for contribution to LEED Indoor Environmental Air Quality credits
- Meets or exceeds environmental criteria for non-flat coatings, according to the U.S. Environmental Protection Agency, U.S. Green Building Council, Canada Green Building Council, South Coast Air Quality Management District, and the California Air Resources Board
- More writing surface with far less environmental impact than a whiteboard

WRITING/DRAWING

After testing over 150 dry-erase markers, it has been deemed that most standard dry-erase markers, in any color, can be used. For best performance, use national brands such as Expo® Bold or Low Odor dry-erase markers. Old or dried out markers should be replaced.

GENERAL CLEANING

For daily erasing and cleaning use a clean, dry-erase cotton cloth or microfiber towel, which will get into the nooks and crannies of the Wink surface. Always wait a few seconds for markings to dry before erasing. Erasers made for dry-erase boards are not recommended.

REGULAR MAINTENANCE

A clean, damp cloth with mild soap or just water, or disposable wipes, should be used periodically to maintain the Wink surface. For markings that are difficult to clean off, Expo® Dry-Erase Surface Cleaner or Cleaning Wipes also work well. After using a cleaner, the surface should be wiped with clean water to remove any residue. Regular household cleaners (such as Windex® or Formula 409®) should not be used, as they can damage the Wink surface.

CSI GUIDE AND MSDS

The CSI Guide and Material Safety Data Sheets for Wink are available at wolfgordon.com.

APPLICATION INSTRUCTIONS

Opening, mixing, and applying Wink should only be done by a professional installer, within three months from date of shipment, and in accordance with these Application Instructions. Please read the Material Safety Data Sheets carefully before opening contents.

WHAT YOU WILL NEED

- Clean metal roller tray and paint roller
- Nine inch, lint-free 1/4" nap roller cover
- Low-tack painter’s tape
- Tarp or disposable drop cloth
- Wink Part A, Part B, and a stir stick

PREPARATION

Over existing painted surfaces: Wink works best when applied over paints with an eggshell or glossier finish. We recommend scuff sanding any high-gloss surface before applying Wink. A Level 5 smoothness is recommended. The surface should be clean, dry, and free of grease and mildew. Since Wink is a high-gloss coating, it will highlight any imperfections, so take the necessary steps to ensure a smooth surface.

If repainting before applying Wink: Sand the existing wall to remove any high points or imperfections, and fill any holes or scratches. Apply primer and base coat of paint so the wall is as smooth as possible with very little stipple and no lap marks or roller lines. Spray application of primer/sealer and a Level 5 smoothness is recommended. Allow paint to fully dry (4+ hrs depending on conditions) before applying Wink.

IMPORTANT: Mask surrounding areas with low-tack painter’s tape and drop cloth. Wink dries quickly, so remove tape while finish is still wet. Any material found under the painter’s tape can be removed with a damp rag.


MIXING

Stir mixture while pouring Part B into Part A, and mix thoroughly for 3 to 3-1/2 minutes. As Parts A and B are incorporated, Wink will begin to thicken slightly. Be sure to incorporate any unmixed paint on the inner sides of the can into the middle. Allow mixed Wink to “sweat-in” for five minutes.

IMPORTANT: Wink has an Open Time of 60 minutes, so once parts A and B are mixed, Wink must be used within the hour. Do not combine multiple kits. Do not reseal cans once opened, since contents will expand.

APPLICATION

Pour Wink into a clean metal roller tray and apply with a nine-inch lint free 1/4" nap roller. Cut in only as far as you are able to paint before the mixture begins to dry. Roll vertically, maintaining a wet edge. Lay off in one direction, from top to bottom. Inspect the application from multiple angles to ensure uniform coverage and no pinholes. The Wink surface will be cured and writable in five days. After curing for five days, we recommend wiping the surface with Wink Surface Conditioner then buffing with a clean cloth. For application assistance, call 800 632-WINK (9465).

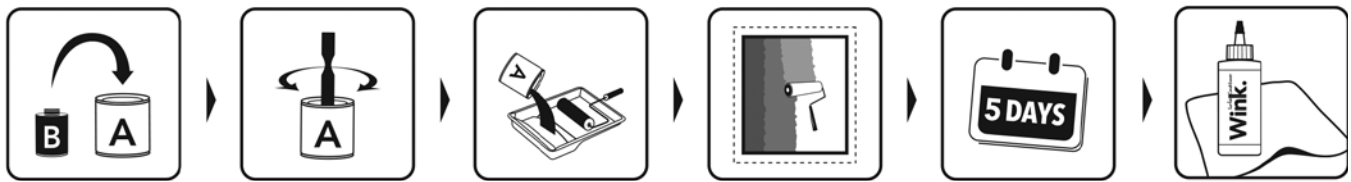

FIRST AID

In case of eye/skin contact, flush area with warm water and remove contaminated clothing. For inhalation of atomized product, move to an area free from further exposure. Do not induce vomiting. See Material Safety Data Sheets for complete first aid instructions. In case of emergency, call 800 535 5053 for immediate assistance.

DISPOSAL

Wink contains no chromium, lead, or mercury. Disposal of containers should be in accordance with applicable federal, state, and local laws and regulations. Contact your sanitation department or household hazardous waste coordinator for information concerning reuse, recycling, or disposal of unused product.

TROUBLESHOOTING

Ink separation: If Wink parts A and B are not mixed thoroughly, a film may be left on the cured Wink surface that will cause the inks in some dry-erase markers to fade or separate when applied. This is perfectly normal, and your new Wink surface will still function properly. Simply go on using the surface as you normally would. After writing on Wink a few times and wiping the surface clean with a soft cloth, this issue will usually resolve itself. For larger areas or for more immediate results, apply Wink Surface Conditioner. Using a clean cloth, rub the conditioner over the entire surface and buff the area with a microfiber cloth.

Shadowing: Over time and through frequent use, residual marker build up may appear on your Wink surface. This can be easily removed with quality dry-erase cleaning sprays or wipes.

Hazy or cloudy appearance: This may be the result of applying Wink too thick or by using the wrong roller cover. The wall can have a cloudy/hazy appearance because the surface of the paint dried before all of the moisture could escape. This will not affect the performance and may go unnoticed with lighter colors. For darker colors there is no quick fix. The wall would have to be prepped and painted again, and Wink would need to be reapplied properly.

Bubbles in the surface: Surface bubbles occur from shaking Wink instead of stirring, using a roller cover that is too thick, or by over-rolling the mixture. Although the bubbles may not interfere with the dry-erase capabilities, the surface may not look ideal. The area may require sanding smooth and repainting with Wink.

Staining: A properly installed Wink surface is highly resistant to staining. If your Wink surface has stains that cannot be removed with dry-erase cleaner, it is generally due to one of the following reasons:

- 1) *The wrong type of marker was used*—Permanent ink, Sharpies, highlighters, ballpoint pens, and other non-dry-erase markers can stain the surface. Many of these marks can be removed by drawing over the blemished area with a dry-erase marker and then wiping the area clean.
- 2) *The coverage rate was exceeded*—The coverage area indicated for each kit should not be exceeded, because if Wink is spread too thin, the surface could be prone to staining.
- 3) *The wrong type of cleaner was used*—Cleaning your Wink surface with regular household cleaners or abrasive cleaners can damage the surface and make it prone to staining. Use quality dry-erase cleaner and a microfiber cloth to keep the surface clean.

SUSTAINABILITY

Sustainability is at the top of our concerns. From the moment we begin to develop a product, we consider essential variables such as recycled and recyclable content, durability, performance and lifecycles, and particularly important in the case of Wink, low VOC emissions. We partner with manufacturers that take environmental responsibility and product transparency as seriously as we do, while maintaining the performance properties that make our interior finishes successful throughout the long life of a commercial interior.

For information on Wink as it relates to LEED and green building rating systems, please go to wolfgordon.com and download the *LEED and Sustainability Form* for Wink. You can also access an HPD for Wink at hpdcollaborative.com.

Wink Tip #7.

Periodically use a clean, damp cloth with mild soap, or disposable wipes, to maintain the Wink surface. Then wipe with clean water to remove any residue and provide a fresh surface for writing and drawing.

LIMITED WARRANTY

Wolf-Gordon extends the manufacturer's warranty for the Wink finish system for ten (10) years from the date of shipment by Wolf-Gordon against failure to adhere to a wall surface; to not crack or peel; to resist staining; and to show no appreciable fade when applied to a wall surface according to the manufacturer's application instructions and properly cleaned and maintained. The limited warranty herein shall not apply to any subsequent failure or damage caused by external factors such as substrate failure or defect, environmental conditions, sharp objects, abuse, misuse, damage, neglect, or accident beyond published limitations for the product; or any defects caused by the materials on the surface to which the product is applied, other than those specified in this warranty.

The liability of Wolf-Gordon under this limited warranty is limited to the replacement value of the Wink product.

THIS LIMITED WARRANTY IS IN LIEU OF ANY OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, OTHER THAN THE MANUFACTURER'S WARRANTY.

For assistance, call 800 632-WINK (9465) or visit wolfgordon.com.



PHOTO CREDITS:

Matt Wargo: Cover, p. 10
Germain Gatewood: 3, 9, 11–26
Monica Slaney: 4
KC Kratt: 5
Michelle Litvin: 6
Dror Baldinger, AIA: 7
Linda Jeub: 27

©2014 Wolf-Gordon Inc.

Wolf Gordon 

800 347 0550
wolfgordon.com

Wallcovering
Upholstery
Drapery
Paint
Wink by Wolf-Gordon

Wolf Gordon 

800 347 0550
wolfgordon.com