




cement zellige tiles

salt

concrete
collaborative

durable | concrete character | subtle movement | tonal variation | low maintenance | rustic | colorful | matte finish | textured

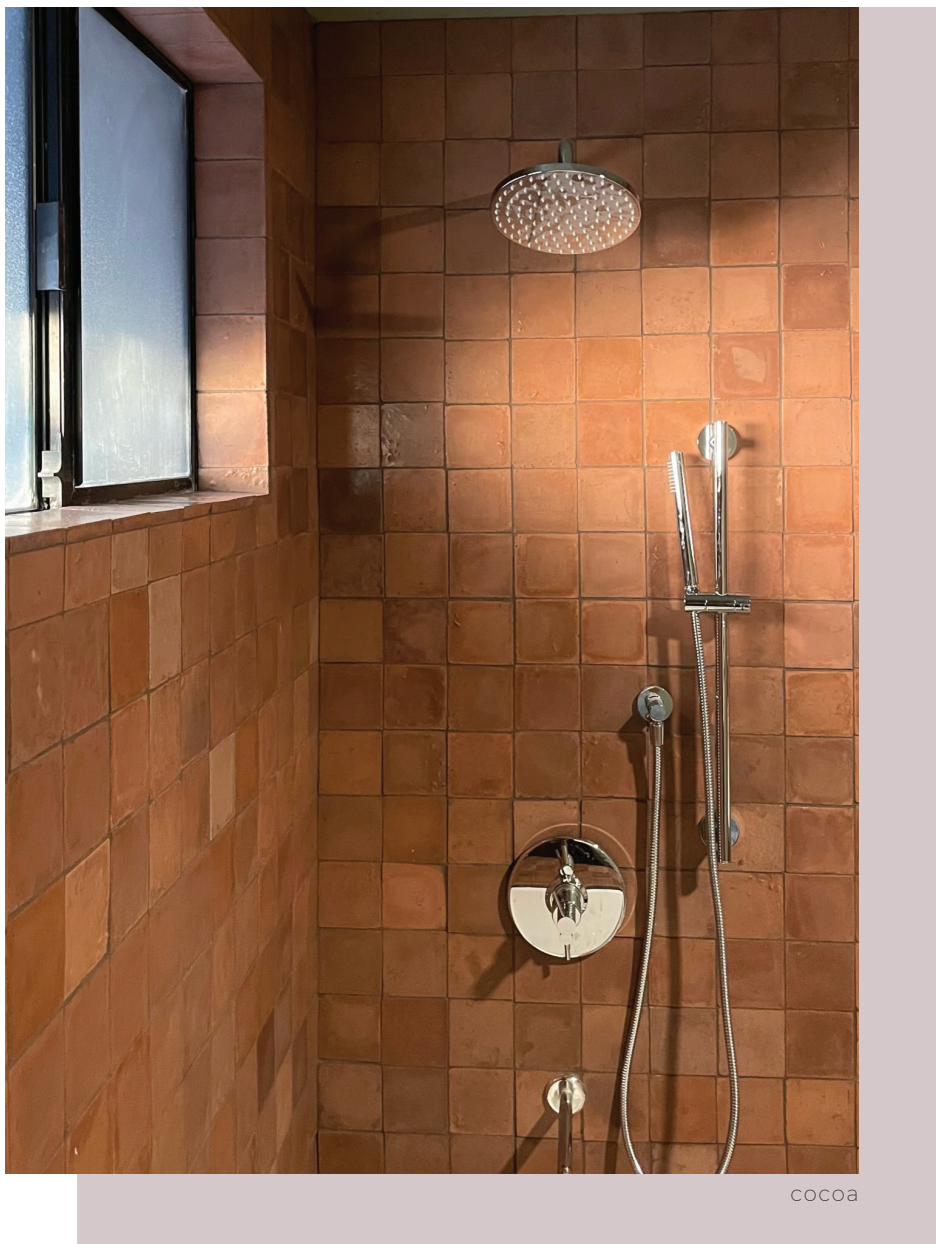

the new salt collection
is our fresh take on a cement
zellige.

a new kind of subway tile, perfectly imperfect, rich with concrete
character. each piece is different with color variations from piece
to piece, rustic edges and a textured surface for an organic feel.
with an inherently matte finish. these are cast to size tiles that
have cast edges and through body color.



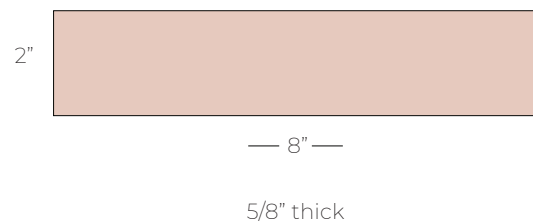


table of use

interior flooring	n/a	pair w/ solana
exterior flooring	n/a	pair w/ trails flekk
interior walls	yes	
exterior walls	yes	
interior countertops	n/a	pair w/ pacifica xsmall
exterior countertops	n/a	pair w/ pacifica xsmall
interior stairs	yes	
exterior stairs	n/a	pair w/ trails flekk
interior base tile	yes	
interior wet areas	yes	
pool copings / wall cap	n/a	pair w/ trails flekk

icons of use




uv stable




interior wet areas



shower rated



interior base tile




exterior walls




high density




interior walls




food safe



low porosity




tonal variation

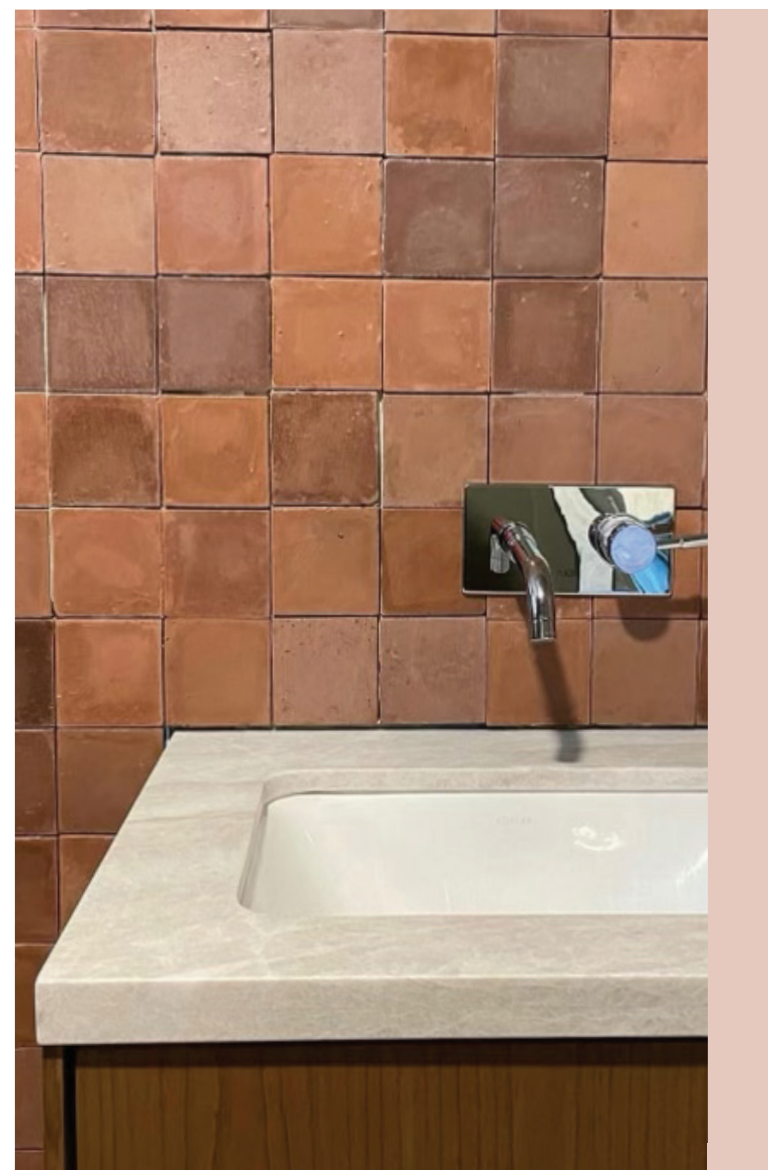

cocoa



quietude



ivory



beige



sable




lilac



millennial pink



ebony



valencia



acacia



quietude




designer eny lee parker uses clay as her main medium


organically drawn to the hand-made, imperfect, earthen nature of the salt tiles. the eny x salt collection embodies colors inspired by everyday items that are also reflective of parker's designs. the small tile dimensions allow people accessibility to tile any surface or piece of furniture themselves.




denim



kiwi

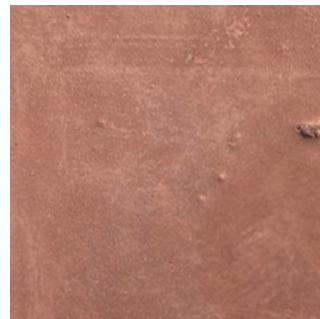

cocoa



milk



pine





cocoa

salt | cement zellige tiles



salt | cement zellige tiles



quietude



valencia

technical summary

ibc flame spread	rating a (0-25ft/hr.)
freeze thaw	meets standards astm c936/c1645
weight (lb/sq.ft)	5/8" = 7.5
thickness tolerance	will vary, not a fully gauged product
overage	allow ample (suggested 20%)
color	variations expected (blend like stone)
curvature tolerance	± 0.5 percent of max tile length
calibrated	no
ansi	137.1 + tcna standards

installation

mock up	required presealed, grouted and cleaned
substrate	cured to max 4% moisture, level 1/8" in 10ft
grout joint	0.5% of max tile length, minimum 1/8"
grout	non sanded grout / laticrete permacolor
adhesive	laticrete 254 platinum rapid
seal	prosoco polishguard (natural finish)

salt cement zellige tiles are installed with the ease of tile. simply thinset, using a rapid setting adhesive equivalent to laticrete 254r platinum rapid, over a level and cured slab. use non sanded grout like laticrete perma color grout. sealed using prosoco polishguard. sealer is available from concrete collaborative. always reference tcna guidelines for general best practices.

* for more info refer to our tech info guide

concrete collaborative

