



solara

honed concrete tiles


concrete
collaborative

honed finish | durable | earthy tones | raw concrete character | tonal variation | hard wearing | inside to out | low maintenance



fossil

solana | honed concrete tiles

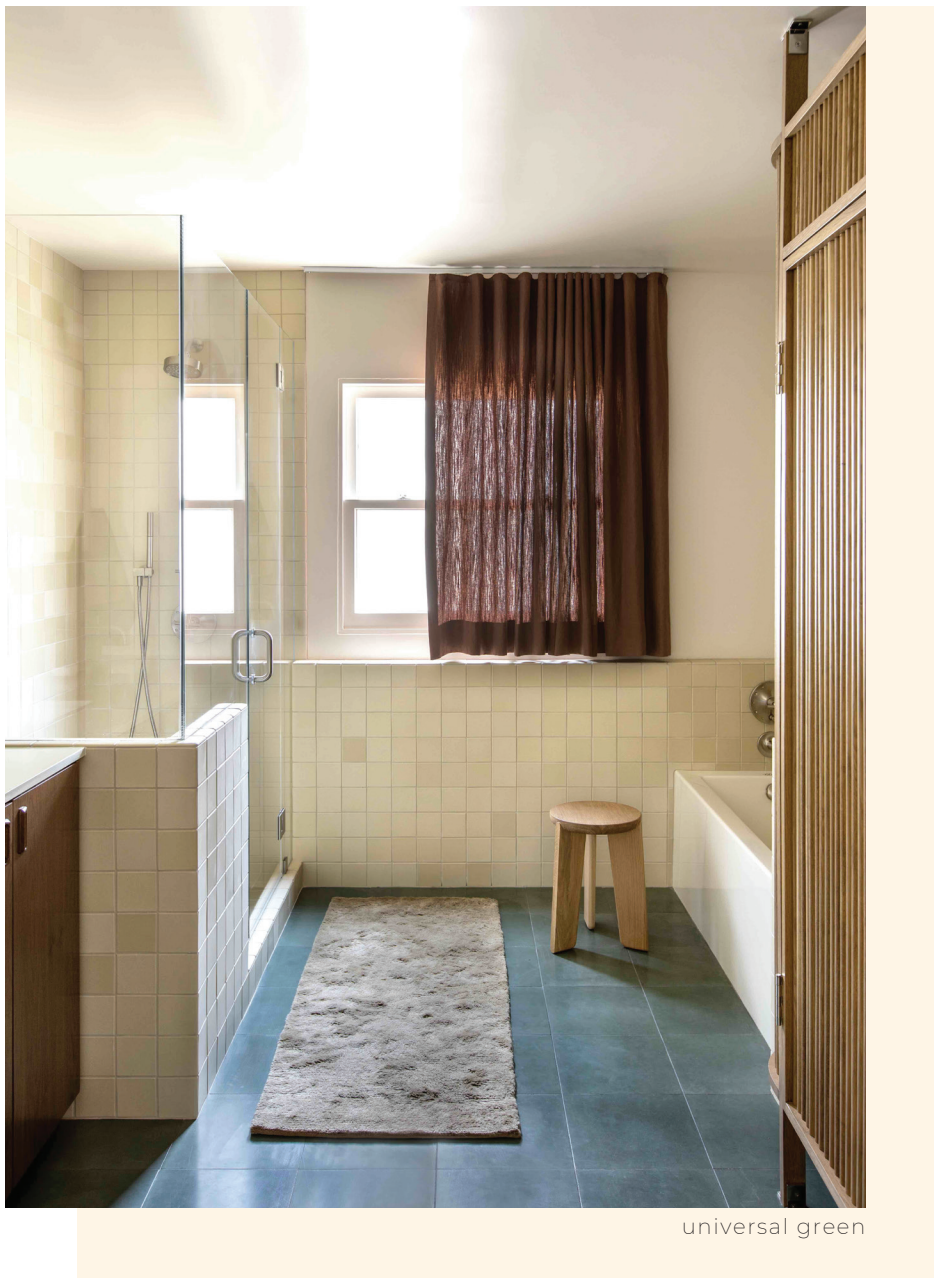

solana honed concrete tiles
feature earthy tones with
a salt and pepper reveal of
natural stone.

subtle sheen with a tactile feel that flows from
inside to out. highly durable and wear-resistant
finish suitable for commercial and residential floors,
stairs and walls.



fossil

solana | uses



table of use

interior flooring	yes	
exterior flooring	n/a	pair w/ trails flekk
interior walls	yes	
exterior walls	yes	
interior countertops	n/a	pair w/ pacifica solana
exterior countertops	n/a	pair w/ pacifica solana
interior stairs	yes	
exterior stairs	n/a	pair w/ trails flekk
interior base tile	yes	
interior wet areas	yes	
pool copings / wall cap	n/a	pair w/ trails flekk

icons of use




mocha + ivory

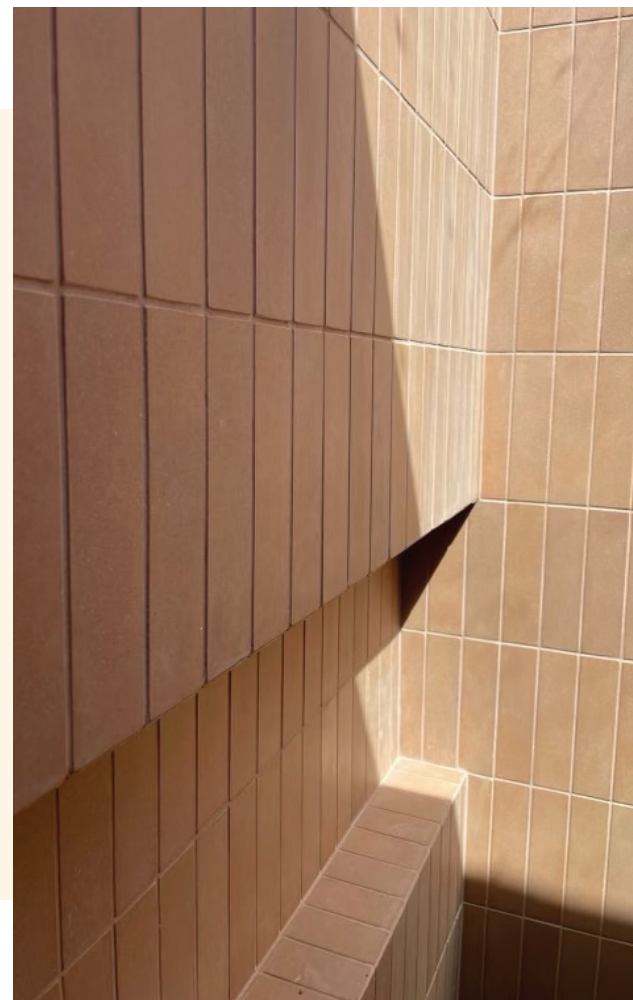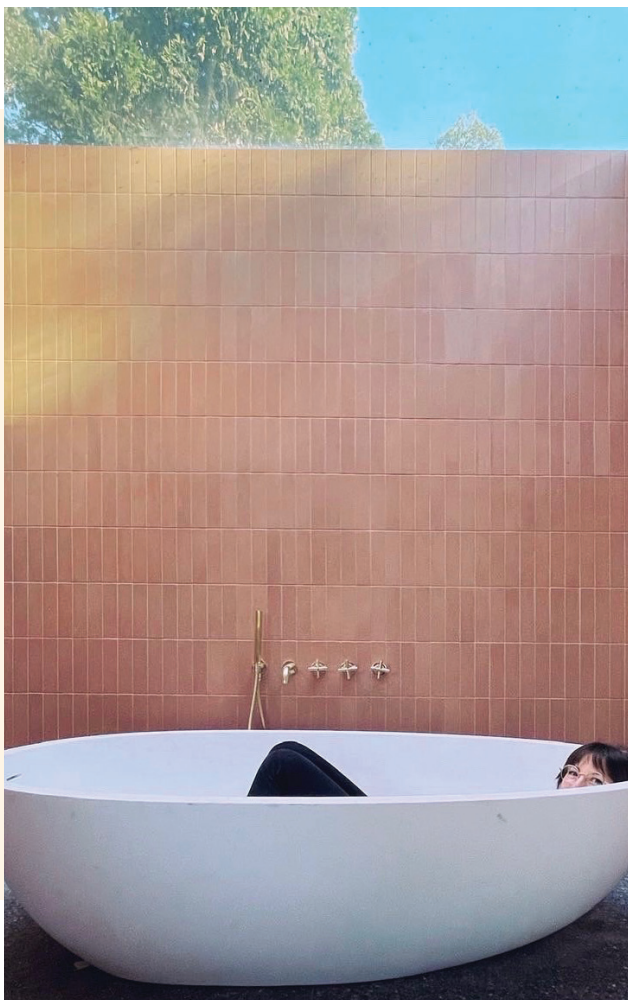

valencia


solana | sizes




5/8" thick




5/8" thick




5/8" thick




5/8" thick




5/8" thick

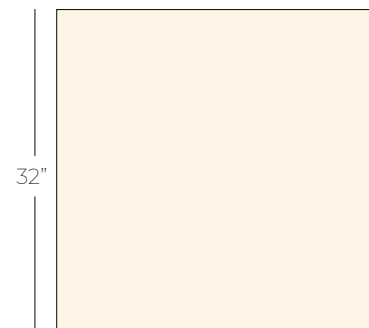


3/4" thick




5/8" thick




5/8" thick




5/8" thick



5/8" thick

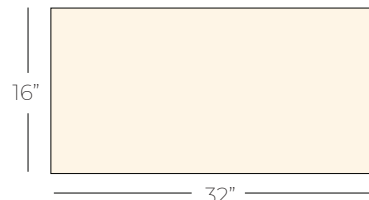

3/4" thick



hex
5/8" thick



top edge finished or unfinished

6" x 24"

base
5/8" thick


tiles are cut to size and actual.
custom sizing is available upon request.
tiles are hand-cast and can have slight variance in thickness.



beige




quietude



ivory



blonde

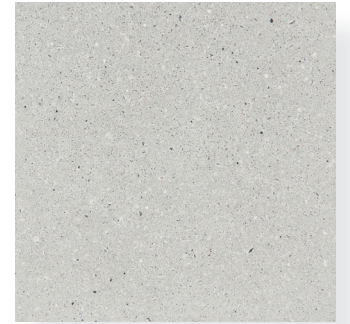

shale



acier




millennial
pink




taupe



beige



mocha

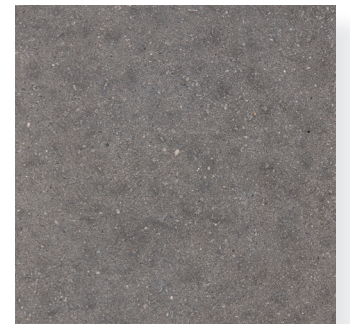


fossil



quietude




pewter



ebony



quietude



azure




mulberry



valencia



acacia



lichen



universal
green



shale

solana | honed concrete tiles



shale

solana | honed concrete tiles



acier



fossil

technical summary

dcof (ansi b101.3)	0.60
compressive	>8000psi
ibc flame spread	rating a (0-25ft/hr.)
freeze thaw	meets standards astm c936/c1645
weight (lb/sq.ft)	5/8" = 7.5 3/4" = 10
thickness tolerance	will vary, not a fully gauged product
overage	allow ample (suggested 20%)
color	variations expected (blend like stone)
curvature tolerance	± 0.5 percent of max tile length
calibrated	no

installation

mock up	required; grouted, scrubbed and sealed
substrate	cured to max 4% moisture, level 1/8" in 10ft
grout joint	0.5% of max tile length, minimum 1/8"
grout	cementitious / sanded
adhesive	laticrete 254r platinum rapid
expansion joint	15' each direction, at perimeter, honored from substrate. refer to tcna
clean	wet-scrub with htc twister pad (white)
seal	prosoco polishguard (natural finish)

solana honed concrete tiles are dimensionally accurate and installed with the ease of tile. simply thinset, using a rapid setting adhesive equivalent to laticrete 254r platinum rapid, over a level and cured slab. use quality sanded grout like laticrete perma color grout. once installed, the surface should be wet-scrubbed using the htc twister cleaning system and sealed using prosoco polishguard. pads and sealer are available from concrete collaborative. always reference tcna guidelines for general best practices.

* for more info refer to our tech info guide

concrete collaborative

