




VITREOUS GLASS

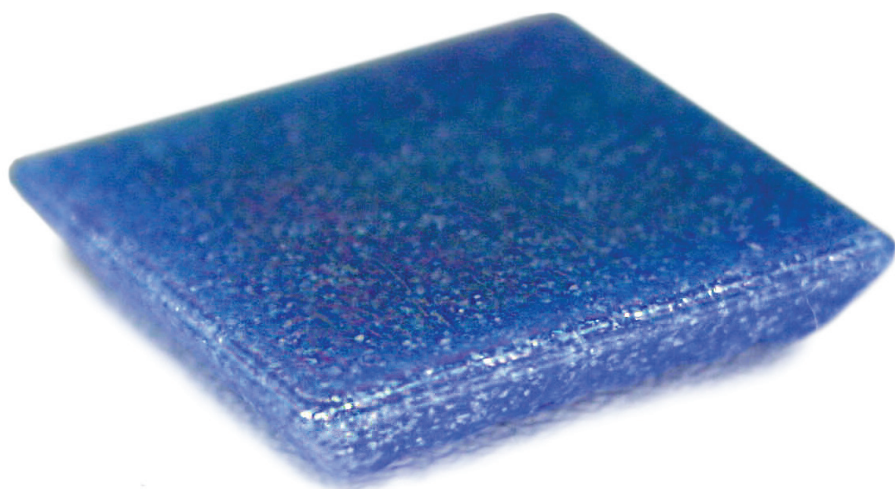


APPLICATIONS | PROFILES | SPECIFICATIONS | COLOR LINES

3/4" VITREOUS GLASS



465 Medford Street, Suite 101, Boston, MA 02129 USA | +1 617 418 1928 | ARTAIC.COM

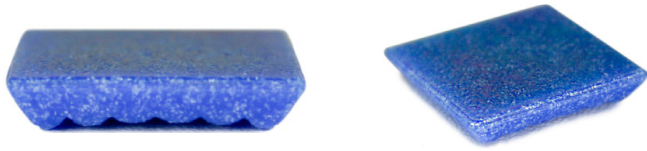

SIZE: 3/4" x 3/4" x 1/8"

COLORS: 136 available

FINISHES: Metallic, Opalescent, Specialty

APPLICATIONS:

Interior	Exterior	Residential	Commercial	Wall	Pool	Floor
✓	✓	✓	✓	✓	✓	light residential traffic

STATS:

Sheet Dimensions:		12.51" x 12.51"
Tiles per Row/Column:		15 x 15
Tiles per Sheet:		225
Sheet Weight:		1.45 lbs
Grout Spacing:		.045" (1.13mm)


DESCRIPTION

Artaic's vitreous glass is our most popular tile material. An extensive color palette with many finish options lead to vibrant and dynamic surfaces of mosaic imagery. Tile is the perfect way to inject style into any design without losing functionality.

VITREOUS GLASS:

- through-body color
- resistant to fading
- resistant to staining
- resistant to chemicals
- resistant to fire
- suitable for any indoor or outdoor projects as well as for use in wet areas
- fabricated in the USA

1/2" vitreous glass tile size provides a low price-point for large projects. Each sheet is labeled and matched on an installation diagram.



RESISTANT TO SCRATCHES
EN 101 / ISO 13630




RESISTANT TO FROST
UNI EN 202 * ISO 10545/12
ASTM C1026



RESISTANT TO CHEMICAL ATTACK
UNI EN 122 * ISO 10545/13
ASTM C1026



<0.5% WATER ABSORPTION
ISO 10545-3 /
ASTM C1026



RESISTANT TO COLORS FADING
DIN 51904




RESISTANT TO THERMAL SHOCK
UNI EN 140 * ISO 10545/9
ASTM C484

3/8" VITREOUS GLASS



465 Medford Street, Suite 101, Boston, MA 02129 USA | +1 617 418 1928 | ARTAIC.COM



SIZE: 3/8" x 3/8" x 1/8"

COLORS: 136 Available

FINISHES: Metallic, Opalescent, Specialty

APPLICATIONS						
Indoor	Outdoor	Residential	Commercial	Wall	Pool	Floor
✓	✓	✓	✓	✓	✓	light residential traffic

STATS:

Sheet Dimensions:		12.51" x 12.51"
Tiles per Row/Column:		27 x 27
Tiles per Sheet:		729
Sheet Weight:		1.01 lbs
Grout Spacing:		.045" (1.13mm)

DESCRIPTION

Artaic's vitreous glass is our most popular tile material. An extensive color palette with many finish options lead to vibrant and dynamic surfaces of mosaic imagery. Tile is the perfect way to inject style into any design without losing functionality.

VITREOUS GLASS:

- through-body color
- resistant to fading
- resistant to staining
- resistant to chemicals
- resistant to fire
- suitable for any indoor or outdoor projects as well as for use in wet areas
- fabricated in the USA

3/8" vitreous glass tile size provides a high resolution for smaller projects. Each sheet is labeled and matched on an installation diagram.



**RESISTANT TO
SCRATCHES**
EN 101 / ISO 13630




RESISTANT TO FROST
UNI EN 202 * ISO 10545/12
ASTM C1026



**RESISTANT TO
CHEMICAL ATTACK**
UNI EN 122 * ISO 10545/13
ASTM C1026



**<0.5% WATER
ABSORPTION**
ISO 10545-3 /
ASTM C1026



**RESISTANT TO
COLORS FADING**
DIN 51904




**RESISTANT TO
THERMAL SHOCK**
UNI EN 140 * ISO 10545/9
ASTM C484

1/2" VITREOUS GLASS



465 Medford Street, Suite 101, Boston, MA 02129 USA | +1 617 418 1928 | ARTAIC.COM

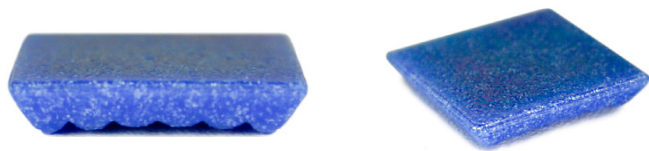

SIZE: 1/2" x 1/2" x 1/8"

COLORS: 180 available

FINISHES: Metallic, Opalescent, Specialty

APPLICATIONS:

Interior	Exterior	Residential	Commercial	Wall	Pool	Floor
✓	✓	✓	✓	✓	✓	light residential traffic

STATS:

Sheet Dimensions:		12.51" x 12.51"
Tiles per Row/Column:		25 x 25
Tiles per Sheet:		625
Sheet Weight:		1.21 lbs
Grout Spacing:		.045" (1.13mm)

DESCRIPTION

Artaic's vitreous glass is our most popular tile material. An extensive color palette with many finish options lead to vibrant and dynamic surfaces of mosaic imagery. Tile is the perfect way to inject style into any design without losing functionality.

VITREOUS GLASS:

- through-body color
- resistant to fading
- resistant to staining
- resistant to chemicals
- resistant to fire
- suitable for any indoor or outdoor projects as well as for use in wet areas
- fabricated in the USA

1/2" vitreous glass tile size provides more detailed resolution for imagery. Each sheet is labeled and matched on an installation diagram.



RESISTANT TO SCRATCHES
EN 101 / ISO 13630




RESISTANT TO FROST
UNI EN 202 * ISO 10545/12
ASTM C1026




RESISTANT TO CHEMICAL ATTACK
UNI EN 122 * ISO 10545/13
ASTM C1026



<0.5% WATER ABSORPTION
ISO 10545-3 /
ASTM C1026



RESISTANT TO COLORS FADING
DIN 51904




RESISTANT TO THERMAL SHOCK
UNI EN 140 * ISO 10545/9
ASTM C484

1" VITREOUS GLASS



465 Medford Street, Suite 101, Boston, MA 02129 USA | +1 617 418 1928 | ARTAIC.COM

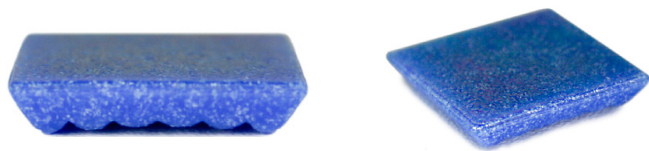

SIZE: 1" x 1" x 1/8"

COLORS: 180 available

FINISHES: Metallic, Opalescent, Specialty

APPLICATIONS:

Interior	Exterior	Residential	Commercial	Wall	Pool	Floor
✓	✓	✓	✓	✓	✓	light residential traffic

STATS:

Sheet Dimensions:		12.51" x 12.51"
Tiles per Row/Column:		12 x 12
Tiles per Sheet:		144
Sheet Weight:		1.45 lbs
Grout Spacing:		.016" (.41 mm)

DESCRIPTION

Artaic's vitreous glass is our most popular tile material. An extensive color palette with many finish options lead to vibrant and dynamic surfaces of mosaic imagery. Tile is the perfect way to inject style into any design without losing functionality.

VITREOUS GLASS:

- through-body color
- resistant to fading
- resistant to staining
- resistant to chemicals
- resistant to fire
- suitable for any indoor or outdoor projects as well as for use in wet areas
- fabricated in the USA

1" vitreous glass tile size provides a low price-point for large projects. Each sheet is labeled and matched on an installation diagram.



RESISTANT TO SCRATCHES
EN 101 / ISO 13630




RESISTANT TO FROST
UNI EN 202 * ISO 10545/12
ASTM C1026



RESISTANT TO CHEMICAL ATTACK
UNI EN 122 * ISO 10545/13
ASTM C1026



<0.5% WATER ABSORPTION
ISO 10545-3 /
ASTM C1026



RESISTANT TO COLORS FADING
DIN 51904



RESISTANT TO THERMAL SHOCK
UNI EN 140 * ISO 10545/9
ASTM C484

TECHNICAL CHARACTERISTICS & TEST DATA

I.	Chemical Properties:		
1	Chemical Attack Resistance	EN 122 / ISO 10545: Part 13	Resistant
2	Household Chemicals Resistance	IS 13630 (Part 8): 1991 / EN 122: 1984	Resistant
3	Resistance to Swimming Pool Salts	IS 13630 (Part 8): 1991 / EN 122: 1984	Resistant
4	Staining Test	IS 13630 (Part 8): 1991 / EN 122: 1984	Passes
5	UV Resistance	DIN 51094	Resistant
II.	Dimension & Surface Quality:		
1	Color Resistance to fading	DIN 51094	Resistant
2	Facial Dimensions - Average	ASTM C 499 / 78 (99)	Passes
3	Facial Dimensions - Range	ASTM C 499 / 78 (99)	Passes
4	Range of Thickness	ASTM C 499	Passes
III.	Physical Properties:		
1	Coefficient of Friction	ASTM C 1028	Passes
2	Crazing	ASTM C 424	Passes
3	Scratch Hardness	EN 101 / ISO 13630: Part 13	Passes
4	Slip Resistance	DIN 51097 - 80	Passes
5	Water Absorption	ASTM C 373 / 88 (99) / ISO 10545: Part 3	Nil
6	Wedging	ASTM C 502 - 93a (1999)	Passes
IV.	Thermal Properties:		
1	Coefficient of Linear Thermal Expansion	EN 103	Passes
2	Frost Resistance	EN 202 / ISO 10545: Part 12	Passes
3	Thermal Shock Resistance	ASTM C 484/ 99/EN 104/ISO 10545: Part 9	Resistant

Also available in the following sizes:



1" Size (All Colors)




3/4" Size •
(Select Colors)




1/2" x 1" Size
(Solids and Blends Only)



845*** •



608* •




607* •




606* •




605* •




604* •



603* •



602* •



601* •



609*** •



846***



700* •



699* •




698* •




697* •



824* •



696* •




830*




831*




832*



835*




836*




837*




662* •



661* •



660* •



834*




666* •




665* •




664* •




663* •



630* •



632* •



639*



640* •



839* •



840* •




633* •




634*



635* •



636* •




841*




803* •




667* •



691* •



692* •



693* •




694* •




825*



701* •



690* •



828*




827*



826*



695* •



847***



848***



705***




704***




702***




720* •



721* •




833* •




722* •



723* •



724* •



725* •



726* •



730***



729***



856***



757***



857***



727* •




760* •




759* •



758* •



786* •



780* •



781* •



782* •



783* •



784* •



785***



750*** •



751*** •



752*** •



753*** •



754*** •



755*** •


Key:

Price Tier 1 = *
Price Tier 2 = **
Price Tier 3 = ***
Price Tier 4 = ****
Price Tier 5 = *****

Color offering is subject to change.
Shade variations may occur.

ARTAIC
INNOVATIVE MOSAIC

1/2" VITREOUS GLASS

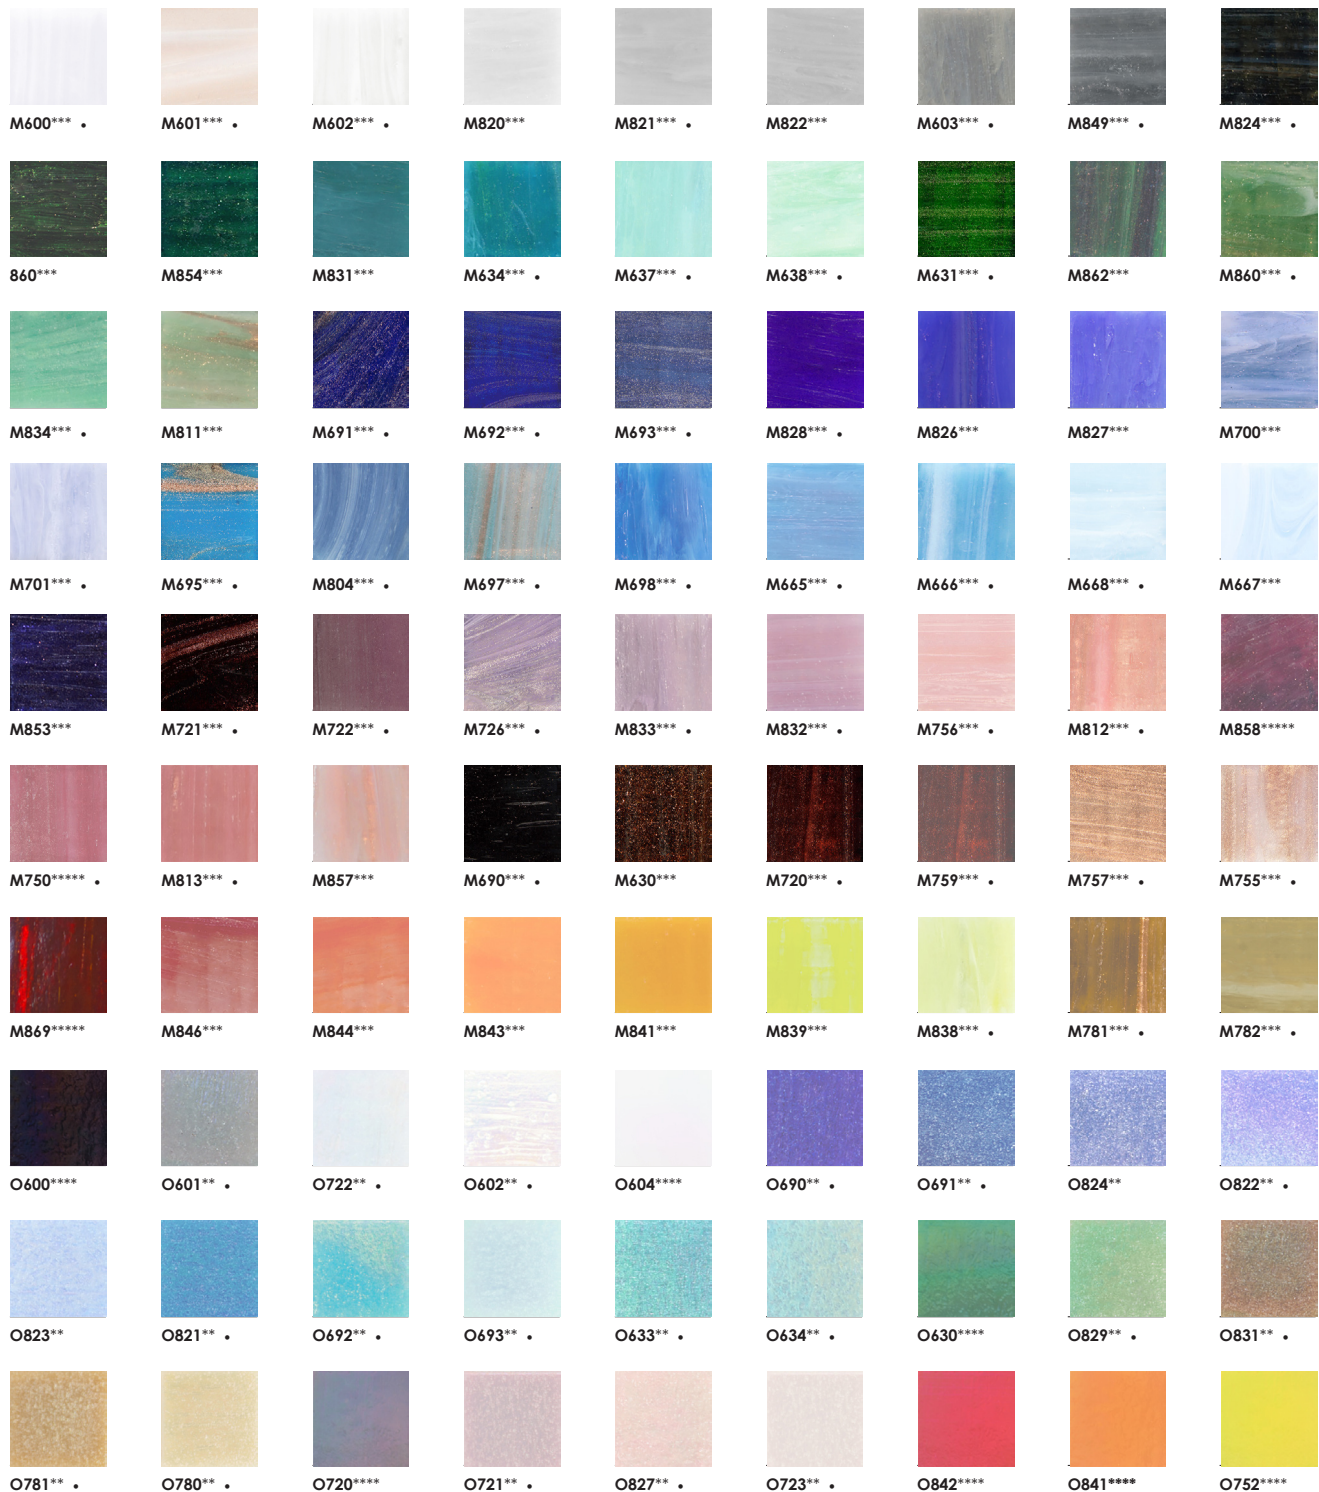

For best results, Artaic suggests
Bostik adhesives and grout.