

RAZZO

65% NIKE GRIND + 35% EPDM




Chicago



Miami



NYC

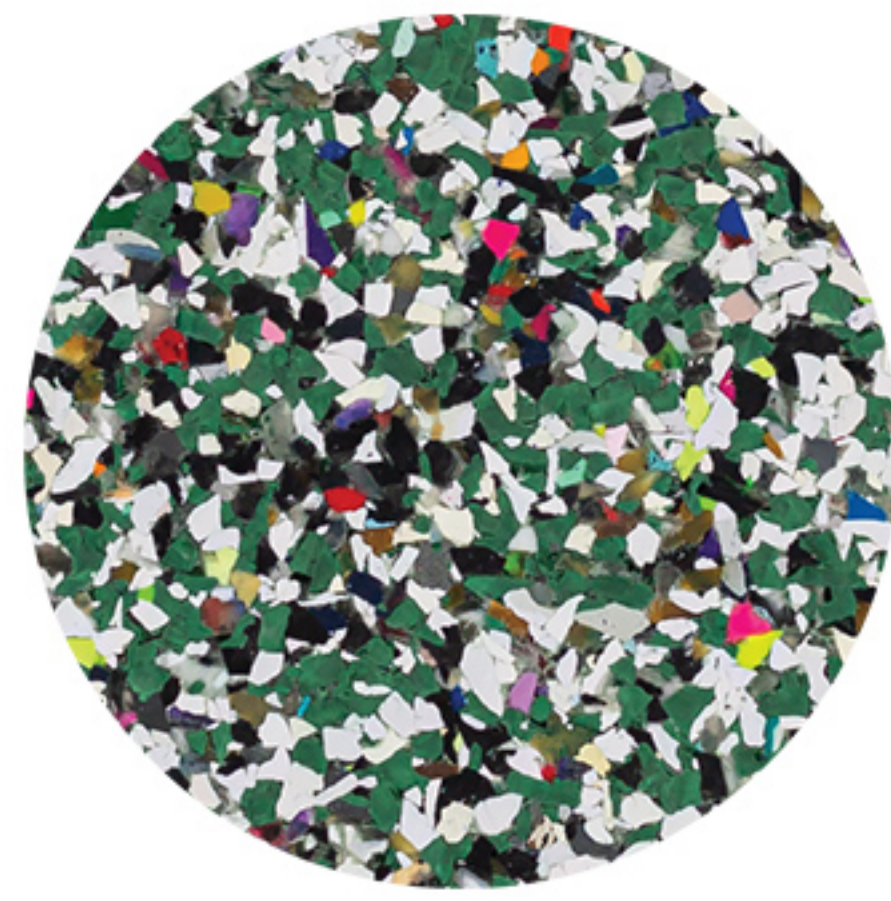

Philadelphia




Charlotte



Orlando



Houston

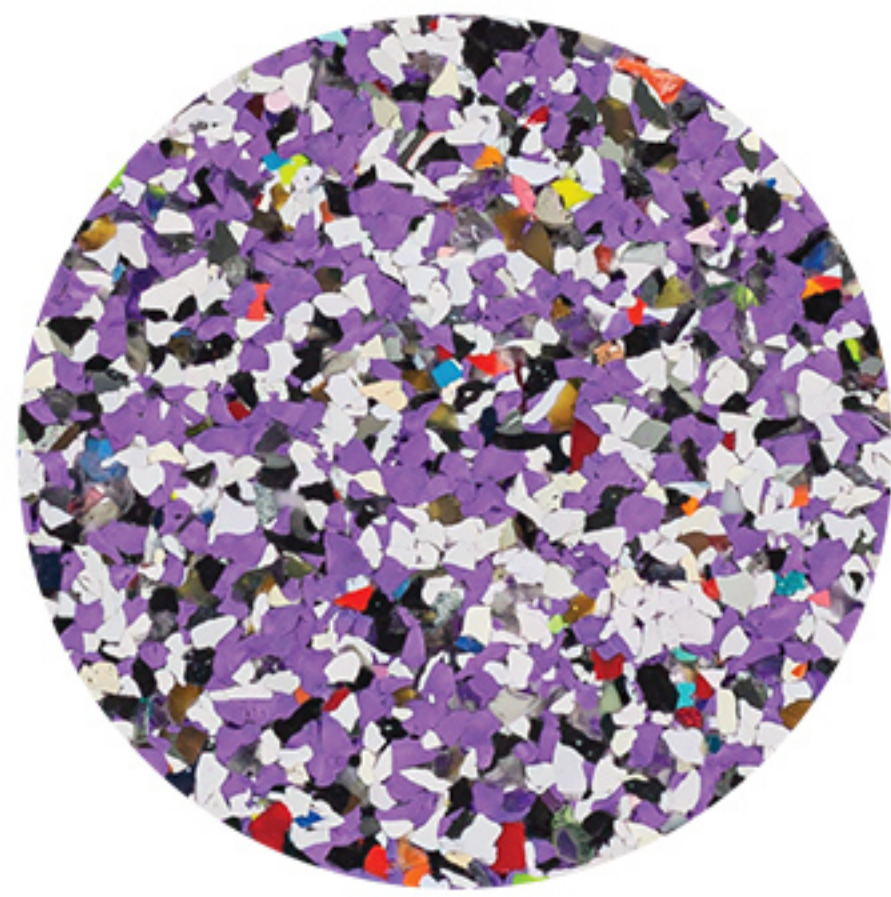

San Francisco



Portland



Los Angeles



Nashville



Las Vegas

DESCRIPTION

TEST METHOD

RESULT

SOUND ABSORPTION NOISE REDUCTION COEFFICIENT	ASTM C423	SAA - 0.04 NRC - 0.05
TABER ABRASION	ASTM C501	Weight loss 0.92 grams(1.39%)
COMPRESSION SET UNDER FORCE	ASTM D395B	82.2% Recovered; 17.8% Unrecovered
BREAKING LOAD AND ELONGATION	ASTM D412	Elongation - 48.71% Tensile - 204.4lbs/sq.in.
STATIC COEFFICIENT OF FRICTION	ASTM D2047	Dry 0.78
HARDNESS SHORE A DIRMETER	ASTM D2240	65
IMPACT SOUND TRANSMISSION	ASTM E492	IIC 58
CRITICAL RADIANT FLUX	ASTM E648	0.48 watts/squre cm
FLEXIBILITY	ASTM F137	6mm mandrel pass
ELECTRICAL RESISTANCE - SURFACE TO GROUND	ASTM F150	4.0 x 10^10 ohms (Average)
ELECTRICAL RESISTANCE - SURFACE TO SURFACE	ASTM F150	2.8 x 10^10 ohms (Average)
RESISTANCE TO CHEMICALS (5MIN & 24HR)	ASTM F925	Slight to moderate color change from 5% Acetic Acid, Mineral Oil, 5% phenol, Kerosene and Olive Oil
STATIC LOAD (250LBS)	ASTM F970	0.009 inch Residual Compression
SHORT TERM INDENTATION (140 LBS)	ASTM F1914	-0.064 inch Residual Indentation

AVAILABLE FORMATS
THICKNESS: 4MM - 18MM

24" x 24"




24" x 36"



48" x 72"



24" x 24" x 33.94"

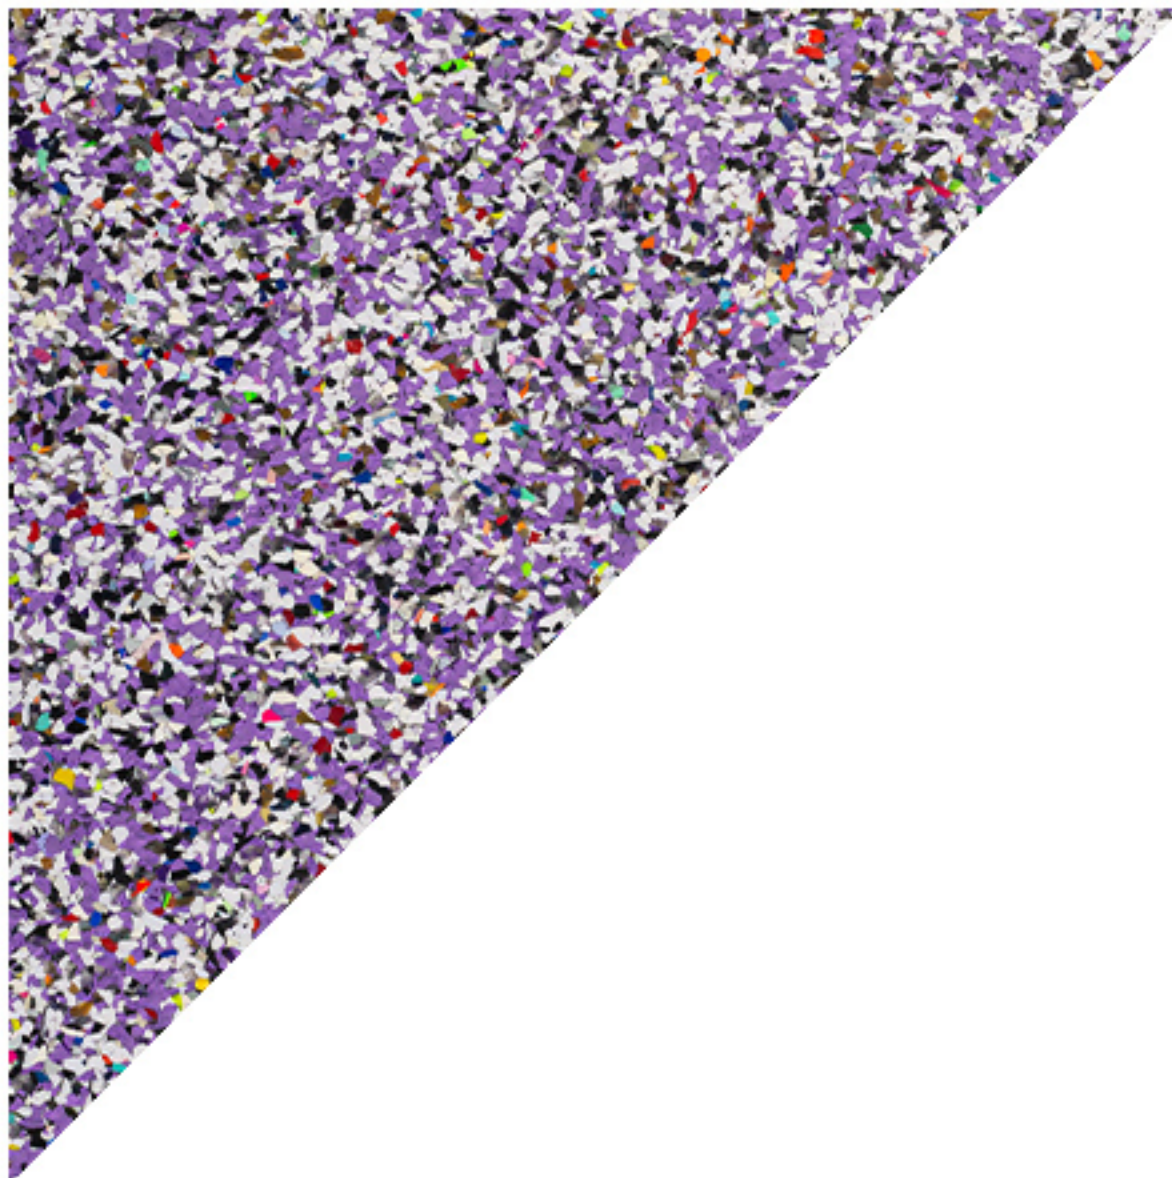

38" x 38"

