


Tred-MOR®

FLOORLINER Series


dBarrier™

- For use beneath any hard- (2mm+) or soft-surface flooring
- Suppresses impact sound transfer through the floor to the room below
- Smooths out minor floor irregularities
- Hypoallergenic and CRI Green Label Plus-certified; 100% recyclable
- Installs quickly and easily; no glue, single-glue, or double-glue

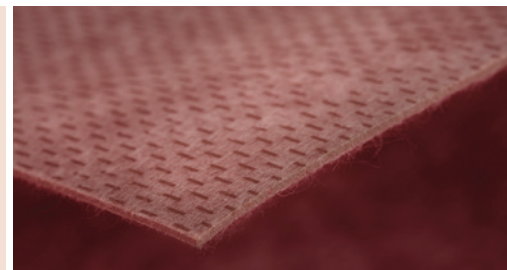


DeciBLOK™

- For use beneath 6.5mm+ rigid core vinyl, engineered floor, or modular tile
- Suppresses impact sound transfer through the floor and reduces room echo
- Inhibits the growth of mold, mildew, and odor-causing bacteria
- Hypoallergenic and CRI Green Label Plus-certified; 100% recyclable
- Installs quickly and easily; no glue, single-glue, or double-glue

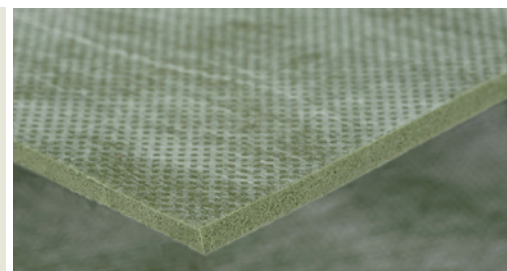


Silent Walk™

- For use beneath 6.5mm+ rigid core vinyl, engineered floor, or modular tile
- Superior dampening of impact sounds before transferring through the floor
- Inhibits the growth of mold, mildew, and odor-causing bacteria
- Hypoallergenic and CRI Green Label Plus-certified; 100% recyclable
- Installs quickly and easily; no glue, single-glue, or double-glue

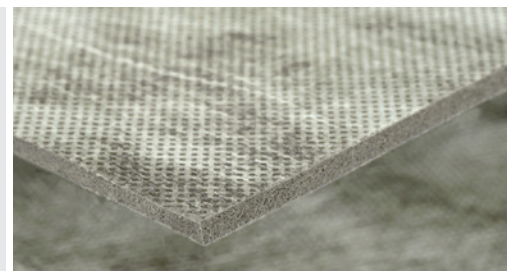

Modular PVI™

- Engineered for use under PVC-backed modular carpet tile or modular composite tile
- Provides passive vibration isolation of sound transfer through floors
- Offers comfort and support to carpet tile while extending carpet life
- Keeps spills from penetrating to subfloor
- Installs quickly and easily; no glue, single-glue, or double-glue

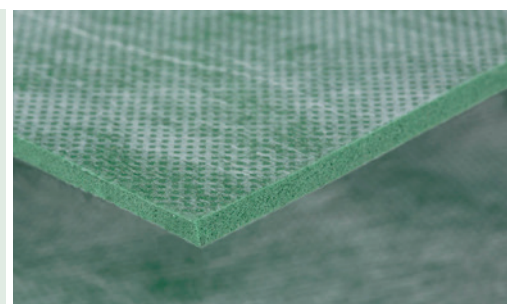

Tred-MOR® FloorLiner™ is the flooring industry's premier line of flooring cushion and acoustic underlayment systems for noise, moisture, and comfort control. Whether it's for carpet tile, LVP/LVT, or solid-core vinyl, this series provides premium options to ensure superior performance of any floor.

Quality and performance are essential in high-traffic and heavy-use commercial environments. Our dBarrier®, DeciBLOK®, Silent Walk™, and Modular PVI™ surface

liners offer breathable, antimicrobial support that creates a sound and moisture barrier on the subfloor. They are made from high-density synthetic rubber, provide superior anti-fatigue comfort, and have been proven to outlast and outperform the competition.

Visit **TredMOR.com** to learn more about how FloorLiner from Tred-MOR adds moisture, comfort, and noise control to your floor.



Find the right underlay or liner at **TredMOR.com**

Tred-MOR®

Floor Cushion and Acoustic Systems
by SCI®, a Leggett & Platt company

Tred-MOR®

FLOORLINER Series

dBarrier™

DeciBLOK™

Silent Walk™

Modular PVI™

Product Code	BV0340	BV0081	BV0185	BV0278
Color	Red Clay	Olive Green	Gray	Bright Green
Material Content	100% SBR	100% SBR	100% SBR	100% SBR
Traffic Classification	Class III Extra Heavy	Class III Extra Heavy	Class III Extra Heavy	Class III Extra Heavy
Material Weight	42 oz / SY	44 oz / SY	62 oz / SY	62 oz / SY
Density	62 lbs/ft³	37 lbs/ft³	31 lbs/ft³	33 lbs/ft³
Thickness	1.42 mm (1/16")	2.5 mm (3/32")	4.0 mm (5/32")	4.0 mm (5/32")
Roll Weight	58 lbs	70 lbs	79 lbs	124 lbs
Product Dimensions	4' 6" x 44' 5" (200 sf)	4' 6" x 48' (216 sf)	4' 6" x 40' (180 sf)	4' 6" x 60' (270 sf)

Moisture Resistance

Resistance to topical liquids	100%	100%	100%	100%
Vapor Permeance from slab ASTM E96	Class II Semi Impermeable	Class III Semi Permeable w/ MC; Class I – Impermeable	Class III Semi Permeable w/ poly; Class I – Impermeable	Class III Semi Permeable
Antimicrobial	Guardian™	Guardian™	Guardian™	Guardian™

Accoustical Performance

IIC	69	70	72	65
STC	61	66	65	52
Δ IIC	26	23		32

Comfort and Durability

Compression set @ 50% ASTM D3676	31.50%	24.40%	35.20%	34.60%
Indentation Forced Deflection @ 25%	677.2 lbs of force	290.4 lbs of force	264.9 lbs of force	344.6 lbs of force
Indentation Forced Deflection @ 65% ASTM 3574	Exceeds 5,000 lbs of force	3,323.6 lbs of force	1,964.3 lbs of force	2828.4 lbs of force

Green Credentials

Recyclable	100%	100%	100%	100%
Indoor Air Quality	CRI Green Label Plus-certified	CRI Green Label Plus-certified	CRI Green Label Plus-certified	CRI Green Label Plus-Certified
VOC Emissions	Pass – Calif. Section 01350	Pass – Calif. Section 01350	Pass – Calif. Section 01350	Pass – Calif. Section 01350

Flame Certification

Pill Test DOC-FF 1-70	Pass	Pass	Pass	Pass
Smoke Chamber	Pass	Pass	Pass	Pass
Radiant Panel	Composite Test with Floor	Composite Test with Floor	Composite Test with Floor	Composite Test with Floor



Find the right underlay or liner at [TredMOR.com](https://www.TredMOR.com)

Tred-MOR®

Floor Cushion and Acoustic Systems
by SCI®, a Leggett & Platt company

© 2019 Leggett & Platt, Incorporated | 25923_1119