



laguna

polished concrete tiles

concrete
collaborative

smooth finish | durable | inherent sheen | concrete character | tonal variation | hard wearing | slip resistant | low maintenance



azure

laguna | polished concrete tiles



acier

laguna polished concrete tile features a smooth surface with vibrant color and inherent sheen.

our original off-form concrete tile boasts integral colors with a natural array of tones and mottling. highly durable and wear resistant, ideal for commercial and residential interior floors and walls.




pewter

table of use

interior flooring	yes	
exterior flooring	n/a	pair w/ trails flekk
interior walls	yes	
exterior walls	yes	
interior countertops	n/a	pair w/ pacifica xsmall
exterior countertops	n/a	pair w/ pacifica xsmall
interior stairs	n/a	pair w/ solana
exterior stairs	n/a	pair w/ trails flekk
interior base tile	yes	
interior wet areas	yes	
pool copings / wall cap	n/a	pair w/ trails flekk

icons of use



uv stable




interior



interior



shower



interior



high
density



interior



interior wet




food safe




low porosity



heavy



exterior




tonal



lichen + ivory




olive + ebony + blonde + ivory




5/8" thick




5/8" thick




5/8" thick



5/8" thick




5/8" thick

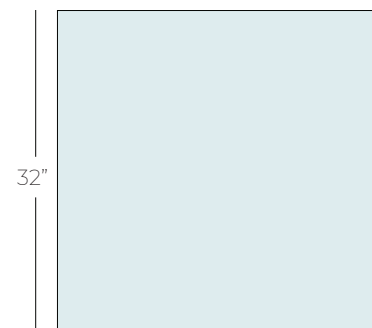


3/4" thick




5/8" thick




5/8" thick




5/8" thick



5/8" thick

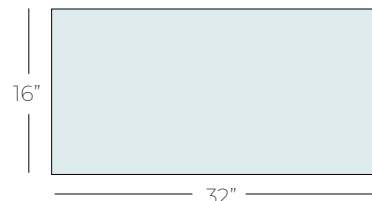

3/4" thick




hex
5/8" thick




top edge finshed or unfinished

6" x 24"

base
5/8" thick

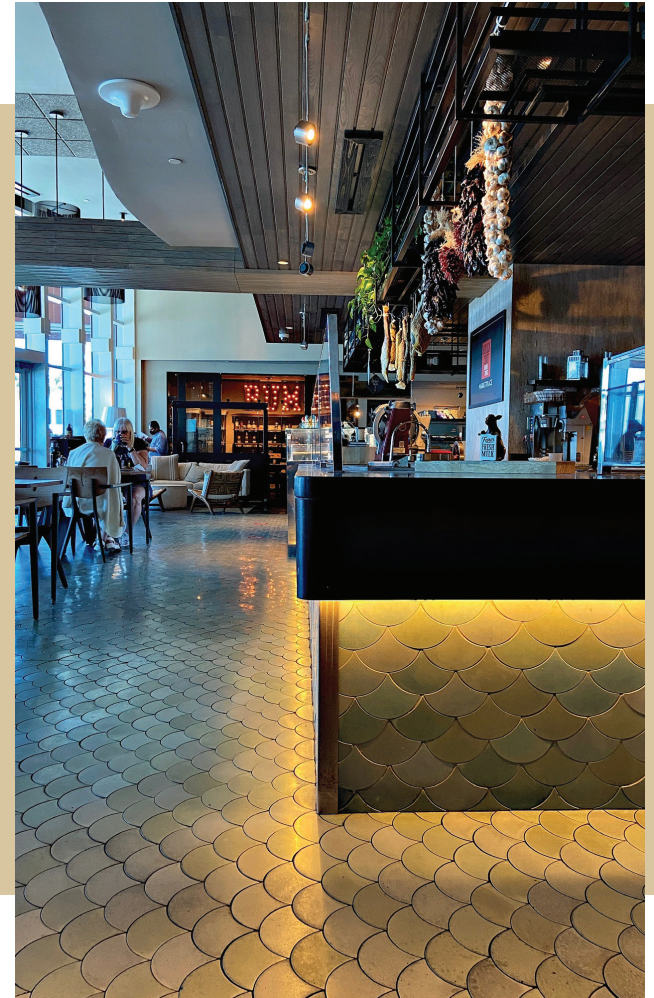

quietude

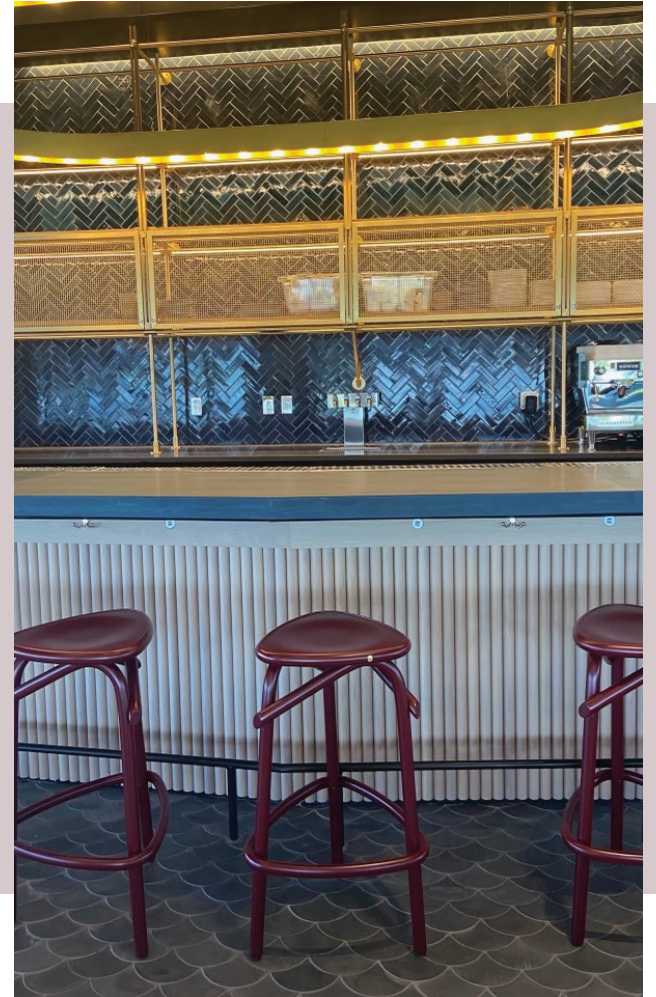

pewter + ivory + acier + azure



millennial pink



millennial pink



ivory



blonde




shale



acier



millennial
pink




taupe



pewter



mocha




fossil



quietude



beige




mulberry




acacia



valencia



ebony



quietude



azure




lichen




universal
green



acacia

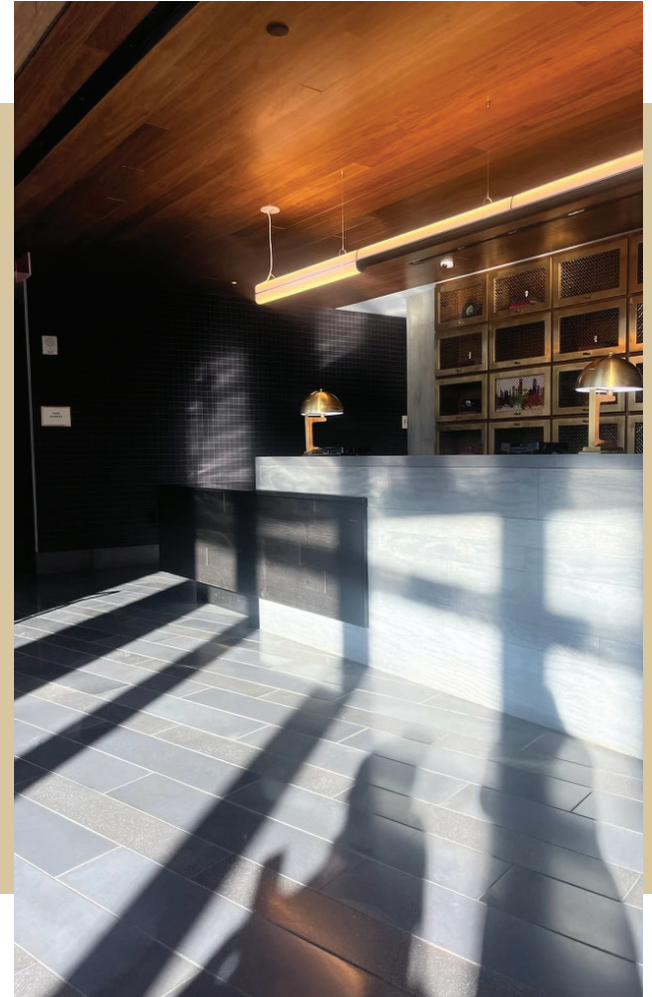

ebony

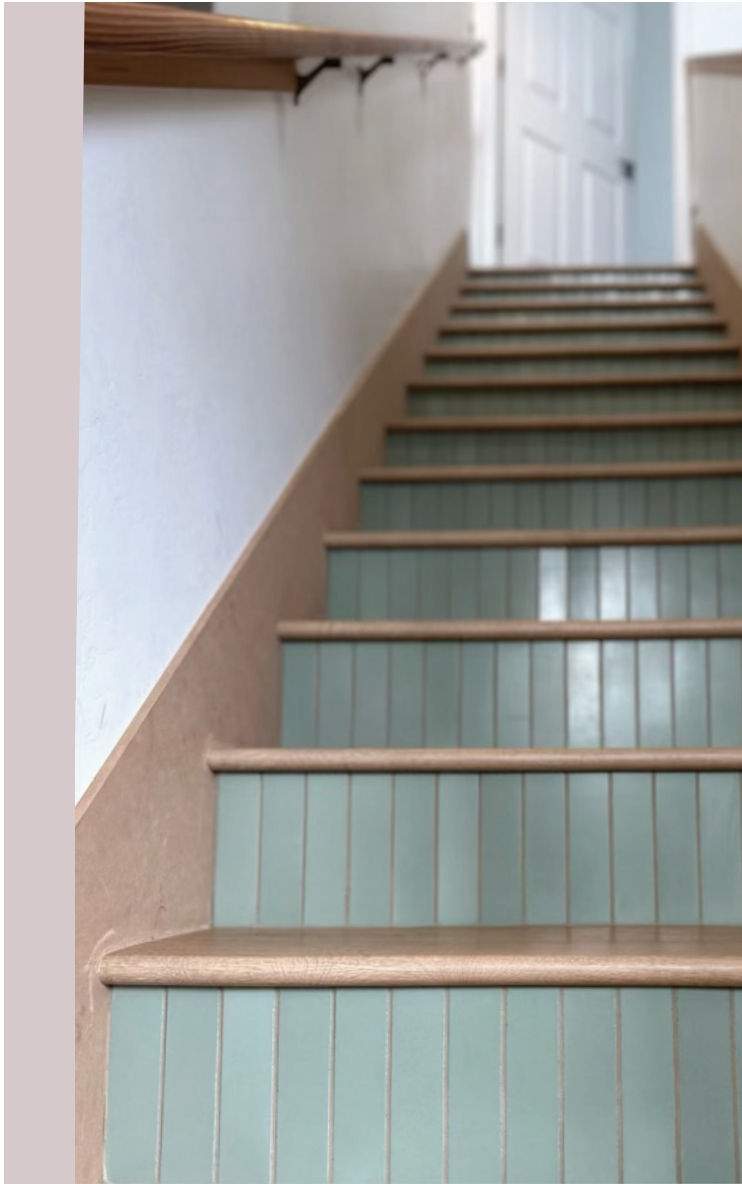

quietude

technical summary

dcof (ansi b101.3)	0.60
compressive	>8000psi
ibc flame spread	rating a (0-25ft/hr.)
freeze thaw	meets standards astm c936/c1645
weight (lb/sq.ft)	5/8" = 7.5 3/4" = 10
thickness tolerance	will vary, not a fully gauged product
overage	allow ample (suggested 20%)
color	variations expected (blend like stone)
curvature tolerance	± 0.5 percent of max tile length
calibrated	no

installation

mock up	required; grouted, scrubbed + sealed
substrate	sound to cured to max 4% moisture, level 1/8" in 10ft
grout joint	0.5% of max tile length, minimum 1/8"
grout	cementitious / sanded
adhesive	laticrete 254r platinum rapid
expansion joint	15' each direction, at perimeter, honored from substrate. refer to tcna
clean	wet-scrub with htc twister pad (white)
seal	prosoco polishguard (natural finish)

laguna polished concrete tiles are dimensionally accurate and installed with the ease of tile. simply thinset, using a rapid setting adhesive equivalent to laticrete 254r platinum rapid, over a level and cured slab. use quality sanded grout like laticrete perma color grout. once installed, the surface should be wet-scrubbed using the htc twister cleaning system and sealed using prosoco polishguard. pads and sealer are available from concrete collaborative. always reference tcna guidelines for general best practices.

* for more info refer to our tech info guide

concrete collaborative

