

ALETTE CONTRACT

adore.

WARRANTY

10 Years Commercial
Lifetime Residential

Alette Contract by Adore, with a 20 mil / 0.5 mm wear layer and a Duramond™ reinforced surface, is beautiful flooring engineered for superior performance in commercial space.

Contract's tiles and planks recreate the look and feel of natural material. The line's visually enhancing features include four sided beveling, texturized surfaces and high definition prints.

Alette Contract is FloorScore® certified, 100% recyclable and certified safe for indoor air quality.



ALETTE CONTRACT SPECIFICATIONS

ASTM F1700, Class III, Type B | Heterogeneous vinyl flooring

DIMENSIONS AND PACKING

WEAR LAYER: 20 mil / 0.5 mm

OVERALL GAUGE: 0.12" / 3 mm

PLANKS LENGTH & WIDTH:
PER BOX:

7.25 X 48" nominal (184 x 1220 mm)
14 PLANKS PER BOX, 33.83 SQ FT, 37.53 LBS.

TILES LENGTH & WIDTH:
PER BOX:

12 X 24" (304.8 x 609.6 mm)
16 TILES PER BOX, 32.00 SQ FT, 37.04 LBS.

	STANDARD	RESULT
CRITICAL RADIANT FLUX	ASTM E648	Class 1
SMOKE	ASTM E662	≤450
RESIDUAL INDENTATION	ASTM F1914	≤ 8%
FLEXIBILITY	ASTM F137	0.5" (12 mm) Mandrel, No Crack or Break
OVERALL THICKNESS	ASTM F368	0.120" (3 mm)
DIMENSIONAL STABILITY	ASTM F2199	<0.020" (0.5 mm) per linear ft.
RESISTANCE TO CHEMICALS	ASTM F925	No Change
HEAT STABILITY	ASTM F1514	ΔE < 8.0
LIGHT STABILITY	ASTM F1515	ΔE < 8.0
RADIANT HEAT SUITABILITY		85°F (29°C)
COEFFICIENT OF FRICTION	ASTM D2047	Meets or Exceeds 0.6



CERTIFIED BY
SCS Global Services



DURAMOND™
SURFACE REINFORCEMENT TECHNOLOGY




100% RECYCLABLE

PLANK DIMENSIONS 7.25" x 48" (nom.) / 184mm X 1220mm

CN-T 462
HEMINGWAY



CN-T 188
HAWTHORNE

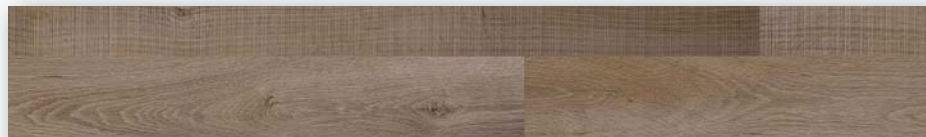

CN-T 156
FAULKNER



CN-T 758
MORRISON



CN-T 113
CHURCHILL



CN-T 153
CORNEILLE



CN-T 183
BARCA



CN-T 193
PETRESCU



TILE DIMENSIONS 12" x 24" / 304.8mm X 609.6mm (nom.)



CN-T 469 STEINBECK



CN-T 533 HARPER