

TEKNOFLOR®

HIGH PERFORMANCE FLOORING



NATURESCAPES HPD™

CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

TRADITIONAL LOOK. MODERN COMPOSITION.

TEKNOFLOR® NATURESCAPES HPD™ is the brand's first organic sheet good made with *ecuran*, an organically-derived composite material processed from plant based oils such as castor oil and naturally occurring minerals such as chalk. This resilient sheet flooring product has all the advantages of resilient sheet vinyl: durability, easy maintenance and versatility but without the PVC. The product offers twenty-four beautiful designs in three distinct styles that can be used independently or together. Naturescapes HPD brings life to organic flooring with design, color, performance and an environmental focus perfect for any commercial space. Contact your Teknoflor sales representative for more information.



DURABLE AND EASY
MAINTENANCE

ENVIRONMENTALLY
FRIENDLY

SAFE

OVERALL THICKNESS

WARRANTY

APPLICATIONS

- **No Wax, No Buff** and no sealers or finishes needed; easily cleaned by damp mopping or auto-scrubbing
- 2.5mm gauge for enhanced performance in heavy traffic areas
- Maintenance savings result in investment payback in approximately two years
- No buff floors mean no bacteria, dust or wax particles are thrown into the air during cleaning
- No odors from floor finishes or strippers; no wax flushed into sewer system
- Complies with REACH requirements for Substances of Very High Concern
- Made with *ecuran*, a high performance and sustainable composite material of organically-derived polyurethane processed from plant based oils such as castor oil and naturally occurring minerals such as chalk
- ADA Compliant
- Approved for emergency egress areas - NFPA 101 and NFPA 99
- 2.5mm
- 12-year commercial warranty / 20-year residential warranty
- Ideal for Healthcare, Senior Living, Retail, Corporate/Office, Academic and Hospitality Environments



NATURESCAPES HPD™
CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

TEKNOFLOR®

TEKNOFLOR® NATURESCAPES HPD™ • JASPER OAK COLLECTION



89500 Natural Cherry



89501 Beach



89502 Sand



89503 Sun Bleached



89504 Dune



89505 Baywood



89506 Driftwood




89507 Classic Grey

TEKNOFLOR® NATURESCAPES HPD™ • PHOENIX COLLECTION




89508 Flint

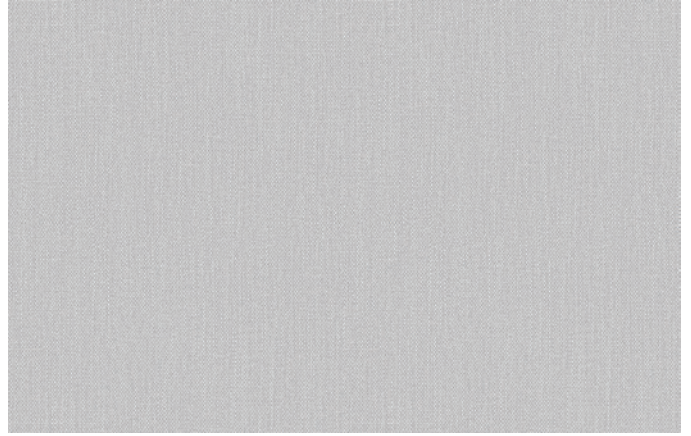

89509 Chalk



89510 Ivory Black

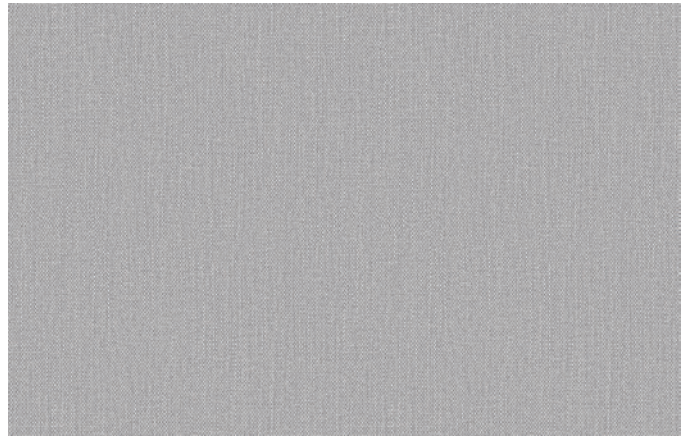

89511 Bentinite




89512 Silt



89513 Evergreen



89514 Forest

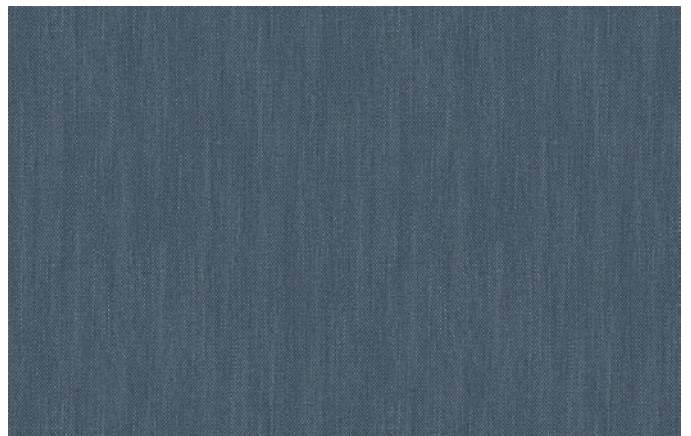

89515 Indigo

TEKNOFLOR® NATURESCAPES HPD™ • ISLEY COLLECTION



89516 Sandstone



89517 Clay



89518 Titanium



89519 Ivory




89520 Lead



89521 Zinc



89522 Graphite

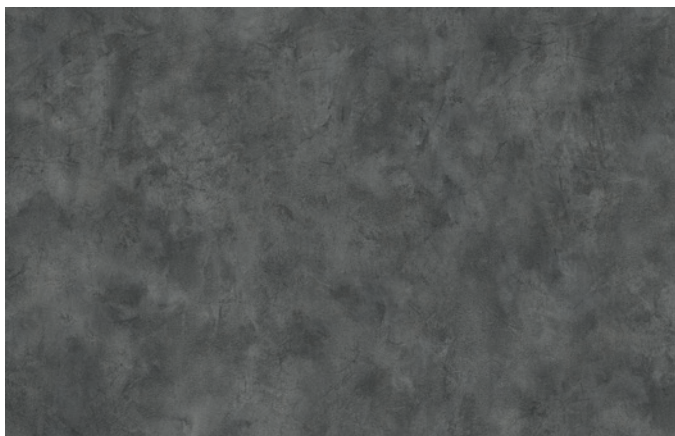

89523 Carbon

TEKNOFLOR® NATURESCAPES HPD™

CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

PRODUCT DATA			
USE	Commercial & Residential	DIMENSIONS	6'7" x 65'7" (2.0M x 20.0M)
COMPOSITION	Polyurethane Sheet Flooring	ROLL SIZE	48.1 sq. yd.
OVERALL THICKNESS	2.5mm (0.098")	ROLLS / PALLET	6
WARRANTY	12-Year Commercial 20-Year Residential	PALLETS / CONTAINER	10

SAFETY & PERFORMANCE	TEST METHOD	STANDARD REQUIREMENT	RESULT
CRITICAL RADIANT FLUX	ASTM E648	Class I: ≥ 0.45 W/sq.cm.	Passes Requirements
SMOKE DENSITY	ASTM E662	Flaming: ≤ 450 Non-Flaming: ≤ 450	Passes Requirements
REACH Substances of Very High Concern	REACH SVHC 174	$\leq 0.1\%$ by Product Weight (per substance)	Passes Requirements
HEAVY METALS	ASTM F963	Refer to Standard	No Concern with Heavy Metal Content
PHTHALATES	ASTM D7823 / CPSC-CH-C1001-09.3	Refer to Consumer Product Safety Improvement Act (CPSIA)	None Detected
ANTIFUNGAL ACTIVITY (No Antimicrobial Agent Added)	ASTM G21	N/A	Face & Back: $<10\%$ Growth
COEFFICIENT OF FRICTION (STATIC, DRY)	ASTM D2047	N/A	≥ 0.6
CASTOR CHAIR	ISO 4918	N/A	25,000 Cycles: 4.5-5.0 AATCC Slight gloss change
Floor Materials & Footwear; Voltage Measurement	ANSI / ESD STM97.2	N/A	Average (Absolute): ≤ 2.0 kV

MANUFACTURING & USAGE	TEST METHOD	STANDARD REQUIREMENT	RESULT
RESIDUAL INDENTATION	ASTM F1914	Maximum: 0.012"	Passes Requirements
STATIC LOAD	ASTM F970	PSI ≥ 75 : R (Residential) PSI ≥ 125 : LC (Light Commercial) PSI ≥ 175 : C (Commercial)	Passes Requirements $\geq 1,000$ PSI
FLEXIBILITY	ASTM F137	No cracks/breaks from 0.25" (6.4mm) Mandrel	Passes Requirements
CHEMICAL RESISTANCE	ASTM F925	No more than "Slight Change"	Passes Requirements
RESISTANCE TO HEAT	ASTM F1514	Average & Max $\Delta E < 8.0$	Passes Requirements
RESISTANCE TO LIGHT	ASTM F1515	Average & Max $\Delta E < 8.0$	Passes Requirements



TEKNOFLOR®

TEKNOFLOR® NATURESCAPES HPD™

CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

TRANSPARENCY & SUSTAINABILITY

Just.

Organization Name: Shannon Specialty Floors, LLC
Organization Type: Distributor
Headquarters: Milwaukee, Wisconsin
Satellite Facilities: None
Number of Employees: 20

Social Justice and Equity Indicators:

Diversity

- ☒ Non-Discrimination
- ☒ Gender Diversity
- ☒ Ethnic Diversity

Worker Benefit

- ☒ Worker Happiness
- ☒ Employee Benefit
- ☒ Continuing Education

Equity

- ☒ Full Time Employment
- ☒ Pay-Scale Equity
- ☒ Union Friendly
- ☒ Living Wage
- ☒ Gender Pay Equity
- ☒ Family Friendly

Local Benefit

- ☒ Local Control
- ☒ Local Sourcing

Stewardship

- ☒ Responsible Investing
- ☒ Community Volunteering
- ☒ Positive Products
- ☒ Charitable Giving
- ☒ Animal Welfare
- ☒ Transparency

Safety

- ☒ Occupational Safety
- ☒ Hazardous Chemicals

THE SOCIAL JUSTICE LABEL
SSF-001
EXP: 02/20/2020

INTERNATIONAL LIVING FUTURE INSTITUTE™ justorganizations.com

Declare.

TEKNOFLOR® Naturescapes HPD™
Shannon Specialty Floors

Final Assembly: Detmold, Germany
Life Expectancy: Commercial - 12 Years, Residential - 20 Years
End of Life Options: Take Back Program (100%)

Ingredients:

Polymer: Polyurethane; **Filler:** Calcium Carbonate, Zeolite; **Flame Retardant:** Aluminum Hydroxide; **Additives and Decor Paper Dyes:** Undisclosed (0.5-1.0%); **Foam Regulator:** White Oil; **Nonwoven:** Polypropylene, Polyester, Glass; **Decor Paper:** Cellulose; **Decor Paper Filler:** Kaolin; **Decor Paper Pigment:** Titanium Dioxide

*LBC Temp Exception I10-E4 Proprietary Ingredients <1%

Living Building Challenge Criteria:

SSF-0003
VOC Content: N/A
EXP: 01 MAY 2019
VOC Emissions: CDPH Compliant

Declaration Status:

- ☒ LBC Red List Free
- ☒ LBC Compliant
- ☒ Declared

Third Party Verified

MANUFACTURER CLAIMS VERIFIED BY: WAP Sustainability
INTERNATIONAL LIVING FUTURE INSTITUTE™ declareproducts.com

Living Product Challenge 1.1
Shannon Specialty Floors
TEKNOFLOR® Naturescapes HPD™

Manufacturing Location: Detmold, Germany

Petal Certified
16/20

Imperatives Achieved
Petals Met: Place, Health & Happiness, Materials, Equity

Life Expectancy: Commercial - 12 years, Residential - 20 years
End of Life Options: Take-Back Program
Functional Unit: 1 sq. meter

Carbon Impact
6.06 kg CO₂ Eq

Water Impact
6.91 m³

Energy Impact
3.60 kg Oil Eq

Waste Impact
99+% Diversion Rate

Declare.

☒ Red List Free
☒ LBC Compliant
☒ Declared

Ingredients: Polymer: Polyurethane; Filler: Calcium Carbonate, Zeolite; Flame Retardant: Aluminum Hydroxide; Additives and Decor Paper Dyes: Undisclosed (0.5-1.0%); Foam Regulator: White Oil; Nonwoven: Polypropylene, Polyester, Glass; Decor Paper: Cellulose; Decor Paper Filler: Kaolin; Decor Paper Pigment: Titanium Dioxide

*LBC Temp Exception I10-E4 Proprietary Ingredients <1%

A Just™ Organization
Verified By: WAP Sustainability

SSF-LP001
EXP: 5/3/2021

INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/lpc

JUST is a program that provides an innovative platform for organizations to be transparent about operations, including employee benefits and financial and community investments. The program highlights companies that have transparency in social justice and equity policies.

Declare is a transparency platform and product database and its label serves as a nutrition label for products.

The Living Product Challenge 1.1 Standard contains seven performance categories, or Petals: Place, Water, Energy, Health and Happiness, Materials, Equity and Beauty. Petals are subdivided into a total of 20 Imperatives, each of which focuses on a specific sphere of influence.



NATURESCAPES HPD™
CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

TEKNOFLOR®