

trinity tile



PARAMOUNT

extra large format porcelain collection



Paramount

Extra Large Porcelain Slabs & Tile

Paramount is the finest format available in the extra large porcelain tile market, without added agglomerates, this product comes from carefully selected raw materials. In the 60"x120"x6 mm format, Paramount weighs only 14 kg/m².

Paramount combines maximum design freedom with great flexibility. On one hand the slab dramatically reduces the number of interruptions in the design, and on the other hand, the wide range of size formats offered guarantees great versatility for all requirements.

Paramount also cares for the environment: the reduced thickness (6 mm) allows 2 to 3 times less raw material to be used compared to quarry materials, as well as lowers energy consumption during production.



FINISHES

Advanced research that combines the technological and aesthetic aspects has resulted in Paramount, the only material in such large sizes that has a completely smooth finish.

This fact contributes to further enhancing the perceived value of this product that is so much one of a kind.

THICKNESS

Paramount tiles, in addition to the exceptional size, offer the novelty of a minimum thickness. The technology available has made it possible to create stunning slabs in an astonishing size associated with a minimum thickness of 6 mm and surfaces without any harshness: characteristics that make it an “essential” material, despite the outstanding size for this feature.

COVERINGS

Thanks to its light weight, easy installation (cutting, drilling, grouting, etc.) and maintenance, Paramount is particularly indicated for covering walls in both indoor and outdoor residential and commercial areas.

Size, thickness, quality, safety and aesthetics are the winning features making Paramount a material suitable also for unusual applications as working plans, counter-tops, partitions and yacht coverings.

INTERIORS

Paramount becomes a real tool for decoration and interior design: a new covering suitable for customizing tables, ceilings, wings and back-lighted partitions.

Transparency: the thickness of Paramount of only 6 mm offers the opportunity to create plays of light and shade. Great effects for great materials.



SUSTAINABILITY

Paramount is sustainable: it comes in a wide range of environment-friendly and LEED certified materials. Bureau Veritas, a world leader in quality and environment risk assessment for industry and services, recently tested, confirmed and certified Statelyst's green spirit.

TECHNICAL

Available in multiple different modular sizes up to an astounding 5' X 10', this collection is the first extra large slab -option of its kind. With features of engineered porcelain, including amazing flexibility, and is crack resistant, mold resistant, heat and frost proof, with no artificial binders and no VOC emissions.

Paramount is ideal for interiors, exteriors, countertops, veneers, furniture, and much more.



PRODUCTS

divine 08

lust 10

marmi 12

style 14



paramount divine

thru color rectified porcelain slabs & tile, made in italy



paramount divine

thru color rectified porcelain slabs & tile, made in italy



optimum white




essential grey



white wood

AVAILABLE SIZES

	 60"x120"	 60"x60"	 30"x60"	 30"x30"	
optimum white	● ▲	● ▲	● ▲	● ▲	▲ POLISHED ● HONED
essential grey	● ▲	● ▲	● ▲	● ▲	
white wood	● ▲	● ▲	● ▲	● ▲	

TECHNICAL SPECIFICATIONS

	nominal thickness	water absorption	scratch hardness	chemical resistance	breaking strength	dynamic coefficient of friction
Test	N/A	ASTM C373	MOHS	ASTM 650	ASTM 648	BOT 3000
Results	6mm	≤ 0.1%	≥ 7	Class A	≥ 250 lbf	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount lust

thru color rectified porcelain slab & tile, made in italy



paramount lust



thru color rectified porcelain slab & tile, made in italy



bright




gold



cloud



wood grey



wood brown



mod white




mod silver



mod copper




mod black



arabescato



dark



napoleon



michelangelo



bluette



crystal

AVAILABLE SIZES

	 120"x60"	 60"x60"	 60"x30"	 30"x30"	 30"x15"
bright	▲	▲	▲	▲	▲
gold	▲	▲	▲	▲	▲
cloud	▲	▲	▲	▲	▲
wood grey	▲	▲	▲	▲	▲
wood brown	▲	▲	▲	▲	▲
mod white	●▲	●▲	●▲	●▲	●▲
mod silver	●▲	●▲	●▲	●▲	●▲
mod copper	●▲	●▲	●▲	●▲	●▲
mod black	●▲	●▲	●▲	●▲	●▲
arabescato	▲	▲	▲	▲	▲
dark	▲	▲	▲	▲	▲
napoleon	▲	▲	▲	▲	▲
michelangelo	▲	▲	▲	▲	▲
bluette	▲	▲	▲	▲	▲
crystal	▲	▲	▲	▲	▲

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	dynamic coefficient of friction	hardness	resistance to deep abrasion	chemical resistance	breaking strength	stain resistance
Test	N/A	C1026	C373	BOT 3000	Mohs	C1243	C650	C648	C1378
Results	6mm	resistant	≤ 0.5%	matte ≥ 0.60	≥ 7	≤ 175 mm ³	class A	≥ 350 lbs.	class A

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390



paramount marmi


thru color rectified porcelain slabs & tile, made in italy



trinity tile
Inspiring Surface Design

paramount marmi

thru color rectified porcelain slabs & tile, made in italy

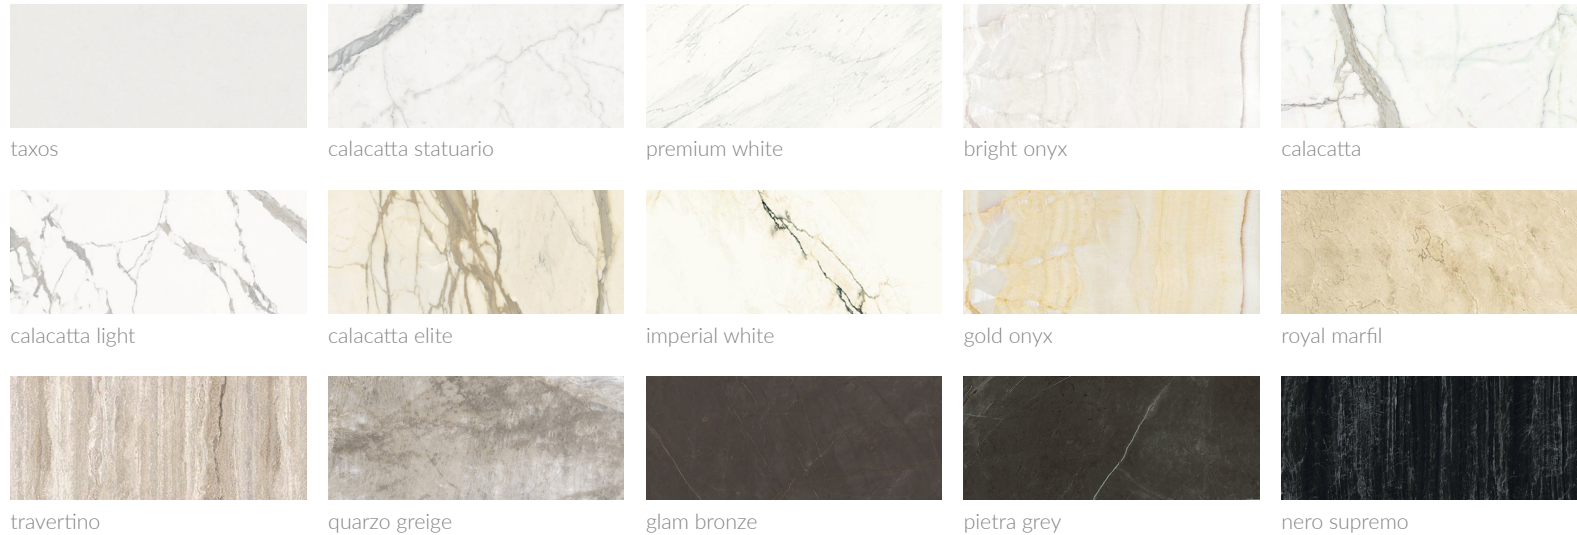

AVAILABLE SIZES

								
	120"x60"	120"x40"	60"x60"	60"x40"	60"x30"	40"x40"	30"x30"	30"x15"
taxos	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
calacatta statuario	●▲		●▲		●▲		●▲	●▲
premium white	●▲		●▲		●▲		●▲	●▲
bright onyx	●▲		●▲		●▲		●▲	●▲
calacatta	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
calacatta light	●▲		●▲		●▲		●▲	●▲
calacatta elite	●▲		●▲		●▲		●▲	●▲
imperial white	●▲		●▲		●▲		●▲	●▲
gold onyx	●▲		●▲		●▲		●▲	●▲
royal marfil	●▲	●▲	●▲	●▲	●▲	●▲	●▲	●▲
travertino	●▲		●▲		●▲		●▲	●▲
quarzo greige	●▲		●▲		●▲		●▲	●▲
glam bronze	▲		▲		▲		▲	▲
pietra grey	●▲		●▲		●▲		●▲	●▲
nero supremo	●▲		●▲		●▲		●▲	●▲

● MATTE ▲ POLISHED

TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	dynamic coefficient of friction	modulus of rupture	resistance to deep abrasion	chemical resistance	thermal shock resistance	stain resistance
Test	N/A	ISO 10454-12	ISO 10545-3	BOT 3000	ISO10545-4	ISO 10545-6	ISO 10545-13	ISO 10545-9	ISO 10545-14
Results	6mm	resistant	≤ 0.5%	≥ 0.60	≥ 35N/mm ²	≤175 mm ³	not affected	resistant	resistant to stain

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

paramount style

thru color rectified porcelain slabs & tile, made in italy





paramount style

thru color rectified porcelain slabs & tile, made in italy



AVAILABLE SIZES

	 120"x60"	 120"x40"	 60"x60"	 60"x40"	 60"x30"	 40"x40"	 30"x30"	 30"x15"
uni ice	● ▲	● ▲	● ▲	● ▲	● ▲	●	● ▲	● ▲
uranus	●	●	●	●	●	●	●	●
mega white		● ▲		●		● ▲		
venus	●	●	●	●	●	●	●	●
white resin		● ▲		●		● ▲		
mega greige		● ▲		●		● ▲		
mega grey		● ▲		●		● ▲		
cinder resin		● ▲		●		● ▲		
mercury	●	●	●	●	●	●	●	●
gray resin		● ▲		● ▲		●		
mega brown		● ▲		● ▲		●		
dark resin		● ▲		● ▲		●		
mega black		● ▲		● ▲		●		
moon	●	●	●	●	●	●	●	●
uni pepper	● ▲	● ▲	● ▲	● ▲	● ▲	●	● ▲	● ▲

● HONED ▲ POLISHED

TECHNICAL SPECIFICATIONS

	water absorption	nominal thickness	thermal expansion coefficient	thermal shock resistance	frost resistance	chemical resistance	breaking strength	dynamic coefficient of friction
Test	ISO 10545-3	N/A	ISO 10545-8	ISO 10545-9	ISO 10545-12	ISO 10545-13	ASTM C-648	ANSI 137.1
Standards	≤ 0.5%	N/A	Testing method available	Testing method available	No alterations to surface	No visible signs of attack	250 lbf	≥ 0.42
Results	honed 0.3% ÷ 0.6%, polished 0.5% ÷ 0.8%	6mm	6 MK ⁻¹	Resistant	Frostproof	Unaffected	253 lbf	Honed ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390

PARAMOUNT
by trinity tile

CORPORATE OFFICES
115 SW 49TH Avenue Ocala,
Florida 34473 866.774.3390

trinitytile.com

